NOVEMBER · 1952
PRICE 75 CENTS

# electronics

A McGRAW-HILL PUBLICATION

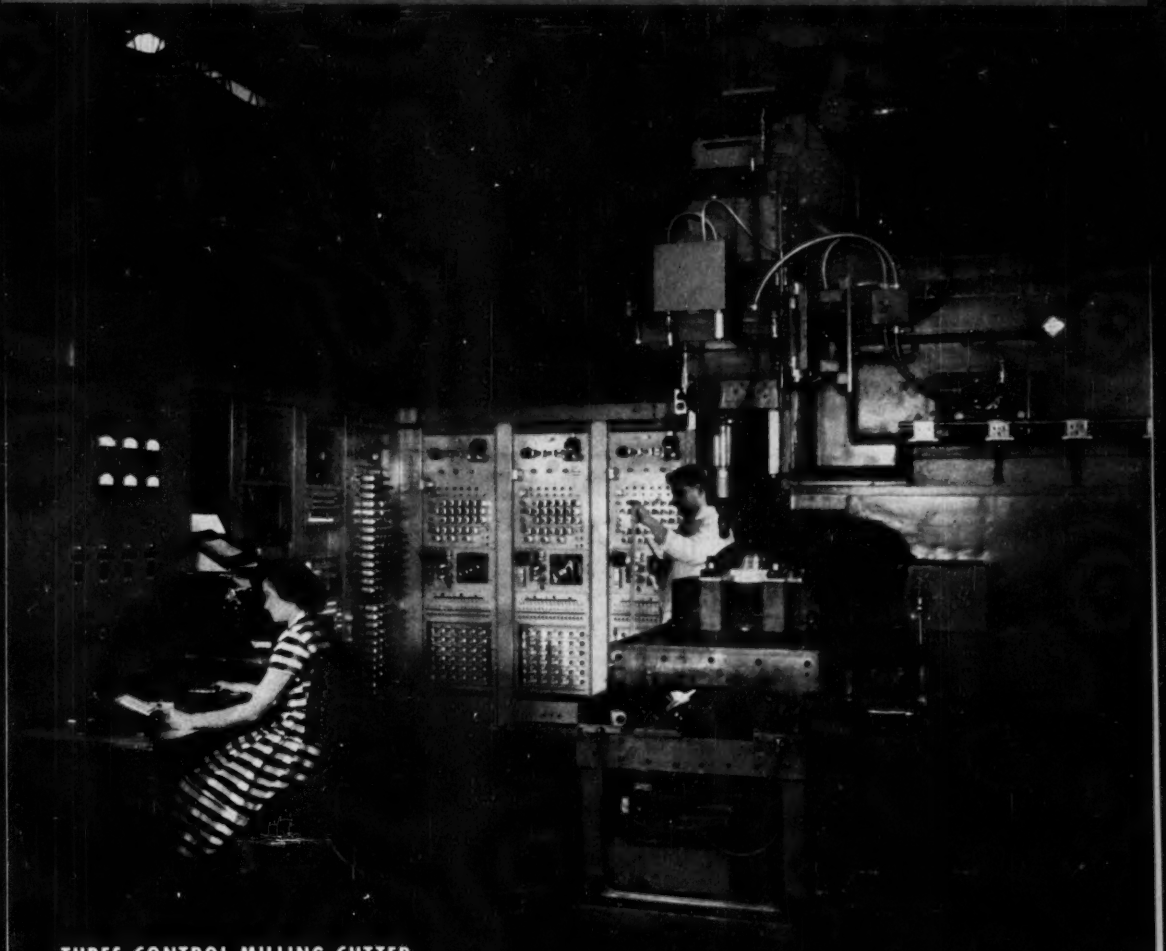

TUBES CONTROL MILLING CUTTER

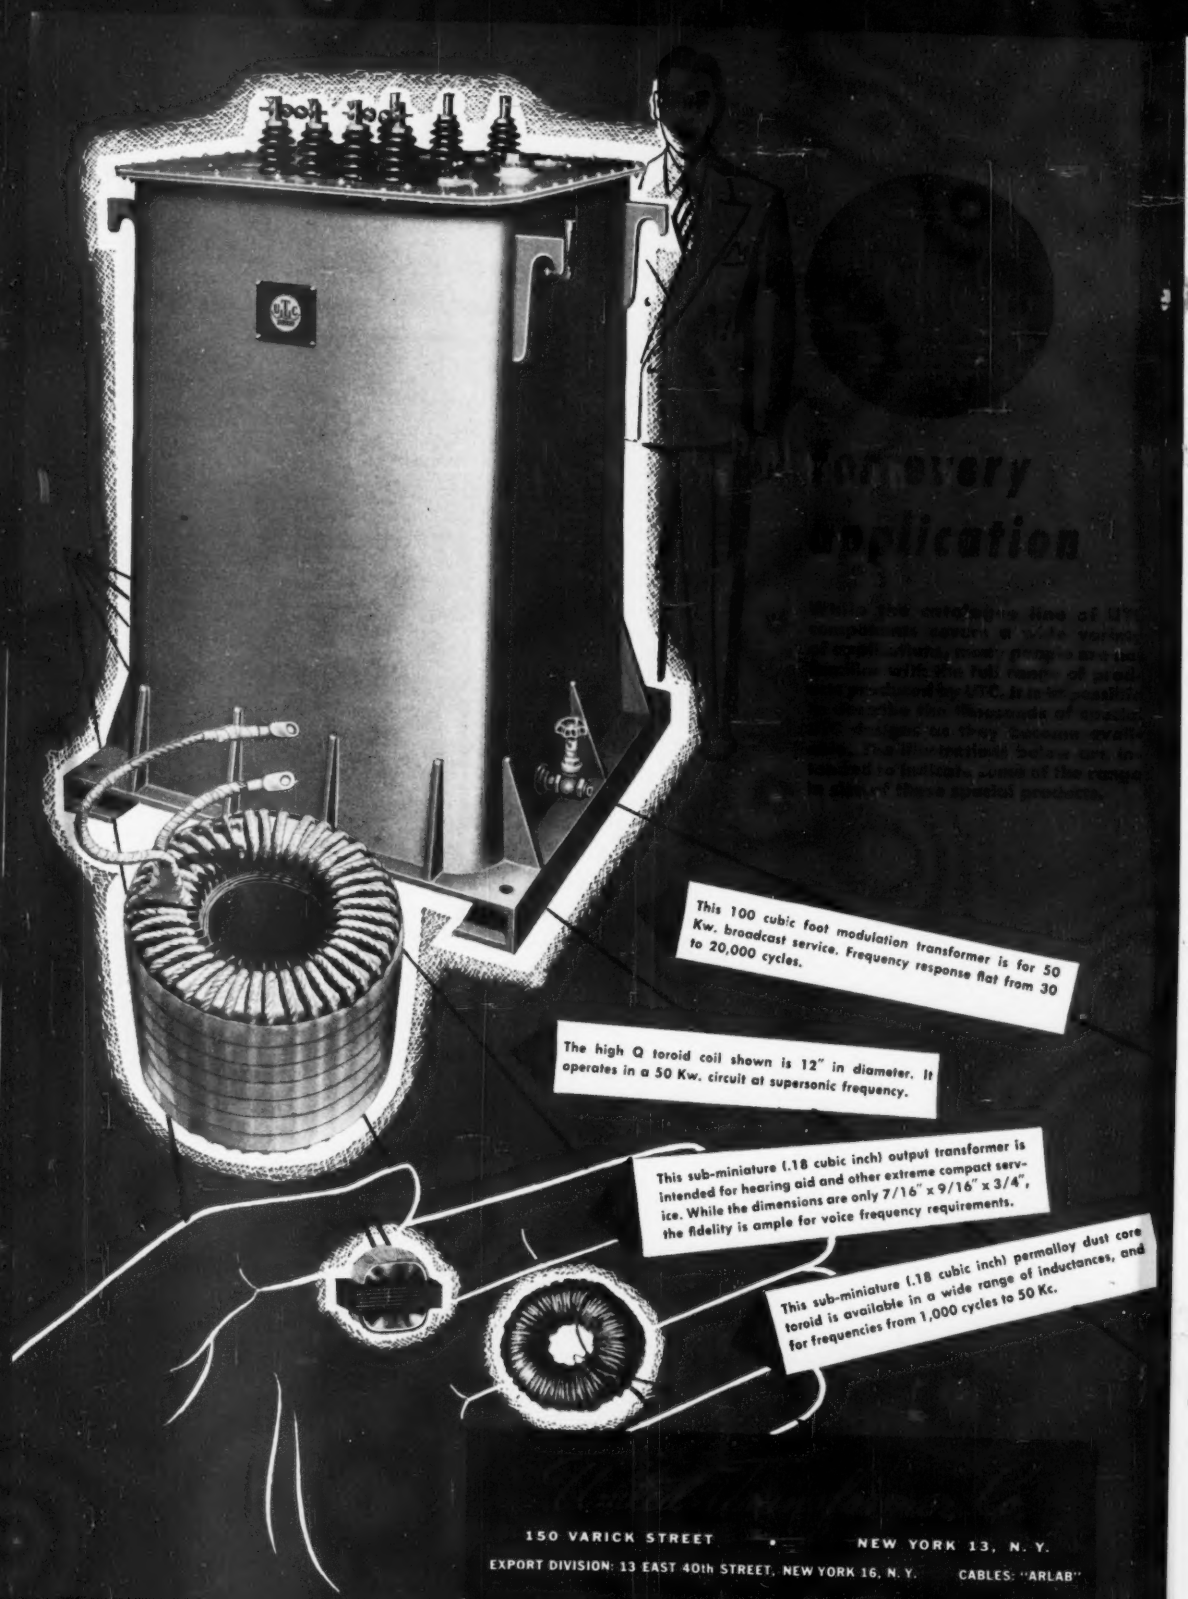
This 100 cubic foot modulation transformer is for 50 Kw. broadcast service. Frequency response flat from 30 to 20,000 cycles.
The high Q toroid coil shown is 12" in diameter. It operates in a 50 Kw. circuit at supersonic frequency.
This sub-miniature (.18 cubic inch) output transformer is intended for hearing aid and other extreme compact service. While the dimensions are only 7/16" x 9/16" x 3/4", the fidelity is ample for voice frequency requirements.
This sub-miniature (.18 cubic inch) permalloy dust core toroid is available in a wide range of inductances, and for frequencies from 1,000 cycles to 50 Kc.

150 VARICK STREET • NEW YORK 13, N. Y.

EXPORT DIVISION: 13 EAST 40th STREET, NEW YORK 16, N. Y. CABLES: "ARLAB"

# electronics

NOVEMBER • 1952
A McGRAW-HILL PUBLICATION

*COVER—Servomechanically controlled milling machine can be made to cut a block of metal into any desired shape in response to number code punched in paper tape and fed through an electronic decoder developed at Servomechanisms Laboratory, MIT. (See page 172)*

FIGURES OF THE MONTH, Electronics Output Index ..... 4

INDUSTRY REPORT, Top-level news, trends and market interpretations ..... 5

ELECTRON BEAMS STERILIZE FOOD AND DRUGS, by E. Alfred Burrill and A. John Gale ..... 98

BROADCASTING TV IN THE UHF BAND, by Jess Epstein and D. W. Peterson ..... 102

DESIGNING AN EXPERIMENTAL 850-MC TV TRANSMITTER, by G. A. Olive ..... 110

TRANSISTORS OPERATE AT 300 MC, by G. M. Rose and B. N. Slade ..... 116

MAGNETIC-AMPLIFIER GAPLESS-CORE TESTS, by J. R. Conrath ..... 119

DIODE LIMITERS SIMULATE MECHANICAL PHENOMENA, by C. D. Morrill and R. V. Baum ..... 122

INVESTIGATING ANTENNAS FOR UHF MOBILES, by Edward F. Harris ..... 127

INDUSTRIAL FREQUENCY STANDARD, by H. W. Kline ..... 130

EVALUATING AFC SYSTEMS FOR TELEVISION RECEIVERS, by George Howitt ..... 132

RATIO METER MEASURES REFLECTION COEFFICIENT, by L. A. Rosenthal, J. L. Potter and G. M. Badoyannis 136

PRINTED CIRCUITS FOR RADIO RECEIVERS, by Elmer Wavering ..... 140

GREY-SCALE GENERATOR, by G. Edward Hamilton and Ralph Howitt ..... 143

SINGLE-SIDEBAND SYSTEM FOR OVERSEAS TELEPHONY, by N. F. Schlaak ..... 146

GERMANIUM PHOTODIODES READ COMPUTER TAPES, by Leroy Packer and William J. Wray, Jr. ..... 150

UNIVERSAL SKIN-EFFECT CHART FOR CONDUCTING MATERIALS, by Harold A. Wheeler ..... 152

DIGITAL COMPUTER PLAYS NIM, by Herbert Koppel ..... 155

TEST PULSE GENERATOR FOR DIGITAL COMPUTERS, by Albert A. Gerlach ..... 158

CONTINUOUS RECORDER KEEP-ALIVE CIRCUIT, by Ronald L. Ives ..... 161

AIR-COOLING NOMOGRAPH, (Reference Sheet), by Eugene Slusser ..... 164

HIGH Q MEASUREMENT, (Reference Sheet), by William J. Spaven ..... 166

CROSSTALK.....97 ELECTRONS AT WORK.....168 PRODUCTION TECHNIQUES.....266 NEW PRODUCTS.....310
PLANTS AND PEOPLE.....396 NEW BOOKS.....414 BACKTALK.....430 INDEX TO ADVERTISERS (Last Page)

W. W. MacDONALD, *Executive Editor;* VIN ZELUFF, *Managing Editor;* John Markus, A. A. McKenzie, James D. Fahnestock, *Associate Editors;* William P. O'Brien, Ronald K. Jurgen, John M. Carroll, William G. Arnold, *Assistant Editors;* Ann Mastropolo, Marilyn Wood, Mary J. Johnson, *Editorial Assistants;* Gladys T. Montgomery, *Washington Editor;* Harry Phillips, *Art Director;* Eleanor Luke, *Art Assistant*

KEITH HENNEY, *Editorial Director*

H. W. MATEER, *Publisher;* WALLACE B. BLOOD, *Manager;* R. S. Quint, *Buyers' Guide Manager;* N. F. Cullinan, *Promotion & Research Assistant;* H. E. Hilty, *Classified Manager;* D. H. Miller, James Girdwood, *New York;* Wm. S. Hodgkinson, *New England;* Warren W. Shew, *Philadelphia;* C. D. Wardner, *Chicago;* J. L. Phillips, *Cleveland;* T. H. Carmody, R. C. Alcorn, *San Francisco;* Carl W. Dysinger, *Los Angeles;* Ralph C. Maultsby, *Atlanta*

ABP November, 1952 ELECTRONICS Member ABC and ABP Vol. 25, No. 11 ABC

Published monthly with an additional issue in June by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

**Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y.** Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publication Division; Ralph B. Smith, Vice-President and Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

**Subscriptions: Address correspondence to Electronics—Subscription Service, 99-129 N. Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address. Subscriptions are solicited only from persons engaged in theory, research, design, production, maintenance and use of electronic and industrial control components, parts and end products. Position and company connection must be indicated on subscription orders.**

Single copies 75¢ for United States and possessions, and Canada: $1.50 for Latin America; $2.00 for all other foreign countries. Buyers' Guide $2.00. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years. Canada, $10.00 a year; $16.00 for two years. Other western hemisphere countries, $15.00 a year; $25.00 for two years. All other countries $20.00 a year; $30.00 for two years. Entered as second class matter August 29, 1936, at the Post Office at Albany, N. Y., under act of Mar. 3, 1879. Printed in U. S. A. Copyright 1952 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved. **BRANCH OFFICES:** 520 North Michigan Avenue, Chicago 11, Ill.; 68 Post Street, San Francisco 4; McGraw-Hill House, London, E.C. 4; Washington, 4; Philadelphia 3; Cleveland 15; Detroit 26; St. Louis 8; Boston 16; 1321 Rhodes-Haverty Bldg., Atlanta 3, Ga.; 1111 Wilshire Blvd., Los Angeles 17; 738-9 Oliver Building, Pittsburgh 22. ELECTRONICS is indexed regularly in The Engineering Index.

# marion's NEW metertester

MODEL M-2

## MEASURES SENSITIVITY AND RESISTANCE

**for testing and calibration of D. C. instruments in the laboratory and on production lines**



Marion's New Metertester (Model M-2) retains proven Marion features but increases application flexibility. In addition to improved circuitry for sensitivity measurement it also measures internal resistance of sensitive instruments without exceeding full scale rating of the instrument under test.

### FEATURES

- Regulated Power Supply
- Stepless Vacuum Tube Voltage Control
- Illuminated 8½" Mirror-Scale Standard Instrument, Hand Calibrated
- Marion Ruggedized Null Indicator movement for bridge balance indication
- Decade of .1% accurate Manganin Wire Wound Resistors
- Direct Reading Bridge Circuit using Helipot
- Complete. No accessories required

### SPECIFICATIONS

ACCURACY: Overall better than ¼ of 1%
RESISTANCE RANGE: 0-5000 ohms
POWER SOURCE: 115V A C 60 cycles
CASE SIZE: 15½" x 10⅛" x 5⅝"
WEIGHT: 15 lbs.

SENSITIVITY RANGES

| | | | |
|---|---|---|---|
| 0-25UA | 0-200UA | 0-800UA | 0-10 MA |
| 0-50UA | 0-400UA | 0-1 MA | 0-100 Volts |
| 0-100UA | 0-500UA | 0-5 MA | |

The New M-2 Model can also be used for additional purposes, such as a precise source of DC current and voltage and as a precision Wheatstone bridge in the 0-5000 ohm range.

For further information write Marion Electrical Instrument Co., 401 Canal Street, Manchester, N. H., U. S. A.



# marion meters

Reg. U.S. Pat. Off.

MANUFACTURERS OF RUGGEDIZED, HERMETICALLY SEALED AND STANDARD PANEL INSTRUMENTS

# MUIRHEAD

## MAGSLIP RESOLVER No. 2

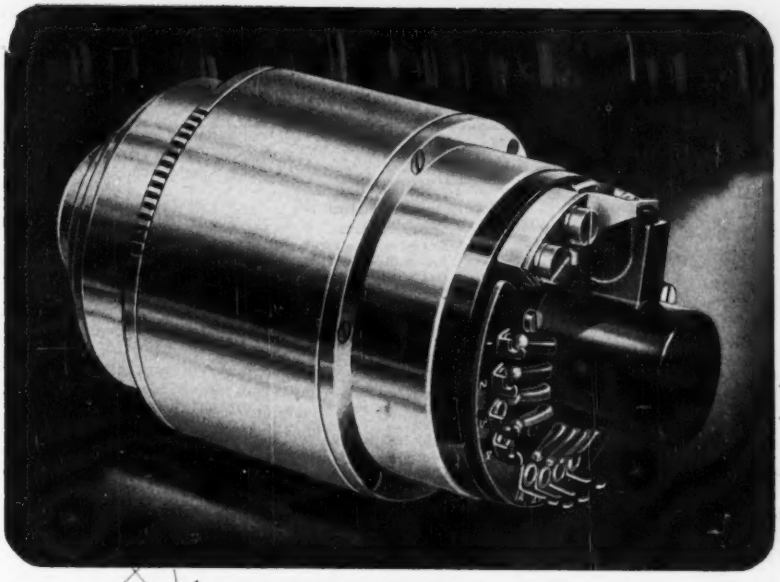

THE RESOLVER No. 2 is a special type of Magslip used for the solution of trigonometrical problems, such as the conversion of polar to Cartesian co-ordinates.

Each stator phase is energized in accordance with an applied computing voltage. No power is taken from this source, energization being obtained by means of an amplifier and a second (feedback) stator winding. The rotor voltages are proportional to the exciting voltages and to the sine and cosine of the angle between the stator and rotor electrical axes. The error does not exceed 0.1%.

MAIL THIS COUPON

Please mail Bulletin B-690 fully describing MUIRHEAD MAGSLIP RESOLVERS.

NAME _____

POSITION _____

COMPANY _____

MAILING ADDRESS _____

**MUIRHEAD & CO. LTD.**

**BECKENHAM · KENT · ENGLAND**

*Precision Electrical Instrument Makers*

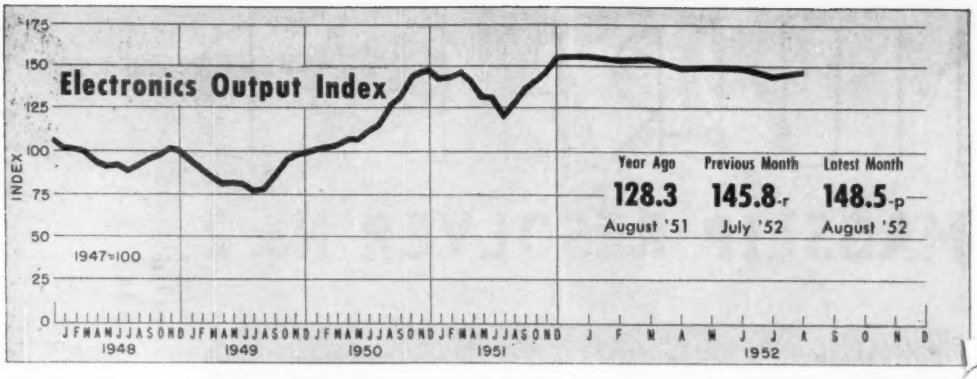


# FIGURES OF THE MONTH

## RECEIVER PRODUCTION

| (Source: RTMA) | Year Ago | Previous Month | Latest Month |
|---|---|---|---|
| | Aug. '51 | July '52 | Aug. '52 |
| Television sets | 146,705 | 198,921 | 397,769-p |
| Home Radio sets | 295,587 | 265,163 | 344,481-p |
| Portable sets | 77,568 | 81,353 | 105,006-p |
| Auto sets | 190,252 | 95,220 | 94,315-p |

## RECEIVER SALES

| (Source: RTMA) | | | June, July & Aug. '52 |
|---|---|---|---|
| Television sets, units | | | 700,490 |
| Radio sets (except auto) | | | 1,139,467 |

## RECEIVING TUBE SALES

| (Source: RTMA) | Aug. '51 | July '52 | Aug. '52 |
|---|---|---|---|
| Receiv. tubes, total units | 23,761,253 | 20,944,831 | 30,141,536 |
| Receiving tubes, new sets | 12,917,526 | 11,504,503 | 19,583,879 |
| Rec. tubes, replacement | 7,230,419 | 6,795,252 | 7,463,893 |
| Receiving tubes, gov't. | 845,514 | 1,956,905 | 1,706,868 |
| Receiving tubes, export | 2,767,794 | 688,171 | 1,386,896 |
| Picture tubes, to mfrs. | 210,043 | 239,625 | 394,605 |

## BROADCAST STATIONS

| (Source: FCC) | Sept. '51 | Aug. '52 | Sept. '52 |
|---|---|---|---|
| TV Stations on Air | 108 | 109 | 111 |
| TV Stns CPs—not on air | 0 | 34 | 51 |
| TV Stns—Applications | 444 | 855 | 855 |
| AM Stations on Air | 2,300 | 2,356 | 2,364 |
| AM Stns CPs—not on air | 101 | 112 | 119 |
| AM Stns—Applications | 280 | 291 | 276 |
| FM Stations on Air | 644 | 622 | 624 |
| FM Stns CPs—not on air | 9 | 21 | 18 |
| FM Stns—Applications | 8 | 12 | 10 |

## NETWORK BILLINGS

| (Source: Pub. Info. Bureau) | Aug. '51 | July '52 | Aug. '52 |
|---|---|---|---|
| AM/FM—ABC | $2,210,352 | $2,082,666 | $2,281,852 |
| AM/FM—CBS | $4,440,261 | $3,238,256 | $3,991,490 |
| AM/FM—MBS | $1,329,375 | $1,339,276 | $1,325,059 |
| AM/FM—NBC | $3,808,906 | $2,878,196 | $3,338,843 |
| TV—ABC | $1,444,593 | $943,387 | $1,166,169 |
| TV—CBS | $3,734,551 | $4,163,245 | $5,105,929 |
| TV—DuMont | $763,071 | $653,415 | $945,780 |
| TV—NBC | $3,359,856 | $4,591,130 | $5,618,643 |

## TV AUDIENCE

| (Source: NBC Research Dept.) | Year Ago | Previous Month | Latest Month |
|---|---|---|---|
| | Sept. '51 | Aug. '52 | Sept. '52 |
| Sets in Use—total | 13,556,000 | 18,354,300 | 18,711,800 |
| Sets in Use—netw'k conn. | 12,839,400 | 18,325,700 | 18,682,800 |
| Sets in Use—New York | 2,490,000 | 3,070,000 | 3,100,000 |
| Sets in Use—Los Angeles | 1,012,000 | 1,230,000 | 1,240,000 |
| Sets in Use—Chicago | 960,000 | 1,210,000 | 1,235,000 |

## COMMUNICATION AUTHORIZATIONS

| (Source: FCC) | July '51 | June '52 | July '52 |
|---|---|---|---|
| Aeronautical | 33,007 | 32,603 | 33,462 |
| Marine | 30,174 | 35,500 | 36,068 |
| Police, fire, etc. | 9,310 | 11,143 | 11,274 |
| Industrial | 9,895 | 13,680 | 13,968 |
| Land Transportation | 4,324 | 5,027 | 5,120 |
| Amateur | 92,822 | 113,092 | 113,863 |
| Citizens Radio | 585 | 1,401 | 1,697 |
| Disaster | 9 | 71 | 80 |
| Experimental | 428 | 488 | 489 |
| Common carrier | 824 | 985 | 985 |

## EMPLOYMENT AND PAYROLLS

| (Source: Bur. Labor Statistics) | July '51 | June '52 | July '52 |
|---|---|---|---|
| Prod. workers, electronic | 229,500 | 266,300-r | 263,400-p |
| Prod. wkrs., radio, etc. | 138,400 | 165,300-r | 162,700-p |
| Av. wkly. earnings, elect. | $60.34 | $64.52-r | $62.52-p |
| Av. wkly. earnings, radio | $57.35 | $61.58-r | $60.68-p |
| Av. weekly hours, elect. | 41.4 | 40.3 | 39.1-p |
| Av. weekly hours, radio | 39.2 | 40.5-r | 39.3-p |

## STOCK PRICE AVERAGES

| (Source: Standard and Poor's) | Sept. '51 | Aug. '52 | Sept. '52 |
|---|---|---|---|
| Radio—TV & Electronics | 259.5 | 291.1 | 304.3 |
| Radio Broadcasters | 244.8 | 279.6 | 288.3 |

## INDUSTRIAL EQUIPMENT ORDERS

| (Source: NEMA) | Quarterly Figures: Year Ago | Previous Quarter | Latest Quarter |
|---|---|---|---|
| | 2nd '51 | 1st '52 | 2nd '52 |
| Dielectric Heating | $600,000 | $150,000 | $510,000 |
| Induction Heating | $3,140,000 | $2,400,000 | $2,410,000 |

## INDUSTRIAL TUBE SALES

| (Source: NEMA) | 2nd '51 | 1st '52 | 2nd '52 |
|---|---|---|---|
| Vacuum (non-receiving) | $7,750,000 | $11,320,000 | $12,110,000 |
| Gas or vapor | $2,700,000 | $3,100,000 | $3,150,000 |
| Phototubes | $360,000 | $500,000 | $480,000 |
| Magnetrons and velocity modulation tubes | $4,130,000 | $8,460,000 | $9,830,000 |

p—provisional; r—revised; e—estimated

# INDUSTRY REPORT



## Plants Push 'Rainy-Day' Planning

**New-product ideas are being stockpiled against possible drop in military orders**

THOUGH business is good today in the electronic industry, the spectre of possible military contract tapering off is once again dominating many engineering and executive planning conferences.

A surprisingly large number of post-cold-war projects have already reached the drafting board. These divide into four major categories.

▶ **Custom Engineering Jobs**—Here is maximum job security for engineering staffs, because special electronic control systems tailored to a particular machine come close to development contracts in engineer man-hour requirements.

In anticipation of custom engineering, engineering staffs are getting acquainted with general process requirements in the most promising fields. The textile, food, machine tool and chemical industries are getting major attention. These and other prospective fields can be parceled out among groups of engineers even today, to encourage the specialization needed for getting best results when the day for action arrives.

▶ **New Stock Products**—This is the obvious but tough answer to the problem. There'll always be some market for a newer and better test instrument, for improved communication equipment, or for new packaged electronic controls, but good new-product ideas here are hard to come by and generally require years to develop. Opportunities are good in the mass entertainment field, but existing large manufacturers with national distribution have a distinct edge on newcomers.

▶ **White Goods**—To counteract traditional summer slump in radio and television receiver business, larger manufacturers in this field have been adding or acquiring lines of refrigerators, air conditioners, dehumidifiers and other so-called white goods. This boosts business during the slack months.

▶ **Nonelectronic Products**—Some small firms are looking ahead with a maximum of flexibility and open-mindedness. They'll make any product, electronic or otherwise, that will hold together their engineering and production staffs long enough for transition from military boom business to normal commercial activity.

## UHF Egg Hatches In Portland, Oregon

**Market becomes commercial guinea pig for companies in the television industry**

EYES of the electronics industry are closely watching every development in the nation's first commercial uhf television market, Portland, Oregon. Literally thousands of representatives of all segments of the industry have visited the city since KPTV took to the air on Sept. 18. Resulting comments of various observers of the Portland picture vary from "confused" to "very encouraging."

▶ **Shortages**—Despite recent experience with the vhf Denver market, some tv distributors were caught without sets when commercial uhf television made its bow in Portland. However, shortages did not become as serious as in Denver, because sets were available in nearby Seattle and San Francisco.



UHF filterplexer, which coordinates tv sound and picture for KPTV in Portland, is examined by one of the engineers who made the historic installation

But other shortages have hampered sales to some extent. Most bothersome has been the shortage of channel-27 tuning strips. Converters have also been in short supply.

▶ **Interference**—Some manufacturers have run into picture interference problems in the Portland market. Taxicab radio, which operates around 150 megacycles, has been partially responsible. But most manufacturers have already licked this problem by using 'stubs' of leadin wire serving as wavetraps.

Some uhf converters have themselves created interference.

▶ **Coverage**—Most manufacturers seem pretty happy with the coverage pattern of KPTV. RCA surveyed the Portland area to chart

reception as soon as the station began operating. They report that the station is radiating a good signal and actual coverage agrees surprisingly well with FCC predictions. There are, however, a few dead spots.

Grade A signals from Portland are reported in adjacent cities of Vancouver, Washington, and in St. Helens and Oregon City, Oregon. Even Salem, Oregon, 42 air miles from Portland, reports reception.

With coverage better than expected, most tv manufacturers are optimistic about uhf tv sales in the Portland area. It is reported that set sales during the first three weeks reached nearly 2,000. Some predict that by the end of the year they will reach at least 50,000.

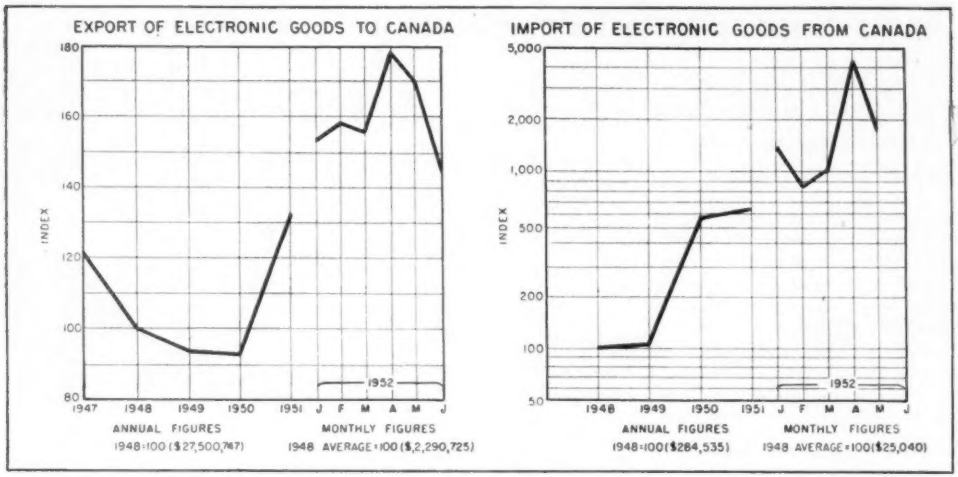


**TRADE** with our northern neighbor reaches new heights in both directions across the border as . . .

# Electronic Business Booms in Canada

## Exports rise steadily; many U.S. concerns open branch plants in the Dominion

CANADA'S SURGE towards industrial prominence means good business for electronics manufacturers on both sides of the border. Exports to Canada of electronic equipment and components are at an all-time high, topping $36 million last year and increasing rapidly. Meanwhile, more than 100 Canadian plants are producing electronic parts and end products. About one-third of these plants are branch plants or subsidiary companies of U.S. concerns.

A rough gage of Canada's growing electronics production is the fact that U.S. imports from Canada promise to top $4.5 million for 1952, representing a 20-fold increase over 1948 figures.

The graphs illustrate the astonishing growth of electronics business across America's northern border. Both graphs are plotted in index figures obtained by dividing yearly totals by 1948 totals and 1952 monthly totals by the average figure for the corresponding period of 1948. The totals were obtained by summing Bureau of Census foreign trade figures for ELECTRONICS' list of electronic commodities.

▶ **Economic Growth**—Sparked by development of Canada's rich natural resources, her economic growth has snowballed during the last 12 years through reinvestment of national income in manufacturing industries. Canada's prosperity, reflected in every facet of her economic life, means improved living standards for her people, additional investment in new plants and equipment and relentless pressure against her natural frontiers.

Canada's economic growth pattern is faithfully reflected by U.S. electronic exports to her. Basic electronic components such as resistors, capacitors and tubes to feed Canadian production lines comprise 36.2 percent of U.S. exports northward. Also high on the list of electronic exports are communications equipments needed to span the miles between Canada's new mines and factories and industrial electronic equipment and instruments needed to equip new plants and laboratories. Export of r-f heating equipment for industry shows the greatest percentage increase over 1950 figures of all electronic equipment.

▶ **Consumer Market**—The home instrument market in Canada directly

(Continued on page 8)

## Sylvania to Serve West Coast Electronics Market from California Location

Sylvania has announced that construction is under way on a modern, completely equipped Electronics Division plant and laboratory in Mountain View, California.

This up-to-date facility of 35,000 square feet is being made available to West Coast manufacturers as a source of electronic components including semiconductor devices, microwave components, and special purpose tubes.

A research and development laboratory will be included to handle design and applications problems on these and other related products.

The addition of this California location to Sylvania's existing electronics facilities marks another step in the company's long-term plan to provide the finest quality products and fastest service to all markets.

For complete information on Sylvania Electronic Products, write Dept. E-2611, Sylvania Electric Products Inc., 1740 Broadway, New York 19, N. Y.

# SYLVANIA

ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; RADIO TUBES; TELEVISION PICTURE TUBES; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

accounts for barely three percent of U. S. electronic exports. Although much of this market is served by Canadian set manufacturers and branch plants of U. S. concerns, the outlook for increased export sales is encouraging. Television sets, auto radios and juke boxes closely follow r-f heating equipment among exports showing the greatest percentagewise increase.

▶ **Electronic Developments**—Upturn in Canada's electronics industry keys into several specific developments outside her overall economic growth. Always a good customer for electronic equipment, the aircraft industry is going great guns in Canada. Jetmakers at AVRO-Canada's Malton plant near Toronto are making headline news with both military and commercial models.

Handmaiden to nuclear energy, the electronics industry derives additional impetus as Canada forges ahead in this field. The Canadian AEC operates establishments at Chalk River and Petawawa, near Pembroke, Ont. Canadian rearmament opens still another field for electronics. Much electronic equipment, particularly radar and microwave communications equipment, is going to Canada's armed forces.

Other significant developments on the Canadian electronics scene include Bell of Canada's Buffalo-Toronto and Toronto-Montreal microwave radio-relay systems, extensive use of broad-band vhf radiotelephone circuits in Western Canada and the recent inauguration of the Canadian Broadcasting Company's first television network that now has stations in Toronto and Montreal.

▶ **Pattern of Growth**—Canadian electronics manufacturers tend to cluster about her two largest cities, Toronto and Montreal. More than half the electronic business is concentrated in Toronto and its sprawling suburbs. Montreal, with its surplus of women workers, has 19 plants engaged in electronics manufacturing. Nearly all the remaining plants are concentrated in the highly industrialized province of Ontario, with the cities of Hamilton, Kitchener and London very much in the running.

# American Railroads Go Electronic

## Use of radio equipment increases. Industrial tv looms on the horizon

INDICATIVE of the growing use of electronics in the railroad business, the number of radio system licensees in this field increased from 97 in June, 1951 to 114 in June 1952. The number of transmitters used by railroad licensees reached a total of over 9,000.




▶ **Investments**—What the railroad market means to electronic manufacturers in terms of dollar volume can be judged from investment reports of representative roads.

The Pennsylvania has already invested $9 million in two-way telephone equipment and plans to expand its use. The Denver & Rio Grande Western has spent over $57,720 on radio and inductive communications systems since 1947. Investments prior to that totalled $109,524. The Missouri-Kansas-Texas invested $40,180 in radio systems in 1951 and Canadian Pacific spent about $34,000. This year, the Northern Pacific completed its $200,000 radio system and the Southern Pacific has announced plans for greater use of radio communications systems.

Industrial television enables this B&O yard clerk to record freight car numbers without walking among the cars and tracks. Unattended camera set up alongside the tracks does all the work as the trains pass in front of it

▶ **What's Ahead**—The railroad industry may become a substantial industrial television market in the future.

The Baltimore & Ohio recently conducted tests of such equipment in conjunction with RCA, to determine whether ITV could contribute to greater efficiency in the operations of a railroad classification yard.

Three new Vidicon cameras were used for the demonstration. One camera chain did the job pictured here. Two others gave an overall view of the classification yard so that the disposition and movement of all cars and switching engines could be watched and coordinated.

# Military Plans Set For '54 Buying

ELECTRONICS buying for aircraft alone in fiscal 1954 will total at least $1.7 billion and may exceed $2 billion.

New defense appropriation requests will be delivered to Congress shortly after it convenes. The overall figure is about the same as that which the Pentagon requested for fiscal 1953, close to $50 billion. Major change will be in the items bought.

▶ **Flying Figures**—The military has accumulated inventories on

(Continued on page 10)

# SPRAGUE LEADS THE WAY WITH RELIABLE HIGH TEMPERATURE (250°C) MAGNET WIRE

Designers of miniaturized transformers, motors, coils, solenoids, etc., are finding that Ceroc ST Magnet Wire leads the field in *tough* applications. Not only does Ceroc ST have superior abrasion resistance to commercial all-tetrafluoroethylene insulated wire, but it also has better cross-over characteristics, and a higher breakdown voltage. The Teflon overlay bonds more securely to the ceramic base insulation than is the case with Teflon bonded directly to copper. And with its years of experience in quality control, the Sprague Electric Company delivers to you a product of uniformly high quality.

Not only may Ceroc ST wire be operated *continuously* at temperatures up to 250°C, but it has been successfully used in short-time military applications at temperatures as high as 350°C. Sprague's Application Engineering Dept. is ready to assist you in working out any problems you may have on the proper use of high temperature magnet wire.

For details on Ceroc ST wire, write for Engineering Bulletin No. 404. Where design requirements necessitate a heavier Teflon coating, investigate Ceroc T wire, with its double Teflon overlay on ceramic base insulation. It's described in Engineering Bulletin No. 402-F. Copies available without obligation on letterhead request to the Application Engineering Dept., Sprague Electric Co., 35 Marshall St., North Adams, Massachusetts.

ENLARGED CROSS-SECTION OF CEROC ST

**SPRAGUE ... PIONEERS IN ELECTRIC AND ELECTRONIC DEVELOPMENT**

some weapons like tanks, ammunition and motor vehicles. These will be eased off. However, with a 143-wing Air Force approved by Congress, the tab for aircraft procurement will be close to the $18-billion figure appropriated this year for Navy and Air Force planes.

Defense Secretary Lovett intends to leave government service but offers to break in his successor and has asked the presidential candidates to name a defense secretary right after election. This would allow the new Pentagon boss to do some spade work on the budget he will have to explain to Congress next year.

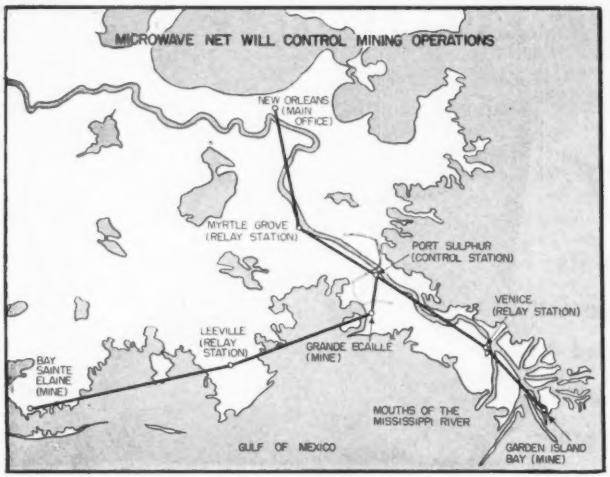


**HURRICANE**-prone marshland is no obstacle, as . . .

# Microwaves Link Remote Mines

## "Swamps rule out telephone lines in Louisiana delta," FCC rules in granting license

MICROWAVE system linking remote industrial operations has been approved by the FCC and will be installed this Fall. A $173,000 Motorola system will link mines operated by Freeport Sulphur in the 300-square-mile marshland of the Mississippi delta with the company's offices in New Orleans and a shipping point at Port Sulphur.

Granting the license, the FCC ruled that marshy terrain coupled with prevalent hurricanes make construction and maintenance of telephone lines impractical.

The microwave network will tie into existing ship-shore radio facilities for communication with the company's fleet of towboats and barges.

Work has already begun on preparing the tower foundations, which must be built on pilings. Equipment installation is scheduled for November.

▶ **Industrial Microwave**—Although most private microwave systems are owned either by electric-power companies or oil and gas pipeline operators, other industries are now finding them useful.

The Linton Summit Coal Co. of Terre Haute, Ind. is installing two stations for communication between their downtown office and the mine, 14 miles distant. In this case, according to the General Electric Co. who furnished the microwave equipment, the telephone company would not provide lines for a single customer.

# Civilian Consultants Serve Uncle Well

## Most make money on government contracts, but wrong choice can result in loss

THERE are three grades of consulting work in which electronic engineers assist the government's preparedness program. Remuneration for such work depends upon the kind of contract covering it.

▶ **Top-Drawer Engineering**—Highly specialized is the work of a consultant who advises a project group on a short-term basis. Under a subcontract, such a specialist might earn between $100 and $200 a day, depending upon the attitude of the contracting officer in allowing these rates as direct costs. They are considered reasonable for the expert who maintains his own staff, laboratory and model shop. Often such men are not called in until a program bogs down and a trouble-shooter is needed.

▶ **Intermediates**—Typified by continuous work on a project for a week to several month, the intermediate specialist's work may be done alone or using a supplemental staff. Especially if the consultant maintains an office and laboratory, such work usually commands a rate well in excess of $50 a day.

▶ **Long-Term Consulting** — Least specialized is the work of a consultant working on a project from three months to several years. This type of work is exemplified by the so-called contract employee of some government agencies. No substantial overhead costs are involved since the consultant, often using space provided for him as, perhaps, a college professor, does not maintain a separate office. Compensation is limited, in general, to $50 a day at most. This is the only type of consultation commonly employed directly by government or in quantity under prime contracts with industrial agencies.

Recommended by many con-

(Continued on page 14)

# Through the years with one of the electronic industry's First Families

CENTRALAB
30th Anniversary
A Div. of GLOBE-UNION Inc.
1922 ERL 1952

EARS

made
good in peacetime)

y's first Tubular-
s coupling
apacitors –

elet Mounted
Ceramic Capacitors

anything
w
them)

# CENTRALAB'S ELECTRONIC FAMILY

## Many members have made electronic history!

Today, many of the most advanced developments in electronic equipment -- from modern hearing aids to television, radar and X-ray -- are built around the revolutionary components pioneered and introduced by Centralab.

Tangible evidence of the ceaseless research that gives fresh emphasis to the fact that many products bearing your trademark serve better -- last longer ... thanks to the continuing engineering advances of Centralab.

As in the past -- so in the future -- you can look to Centralab for leadership in electronic component research.

## Variable Resistors

(Great grandad)

1922 First composition variable resistor ever built

1929 First combination variable resistor and switch

1946 Model 1 - World's smallest switch type variable resistor

1949 Model 2 Radiohm the most modern high quality variable resistor

(Latest addition to this part of the family)



1951 New High Torque Variable Resistor - world's smallest - no bigger than a dime!

## Switches

(She started this branch of the family)



1936 A new and complete line of wave band switches



1938 The industry's first 24 contact per single section switch

1939 First multiple contact lever action switch



1943 The industry's first low-loss, high frequency medium duty power switch



1947 The first slide switch introduced to the industry

(our most beautiful babies!)



1951 New miniature rotary switch. (1 7/16" dia.)

# HAS BEEN GROWING FOR 30 YEARS

## Capacitors

(War babies who made more than good in peacetime)

1936 Temperature Compensating Ceramic Capacitors



1939 Industry's first Ceramic Trimmer Capacitors



1941 Industry's first High Voltage Transmitting Ceramic Capacitors



1945 Industry's first Tubular-Type, By-Pass coupling Ceramic Capacitors —



1946 The first Disc-Type By-Pass coupling ceramic Capacitors introduced to the electronic industry



1947 Industry's first TV High Voltage Ceramic Capacitors



1949 Industry's first Ceramic Tubular Trimmer Capacitors



1951 New Eyelet Mounted Feed-Through Ceramic Capacitors

## Printed Electronic Circuits









(Nobody ever saw anything like these, but now everybody wants them.)

1943 Centralab originated the industry's first printed ELECTRONIC circuit

## Ceramics



1942 First offered fine ceramics to industry. Actually, Centralab had been making ceramics for its own use since 1928 . . . but in 1942 developed a grade L-5 Steatite Ceramic superior to the then existing Navy grade "G" specification

Centralab was the first to metalize ceramics. By 1945 Cordierite and Zirconite bodies with grade L-4 rating were developed.

(This branch of the family just grows and grows and grows and there's no room for all their pictures)

**Centralab**

CRL

A Division of Globe-Union Inc.

914 EAST KEEFE AVENUE • MILWAUKEE

sultants is the sale of service on the basis of negotiated rates for personal services and direct reimbursement for special materials (the so-called time-and-materials subcontract).

Prime contracts are frequently avoided. The usual 7 percent fixed fee allowed on cost-plus-fixed-fee prime contracts runs the risk of being wiped out by disallowances of cost items.

## Communications Firms Scrape Labor Barrel

DUE to defense expenditures and strong tv set demand, communications equipment manufacturers expect to hire 35,000 more workers by December 15, increasing by 10 percent the 365,000 employees in this branch of the industry at mid-year. They still face severe shortages of professional, technical and skilled workers, according to a Department of Labor survey.

More than 40 percent of the companies surveyed, employing two-thirds of the workforce, have had difficulty in finding qualified workers. However, only a few manufacturers reported that the shortages were seriously impeding operations.

► **Area Gains**—A major labor expansion program is projected by electronics manufacturers in Boston, who plan to increase their production staffs by 20 percent. The largest proportional increase is employment in the communications equipment industry during the last year was in New York, with a gain of 33 percent.

## WCEMA Celebrates 10th Anniversary

BOARD of directors of the West Coast Electronic Manufacturers Association will commemorate the Association's tenth year at a dinner at the new Statler Hotel in Los Angeles on Thursday, November 13. The celebration will climax "Western Electronics Week" set for November 10 to 14.

# Freshman Enrollment Increases

### Early returns from schools show increased quantity and quality of new registrants

INDICATIONS are that freshman enrollment in engineering colleges this fall is up 10 to 20 percent over 1951. Overall male college student admissions may show a slight increase over last year's figure despite low tide in supply of high-school graduates that reflects the low birth rate of depression years. The trend towards engineering and away from less technical studies continues.

► **Informed Guesses**—These estimates are based upon statements of several college deans of engineering. U.S. Office of Education survey reports are not yet available, although preliminary returns indicate a 13 percent rise in overall college freshman enrollment. This figure, based largely on returns from smaller schools, will probably be pared down in the final analysis.

Indications, based upon entrance examination results, are that this year's engineering freshman is of slightly higher scholastic calibre than his 1951 predecessor.

► **Demand High**—Demand for young graduates stood at 40,000 this year. This reflected a leveling-off of the tooling-up stage of rearmament and improved utilization of engineers by industry. Engineering graduates totaled 30,000, with only 15,000 immediately available to industry. The balance sheet shows 16½ percent commissioned through ROTC, 22 percent draft eligible, 6½ percent headed towards advanced degrees and 4½ percent enrolled in enlisted reserve or national guard.

The future appears to hold 20,000 engineering graduates for 1953, 17,000 for 1954 and 20,000 for 1955. ROTC enrollees in these classes number 4,600, 7,650 and 11,000.

## Tax Laws Favor Repair of Equipment

### Maintenance costs can be deducted, but replacements must be capitalized or depreciated

EVEN though it may cost more to repair an old spot welder or electronic heating generator than to buy entirely new equipment, some tax-conscious executives are encouraging such work. The reason is that repair costs are deductible on income tax returns. Modifications, however, are not always classed as repairs by the U.S. Treasury Department.

► **Deductible Modifications**—If the intent is to continue ordinary operation or use of a piece of equipment, without appreciably prolonging its life or improving its performance, the cost of the repair is fully deductible on the tax return for the year in which the repair is made. The actual cost of a repair in relation to the cost of new equipment does not effect the tax interpretation if other facts prove it is a true repair.

Repairs made to avoid violating a law or requirement of a regulatory body are usually deductible. Thus, modifications of electron bombarders, diathery equipment and electronically controlled welding equipment to suppress radiation banned by the FCC could be considered deductible.

► **Not Deductible**—Whenever a so-called repair adds materially to the value of a property, appreciably prolongs its life, improves efficiency or gives added functions, it becomes an improvement or replacement in the eyes of the law. The cost must then be capitalized or changed to a depreciation reserve. In the latter case, cost is not deductible in a lump sum but must be spread or depreciated over the reasonable expected life of the equipment.

Proof of intent generally influ-

(Continued on page 16)

# SHOCK and VIBRATION NEWS

**BARRYMOUNTS FOR ASSURED CONTROL OF SHOCK AND VIBRATION**

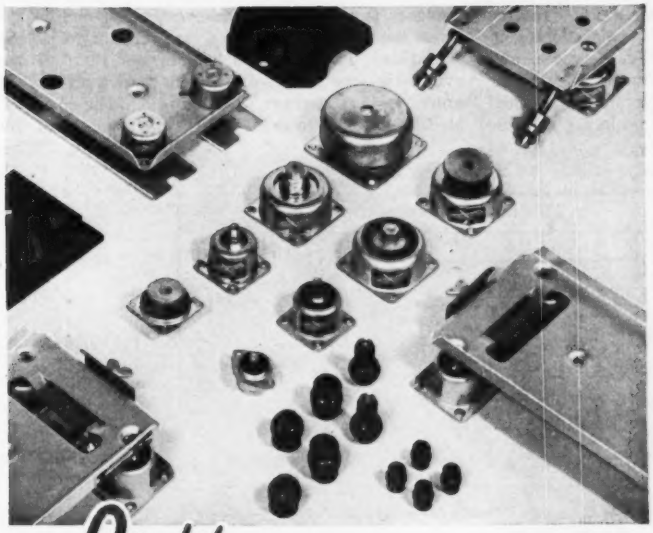

*the* ***Right*** *answer*

**TO YOUR SHOCK AND VIBRATION PROBLEMS**

will be found in this complete family of Barrymounts. From tiny, ounce-rated unit mounts . . . through ruggedized bases . . . to heavy-duty isolators for industrial machinery . . . Barrymounts meet all your needs. FREE CATALOGS give you details of dimensions, load ratings, and military specifications met by these effective vibration and shock isolators.

**FOR AIRCRAFT SERVICE**

Catalog 509 describes ALL-METL Barrymounts for use at extreme temperatures. Catalog 502-A covers Air-damped unit mounts and bases.

**FOR INDUSTRIAL USES**

Catalog 504-B describes the general line of Barrymounts rated from ⅛ ounce to 3300 pounds. Catalog 607 covers the use of Barrymounts with heavy industrial machinery.

**And for SPECIAL PROBLEMS**

ask the advice of our Field Engineering department, organized to apply our wide experience to your particular needs.

Address all inquiries to:

**THE BARRY CORP**

**707 PLEASANT ST., WATERTOWN 72, MASSACHUSETTS**

**SALES REPRESENTATIVES IN**

Atlanta Chicago Cleveland Dallas Dayton Detroit Los Angeles
Minneapolis New York Philadelphia Phoenix Rochester St. Louis
San Francisco Seattle Toronto Washington

ences an examiner's decision on deductions. Here engineering memos and records become vital to prove intent to repair. Full records should be kept of transactions, contracts, notes of conferences, and other data pertinent to a repair job; even dictated personal thoughts on the issue are valuable if dated and filed.

Where repairs are part of an overall factory project, Treasury tendency is to lump the whole cost as an improvement requiring capitalization. Two contracts help to avoid this—one for repairs and the other for replacement, substantiated by detailed records.

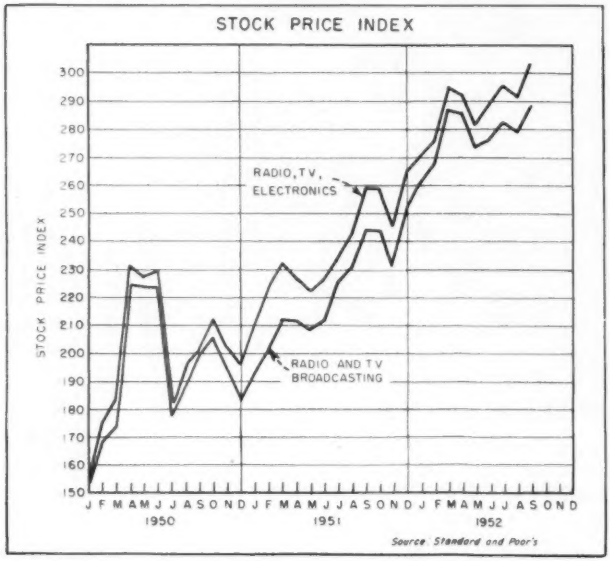


**ELECTRONICS** investors benefit by steady growth of industry that makes . . .

# Stock Price Averages Triple Pre-War Mark

RADIO, television and electronics stock prices soared to a new high in September, reaching an average value of three times that of immediate pre-war years, as shown in the accompanying chart. This increase compares with 1.9 times for all industrial stocks and 1.8 times for all stocks listed on the New York Exchange over the same period.

► **Source**—Stock price average figures are reported each month on page 4 of ELECTRONICS. They are based on a group of stocks selected as being representative of the industry. The figure for "Radio-TV and Electronics" is based on eleven stocks of the following corporations: Admiral, Cornell-Dubilier, Emerson, General Instrument, Magnavox, Motorola, Philco, RCA, Sylvania, Zenith and Raytheon. This list purposely omits certain large corporations, like General Electric and Westinghouse, whose electronic business is but a fraction of their total output. Only two stocks, those of RCA (NBC) and CBS, underly the "Radio Broadcasters" listing.

The values of the stock price averages are based on 100, which represents the equivalent aggregate market value of the stocks for the five year post-war period 1935-1939. The monthly average is computed from the closing price of each stock on the four or five Wednesdays of each month.

The chart shows the stock price trend from January 1950 to the present. These curves tend to show the state of the stock market in general and do not necessarily reflect the vicissitudes of the electronics and broadcasting industries as such.

# Financial Roundup

BEST picture of the bread-and-butter side of the electronics business for the first six months of 1952 is reflected in the earnings statements of manufacturers in the field. In September five companies announced earnings for the period January-June:

| *Company* | *'52 Net Income* | *'51* |
|---|---|---|
| American Cable & Radio ... | $377,408 | $807,732 |
| AT&T .... | 14,938,168* | 17,643,448* |
| IT&T ..... | 9,666,002 | 8,693,096 |
| I-T-E Circuit Breaker . | 1,332,418 | 864,721 |
| Westinghouse ... | 31,507,000 | 31,564,000 |

* Net operating income.

*Tung-Sol*, which recently made its bow on the New York Stock Exchange, announced earnings of $492,241 for the first quarter of 1952. For the 26-week period ending June 28, income was $889,843 compared to $1,305,113 for the same period in 1951.

*IT&T* received $4,844,000 from the Spanish Government in partial payment for the sale of its investment in the Spanish Telephone Company. The company plans to invest $12,000,000 in its Argentina subsidiary, Compania Standard Electric Argentina, for plant expansion and to supply the Government's telephone system with components and raw materials as part of a new agreement recently signed with the Argentine Government. Previous supply and advisory contracts were cancelled. As indemnification for the cancellation, IT&T

(Continued on page 18)

# *Impedance measurements*

## FROM 10 TO 1500 Mc

The General Radio V-H-F Bridge and U-H-F Admittance Meter enable measurements of a variety of impedance types over a very wide frequency range—from 10 to 1500 Megacycles.

Measurements on antennas, transmission lines, coaxial systems and networks, impedance components, and on both v-h-f and u-h-f television circuits may be made to a high degree of accuracy. Reflection coefficient and standing-wave ratio may be readily determined with the aid of either of these instruments.

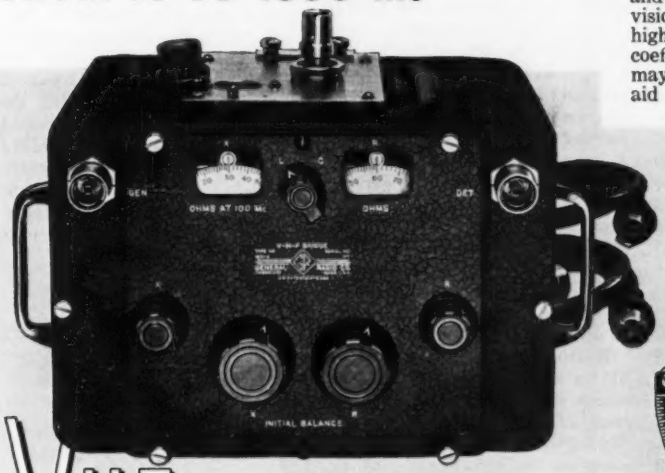


## VHF BRIDGE

**TYPE 1601-A . . . . . $395.**

**Frequency Range:** *10 to 165 Mc, direct reading*
**Reactance Range:** *± 230 ohms at 100 Mc*
**Resistance Range:** *0 to 200 ohms*
**Accuracy:** *Resistance — ±(2% + 1 ohm)*
*Reactance — ±(5% + 2 ohms)*

### Features

- ★ *Resistive and reactive components are independent—no sliding balance*
- ★ *Direct-reading resistive and reactive indicators insure convenience, rapidity and unusual ease in operation*
- ★ *Accurate low impedance measurements with the V-H-F Bridge — measures high impedance indirectly*
- ★ *Accurate measurements over a wide impedance and frequency range with the U-H-F Admittance Meter*
- ★ *Terminal arrangements and accessories permit measurement of both coaxial and lumped circuits — new constant-impedance adjustable line and balun greatly facilitate measurements*
- ★ *Coaxial adaptors eliminate connecting lead and residual terminal capacitance errors*
- ★ *Small size and light weight facilitate use in cramped locations such as antenna towers*

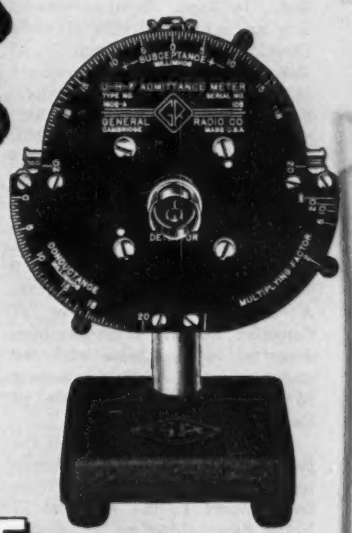


## UHF ADMITTANCE METER

**TYPE 1602 . . . . $295.**

**Frequency Range:** *66 to 1000 Mc, direct reading. Indirectly from 20 to 1500 Mc*
**Conductance Range:** *0.2 to 1000 millimho*
**Susceptance Range:** *±(0.2 to 1000) millimho*
**Accuracy:** *Conductance and susceptance*
*0 to 20 millimho*
*± (5% + 0.2 millimho)*
*20 to ∞ millimho ±5 $\sqrt{M}$ %*
*(M is scale multiplying factor)*

**GENERAL RADIO Company**

275 Massachusetts Avenue, Cambridge 39, Massachusetts
90 West St. NEW YORK 6 920 S. Michigan Ave. CHICAGO 5
1000 N. Seward St. LOS ANGELES 38

received $3,800,000 from the Peron government.

▶**Stock Offerings**—*Skiatron* offered 108,000 shares of additional common stock (par value 10 cents) of the Skiatron Electronics and Television Company at $2.50 per share. Proceeds will be used to carry on a public test of its pay-as-you-see television system known as Subscriber-Vision in the New York Metropolitan area. Plans call for a 90-day test of the system in 300 homes. An initial charge of $1.00 per show will be made during the test. In June, Skiatron entered into an agreement with Hanovia Chemical & Manufacturing Co. of Newark, N. J., a unit of Engelhard Industries and maker of ultraviolet medical and home equipment, which makes plant and production facilities of Hanovia and research and engineering facilities of the Engelhard companies available to Skiatron.

*Admiral* offers to exchange 1 share of its capital stock for 2 shares of Canadian Admiral Corp. A total of 42,654 shares of Canadian Admiral stock has been deposited in accordance with the exchange order. Admiral now owns 85.8 percent of the shares of Canadian Admiral.

*RCA* plans the acquisition of the Estate Stove Company of Hamilton, Ohio, a division of Noma Electric, subject to the approval of Noma Stockholders at a meeting scheduled for Nov. 5. RCA will form a new subsidiary, the RCA-Estate Appliance Co. Inc.

*National Cash Register* has a stock purchase agreement with the Computer Research Corp. of Hawthorne, Calif. under which it will acquire a controlling interest in the company. The transaction, involving $1,000,000, is subject to Federal Court approval. The computer company employs 140 people.

*Electronic Computer Corp.*, Brooklyn, N. Y. is offering an issue of 52,500 shares of Class B (non-voting) common stock (par one dollar) at $3.00 per share. Proceeds are to be used for development work and working capital.

*Electro-Components Corp. of America* offers an issue of 2,000,000 shares of common stock (par one cent) at 12 cents per share. Net proceeds to be used to repay a loan from Electronic Devices, Inc. and for new equipment and working capital.

▶**Stock Registrations and Filings**—*Penn-Allen Broadcasting Co.*, Allentown, Pa. files with SEC for 4,014 shares of common stock (par $10) and 10,035 shares of Class A common stock (par $10) offered in units of two common and five class A shares at $70 per unit without underwriting. Proceeds will be used to construct and operate a television station.

*Television Equipment Corp.* files for 1,225,000 shares of common stock (par 5 cents) to be issued at 11 cents per share. Proceeds will be used for working capital.

*Westinghouse* registers with SEC a statement covering 150,000 shares of its $12.50 par common stock offered under its "Employee Stock Plan". Workers can buy the stock on the installment plan by payroll deductions. For six months after issue in May, 1953 the stock will be offered for $5.00 less than the average market price for it during the first days of April, 1953. The purchase price, in any event is not to be more than $42 or less than $30 a share.

*Electronic Micro-Ledger Accounting Corp.*, Boston, Mass., files notification covering 299,900 shares of common (par 10 cents) to be offered at $1. per share to pay for building equipment.

## New UHF Lead-in Proves Out in Portland

### Special design for tv works according to calculations of designers

TELEVISION engineers want an inexpensive, mechanically rugged, air-insulated two-wire waterproof cable to lead uhf picture signals from antenna to receiver. For vhf television they have found a useful compromise in the familiar 300-ohm ribbon. But losses in ribbon leadins at the new-channel frequencies are extremely high if the ribbon is damp and covered with soot or salt spray.

Engineers of Anaconda Wire and Cable Co., working with those of RCA Service Corp., have come up with a cable that received its baptism during the opening of KPTV in Portland, Oregon, recently. As shown in the illustration, a pair of Copperweld conductors carry the voltage. They are each wrapped with a spiral of polyethylene thread and then surrounded by a clear polyethylene tube. In the final manufacturing process, a brown polyethylene covering is extruded over the pair of tubes laid side by side. In cross section, the cable resembles a rectangle with the corners rounded off. Inside each corner a ridge supports the round tubes away from the walls of the casing.



UHF-TV antenna lead-in uses maximum of air and minimum of insulation close to the conductors. They are wound with spiral plastic thread, inserted in tubes and the tubes are supported away from walls of outer casing

▶**Electrical Characteristics**—Losses per hundred feet of dry cable range from 1.5 db at 100 mc to 5.2 db at 1,000 mc, which is above the high end of the uhf tv band. Wet, the losses run higher. Since there is no sure means, short of dumping the cable into a vat of salt water, to make comparable wet tests, engineers are cagey about mentioning figures in public. Based upon their experiences in Portland, they are content to say, "if reception is good when the line is dry, it is also good when the line is wet."

▶**Where Do We Get It?**—The new line is now available in quantity, although probably not at the local radio store. It will cost, initially,

(Continued on page 20)

# LABORATORY for ELECTRONICS, INC.

## *Research, Engineering and Production of Precision Electronic Equipment*

### MODEL 401 OSCILLOSCOPE

—a high gain, wide band, versatile, general purpose instrument for precise, quantitative studies of pulse waveforms, transients and other high or low speed electrical phenomena.



*For complete information Ask for Bulletin O52*

### MODEL 101 MAGNETOMETER

Accurately measures magnetic field strength using the principle of nuclear resonance.



*For complete information Ask for Bulletin M52*

### MERCURY DELAY LINES

Used for storage of information, comparison of two sets of information, correlations and sequential timing devices, they are the smallest, most compact lines available.



*For complete information Ask for Bulletin MDL51*

### MODEL 802 STABLE MICROWAVE OSCILLATOR

Provides a highly stable source of microwave signals, suitable for use as a laboratory standard. Features a direct reading frequency dial, sine wave modulation input and self-contained power supply.



## Engineering Representatives:

**Albuquerque, New Mexico**
Gerald B. Miller Company
302½ West Central Avenue
Albuquerque 3-1998

**Alexandria, Virginia**
W. A. Brown & Associates
3834 Mt. Vernon Avenue
Overlook 6100

**Atlanta, Georgia**
W. A. Brown & Associates
1570 Northside Drive
Vernon 5395

**Boston 15, Mass.**
Walter T. Hannigan Company
43 Leon Street
Garrison 7-2650

**Chicago 45, Illinois**
Hugh Marsland & Company
6405 N. California Avenue
Ambassador 2-1555

**Cleveland 15, Ohio**
M. P. Odell Company
2536 Euclid Avenue
Prospect 1-6171

**Dallas 1, Texas**
J. Y. Schoonmaker Co.
2011-13 Cedar Springs
Sterling 3335

**Dayton 6, Ohio**
M. P. Odell Company
2676 Salem Avenue
Oregon 4441

**Hollywood 28, California**
Gerald B. Miller
1540 N. Highland Avenue
Hollywood 9-6305

**Minneapolis 2, Minnesota**
H. M. Richardson & Company
2210 Foshay Tower
Geneva 4078

**New York 23, New York**
Land-C-Air Sales Company
1819 Broadway
Plaza 7-7747

**San Francisco 3, California**
Gerald B. Miller Company
1355 Market Street, Space 280D
Klondike 2-2311

**Wichita, Kansas**
George E. Harris & Company
306 Lulu, P. O. Box 3005
Telephone 62-2731

*Phone or write your representative for complete information on LFE electronic equipment.*

LABORATORY for ELECTRONICS, INC.

75 PITTS STREET BOSTON 14, MASS.

PRECISION ELECTRONIC EQUIPMENT • OSCILLOSCOPES • MAGNETOMETERS • COMPUTERS • MICROWAVE OSCILLATORS • MERCURY DELAY LINES

three to four times as much as a good grade of ribbon line. Because it uses a copper-over-steel conductor, it saves critical material. The nearest comparable coaxial cable, for example, requires more than ten times the amount of copper.

When the serviceman installs this line he must seal off the outdoor end to prevent the air spaces filling with moisture. This is simply done by melting the polyethylene at the end with a cigarette lighter and pressing the molten material together into a mass.

## Merrill In For Jones

FEDERAL Communications Commission is again up to team strength by the appointment of Eugene Hyde Merrill, Democrat of Utah, to fill the unexpired term of Robert F. Jones, Republican of Ohio. Although the position runs to June 30, 1954, Merrill's tenure is sure only until Congress reconvenes in January. His future depends both upon party in power and his future acceptability to his own party.

Commissioner Merrill graduated in 1932 from the University of Utah as a mining engineer. His experience in public utilities, from the government side, is extensive and he has held several positions under the Federal government. These include Office of Production Management, Foreign Economic Administration and most recently, in the National Production Authority.

## TV Networks And CP Holders Press Bell

ANALYSIS of the locations of the first 68 new television-station construction permit holders reveals that more than half of them are not in cities on the Bell System's tv network routes, either planned, under construction or in operation. As a result, network broadcasters and new tv cp grantees are asking Bell for additional television network facilities.

▶**Bell's Plans**—Bell says that its statement made when the freeze was first lifted still holds true: "Further expansion of the Bell System's network will be governed by the needs of individual stations and the network broadcasters. Future steps also may be influenced by the availability of critical equipment and material."

The company emphasizes the importance of receiving adequate advance notice of plans from the tv industry, to permit the scheduling of an orderly construction program, and requirements.

**HELICOPTERS** survey Brazilian jungle as . . .

## Microwave Invades Latin America

LOFTY MOUNTAIN PEAKS with precipitous drops to steaming jungle make much of Latin America a line-of-sight propagation paradise. With notoriously bad interurban telephone service, it is not surprising that Latin America is turning to radio relay in a big way.

VHF has long-standing popularity in Latin America, aided in part by availability of channels. Microwave is catching on rapidly, however, with rising demand for increased channel capacity. Further, the Latin-on-the-street exerts much influence on his government's spending and tends often to favor most recent alternative systems.

▶**Obstacles**—Major technical obstacles to microwave installation are lack of dependable power for unattended repeater stations and scarcity of trained technicians.

Financially, dollar-exchange restrictions are common and in some countries, import bans had to be met by shipping unfinished chassis to local assembly plants.

In spite of these problems, 16 microwave systems are either operating or planned in eight different Latin American countries. Fully half the systems are used for remote control, linking studios with distant radio transmitters or receivers.

▶**Brazil**—A nine-hop, 24-channel microwave system linking Rio de Janeiro and São Paulo will be Brazil's longest. Ordered from International General Electric by Senhor João do Amaral, local newspaper and radio magnate, the system will provide two high-fidelity channels to serve Amaral's Rio and São Paulo a-m outlets. Remaining channels will be used for telephone, facsimile and leased-wire teleprinter. Most likely leasee . . . the Brazilian army.

Complete plans call for an 850-mile system extending southward to Porto Alegre. Senhor Amaral, who is currently installing televi-

(Continued on page 22)

# EXPERTS *in Filters for the Military*













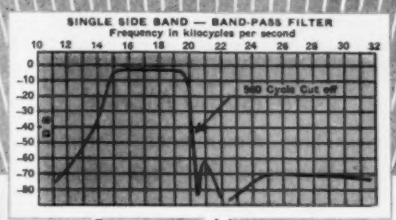


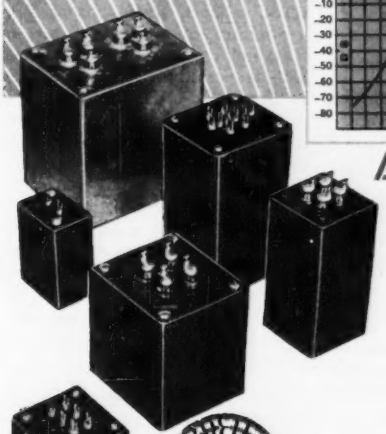

## *Burnell* High Quality Toroids and Audio Filters

With each new technological advancement in military electronics the design engineer has had to cope with more difficult network problems.

Today it is not sufficient for the engineer just to know what signal to clean up or which to reject or separate.

His filter requirements have become increasingly complicated by other critical factors such as phase shift, linearity, transient response, extreme accuracy through wide temperature ranges etc.

True, these have always existed to a certain degree but their importance has become considerably amplified in such applications as Guided Missiles, Radar and Sonar.

The BURNELL & CO. engineering staff has won many friends among our customers through the valuable assistance they have rendered in the solution of their network problems. If YOUR application involves audio filters or similar networks write or call our engineers who will give prompt attention to your requirements.

*Burnell & Company*
YONKERS 2, NEW YORK
CABLE ADDRESS "BURNELL"

EXCLUSIVE MANUFACTURERS OF COMMUNICATIONS NETWORK COMPONENTS

sion transmitters in both Rio and São Paulo, plans eventually to parallel his system with a microwave television relay.

▶**Cuba**—Two rival Cuban television networks are planning parallel microwave television relays from Havana to Santiago, 500 miles distant. Both systems will use Philco equipment.

Radiotelevision El Mundo has ordered a 5-station, 110-mile network from Matanzas to Santa Clara. The system will furnish one tv channel and a service channel.

Circuito CMQ is beginning its network with a 7-station system linking Havana with Santa Clara. It will provide three tv channels and three service channels.

**Microwave Systems in Latin America**

| | | |
|---|---|---|
| **Remote Control** | | |
| Argentina (Army) | Federal | ..... |
| (Navy) | RCA | 4 terminals |
| Brazil (Navy) | RCA | 6 terminals |
| Chile (Government) | ..... | ..... |
| Cuba (Aeronautical Radio de Cuba) | Federal | 2 terminals |
| Mexico (Government) | ..... | 12 miles |
| Aeronautical Radio de Mexico | Federal | 2 terminals |
| Guatemala (Tropical Radio) | Raytheon | 2 terminals |
| **Telephone** | | |
| Mexico (Telephones de Mexico) | Federal | 2 term., 1 rep. |
| Puerto Rico Telephone Co. | Federal | ..... |
| Puerto Rico Water Resources Authority | Motorola | 12 miles |
| Venezuela (Shell Petroleum) | Standard Elec. (Brit) | 30 miles |
| **Radio and TV Relay** | | |
| Brazil (Amaral) | GE | 2 term., 8 rep. |
| Cuba (Circuito CMQ) | Philco | 2 term., 5 rep. |
| (El Mundo) | Philco | 2 term., 3 rep. |
| **Telegraph** | | |
| Puerto Rico Communications Authority | ..... | 2 term., 1 rep. |

## Denver's Second TV Station On Air

KBTV, Denver's second tv station, began regular programming on Oct. 12 with the programs of CBS and ABC. The station ran a series of engineering test programs previous to that date.

With its interim power of 12 kw erp, reception is reported at Cheyenne, Wyoming, Colorado Springs and across the continental divide at Granby, Colorado, indicating that eventual service will cover an area within a radius of 100 miles.

Wide coverage is attributed to the transmitter location on Lookout Mountain, 2,500 feet above Denver. TV receiver servicemen report that little adjustment of antennas is necessary to receive the channel 9 signal.

The Rocky Mountain Electrical League reports 57,964 sets in the area as of October 1. Predictions are that up to 100,000 sets will be sold there by January 1, next year.

## Binaural Sound Is New Audio Market

### Three-dimensional listening takes hold. Two-track discs and tapes appear

DEMONSTRATIONS of new multiple-channel audio equipment in New York City's Broadway Theater and by many different electronic manufacturers at the Audio Fair presage a new market for radio and audio equipment. Possibilities are doubly enticing dollar-wise because everything must be in duplicate, from the microphones that serve as twin ears right on through the audio system to the speakers that reproduce the illusion of directional sound.

Purists maintain that true binaural sound reproduction (each instrumental sound appears to be coming from the location of that instrument in the orchestra) can be obtained only with earphones fed by separate channels. With loudspeakers spaced the recommended ten feet or more apart, each ear hears both sound sources to a varying extent, depending on listening position, and the effect is really stereophonic. However, industry favors the term binaural as a simpler designation.

▶**Seven-Channel Theater Sound**—Most dramatic of all listening effects achieved to date is that of Reeves-backed 'Cinerama'. Here seven different magnetic sound tracks on 35-mm sprocketed film feed seven groups of speakers arranged behind a huge circular screen almost surrounding the audience. Synchronous motors insure lip-sync with the three projectors employed. During filming of scenes, microphone placement is carefully related to speaker locations in the theater. Thus, when filming the landing of a plane on an aircraft carrier, the seven microphones are equally spaced along the length of the carrier to pick up the sound as the plane roars past each. The resulting illusion in the theater is that the roaring plane goes right over the heads of the audience.

▶**Two-Station Broadcasting**—Use of two separate microphones and sound channels when broadcasting a program simultaneously over an a-m radio station and its f-m affiliate permits reception on two receivers in opposite corners of a living room in a home, to give binaural broadcast reception. This technique was demonstrated by WQXR-AM and WQXR-FM in two broadcasts during the Audio Engineering Society's annual convention. Two wire lines were leased to carry one of the programs to Hartford for broadcasting there by F. M. Doolittle's f-m and a-m stations, to demonstrate feasibility of network binaural.

▶**Twin-Groove Disc Recordings**—Use of two parallel grooves on 33⅓-rpm LP discs as a two-channel source for binaural sound was advocated by Emory Cook of Cook Labs in the opening paper at the convention. Two ordinary LP pickups are mounted one behind the other on a single arm, with their needles riding in adjacent grooves,

(Continued on page 24)

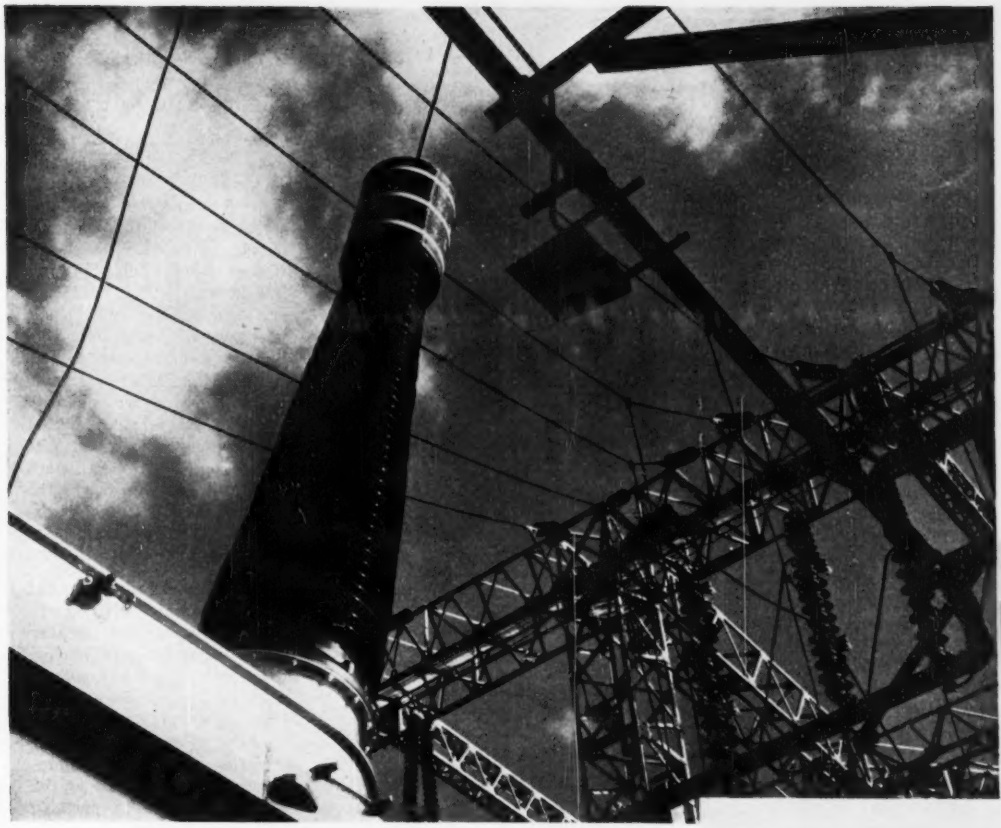

# "More Power to You—Safely, with SYNTHANE"

Electrical energy is restless . . . would jump at any chance to escape—if it could.

The fact that voltage can be stepped up for transmission, stepped down for use; that current can be led to and from transformers, around switchboards, and steered into circuits safely you may credit to electrical apparatus builders. Important materials to them are Synthane laminated plastics.

Synthane laminated plastics are used in transformers for spacers and coil forms because it is an insulator unaffected by oils; in tap changer panels because it is a machinable insulator with high dielectric strength; in "Glowtectors" because of high insulation resistance and abuse-resistance; in circuit breakers and bus bars for its arc resistance.

Synthane, an unseen essential to power generation, transmission, and control, may be helpful to you. Send for your copy of the Synthane Catalog and learn all about Synthane's combination of electrical, chemical, physical and mechanical properties. Synthane Corporation, 6 River Road, Oaks, Pennsylvania.

**PETTICOAT STANDOFF INSULATORS** machined from Synthane square-hole tubing. Here, Synthane was specified for its good dielectric properties, machinability and rugged strength.

*Synthane-one of industry's unseen essentials*

**SYNTHANE**

**LAMINATED PLASTICS**

to play these records through two separate sound systems.

Several record manufacturers are coming out with binaural records, priced under $5 per 12-inch disc; this is comparable to present LP prices, though twin-track recording necessarily cut playing time in half. One large receiver manufacturer is considering production of binaural phonographs having dual amplifiers and one remote speaker.

► **Twin-Track Magnetic Tape**—Both Magnecord and Ampex have two-track tape equipment of high-fidelity professional quality, to sell in the $850 and $1,500 price ranges respectively. These models were widely used as signal sources for binaural demonstrations in the exhibit rooms at the Audio Fair. Both use standard magnetic tape and staggered heads to give two parallel tracks. Narrowed tracks give slightly poorer signal-to-noise ratio but do not affect fidelity.

The psychological effect of binaural listening on the ears is such that background noise and distortion become much less noticeable; the result is a tremendous impact on first-time listeners even with mediocre audio equipment.

## Electronic Music Business Growing

### Larger 1952 sales volume forecast as trend toward tube-equipped organs increases

ELECTRONIC musical instruments represent a substantial equipment market for manufacturers.

Instrument sales this year are expected to be at least 30 percent higher than 1951's substantial volume. Sales of electronic organs alone in 1951 were about $35 million, and amplifiers which are now available for virtually every stringed instrument reached a volume of over $1.5 million last year.

► **Assemblers**—Some musical instrument manufacturers assemble their own electronic equipment and have sizeable electronic departments

This 93 tube all-electronic organ, used at the political convention in Chicago, turned out volume equal to 50 ordinary pipe organs or 3,000 home radios

in operation. During World War II, when instrument manufacturing was curtailed, many produced military electronic equipment.

## Parts Distributors Get Ready For UHF

### NEDA convention airs UHF problems of distributors and manufacturers alike

ELECTRONIC parts distributors at the recent NEDA Convention were uneasy about the uhf television picture. Big questions on their minds concerned deliveries of converters, antennas and lead-in for uhf. Even though most of the cities they represented did not have uhf cp grants, distributors wanted to be ready for it.

Several distributors at the convention did come from cities with cp grants for uhf stations. They reported that telephones began ringing as soon as the grants were announced. Customers wanted samples of uhf antennas, converters and lead-in as well as special servicing instructions. As a result, some parts distributors in markets that may not have uhf tv for years, find that the demand is substantial and supply is lacking.

► **On The Spot**—A panel of manufacturers representing antenna, lead-in, converter, tube and set companies were put on the spot at the convention to answer these delivery and supply questions. But on the whole they were unable to give definite answers. They did say, however, that by November such equipment would really start rolling, including full-channel tv sets as well. The manufacturers pointed out two main reasons why quantity deliveries of the equipment had not been made. First, they wanted to take up to the last minute to work on further improvements of the equipment; second, quantity demand was still very small, despite words to the contrary.

► **Outlook** — Regardless of uhf problems, electronic distributors and manufacturers are looking forward to increased sales volume. H. F. Bersche of RCA predicted that electronic renewal volume would reach $600 million this year. He based the figure on the following estimates of electronic equipment in use as of the end of the year: Radio (home, auto, portable sets)—110 million, television sets—20,250,000, AM-FM stations—2,940, tv stations—125, Non-broadcast communications—500,000 and amateur stations—110,000. By 1955 electronic renewal volume is expected to reach $1 billion and by 1960 a total of $2 billion. Thus the outlook is bright for electronic distributors despite present uhf problems.

## Drive-in Theatre TV Makes Its Debut

USE of theatre television in a Rutherford, N. J. drive-in theatre, for the Walcott-Marciano title fight telecast, opened a new field for the growing medium and set new attendance records for the theatre even though admission was $10 per car. The pictures shown were said to be the largest ever projected (24 by 36 feet). The projection

(Continued on page 26)

# NEW! Complete Line of ERIE BUTTON® MICAS for 150°c Operation

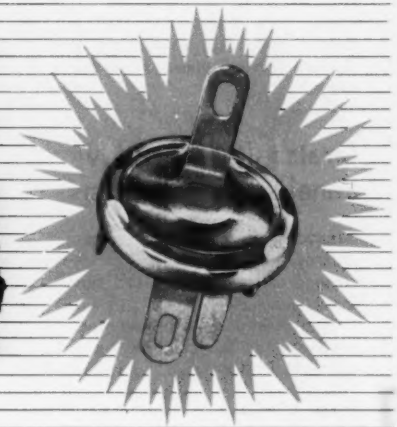

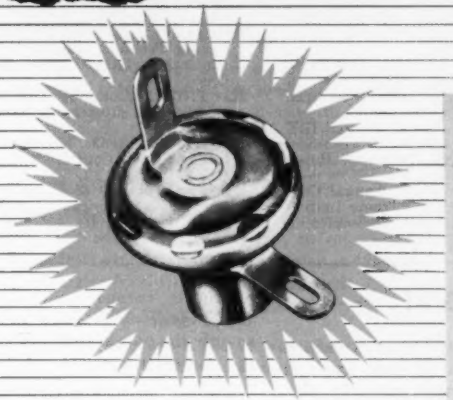

THE addition of a new complete line of ERIE Button Silver-Mica Condensers, designed for operation at 150°C, is important news to manufacturers of military electronic equipment and specialized commercial applications. The new line greatly extends the range of applications for the popular ERIE Button Micas. The new line is available in the eight standard terminal and mounting styles, and in other styles on special order. Write for samples and literature.

## SPECIFICATIONS

**Maximum Operating Temperature:** 150°C.
**Voltage Rating:** 500 DC.
**Capacitance Values:** All standard decade values from 10 mmf to 1000 mmf.
**Capacitance Tolerance:** ± 20%, ± 10%, ± 5%, ± 2%, or ± 1 mmf, whichever is greater.
**Q:** 1000 minimum for values above 30 mmf.
**Insulation Resistance:** 10,000 megohms minimum.
**Life Test:** 750 volts DC for 1000 hours at 150°C.
**Seal Test:** Moisture resistance conditioning in accordance with MIL M745. After this the following shall be met:
- **Insulation Resistance:** 500 megohms minimum.
- **Q:** 500 minimum for values above 30 mmf.
- **Capacitance Change Limit:** 3% or 0.5 mmf, whichever is greater.

**Temperature and Immersion Cycling:** In accordance with ASESA Project 114. After this the following shall be met:
- **Dielectric Strength:** 600 volts DC.
- **Insulation Resistance:** 3000 megohms minimum.
- **Q:** 750 minimum for values above 100 mmf.
- **Capacitance Change Limit:** 3% or 0.5 mmf, whichever is greater.

ERIE RESISTOR CORP.

**ERIE RESISTOR CORPORATION** . . . ELECTRONICS DIVISION

*Main Offices:* **ERIE, PA.**

*Sales Offices:* Cliffside, N. J. • Philadelphia, Pa. • Buffalo, N. Y. • Chicago, Ill. Detroit, Mich. • Cincinnati, Ohio • Los Angeles, Calif.

*Factories:* **ERIE, PA.** • **LONDON, ENGLAND** • **TORONTO, CANADA**

throw of 125 feet is the longest on record.

Equipment consisted of RCA's standard theatre television system mounted on a five-ton truck. The signal was microwaved to the mobile projection booth from the Empire State building, 5½ miles away.

## Stretch-Out Hits New Panel-Instrument Firms

STRETCHING OUT of government contracts has adversely affected some manufacturers in the panel-instrument field.

The panel-instrument market is good, constituting about 90 percent of the total instrument business in this country in terms of units sold. Level of business activity has remained fairly steady for the past 12 months.

Old and established firms, in most cases, have not greatly increased their production capacity and are enjoying good business conditions. But new manufacturers built plants, anticipating a radical increase in demand due to military needs. This radical increase has not yet materialized.

## Robot Stencil-Cutter

New photoelectric machine by Roneo Ltd., London, produces a ready-to-use stencil in a few minutes from almost any typewritten, drawn, printed or photographic copy. As a phototube scans the original line by line, an electric spark cuts a facsimile design spot by spot on the stencil

### MEETINGS

OCT. 29: Armed Forces Communications Association, New York Chapter, Officers Club, Governor's Island, New York.
Nov. 5-7: Sixteenth Annual Time and Motion Study and Management Clinic, Sheraton Hotel, Chicago, Ill.
Nov. 7: IRE Microwave Professional Group, Symposium On Microwave Circuits, Western Union Telegraph Co. Auditorium, New York, N. Y.
Nov. 7: AIEE Symposium, The Science of Music and Its Reproduction, Engineering Societies Bldg., New York, N. Y. Other lectures scheduled for Dec. 11, Jan. 15, Feb. 20, Mar. 12 and Apr. 16.
Nov. 10-13: NEMA, Haddon Hall, Atlantic City, N. J.
Nov. 10-30: International Radio and Electronics Exhibition, Bombay, India.
Nov. 17-18: AIEE, Technical Conference on Recording and Controlling Instruments, Benjamin Franklin Hotel, Philadelphia, Pa.
Nov. 19: American Standards Association, 34th Annual Meeting, Waldorf Astoria, N. Y.
Nov. 21-22: Fourth Annual IRE Regional Papers Technical Conference, President Hotel, Kansas City, Mo.
Nov. 24-25: Fifth Annual Conference on Electronic Instrumentation and Nucleonics in Medicine, New Yorker Hotel, New York, N. Y.
DEC. 10-12: IRE-AIEE Computer Conference, Park Sheraton Hotel, New York, N. Y.
JAN. 14-16, 1953: Joint AIEE-IRE Conference on High Frequency Measurement, Washington, D. C.
FEB. 4-6: Western Computer Conference, Hotel Statler, Los Angeles, Calif.
FEB. 5-7: IRE Southwestern Conference and Electronics Show, Plaza Hotel, San Antonio, Texas.
MARCH 9-12: NEMA, Edgewater Beach Hotel, Chicago, Ill.
MARCH 23-25: Sixth Annual Conference for Protective Relay Engineers, A & M College of Texas, College Station, Texas.
MARCH 23-26: IRE National Convention, Waldorf-Astoria Hotel and Grand Central Palace, New York, N. Y.
APRIL 18: Seventh Annual Spring Technical Conference, Cincinnati IRE, Cincinnati, Ohio.
MAY 11-13: National Conference on Airborne Electronics, Dayton, Ohio.
MAY 18-21: 1953 Electronic Parts Show, Conrad Hilton Hotel, Chicago, Ill.
MAY 24-28: NAED, 45th Annual Convention, Conrad Hilton Hotel, Chicago, Ill.

## Business Briefs

► **Magnetrons** and klystrons will be manufactured in Europe under an agreement recently made by Raytheon with the Fabbrica Italiana Raddorizzatori Apparecchi Radiologici (F.I.R.A.R.) of Genoa, Italy.

► **FCC** may postpone the effective date of rules for medical diathermy equipment made before July 1, 1947 to June 30, 1953.

► **Import Quota** recently set by the Italian government limits shipments of U. S. tv receivers to 5,000 for the second half of 1952.

► **An Endless Loop** of magnetic tape is used by P. K. Tobin of Evanston, Illinois to teach his young parakeet to talk. The tape player is turned on when the family goes out for the evening, so only the parakeet has to endure the endless repetition.

► **Largest** train communications system in the world, representing an investment of $9 million, is operated by the Pennsylvania Railroad. Nearly 1,300 radiophones are in service on trains and in wayside control towers along 2,000 miles of line.

► **Analysis** of one typical electronic equipment order placed with Westinghouse revealed that 44 percent of the $16,965,288 contract had been passed along to subcontractors and suppliers. The largest of these subcontractors in turn spent 41.6 percent of his contract with 254 other firms. In all, a total of 381 firms participated in filling this one defense order.

# How HONEYWELL MERCURY SWITCHES

## help put the "automatic" in MAYTAG Automatic Washers!

An automatic washer must give safe, trouble-free service day after day. Water inflow must be accurately regulated and washing action begun at the proper time. The machine must never start while the lid is raised, must stop if the spin-drying basket becomes unbalanced during the drying cycle.

The Maytag Automatic Washer performs these vital functions unfailingly—with the help of three Honeywell Mercury Switches located in the machine's cover. Glass enclosures fully protect the switches from the effect of water vapor and splash which may vary from 60° to 150° F.

### Prevents operation if lid is open or clothes in drying cycle are off balance

When the cover of the washer is lifted, this mercury switch tilts and stops the machine until lid is closed again. Actuated by a trigger, it also shuts off power if the spin-drying basket becomes unbalanced.

### Controls water level

Proper water level is maintained automatically by a float which tips this switch to an angle causing it to shut off the inflow of water and hold desired water level within 1–16 of an inch.

### Starts washing action

When the float reaches proper water level, this switch starts the washer agitator and begins the washing cycle.

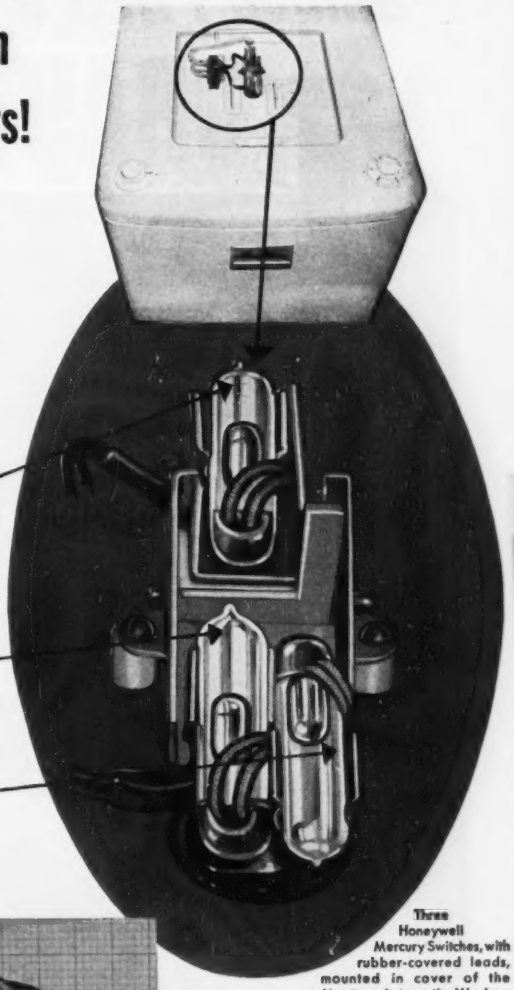

Three Honeywell Mercury Switches, with rubber-covered leads, mounted in cover of the Maytag Automatic Washer.

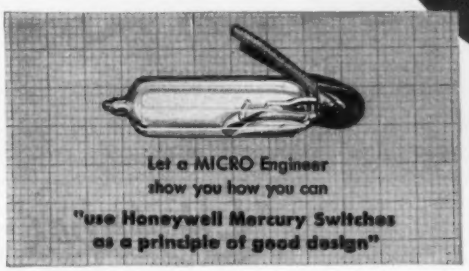

Let a MICRO Engineer show you how you can

**"use Honeywell Mercury Switches as a principle of good design"**

Your nearby MICRO field engineer will help select the *exact* mercury switch for your application from more than 90 Honeywell Mercury Switch designs. These include a wide variety of mountings, actuating linkages, lead supports, terminal blocks embedments and enclosures. Contact your nearest MICRO branch office for information.

**MICRO**

MAKERS OF PRECISION SWITCHES

FREEPORT, ILLINOIS

A DIVISION OF

MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

# *Unique PHELPS DODGE development*

# DRASTICALLY CUTS

- ✓ FAST WIRE-TO-WIRE BONDING INTO RIGID COIL.
- ✓ REDUCES FORMING AND ASSEMBLY OPERATIONS.
- ✓ FAR FEWER STEPS IN WINDING TYPICAL TV YOKE COIL.
- ✓ MAKES POSSIBLE UNUSUAL SHAPE COILS.

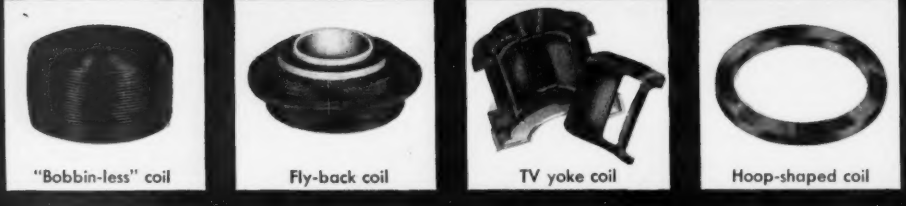

"Bobbin-less" coil | Fly-back coil | TV yoke coil | Hoop-shaped coil

*"It takes the best*

## *PHELPS DODGE COPPER PRODUCTS*

**CORPORATION**

# *in Magnet Wire--BONDEZE*...*

# COIL WINDING COSTS!

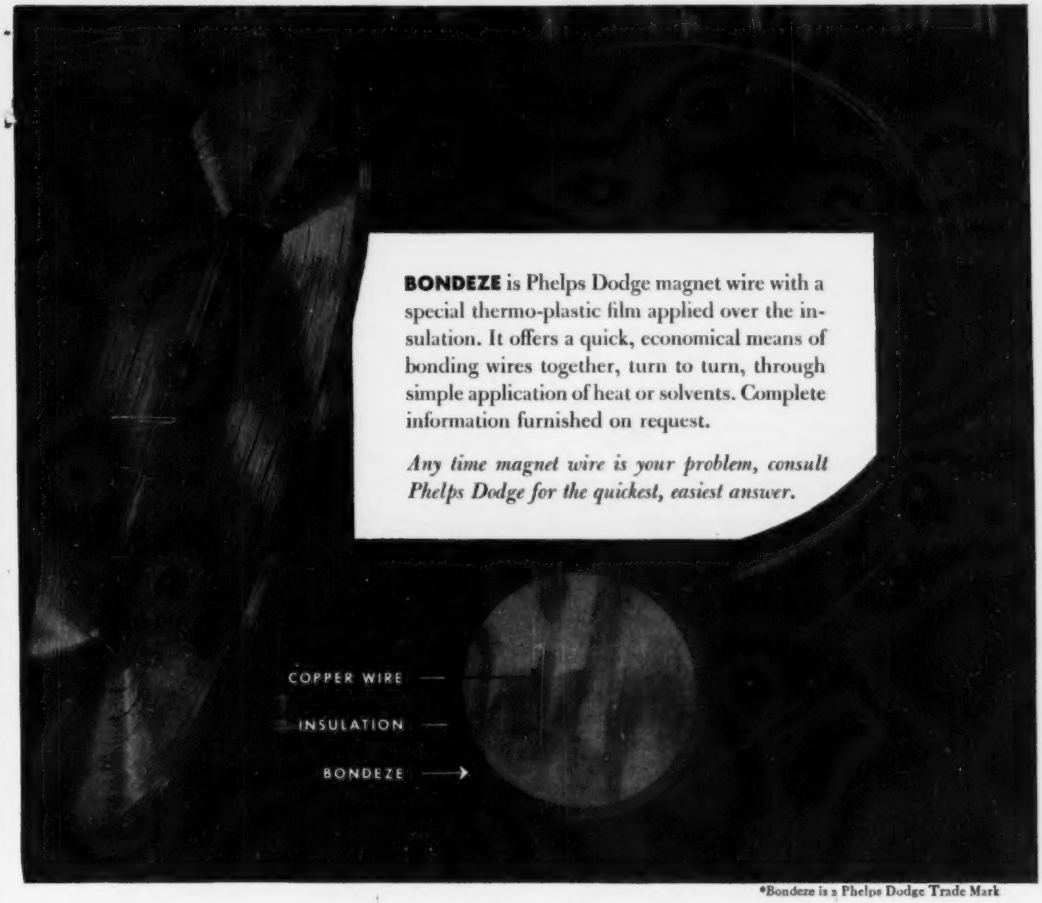


**BONDEZE** is Phelps Dodge magnet wire with a special thermo-plastic film applied over the insulation. It offers a quick, economical means of bonding wires together, turn to turn, through simple application of heat or solvents. Complete information furnished on request.

*Any time magnet wire is your problem, consult Phelps Dodge for the quickest, easiest answer.*

*Bondeze is a Phelps Dodge Trade Mark

*to make the best!"*

PHELPS DODGE COPPER PRODUCTS CORPORATION

**INCA MANUFACTURING DIVISION**

FORT WAYNE, INDIANA

# WHAT ABOUT
# Temperature Coefficient
## IN *PRECISION* RESISTORS

Specify a precision resistor for electronic equipment you are designing, and you frequently become involved in temperature coefficient. At this point, many engineers do not fully understand the temperature coefficient they select from a table.

First of all, the temperature coefficient (T.C.) of a resistor is the variation in resistance (ohmic value) as the temperature changes. It is expressed as a change per degree Centigrade—either Per Cent, Parts/Million, or Ohms/Ohm. It should not be confused with stability—the lack of resistance change at a given temperature after aging, temperature cycling, or overload testing.

**SPECIFIED T.C. CAN BE INACCURATE:** Temperature coefficient of a precision wire-wound resistor is dependent almost entirely upon the alloy of the wire used. However, it is *not* necessarily the *nominal* value specified by the wire manufacturers for a particular alloy. Wire manufacturers cannot economically control T.C. within the close limits required by many of today's highly precise applications. T.C. of a given alloy and diameter may vary from spool to spool, and even within the same spool.

The variation in T.C. is particularly great in the "E" alloys—commonly called "special low-T.C. wire." For example, Shallcross' laboratory tests have shown T.C. to vary from higher than ±.004%/°C. to lower than ±.001%/°C. for resistors wound with "E" alloys *nominally* ±.002%/°C.

**THE ONLY WAY TO T.C. ACCURACY:** Shallcross manufactures resistors wound with all commonly used alloys made in the following degrees of T.C. quality:

1. *Resistors wound with a designated alloy and offering no guarantee of T.C. other than the limits established by the wire manufacturer.*

2. *Resistors wound with wire from spools pre-tested and selected for T.C.* Determination and recording of the T.C. of each spool of "E" alloy wire is part of the standard Shallcross inspection procedure. Selection assures only that the yield of resistors within specific T.C. limits will be high. It does *not* assure that *all* resistors wound with tested wire will be within the T.C. limits of selection.

3. *Resistors with a guaranteed T.C. over a given temperature range.* Pre-selected wire is used to wind these resistors, readings are taken at several temperatures, and the T.C. is computed. Only individual resistors within the customer's specified T.C. limits are released. Although time-consuming, this is the *only* known way to guarantee a particular temperature coefficient or, in the case of "E" wire, the much publicized *range* of ±.002%/°C.

***Further details on T.C. and other resistor characteristics are available in Shallcross Bulletin R-3C.***

**SHALLCROSS MANUFACTURING COMPANY • 522 PUSEY AVENUE, COLLINGDALE, PA.**

The first of a series to promote a better understanding of the performance characteristics of precision wire-wound resistors.

**MATCHED T.C.**

Shallcross regularly produces pairs of precision wire-wound resistors with closely matched temperature coefficients. Such pairs may be matched to within ±.005%/°C.




**SELECTED T.C.**

Resistors may be made with practically any desired positive or negative temperature coefficient between −.002%/°C. and +.018%/°C. A specified T.C. may be selected within ±.0005%/°C. over a given temp. range.



**NEW INSTRUMENT RESISTOR**

This Shallcross Type 2455 1-watt instrument resistor measures 1⅛" L. x ⅜" Diam. It is designed for decades and other applications requiring resistance values from 0.1 to 1000 ohms with close tolerances, low temperature rise, and low inductance.

# "ZERO" PHASE SHIFT

## COMPUTER REFERENCE VOLTAGE TRANSFORMERS

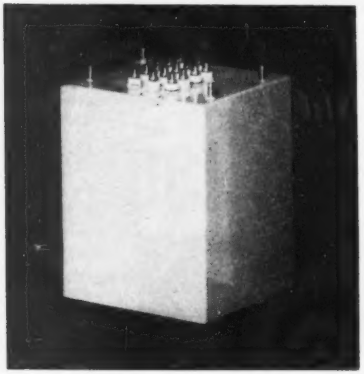

***LESS THAN 0.1 MILLIRADIAN PHASE SHIFT***

***±.02% ACCURACY OF VOLTAGE RATIOS***

A radical new approach to the design and manufacture of precision transformers makes it possible to have calculable minimum errors.

The actual measurement of phase shift and voltage ratio is in complete agreement with the calculation to lowest value that measurement is possible.

## MIL-T-27 TRANSFORMERS

TOROIDAL TRANSFORMERS
INSTRUMENT TRANSFORMERS
PULSE TRANSFORMERS
VIDEO TRANSFORMERS
INPUT-INTERSTAGE-OUTPUT
POWER TRANSFORMERS
MAGNETIC AMPLIFIERS



**INDUCTANCE MEASUREMENT** — Any operating condition can be simulated in the range of 0-1000V A.C. and 0-5 Amps. D.C.

**DEVELOPMENT OF AUDIO TRANSFORMERS** — All characteristics of audio transformers in the range of .01 cycle to 10 Megacycle can be measured and evaluated.

**POWER LOSS MEASUREMENT** — Losses as low as 15 micro watts in the range of 20c to 200 K.C. can be measured and analyzed and possible improvements effected.



**PULSE TRANSFORMER DESIGN** — The cut and try methods commonly used in the design of pulse transformers has been largely supplanted by the use of special equipment.

TRANSFORMERS INC

# TRANSFORMERS INC.

532 NORTH STREET • ENDICOTT, NEW YORK

Telephone ENDICOTT 8-1801

STATIC ELECTROMAGNETIC DEVICES

# HERTZ ... FIRST to prove the existence of Electromagnetic Waves

*Heinrich Rudolph Hertz*

*1857-1894*

A pupil of Helmholtz, and Professor of Physics at the University of Bonn, this eminent German physicist was first to intentionally produce and measure electromagnetic waves. They were named "Hertzian waves" in his honor.

His research, the basis for all modern electronics, gave Marconi the idea for the "wireless."

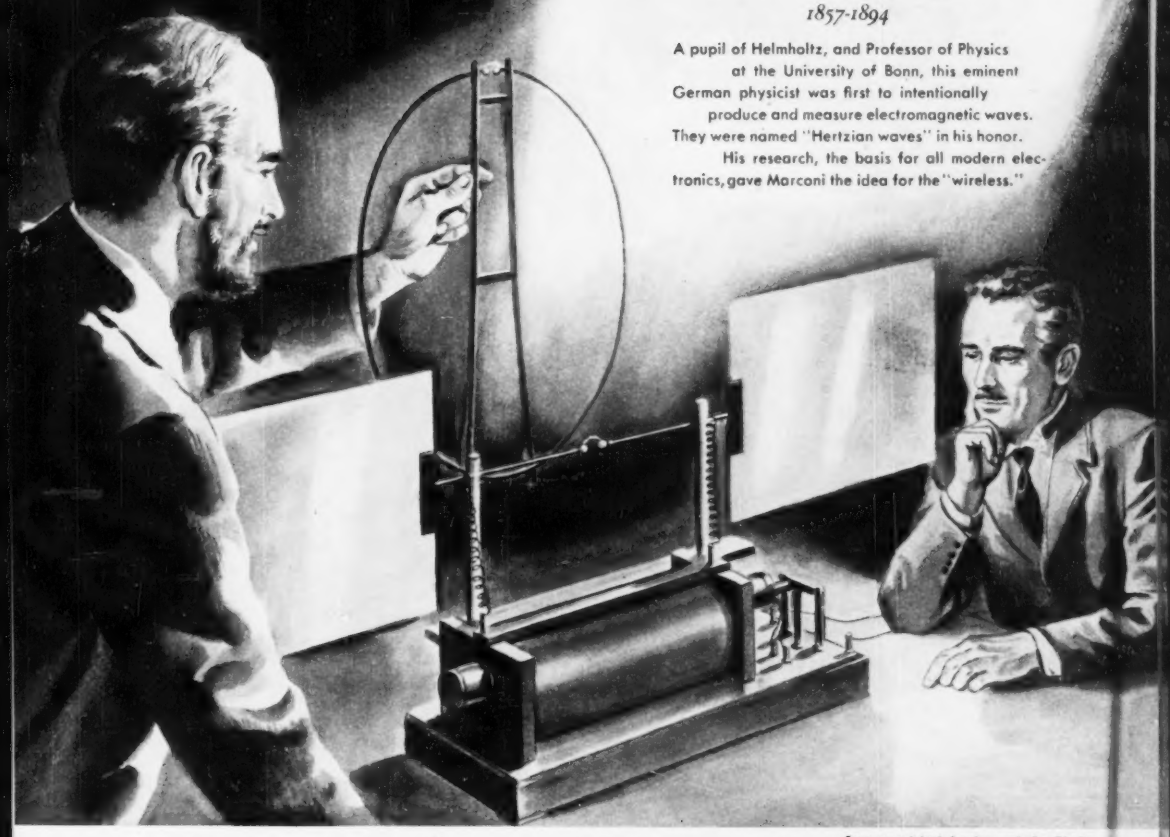

From an original drawing made for Ohmite

# OHMITE® ... FIRST in Resistors ...today

*Be Right with*

**OHMITE**

**RHEOSTATS**

**RESISTORS**

**TAP SWITCHES**



For its toughest resistance problems, industry turns to Ohmite wire-wound resistors . . . the most widely used resistors on the market, today. Ohmite offers *greater dependability* and longer life, even under the most adverse conditions. Ohmite offers *wider assortment*, too—a complete selection of types and sizes for every need. Specify Ohmite resistors, and know you use the best!

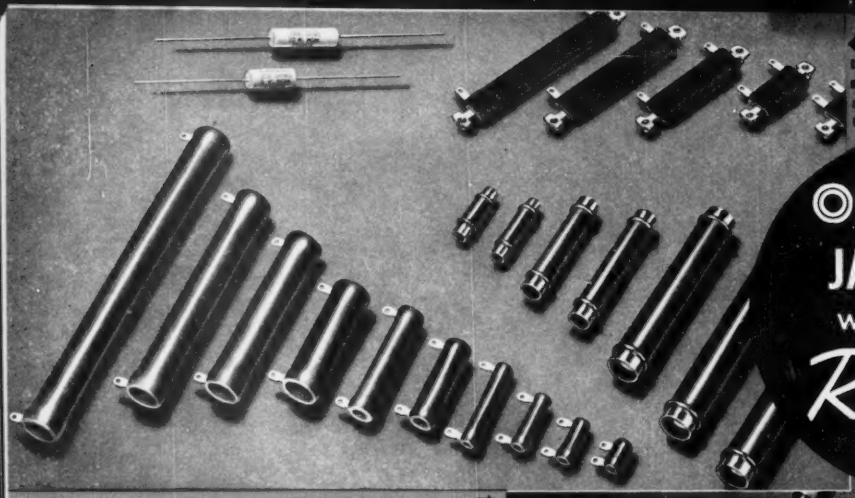

The Ohmite line of tab-terminal, ferrule-terminal, axial-terminal, and flat type resistors that meet JAN-R-26A, Characteristics "G" and "J."

# OHMITE JAN TYPE WIRE-WOUND *Resistors*

Ohmite tab-terminal and ferrule-terminal type resistors that meet JAN-R-26A, Characteristic "F."

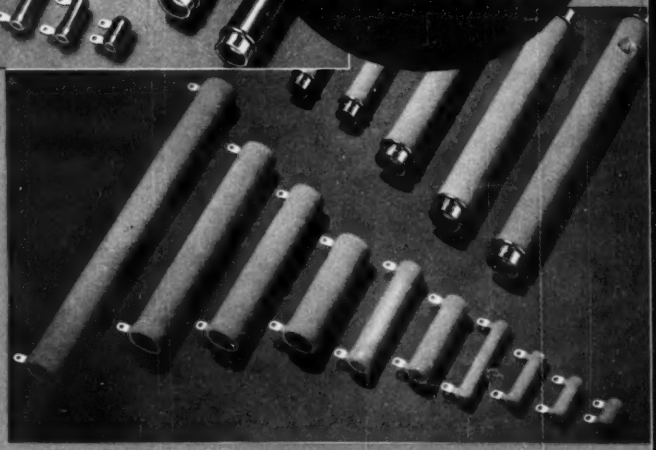

## STYLES AND SIZES

### TAB-TERMINAL TYPE
Characteristics G, J, and F

| Style | Over-all length | Diameter | *Watts |
|---|---|---|---|
| RW-29 | 1-3/4" | 1/2" | 6 |
| RW-30 | 1" | 19/32" | 8 |
| RW-31 | 1-1/2" | 19/32" | 10 |
| RW-32 | 2" | 19/32" | 12 |
| RW-33 | 3" | 19/32" | 18 |
| RW-34 | 3" | 29/32" | 30 |
| RW-35 | 4" | 29/32" | 38 |
| RW-36 | 4" | 1-5/16" | 60 |
| RW-37 | 6" | 1-5/16" | 78 |
| RW-38 | 8" | 1-5/16" | 110 |
| RW-39 | 12" | 1-5/16" | 166 |

### TAB-TERMINAL TYPE
with terminal hole to clear No. 8 screw Characteristics G, J, and F

| Style | Over-all length | Diameter | *Watts |
|---|---|---|---|
| RW-40 | 3" | 29/32" | 24 |
| RW-41 | 4" | 29/32" | 32 |
| RW-42 | 4" | 1-5/16" | 49 |
| RW-43 | 6" | 1-5/16" | 74 |
| RW-44 | 8" | 1-5/16" | 100 |
| RW-45 | 12" | 1-5/16" | 160 |
| RW-46 | 10-1/2" | 1-5/16" | 135 |
| RW-47 | 10-1/2" | 1-9/16" | 145 |

### FERRULE-TERMINAL TYPE
Characteristics G, J, and F

| Style | Over-all length | Diameter | *Watts |
|---|---|---|---|
| RW-10 | 11-7/16" | 1-5/16" | 140 |
| RW-11 | 9-5/8" | 1-5/16" | 116 |
| RW-12 | 7-7/16" | 1-5/16" | 86 |
| RW-13 | 5-1/8" | 1-1/16" | 58 |
| RW-14 | 4-7/16" | 1-1/16" | 48 |
| RW-15 | 2-15/16" | 3/4" | 28 |
| RW-16 | 2-3/8" | 3/4" | 14 |

### FLAT TAB-TERMINAL TYPE
(Stock Mounting) Characteristics G and J

| Style | Over-all length | Width of Core | Thickness of Core | †Watts |
|---|---|---|---|---|
| RW-20 | 2-1/2" | 1-3/16" | 1/4" | 15 |
| RW-21 | 3-1/4" | 1-3/16" | 1/4" | 22 |
| RW-22 | 4-3/4" | 1-3/16" | 1/4" | 37 |
| RW-23 | 6" | 1-3/16" | 1/4" | 47 |
| RW-24 | 7-1/4" | 1-3/16" | 1/4" | 63 |

### AXIAL-TERMINAL TYPE
Characteristics G and J

| Style | Length of Core** | Diameter | †Watts |
|---|---|---|---|
| RW-55 | 1-3/8" | 5/8" | 5 |
| RW-56 | 2" | 5/8" | 10 |

**2-1/2" wire leads

*Watts free air JAN Characteristic "F" or "G"

†Watts free air JAN Characteristic "G"

## . . . MEET REQUIREMENTS OF JOINT ARMY-NAVY SPECIFICATION JAN-R-26A

(Amendment 3)

Ohmite offers an unusually complete line of resistors that meet the most rigid requirements (characteristics "G," "J," and "F") of Joint Army-Navy Specification JAN-R-26A. To meet these requirements, resistors must pass severe moisture resistance and thermal shock tests. They are required to withstand strenuous vibration applied for five continuous hours, and satisfy the requirements of many other tests.

Of the 38 different resistor styles listed in JAN-R-26A, Ohmite offers 33 styles that meet these specifications, in a complete range of resistance values.

OHMITE MANUFACTURING COMPANY
4816 Flournoy Street, Chicago 44, Illinois

*Be Right with . . .*

# OHMITE®

RHEOSTATS • RESISTORS • TAP SWITCHES

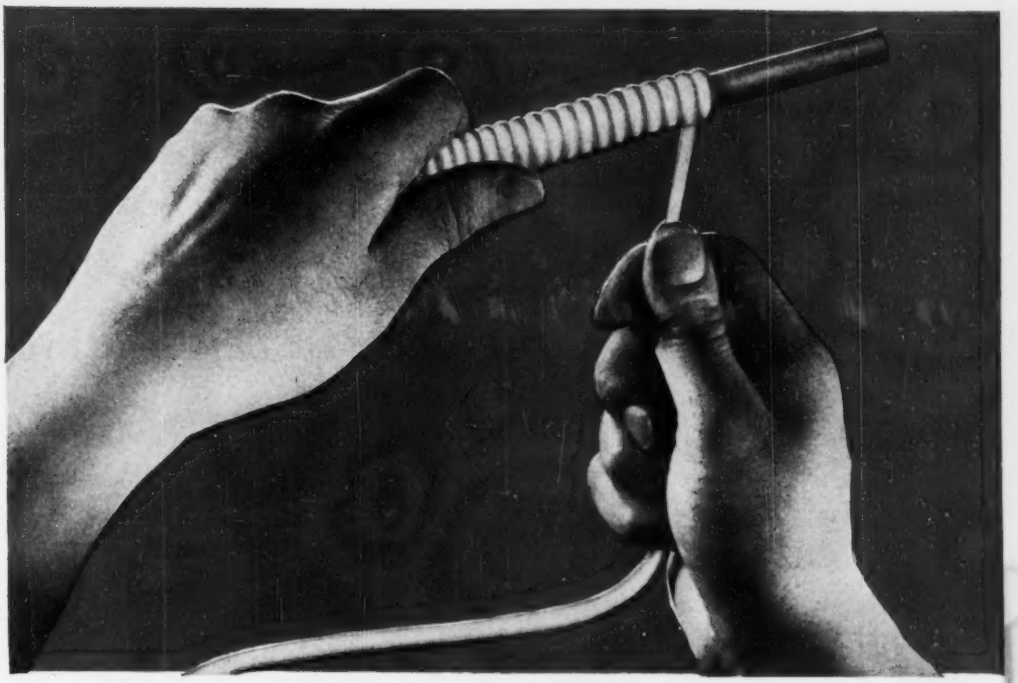

# Now . . . an extremely flexible high-temperature tubing . . . IRVINGTON Silicone Rubber-Coated Fiberglas*

If you need a *flexible* insulating tubing that meets Class "H" specifications—and particularly if you need it *now*—look into this new Irvington product!

With the introduction of Silicone *Rubber*-Coated Fiberglas Tubing, Irvington offers to the electrical industry a product that, like the resin-coated type, meets all NEMA Class "H" requirements. In addition, this new tubing has the advantage of extreme flexibility. Its white color is a plus wherever appearance is a factor.

AND . . . Irvington Silicone Rubber-Coated Fiberglas Tubing is available for immediate delivery!

Get the full story—just mail the coupon for technical data sheet.




*T.M. Reg. U. S. Pat. Off. by Owens-Corning Fiberglas Corp.

*Send this convenient coupon now*

**Irvington**

**VARNISH & INSULATOR COMPANY**

Irvington 11, New Jersey

Plants: Irvington, N. J.; Monrovia, Calif.; Hamilton, Ontario, Canada

Irvington Varnish & Insulator Co. EI-11/52
11 Argyle Terrace, Irvington 11, N. J.

Gentlemen:
Please send me technical data sheet on Irvington Silicone Rubber-Coated Fiberglas Insulating Tubing.

Name.....Title.....

Company.....

Street.....

City.....Zone.....State.....

# AMPEX MODEL 500 SIMPLIFIES TELEMETERING

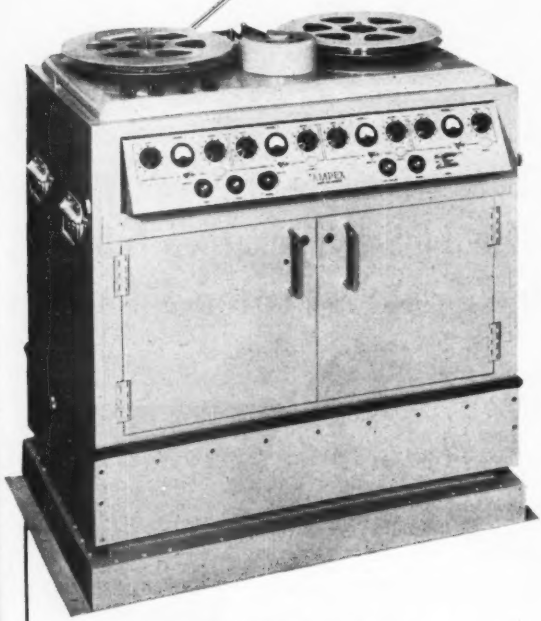

## Entire output of FM-FM receivers is recorded on tape without detectable error or loss of data.

**AMPEX** magnetic tape permanently records data in electrical form. Data reduction can then be carried out any time, any place and in any way. This eliminates the need for complex filter and discrimination systems at each ground station. This frequently lowers ground station cost and complexity to one-third that of alternative installations. Use of fewer mechanical and electronic components also decreases the chance of losing any critical data.

The AMPEX Model 500 was developed to achieve the extremely steady tape motion and high frequency response required in FM-FM telemetering. This performance also serves other data recording fields that have similarly high demands. The Model 500 has a frequency response up to 100 kc. to simultaneously record all RDB telemetering bands. Its extremely low tape flutter and wow account for an overall playback error less than 0.7%, (using subcarrier frequencies deviated ±7½%).

***Features of the AMPEX Model 500***

- *Records frequencies up to 100 kc. (including all RDB bands)*
- *Records the output of one to four receivers*
- *Overall playback error less than 0.7% on final data*
- *Less than 0.1% peak-to-peak flutter and wow*
- *Ruggedly constructed to meet military requirements*
- *16 minutes recording time at 60-inch tape speed*

***Write for further information to Department E***

AMPEX

MAGNETIC RECORDERS

AMPEX ELECTRIC CORPORATION • 934 CHARTER STREET • REDWOOD CITY, CALIFORNIA

# ELECTRONIC TEST INSTRUMENTS

## New broad band Adaptors and Detector Mounts offer high accuracy, easy operation, low cost

Model 485 Detector Mounts and 281A Adaptors typify the new *-hp-* line of precision waveguide test instruments. Each has the simplest possible construction consistent with its basic function. Each covers the complete frequency range of its waveguide size and is wholly integrated with other equipment for the same band. Novel circuitry plus simple mechanical design insure highest accuracy and stability, provide utmost operating ease and permit quantity production at low cost.

### -hp- 485 Detector Mounts

These mounts offer new convenience in measuring microwave power with a bolometer, or detecting rf energy with a crystal. A single tuning control adjusts match easily and quickly. (See Figure 1.) For optimum match, mounts may be preceded by a slide-screw tuner such as *-hp-* 870A. Detected output appears at a BNC jack, and may be measured with an *-hp-* 430B Microwave Power Meter or an *-hp-* 415A Standing Wave Indicator.

*-hp- 485B Mounts* are tunable and available in waveguide sizes 2" x 1", 1½" x ¾", 1¼" x ⅝", and 1" x ½". Maximum VSWR when used with a Sperry 821 barretter is 1.25. These mounts also accommodate 1N21 and 1N23 crystals.

*-hp- S485A Mount* is for use with 3" x 1½" waveguide, and employs only a Sperry 821 barretter. It requires no tuning, and maximum VSWR is 1.25 at any point in the frequency band.

### -hp- 281A Adaptors

These adaptors provide a convenient means of transmission between waveguide and coaxial systems. Power may be fed in either direction, and each unit covers the full frequency range of its waveguide size with VSWR less than 1.25. (See Figure 2.) Coaxial connections are made to a standard Type N plug, and waveguide connections to a plain AN flange. *-hp-* 281A Adaptors are offered in all waveguide sizes covering the frequency range from 2.6 to 12.4 kmc.



Figure 1. Typical VSWR vs. Frequency, -hp- 485A, when used with barretter.



Figure 2. Typical VSWR vs. Frequency, -hp- X281A.

*For complete details, see your -hp- field representative or write direct*

**HEWLETT-PACKARD COMPANY**
2478A PAGE MILL ROAD • PALO ALTO, CALIFORNIA

**Instruments for Complete Coverage**

**MINNEAPOLIS**
Sept. 29, through Oct. 1.

**MILWAUKEE**
Oct. 7, through Oct. 10.

**ST. LOUIS**
Sept. 23, through Sept. 26.

**BUFFALO**
Oct. 29, through Oct. 31.

**NEW HAVEN**
Nov. 11, through Nov. 13.

**BALTIMORE**
Nov. 18, through Nov. 20.

**NEWARK**
Nov. 4, through Nov. 7.

**CINCINNATI**
Oct. 21, through Oct. 23.

**WINSTON-SALEM**
Dec. 9, through Dec. 11.

# Coming to help you

**solve problems in design and production!**

"BRINGING the mountain to Mohamet might best describe Dow Corning Corp.'s traveling exhibit . . . Free standing panels . . . separate the exhibit into nine bays, each emphasizing a property of silicones and showing where that property brings a benefit to an actual end product or operating unit . . ."
INDUSTRIAL MARKETING (June 1952)

"NEXT TO THE GREATEST SHOW ON EARTH . . . We could go on . . . reciting the fantastic properties of Silicones, but just as breathtaking as the materials were the display techniques used to demonstrate them . . ."
CIRCUIT RIDER (Vol. 6, No. 2, published by Electrical Construction and Maintenance)

". . . Heat Stability Plus: Visitors . . . see, among other demonstrations, how Silastic (Dow Corning's silicone rubber) remains soft and flexible at temperatures far above the limits of organic rubber . . ."
CHEMICAL WEEK (Jan. 26, 1952)

"IF YOU HAVEN'T already seen it, don't miss it when it comes around . . ."
POWER ENGINEERING (May 1952)

## DOW CORNING SILICONES . . . are no longer a mystery or a "future possibility" to the 17,000 executives and engineers, representing more than 4600 plants, who have already seen the Dow Corning Silicone Exposition.*

They learned that silicones are fluids and resins that keep clothes and shoes and brick walls dry in the rain. They're fluids that polish without rubbing.

They're rubber that won't melt on hot aircraft engine cylinders or freeze on switches that operate bomb bay doors at 100° below zero.

They're electrical insulating resins and varnishes that double the power of electric motors, or multiply by 10 the life of electric machines.

They're paints that protect metal at 1000°F. They're foam killers and release agents. They're a whole family of new engineering materials that can help you to improve your product or to cut production costs.

*In Boston • Chicago • Cleveland • Dayton Detroit • Fort Worth • Houston Indianapolis • Los Angeles • New York Philadelphia • Pittsburgh • Seattle Washington, D.C. • or Wichita.

***DON'T MISS IT***

**MAIL THIS COUPON TODAY**

**Dow Corning Corporation, Dept. BE-23 Midland, Michigan**

Kindly include me among your guests at the private showing of the Dow Corning Silicone Exposition in

☐ St. Louis ☐ Buffalo
☐ Minneapolis ☐ Newark
☐ Milwaukee ☐ New Haven
☐ Cincinnati ☐ Baltimore
☐ Winston-Salem

NAME _____

ADDRESS _____

CITY _____ ZONE ____ STATE ____

Atlanta
Chicago
Cleveland
**DOW CORNING**
Dallas
Los Angeles
New York
Washington D. C.

DOW CORNING SILICONES **CORPORATION**
MIDLAND, MICHIGAN

CANADA: Fiberglas Canada Ltd., 1200 Bay St., Toronto, Ontario
ENGLAND: Midland Silicones Ltd., 49 Park Lane, London, W.1

# *Innovation in Button Seals*

## ONE-PIECE LUGGED CONDENSER SEAL #1535

● Because there has been a consistent demand for a one-piece lugged condenser seal, Hermetic has developed a complete line of these important components, ranging from .152 diameter to .962 diameter. The seal provides a one-piece lugged tubing for positive external connections that allows minimum center to center assembly on smaller sizes. Handling and vibration will not affect the security of attachment of lug to tubing. The lug cannot come loose as in the case of a two-piece assembly. Lugged tubing is also available on individual feed-throughs and multi-headers.

This is another example of how Hermetic spares no pains to produce the most efficient, most foolproof headers in the electronics field. It is also another reason why Hermetic leadership, based on its many outstanding achievements and services, is widely recognized from coast to coast.

For the answer to your problems, contact Hermetic, the one and only dependable source of supply, and be sure that your requirements will be given top engineering assistance.

Write for your FREE copy of Hermetic's colorful, informative, new, 32-page brochure, the most complete presentation ever offered on hermetic seals.

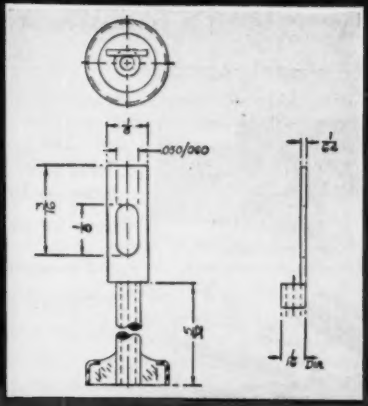

**Hermetic Seal Products Co.** 31 South Sixth Street Newark 7, New Jersey

FIRST AND FOREMOST IN MINIATURIZATION

# Items like these available QUICKLY at CHASE® warehouses

COPPER NAILS and TACKS

COPPER STORM NAILS

BRASS and BRONZE BOLTS and NUTS

BRASS and BRONZE CAP, MACHINE and LAG SCREWS

BRASS COTTER PINS
BRASS ESCUTCHEON PINS

BRASS and COPPER RIVETS, BURS

BRASS, BRONZE and COPPER WASHERS



SOLDERING COPPERS



INDUSTRIAL WIRE CLOTH and BRASS STRAINER CLOTH

INDUSTRIAL and AUTOMOTIVE FITTINGS

PERFORATED METAL IN BRASS, BRONZE and COPPER

BEARING BRONZE BARS

CALL US FOR ANYTHING from Bearing Bronze Bars to Brass or Bronze Bolts . . . or any other brass or copper item for maintenance, repair, operating or production.

Twenty-three Chase warehouses are located in major industrial centers from coast to coast. Phone the one nearest you. We can usually fill your orders from stock.

Chase® BRASS & COPPER

WATERBURY 20, CONNECTICUT • SUBSIDIARY OF KENNECOTT COPPER CORPORATION

• *The Nation's Headquarters for Brass & Copper*

| | | | | | | |
|---|---|---|---|---|---|---|
| Albany† | Chicago | Denver† | Kansas City, Mo. | Newark | Pittsburgh | San Francisco |
| Atlanta | Cincinnati | Detroit | Los Angeles | New Orleans | Providence | Seattle |
| Baltimore | Cleveland | Houston† | Milwaukee | New York | Rochester† | Waterbury |
| Boston | Dallas | Indianapolis | Minneapolis | Philadelphia | St. Louis | (†sales office only) |

# NOW

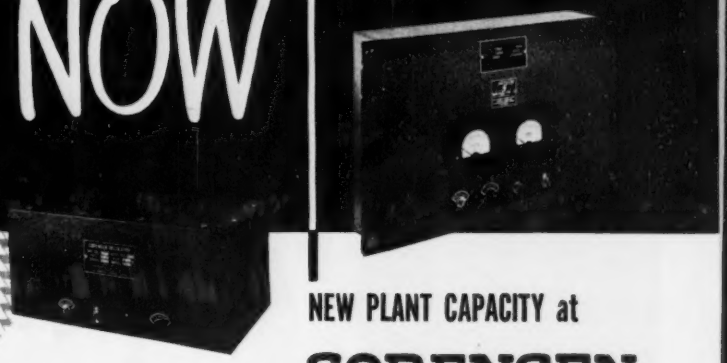

## NEW PLANT CAPACITY at SORENSEN

### MEANS FASTER DELIVERY OF HIGHLY SOUGHT AFTER



**SORENSEN**

- **AC LINE REGULATORS**
- **NOBATRONS** (regulated low-voltage, high current DC sources)
- **NOBATRON-RANGERS** (regulated wide-range variable DC sources
- **B-NOBATRONS** (regulated high-voltage, low current DC sources)

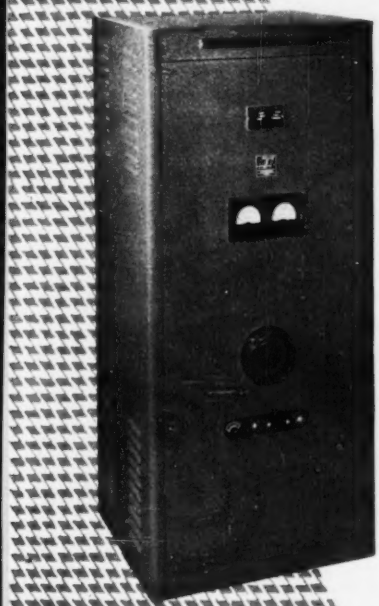

We have been gratified by the electronics industry's acceptance of Sorensen & Co. as power regulation specialists. This acceptance has taken form as a heavy demand for our regulators that has frequently necessitated extensive delays in filling orders, a situation disliked by us as much as by our customers.

Long-range plans for increasing production were put into effect. They involved a series of **increases** — in plant area, personnel, product and process engineering departments, special tooling. The result — now — a drastic **decrease** in waiting time for standard catalog items.

Development engineering hasn't been neglected either. Within the next year new germanium tubeless power supplies, frequency changers, precision battery chargers will be introduced.

To summarize — better deliveries, lots of new stuff on the fire. A postcard brings you full information, puts you on our mailing list for advance data on new products.

SORENSEN

*For Complete Information Write*

SORENSEN & COMPANY, INC.

375 Fairfield Avenue Stamford 1, Conn.

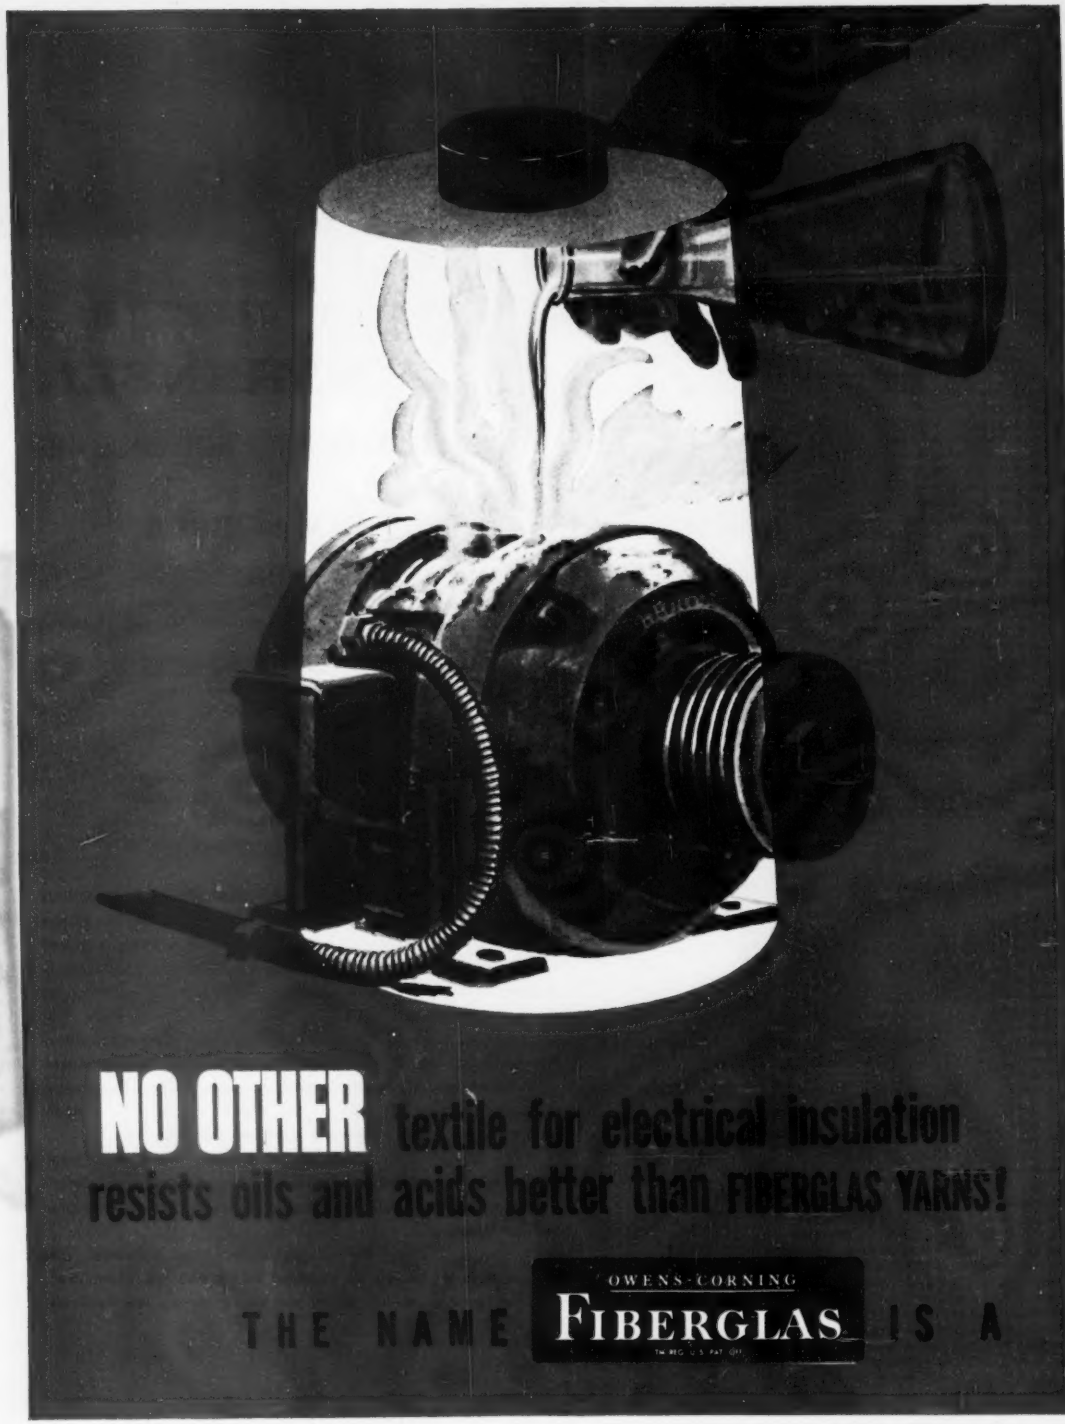
NO OTHER textile for electrical insulation
resists oils and acids better than FIBERGLAS YARNS!
THE NAME OWENS-CORNING FIBERGLAS IS A

IF YOU MAKE OR USE

# ELECTRICAL EQUIPMENT

IT WILL PAY YOU TO SPECIFY

# FIBERGLAS* *insulating materials*

Many electrical insulating materials used in apparatus, wire or cable soon break down under the ravages of oils and acids. This means costly down-time for repairs or complete replacement.

That's why today, more and more makers and users of electrical equipment are specifying insulating materials made with Fiberglas yarns. Because they are made of glass in fibrous form, Fiberglas yarns resist deterioration from oils and acids better than organic yarns.

Fiberglas tapes, varnished cloths, sleeving and tubing, cords, wire and cable insulations, and laminates, as used in electrical apparatus resist rot and corrosion from oils and acids . . . deliver top service at higher operating temperatures.

So, if you're a maker or user of electrical equipment, remember to specify Fiberglas.

Owens-Corning Fiberglas Corporation, Electrical Sales Division, Dept. 860, 16 East 56th St., New York 22, N.Y.

FIBERGLAS YARNS ALSO GIVE YOU THESE COST-SAVING ADVANTAGES



**MOISTURE RESISTANCE**
Wire, cable, and apparatus resist moisture better, if they're made with Fiberglas materials.

**HEAT RESISTANCE**
Fiberglas insulating materials resist break-down under heat.

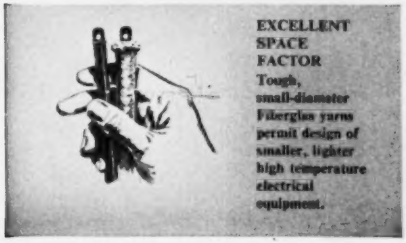

**EXCELLENT SPACE FACTOR**
Tough, small-diameter Fiberglas yarns permit design of smaller, lighter high temperature electrical equipment.

**HIGH TENSILE STRENGTH**
Even in small diameters, Fiberglas yarns have higher tensile strength than other insulating textiles.

GOOD GUIDE TO A GOOD BUY!

*Fiberglas is the trade-mark (Reg. U. S. Pat. Off.) of Owens-Corning Fiberglas Corporation.

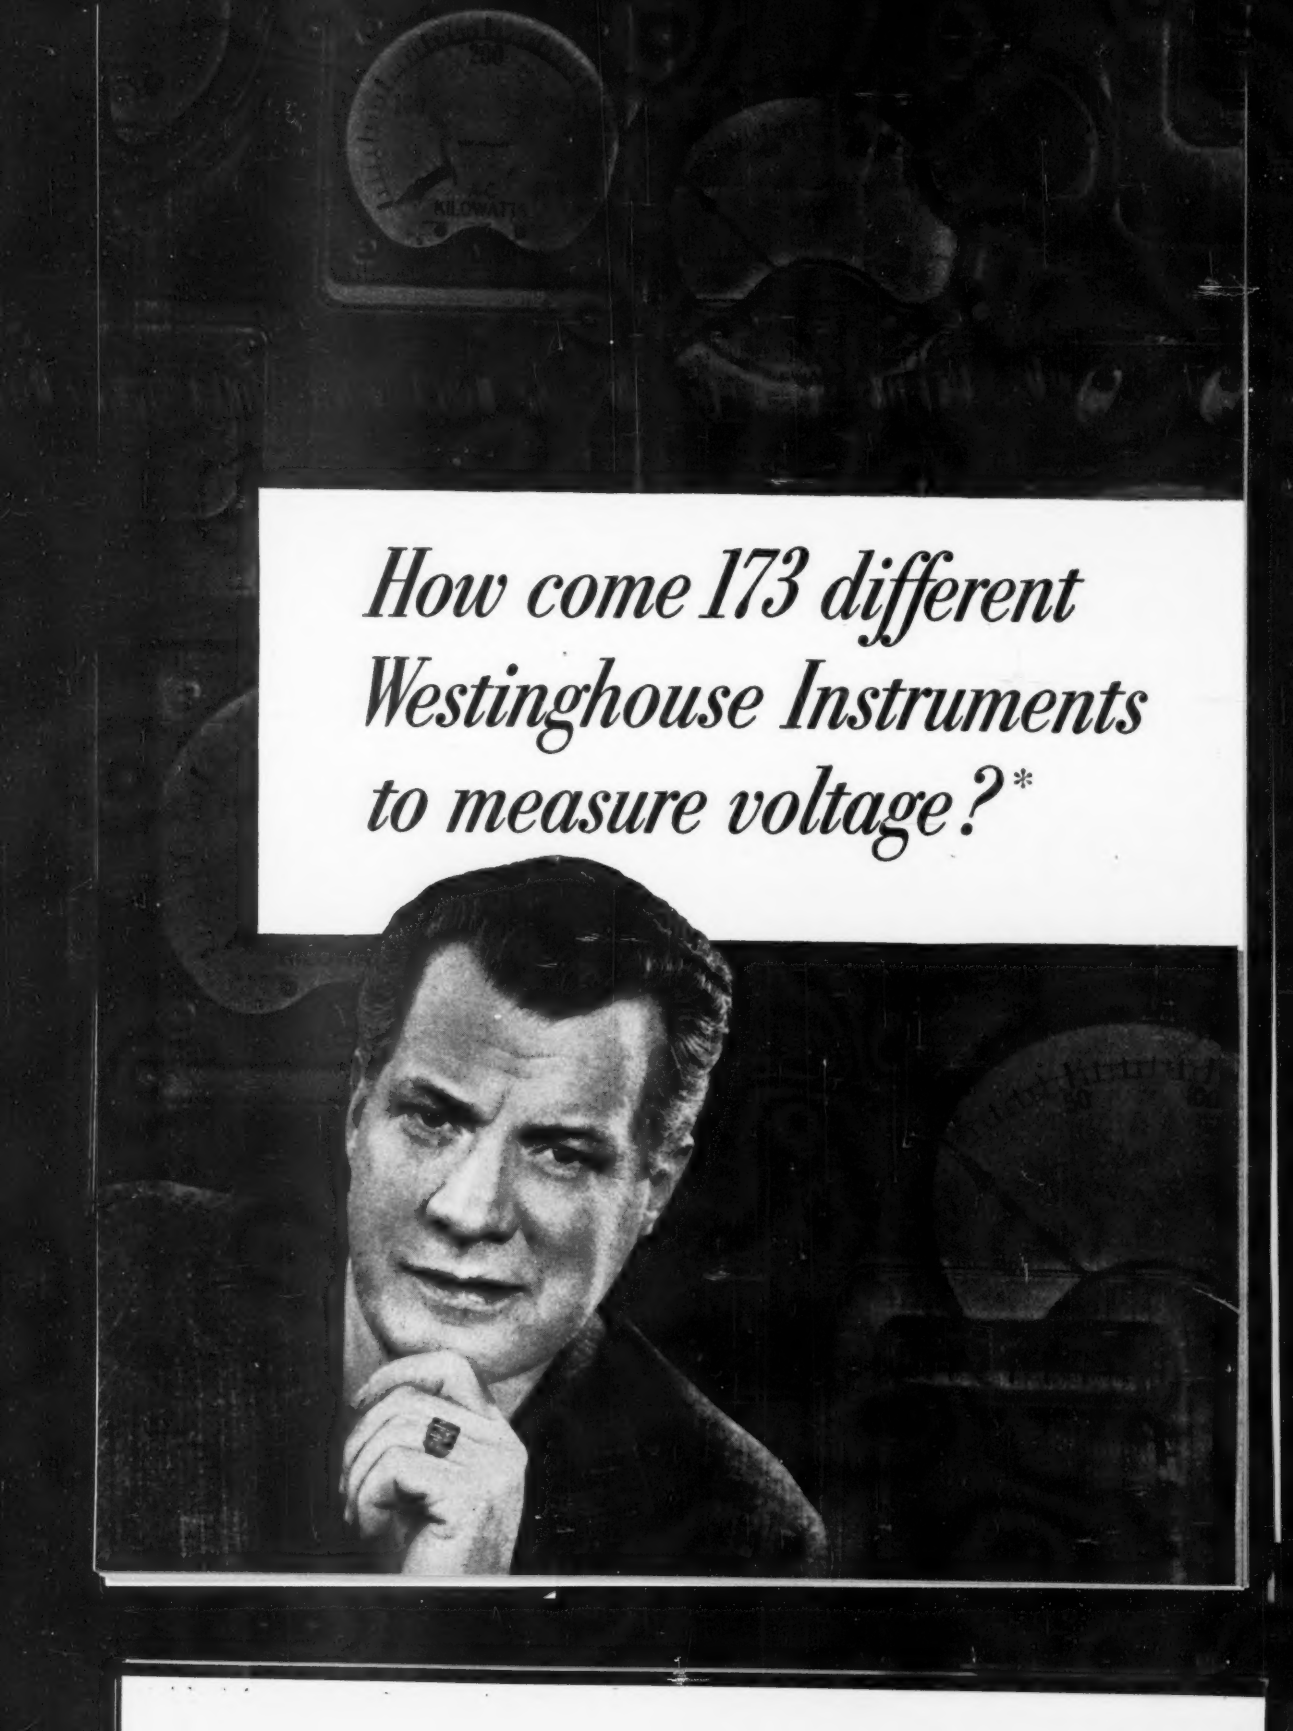


# *How come 173 different Westinghouse Instruments to measure voltage?**

# Because

—a wider choice of instruments offers you . . . greater latitude in product design . . . the answer to more precise control of a process . . . an opportunity to boost the efficiency of plant facilities.

# the proper instrument

Whether you want to measure amperes, volts, watts, vars, frequency, power factor or synchronism—you can always get the *right* instrument when you specify Westinghouse. It's the most complete line of electrical measuring instruments in the industry! The line also includes many types to measure position, time, temperature and speed.

# properly engineered

For any instrument application, you want sustained accuracy . . . easy readability. Westinghouse designs are the result of over 60 years of instrument engineering aimed at giving you the ultimate in these essentials of fine instrumentation. The performance of all Westinghouse Instruments meets ASA Standards.

# properly applied

You save engineering time and expense . . . gain more effective use of instruments when you have manufacturer's assistance in their application. A team of highly trained Instrument Application Engineers is available to work with you in applying all Westinghouse Instruments.

# registers an advantage for you!

The experience of a large eastern manufacturer provides an example. By applying standard Westinghouse GY-40 Recording Wattmeters to predetermine load on mixers, they obtained a 15 percent saving in mixing cycle time! A typical pay-off when the proper instrument, properly engineered is properly applied! Next time, specify Westinghouse! J-40418



*

The extensive coverage of Westinghouse voltage measuring instruments is further emphasized by the fact that there are 36 different instruments just to measure d-c millivolts.

For complete information about all Westinghouse Instruments, wire for Booklet B-4696. Address: Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania.

YOU CAN BE SURE... IF IT'S

Westinghouse

## *Accurate—Portable—* **AVAILABLE**

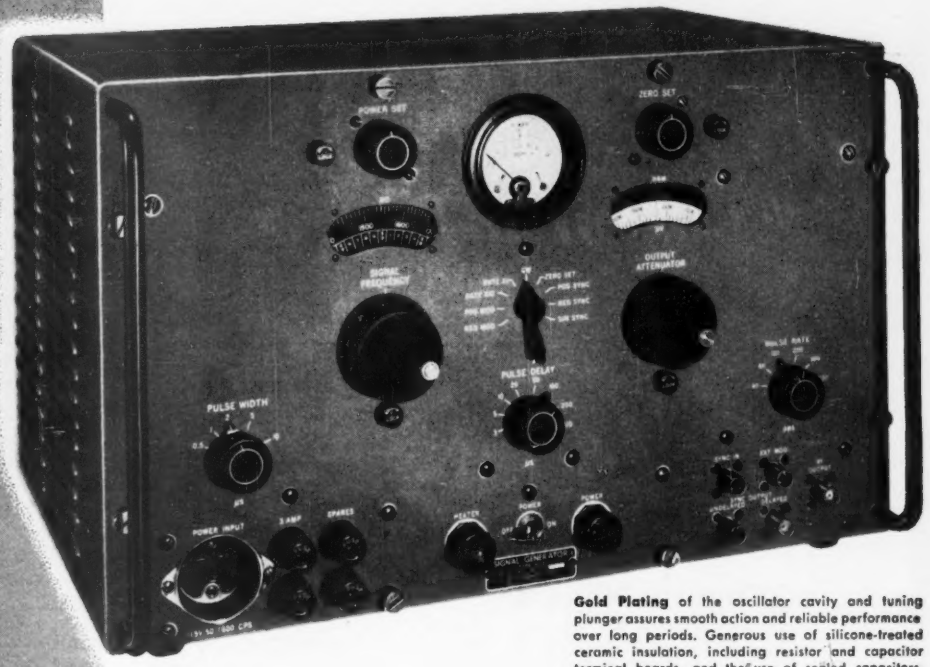


**Gold Plating** of the oscillator cavity and tuning plunger assures smooth action and reliable performance over long periods. Generous use of silicone-treated ceramic insulation, including resistor and capacitor terminal boards, and the use of sealed capacitors, transformers, and chokes, insures operation under conditions of high humidity for long periods.

### The Type H-12

# UHF SIGNAL GENERATOR

## 900-2100 Megacycles

This compact, self-contained unit, weighing only 43 lbs., provides an accurate source of CW or pulse amplitude-modulated RF. A well-established design, the Type 12 has been in production since 1948. The power level is 0 to −120 dbm, continuously adjustable by a directly calibrated control accurate to ±2 dbm. The frequency range is controlled by a single dial directly calibrated to ±1%. Pulse modulation is provided by a self-contained pulse generator with controls for width, delay, and rate; or by synchronization with an external sine wave or pulse generator; or by direct amplification of externally supplied pulses.

Built to Navy specifications for research and production testing, the Type H-12 Signal Generator is equal to military TS-419/U. It is in production and available for delivery.

**Price: $1,950 net, f.o.b. Boonton, N. J.**

### Type H-14 Signal Generator

(108 to 132 megacycles) for testing OMNI receivers on bench or ramp. Checks on: 24 OMNI courses, left-center-right on 90/150 cps localizer, left-center-right on phase localizer, Omni course sensitivity, operation of TO-FROM meter, operation of flag alarms.

**Price: $942.00 net, f.o.b. Boonton, N. J.**

ARC **Aircraft Radio**
**CORPORATION—BOONTON, N. J.**

**Dept. 1**

**WRITE TODAY** for descriptive literature on A.R.C. Signal Generators or airborne LF and VHF communication and navigation equipments, CAA Type Certificated for transport or private use.

*Dependable Electronic Equipment Since 1928*

# FERROXCUBE-3C cores are nickel-free

**APPLICATIONS:**

- I-F TRANSFORMERS
- PERMEABILITY TUNING DEVICES
- LOW-LOSS INDUCTORS
- SATURABLE CORE REACTORS
- HORIZONTAL OUTPUT TRANSFORMERS
- DEFLECTION YOKES
- TELEPHONE LOADING COILS

When your drawings call for Ferroxcube 3C cores for your TV deflection yokes and horizontal output transformers, you can forget about procurement problems. These ferrite cores are nickel-free . . . . and delivery will be made exactly as scheduled by you!

Improved temperature stability, high saturation flux density, and high permeability are among the other advantages of Ferroxcube 3C.

Complete technical data is yours for the asking in Engineering Bulletin FC-5101A, available on letterhead requests. ★ ★ ★ ★ ★ ★ ★ ★ ★

## FERROXCUBE

THE MODERN CORE MATERIAL

## FERROXCUBE CORPORATION OF AMERICA

*• A Joint Affiliate of Philips Industries and Sprague Electric Co., Managed by Sprague •*

SAUGERTIES, NEW YORK

# DESIGNER'S



CAPACITORS

METERS AND INSTRUMENTS



TRANSFORMERS



POWER SUPPLIES

VOLTAGE REGULATORS

RECTIFIERS



CONTROL



AMPLISTATS

# Ready to serve expanding tv industry— G-E components for transmitter builders

Recent lifting of the freeze on new television stations has created many design and production problems for transmitter manufacturers. General Electric is ready to help designers solve one of these problems by providing a dependable supply of reliable, long-life electrical components.

To avoid costly delays, G.E. will plan output of its ample manufacturing facilities to match your production schedules. And recent design improvements and important new products resulting from continuing G-E research and development activities will add to the performance of your equipment.

If you are engaged in supplying the huge demand for new tv station equipment, you'll find it worthwhile time-wise, cost-wise, and quality-wise to investigate the full line of applicable General Electric products. Your G-E Apparatus Sales Engineer has the story. Get in touch with him today, or write, giving full details and quantities involved, to General Electric Co., Sect. 667-22, Schenectady 5, N. Y.

GENERAL ELECTRIC

# DIGEST

## TIMELY HIGHLIGHTS ON G-E COMPONENTS

### New drawn-oval capacitors are 10 to 20% lower priced

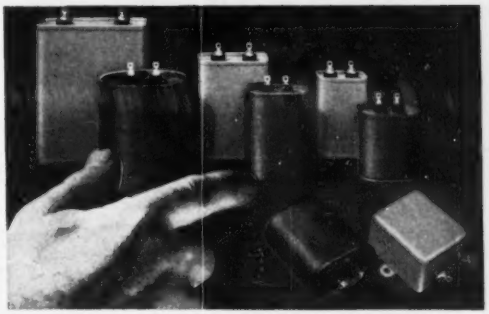

Here's a new line of General Electric capacitors for electronic applications, housed in drawn-oval containers, that features size reductions up to 30 per cent and cost reduction up to 20 percent! These fixed paper-dielectric capacitors also weigh less and are mechanically stronger than conventional types because of the drawn-steel container's single seam, hermetically sealed by double rolling. What's more, shipments are shorter. Designed to replace case styles CP70 and CP53, the new units are available in ratings from 2.0 muf to 10.0 muf, 600 to 1500 volts d-c and 330 to 660 volts a-c. See Bulletin GEA-5777.

### New G-E reactor makes d-c voltage measurement safer



G.E.'s new d-c voltage measuring reactor minimizes hazard to personnel and equipment by isolating the instrument circuit from the d-c power source when making d-c voltage measurements. Since special safety precautions are not necessary, instrumentation costs are reduced. Available in six models for measurements up to 1200 volts. For complete application information, check Bulletin GEC-898.

### New analog field plotter simplifies field studies



Electronics equipment engineers will find the General Electric analog field plotter a valuable aid in design work. Comprising plotting board and associated electric equipment, it speeds solution to problems such as electrode shapes in electronic tube design, field patterns in wave guides and electron lenses. Accompanying 50-page manual explains operation. See Bulletin GEC-851.

### New G-E program boosts electronics in industry




"Progressive Mechanization," a new G-E More Power to America program, has just been launched. Consisting of a color movie and an authoritative manual, its aim is to help step up industry's mechanization. One expected result is an expansion of the market for electronic controls. For details on this program which may mean added business for you, check Bulletin GEA-5789.

**EQUIPMENT FOR ELECTRONICS MANUFACTURERS**

**Components**
- Meters, Instruments
- Dynamotors
- Capacitors
- Transformers
- Pulse-forming networks
- Delay lines
- Reactors
- Thyrite®
- Motor-generator sets
- Inductrols
- Resistors
- Voltage stabilizers
- Fractional-hp motors
- Rectifiers
- Timers
- Indicating lights
- Control switches
- Generators
- Selsyns
- Relays
- Amplidynes
- Amplistats
- Terminal boards
- Push buttons
- Photovoltaic cells
- Glass bushings

**Development and Production Equipment**
- Soldering irons
- Resistance-welding control
- Current-limited high-potential tester
- Insulation testers
- Vacuum-tube voltmeter
- Photoelectric recorder
- Demagnetizers

*Reg. Trade-mark of General Electric Co.

General Electric Company, Section C667-22
Schenectady 5, New York

Please send me the following bulletins:

Indicate: √ for reference only
X for planning an immediate project

- ☐ GEA-5777 Drawn-Oval Capacitors
- ☐ GEA-5789 Progressive Mechanization
- ☐ GEC-851 Analog Field Plotter
- ☐ GEC-898 DC Voltage-Measuring Reactor

Name.....

Company.....

City..... State.....

## PROBLEM:

***To get reliable automatic temperature control at low cost***

## SOLUTION:

***GENERAL PLATE'S fabricated* TRUFLEX® *thermostat metal assemblies meet every temperature requirement***

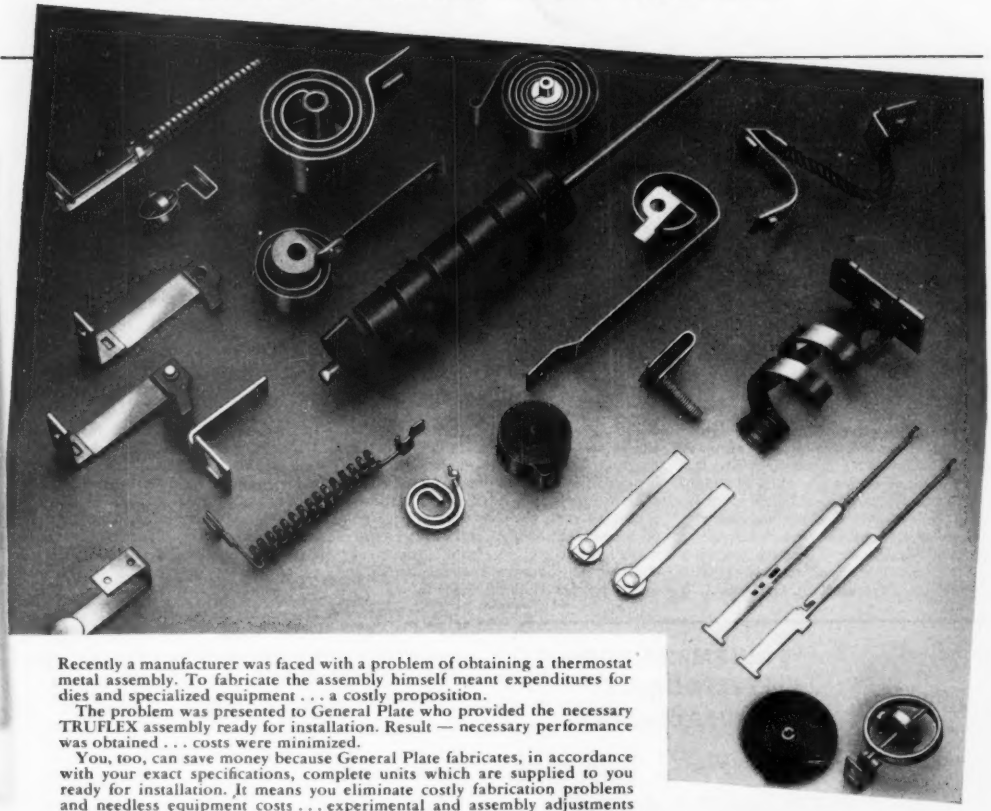

Recently a manufacturer was faced with a problem of obtaining a thermostat metal assembly. To fabricate the assembly himself meant expenditures for dies and specialized equipment . . . a costly proposition.

The problem was presented to General Plate who provided the necessary TRUFLEX assembly ready for installation. Result — necessary performance was obtained . . . costs were minimized.

You, too, can save money because General Plate fabricates, in accordance with your exact specifications, complete units which are supplied to you ready for installation. It means you eliminate costly fabrication problems and needless equipment costs . . . experimental and assembly adjustments are crossed from your books.

You get reliable performance because every order comes to you an exact duplicate of the original . . . consistently uniform in tolerances, temperature reaction and performance, thus preventing rejects and costly adjustments in assembly.

General Plate TRUFLEX Thermostat Metal Assemblies will be made to meet your specification requirements for temperature range, electrical resistance, corrosion resistance, etc. However, if you prefer to make your own assemblies, General Plate will produce sheet or strip to your material specifications. Write for information or engineering assistance.

***Have You a Composite Metal Problem? General Plate can solve it for you***

**GENERAL PLATE**

*Division of Metals & Controls Corporation*

**311 FOREST STREET, ATTLEBORO, MASS.**

# Westinghouse

## announces a great new division to manufacture a full line of RELIATRON™ TUBES

**Receiving Tubes—**
**Television Picture Tubes—**
**Power Tubes**

Westinghouse proudly announces a completely new division—*THE ELECTRONIC TUBE DIVISION*. Its aim is this: To become the leader of the industry in providing better electronic tubes and better service to all tube users.

To provide this new standard of service to all branches of the electronic tube industry, Westinghouse has equipped its new tube division with completely new production, research, and distribution facilities.

***Westinghouse RELIATRON Tubes are now available; many types are on their way at this moment to distributors, dealers, equipment manufacturers, government, government contractors.***

THE

# Westinghouse

## ELECTRONIC TUBE DIVISION

- Experienced Personnel
- Modern Facilities
- Rigid Standards

Westinghouse offers the electronics industry thirty years of experience in tube development, application, and manufacture. From this experience have come many of the tube innovations that today are the basis for the electronics industry. In all cases, Westinghouse customers benefited by being first with new types. The list at the right indicates a few Westinghouse contributions.

The personnel of the new Westinghouse Electronic Tube Division comprise a brilliant engineering, production and sales team—recruited from Westinghouse's 46 manufacturing divisions and key experts from throughout the industry.

Tubes produced by Westinghouse will bear the name . . .

**RELIATRON**

. . . an unbreakable bond of reliability and electronics. It indicates performance and dependability on a new scale for the electronic tube industry.

## Look at This Brilliant History of Westinghouse Electronic Tube Achievements:

★ The Westinghouse-designed WD-11 tube was the first dry battery type and was part of the first commercial radio receiver ever produced in America.

★ Westinghouse was the first manufacturer to develop and mass-produce tubes utilizing an indirectly heated cathode.

★ Westinghouse designed and produced the first ac-operated detector tube, the Type 27.

★ Westinghouse established the first commercial radio broadcast station, KDKA, in 1920 and thus opened the mass market for home radios.

★ Basic development and demonstration of the cathode ray television system was performed in Westinghouse laboratories and patented in 1929.

★ Westinghouse developed and introduced both electromagnetic and electrostatic types of cathode ray tubes in 1930.

★ Westinghouse design engineers invented the Ignitron, which solved long-standing problems of precise, high-speed switching of heavy electric currents.

★ Westinghouse pioneered in high-powered transmitting tubes for use in both pulsed and CW radar applications. The famous Westinghouse Type WL-530 was in the Pearl Harbor radar set which gave the warning of the approach of Japanese planes in 1941. This tube led the way to all subsequent radars.

THESE MEN LEAD THE WESTINGHOUSE ELECTRONIC TUBE DIVISION TEAM

**HAROLD G. CHENEY, General Sales Manager:**
A Westinghouse tube and lamp sales executive for 31 years, Mr. Cheney was appointed General Sales Manager of the Electronic Tube Division in August, 1951. Prior to his appointment he was assistant to the general lamp sales manager and supervisor of lamp sales contracts. He was a key factor in giving to the lamp industry the stabilizing influence of Westinghouse's fair, sound business and sales policies.

**EUGENE W. RITTER, Vice-President and Manager:**
For eight years he was with the Corning Glass Works as vice-president and director, later president of the Corning Glass Works of South America. Previously he had been employed by the Radio Corporation of America for 12 years as a member of the Radio Tube Design and Development Division, manager of the Radiotron Company, later vice-president of the RCA Manufacturing Company.

**JAMES L. BROWN, Manager, Receiving and Cathode Ray Tube Sales:**
For 14 years Mr. Brown was an electronic tube and apparatus sales executive and engineer for the General Electric Company—on the West Coast for 7 years and later as central regional sales manager for receiving and television picture tubes. He is a former purchasing agent of Hoffman Radio Company.

**DR. E. A. LEDERER, Manager of Engineering:**
He was formerly chief engineer for National Union Radio Corporation and for 17 years was a member of the tube development staff of Radio Corporation of America. He participated in early vacuum tube development work with the Westinghouse research and engineering staffs from 1923 to 1930.

**JOHN J. DOYLE, Manager, Power Tube Sales:**
A veteran of 25 years' Westinghouse service, Mr. Doyle was manager of electronic tube sales to distributors prior to his present appointment. Previously he was manager of electronic tube parts sales and has held various sales executive positions in the Lamp Division.

**WESTINGHOUSE IN ELMIRA, NEW YORK**

360,000 square feet of steel, glass and brick designed for one thing —to house the most efficient electronic tube production in the world. Here, completely modern straight-line exhaust, Lehr, and screen setting equipment produce Westinghouse RELIATRON Television Picture Tubes of unsurpassed quality. Here also are produced the famous Westinghouse line of power, transmitting, industrial and special purpose tubes. Plant layout is designed around efficient, straight production lines. Into them feed raw materials and sub-assemblies. From them, tubes enter an exacting testing cycle. To assure prompt delivery, tubes are loaded directly into trucks or railroad cars waiting on Westinghouse's own spacious rail siding. Here at Elmira, too, is located the headquarters of the Westinghouse Electronic Tube Division with sales, engineering and production management ready to extend a warm welcome to you.

**WESTINGHOUSE IN BATH, NEW YORK**

Located at Bath in the scenic Finger Lakes region of upstate New York, this Westinghouse Receiving Tube Plant is another 220,000 square feet of modern production efficiency. It lies only a few miles from a major source of glass tube envelopes. It is served by sidings of one of the nation's leading railroads—only hours away from all principle markets. It is less than one hour from the Elmira factory and the advice and supervision of the Division's headquarters staff. Here at Bath, the most modern cathode-coating, grid-winding, spot welding and sealex equipment is operated by the industry's leading craftsmen. Famous Westinghouse quality control standards rule from raw material to testing of finished tubes. From this plant are shipped the finest receiving tubes in the industry—Westinghouse RELIATRON Tubes.

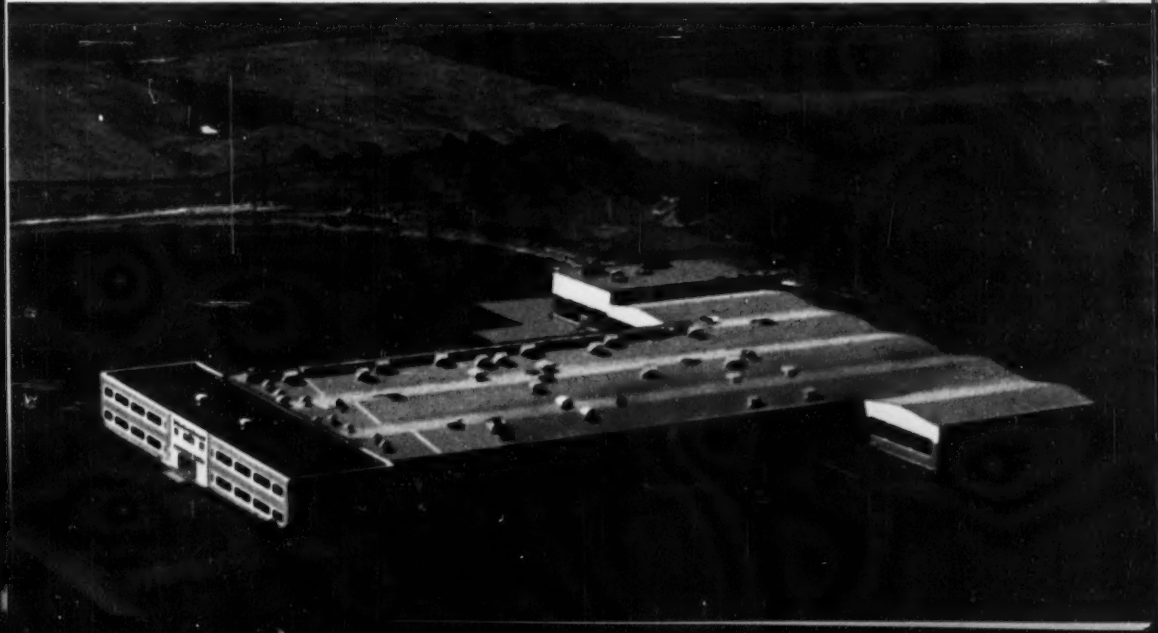

# RELIATRON

# TUBES are backed by Westinghouse reliability

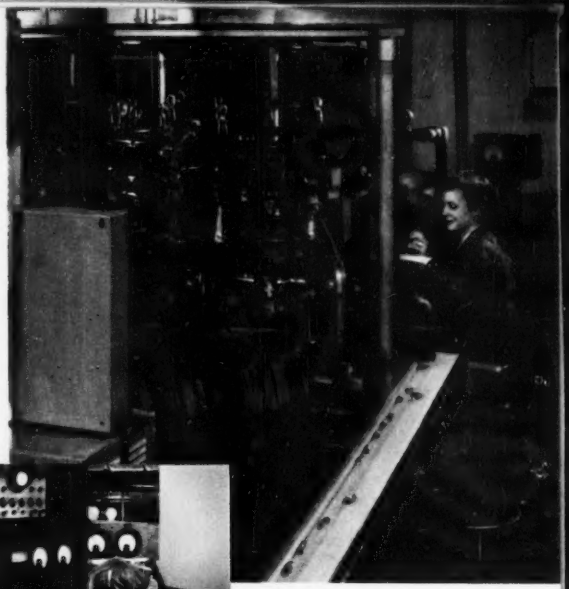

Sealex units at Bath, New York, turn out miniature tubes for government and commercial use. From here, tubes enter a rigorous program of checks and testing.

Here, an early Westinghouse WD-11 tube, one of the earliest types ever made, is shown just as it was used in the first commercial radio receivers.



This exclusively-Westinghouse quality control test set is one of a large battery of equipments which provide you with tubes of the highest quality and reliability.

Basic and application research are of prime importance in the Westinghouse Electronic Tube Division's plans. Such research has helped build the tube industry, and has made Westinghouse dominant in development.

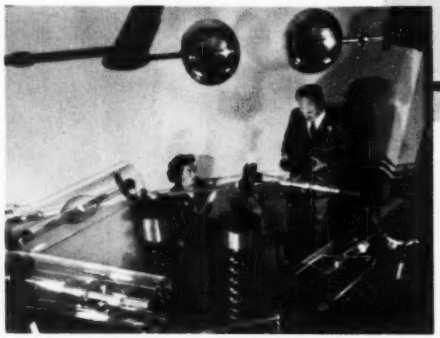

### TUBE RESEARCH AND DEVELOPMENT

The Westinghouse position of leadership in electrical and electronic manufacturing is founded on the untiring efforts of its research staff. The Electronic Tube Division is already at work improving present tube types and developing new types for superior service and new applications, including UHF.

### QUALITY CONTROL

RELIATRON tube performance is assured by an exacting program of quality control. Every step in the manufacture of RELIATRON Tubes—from raw materials to finished product—must meet standards which are the toughest in the industry.

### ENGINEERING AND SALES SERVICES

Whatever your problem, whether you are an equipment manufacturer, government laboratory, or parts distributor, you will find Westinghouse sales representatives and application engineers in your area at your service. Sales and engineering offices are located strategically throughout the country to serve you.

### ADVERTISING

Trade acceptance of Westinghouse RELIATRON Tubes will be supported by a nationwide advertising campaign second to none. Technical data, pricing service and application information are available to all tube users. Sales promotion programs for distributors and service dealers will be hard-hitting, sure sales builders. Your product or service will profit from consumer acceptance built by the tremendous national advertising of the name "Westinghouse."

### DISTRIBUTORS, EQUIPMENT MANUFACTURERS, WRITE NOW

For complete information on the Westinghouse line of RELIATRON Receiving Tubes, Television Picture Tubes, and Power Tubes, write or wire Westinghouse Electric Corporation, Dept. 101, Elmira, New York. Or call your nearest Westinghouse Electronic Tube Division Sales Office.

**YOU CAN BE SURE...IF IT'S**

# Westinghouse

**WESTINGHOUSE ELECTRIC CORPORATION, ELECTRONIC TUBE DIVISION, ELMIRA, N. Y.**

EB-101 10-52 (250M) Printed in U.S.A.

# Noise Suppression?

## Engineers think of FILTRON for RF Noise Suppression!

Sorry, but we are only able to solve all your RF Interference Suppression problems on electronic equipment!

**FILTRON** will *custom design* the proper filter, tested for your circuit conditions, to meet size, weight and overall configuration—and meet military RF Interference Suppression limits and specifications.

**FILTRON's** advanced engineering, due to constant research and development, together with **FILTRON's** production know-how, insures quality components to meet your delivery requirements.

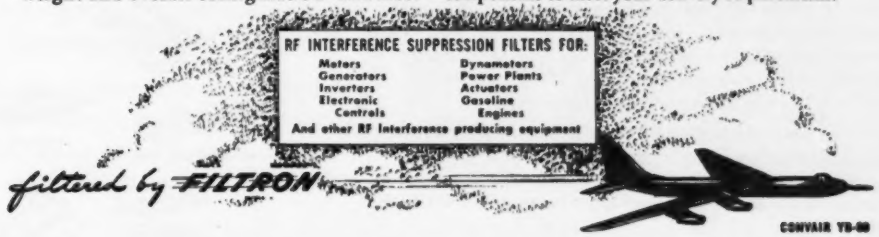


*An inquiry on your Company letterhead will receive prompt attention*

**THE ~~FILTRON~~ COMPANY, INC. · FLUSHING, LONG ISLAND, NEW YORK**

LARGEST EXCLUSIVE MANUFACTURERS OF RF INTERFERENCE FILTERS

# INSUROK® Rods and Tubes

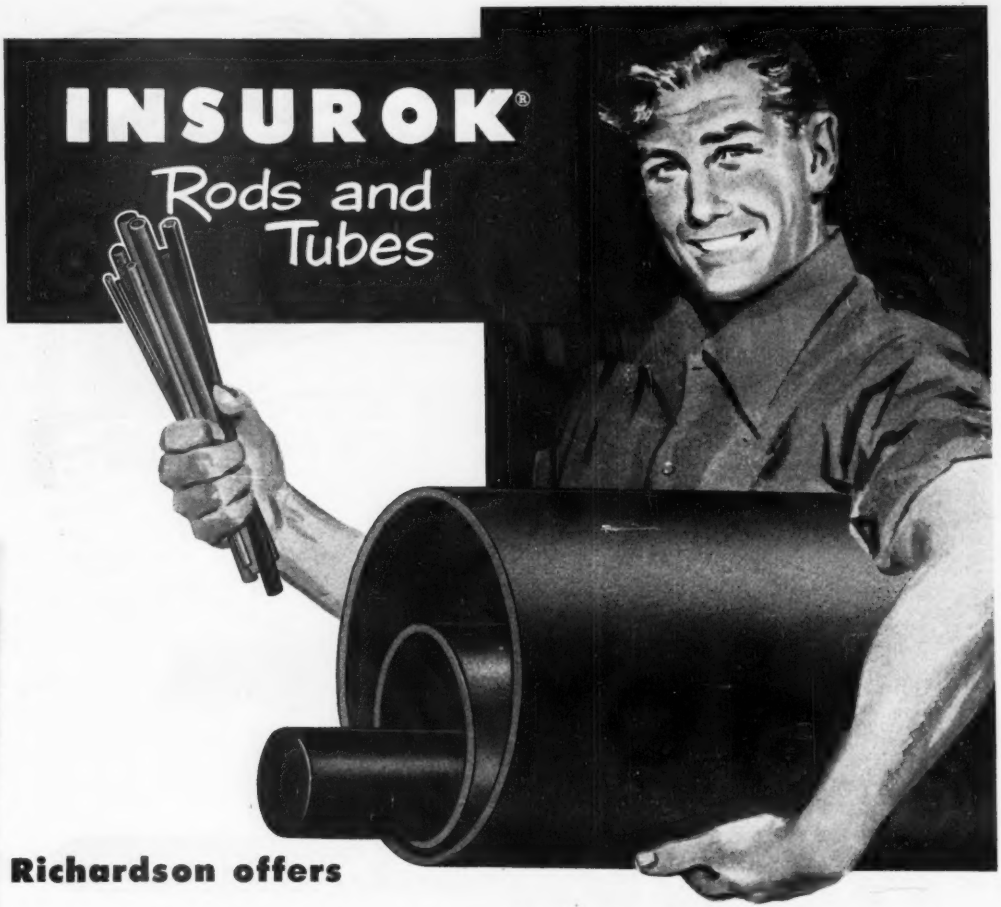

## Richardson offers a complete line of Laminated Plastic Rods and Tubes to meet your needs

You'll find a large range of laminated plastic rods and tubes of various diameters in the Richardson line. Laminated tubes are available in fabric-base and paper-base grades, in 36" lengths and in diameters from 1/8" to 12 1/2". Special larger sizes can be made upon request. Laminated rods are available in molded-paper or fabric-base grades in diameters from 1/8" to 2". Diameters from 2" to 6" can be machined from sheet stock.

Whatever your plastics requirements, consult The Richardson Company. Richardson offers a *complete* plastics service—embracing materials development, design, molding, laminating, and fabricating. Write for 20-page booklet—"Laminated INSUROK."




*The* RICHARDSON COMPANY

FOUNDED 1858 — LOCKLAND, OHIO

2797 Lake Street, Melrose Park, Illinois (Chicago District)

# IF YOU'RE SINGING THOSE "case and cover blues"

## LET HUDSON chase your troubles away!

IF waiting for cases, covers and specification metal stampings stymies your production, it will pay you to check with Hudson, now! For Hudson standard cases and covers — mass produced to meet all but the most unusual closure requirements—are available in scores of shapes and sizes.

Consult the new Hudson catalogs for a practical, economical solution to your problems. Just call or write today for complete information and data by return mail! Please address inquiries to Desk 210.

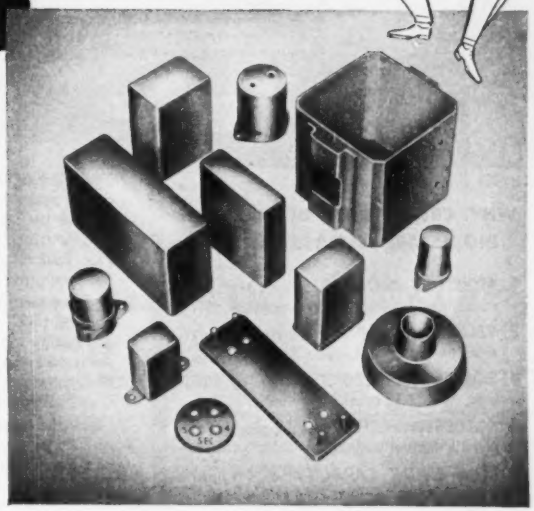

**HUDSON TOOL AND DIE COMPANY • INC**

PRODUCERS OF CASES, COVERS AND CUSTOM METAL STAMPINGS FOR ELECTRICAL, ELECTRONIC AND NUCLEONIC INDUSTRIES

**118-122 SO. FOURTEENTH STREET, NEWARK 7, NEW JERSEY**

# *New* CBS-HYTRON
# Germanium Diodes
## *Guaranteed Moisture-Proof!*




### Mechanical Specifications

A. .020" copper-clad wire
B. Nickel-silver "clip-in" pin
C. Glass-filled plastic case
D. Germanium crystal soldered directly to base
E. .005" tungsten cat whisker
F. Moisture-resistant impregnating wax

### GENERAL PURPOSE TYPES

1N48
1N51
1N52
1N63
1N64
1N65
1N69*
1N70*
1N75
1N81*

*JAN TYPES

### WHY CBS-HYTRON GERMANIUM DIODES ARE BETTER RECTIFIERS

1. ***MOISTURE-PROOF*** . . . eliminates humidity and contamination problems
2. ***SELF-HEALING*** . . . self-recuperating from temporary overloads
3. ***SUBMINIATURIZED*** . . . only ½ inch long, ¼ inch in diameter
4. ***SOLDERED WAFER*** . . . omission of plating eliminates flaking
5. ***LOW SHUNT CAPACITY*** . . . 0.8 μμfd average
6. ***SELF-INSULATING CASE*** . . . mounts as easily as a resistor
7. ***EXCEPTIONAL LIFE*** . . . 10,000 hours minimum under rated conditions
8. ***NO FILAMENTS*** . . . low drain, no hum

Vital germanium wafer in a CBS-Hytron diode is *guaranteed moisture-proof*. Sealed against deadly moisture . . . fumes . . . and contamination, a CBS-Hytron diode keeps moisture where it belongs . . . out! First, by a chemically and electrically inert impregnating wax. Second, by a glass-filled phenolic case. With *moisture-proof* CBS-Hytron germanium diodes, you can be sure of maximum trouble-free life.

Superior techniques also permit CBS-Hytron to omit plating of the germanium wafer. Soldering is directly to the base. Thus flaking is eliminated and quality improved. Universal design of CBS-Hytron diodes follows Joint Army-Navy specifications. "Clip-in" feature gives you versatility, ruggedness, and electrical stability. Flexible pigtails of copper-clad steel welded into sturdy nickel pins also insure you against damage by soldering heat.

Check the eight important-to-you reasons why CBS-Hytron *moisture-proof* germanium diodes are better rectifiers. Send today for complete data and interchangeability sheets. Specify CBS-Hytron *guaranteed moisture-proof* diodes for superior, trouble-free operation.

CBS HYTRON
HYTRON
A DIVISION OF COLUMBIA BROADCASTING SYSTEM, INC.
SALEM, MASSACHUSETTS

*Variable*

# BAND-PASS FILTERS

*for*

# SELECTIVE AMPLIFICATION

★

## KROHN-HITE

**Models 310-A and 330-A**



**20 cps to 200 kc**

### Specifications Model 310-A

**BAND WIDTH:** Continuously variable up to the maximum width covering the entire range from 20 cps. to 200 kc.
**FREQUENCY RANGE:** High and low cut-off frequencies independently tuned, continuous from 20 cps. to 200 kc, in four decade bands.
**FREQUENCY ACCURACY:** Calibration ±10%.
**GAIN:** Unity (0 db) in pass band.
**SLOPE:** Each side 24 db/octave with peaking factor to reduce attenuation at the cut-off frequencies.
**MAXIMUM ATTENUATION:** Greater than 60 db.
**INPUT CHARACTERISTICS:**
IMPEDANCE: Approximately 6 megohms in parallel with 50 mmfd.
MAXIMUM INPUT AMPLITUDE: 5 volts rms.
**OUTPUT CHARACTERISTICS:**
IMPEDANCE: 500 ohms.
INTERNAL HUM AND NOISE: Less than 3 millivolts.
**INPUT POWER:** 105-125 volts, 50-60 cps, 40 watts.
**FORM:** Aluminum cabinet, overall dimensions: 12" wide, 7" high, 8" deep. Weight 14 lbs.
**PRICE:** $275.00 Net, f.o.b. Cambridge, Mass.



**.02 cps to 20 kc**

### Specifications Model 330-A

**BAND WIDTH:** Continuously variable up to the maximum width covering entire range: STANDARD MODEL: From 0.02 to 2,000 cps.
MODIFIED UNIT: From 0.2 to 20,000 cps.
**FREQUENCY RANGE:** High and low cut-off frequencies independently tuned; continuous: STANDARD MODEL: From 0.02 to 2,000 cps.
MODIFIED UNIT: From 0.2 to 20,000 cps.
**FREQUENCY ACCURACY:** Calibration ±5%.
**GAIN:** Unity (0 db) in pass band.
**SLOPE:** Each side, 24 db/octave with peaking factor to reduce attenuation at the cut-off frequencies.
**MAXIMUM ATTENUATION:** Greater than 80 db.
**INPUT CHARACTERISTICS:**
IMPEDANCE: Approximately 20 megohms in parallel with 200 mmfd.
MAXIMUM INPUT AMPLITUDE: 10 volts rms.
**OUTPUT CHARACTERISTICS:** IMPEDANCE: 500 ohms.
INTERNALLY GENERATED NOISE: 50 microvolts.
**INPUT POWER:** 105-125 volts, 50-60 cps, 50 watts.
**PRICE:** $450.00 Net, f.o.b. Cambridge, Mass.

All Krohn-Hite Instruments fully guaranteed for one year against defective materials and workmanship. Prices net — f.o.b. Cambridge. *Write for free catalog.*

## KROHN-HITE INSTRUMENT COMPANY

580 MASSACHUSETTS AVENUE
DEPT. E, CAMBRIDGE 39, MASS., U.S.A.

**FILTERS**

| Model | Type | Frequency Range | Noise & Hum | Price |
|---|---|---|---|---|
| 310-A | Band-Pass | 20 cps to 200 kc | 3 mv | $275.00 |
| 330-A | Band-Pass | .02 cps to 2 kc | 0.1 mv | $450.00 |
| | Band-Pass | 0.2 cps to 20 kc | 0.1 mv | $450.00 |
| 340-A | Servo | .01 cps to 100 cps | 10 mv | $350.00 |
| 350-A | Rejection | .02 cps to 2 kc | 0.1 mv | $450.00 |
| 360-A | Rejection | 20 cps to 200 kc | 5 mv | $275.00 |

**OTHER INSTRUMENTS**

**OSCILLATORS**

| Model | Frequency Range | Distortion | Output | Price |
|---|---|---|---|---|
| 400-A | .009 cps to 1.1 kc | 1% | 25 mw/10 v | $350.00 |
| 400-C | .009 cps to 1.1 kc | 1% | 100 mw/10 v | $375.00 |
| 410-A | .02 cps to 20 kc | 1/4% | 10 mw/5 v | $950.00 |
| 420-A | .35 cps to 52 kc | 1% | 25 mw/10 v | $290.00 |
| 420-C | .35 cps to 52 kc | 1% | 100 mw/10 v | $325.00 |
| 430-A | 5 cps to 520 kc | 1% | 50 mw/10 v | $145.00 |
| 440-A | .01 cps to 100 kc | 1/10% | 100 mw/10 v | $450.00 |

# a *new* concept in OSCILLOGRAPHY

## the new DU MONT Type 304-A

The new Du Mont Type 304-A, succeeding the world-famous Type 304-H, is more than simply a new instrument – more than a new combination of established circuits. It represents a significant development in the science of instrumentation. The Type 304-A is *a true electronic voltmeter.* This reflects a new concept in oscillography. Every feature of the Type 304-A has been evaluated with this concept in mind. All of the features that made the Type 304-H so valuable as a qualitative instrument have been preserved and augmented to enable not only qualitative analyses, *but rapid, accurate quantitative amplitude measurement* as well. The novel amplitude calibrating system of the Type 304-A permits signal measurements from the screen *directly in volts.* Unlike electro-mechanical devices, the new Type 304-A is not restricted to measurement of sinusoidal signals – or peak-to-peak values of voltage. The Type 304-A may be used to measure any amplitude portion of signals within its performance specifications.

## SPECIFICATIONS:

**CATHODE-RAY TUBE** – New Flat-Face Type 5ADP-
**ACCELERATING POTENTIAL** – 3000 volts.
**Y-AXIS:** ***Deflection Factor*** – Through amplifier, 0.1 p-p volts FULL SCALE (equivalent to 0.025 p-p volt/inch). Direct, 32-39 p-p volts/inch.
***Frequency Response*** – Direct coupling: flat to 0. Down not more than 10% at 100,000 cps. Capacitive Coupling: down not more than 10% at 10 and 100,000 cps. Down not more than 50% at 300,000 cps. Provision for balanced input on 0.1 VOLT-FULL-SCALE range.
***Undistorted Deflection*** – More than 4 inches.
Expansion – Equivalent to 20 inches.
***Input Impedance*** – *Amplifier:* (single ended) 2 megohms 50 $\mu\mu f$; (balanced) 2 megohms, 35 $\mu\mu f$. *Direct:* (single ended) 1.5 megohms, 20 $\mu\mu f$; (balanced) 3 megohms, 20 $\mu\mu f$.
**X-AXIS:** ***Deflection Factor*** – Through amplifier, 0.3 p-p volt/in. Direct, 40-50 p-p volt/in.
***Frequency Response*** – Direct coupling: flat to 0. Down not more than 10% at 100,000 cps; down not more than 50% at 300,000 cps. Capacitive coupling: Down not more than 10% at 10 and 100,000 cps. Down not more than 50% at 300,000 cps.
***Undistorted Deflection*** – More than 4 inches.
Expansion equivalent to 30 inches.
***Input Impedance*** – *Amplifier:* 2.2 megohms, 50 $\mu\mu f$. *Direct:* (single ended) 1.5 megohms, 20 $\mu\mu f$; (balanced) 3 megohms, 20 $\mu\mu f$.
**LINEAR SWEEPS:** ***Sweep Frequency*** – Recurrent and driven sweeps continuously variable from 2 to 30,000 cps. Maximum sweep-writing-rate, 1"/$\mu$sec. Provision for sweeps of extra-long duration; ½ sec. of sweep obtained for each microfarad of external capacitance.
***Synchronization*** – from signal of either polarity.
***Sync Limiting*** – on both driven and recurrent sweeps.
**VOLTAGE MEASUREMENT** – Squarewave standard applied for calibration by front panel push button.
***Voltage Range:*** VOLTS FULL SCALE, 0 to 0.1, 1, 10, 100 volts. MULTIPLIER: x1 to x10
Overall Accuracy: 5%
**INTENSITY MODULATION** – 15 volts blanks beam at normal intensity settings.
**CALIBRATED SCALE** – Variable illumination. Numbered calibrations for amplitude measurement.
**PRIMARY POWER** – 115 or 230 volts. 50-400 cps. 110 watts.
**PHYSICAL CHARACTERISTICS** – Metal cabinet with grey wrinkle finish. Dimensions: height 13½", width 8¼", depth 19½". Weight 50 lbs.

CALIBRATING the Type 304-A is as simple and easy as zeroing a vacuum-tube voltmeter. Depressing the CALIBRATOR push button on the front panel applies a square wave signal of precisely 0.1 p-p volt to the amplifier. The MULTIPLIER control is then adjusted for full scale deflection (4 inches) so that the peaks are at 0 and 100. Amplitude may now be read directly from the scale where four inches vertically indicate 0.1, 1, 10, or 100 volts, as determined by VOLTS FULL SCALE selector. Depressing the CALIBRATOR push button again, returns signal applied to Y-input terminals to the screen.

The MULTIPLIER control also permits calibration of the scale to other values. For, say, 200 volts-full-scale, the MULTIPLIER control is adjusted near 2 so peaks of squarewave are at zero and 50 on the scale. Amplitude may now be measured directly in volts simply by multiplying the scale reading by the setting of the MULTIPLIER control (2) and the VOLTS FULL SCALE setting (100). Use of the MULTIPLIER control extends the range of the Type 304-A to 1000 volts-full-scale.



**DOMESTIC PRICE $333.00**

**ALLEN B. DU MONT LABORATORIES, INC., INSTRUMENT DIVISION - 1500 MAIN AVENUE, CLIFTON, NEW JERSEY**



# How IBM gets perfection outside to match its precision inside

IBM business machines are known the world over for their precision. And they *look* the part, too.

But the modern lines which make these machines so attractive make their fabrication a challenge to Karp Metal Products Co., Inc., one of IBM's sheet metal fabricators.

For only with its creative staff of sheet metal craftsmen... its ability to tool complex jobs... its 77,000 square feet of most modern plant facilities is Karp able to match IBM's precision inside with flawless fabrication outside.

These same facilities can solve *your* cabinet, housing or enclosure problems, too. Karp engineers can often show you the way to design modifications which cut initial costs and speed assembly; they can also show you how to take advantage of Karp's vast assortment of available dies.

Whether your needs are as large as IBM's or more moderate, you'll find it profitable to do business with Karp.

IBM Proof Machine

IBM Card Verifier

KARP METAL PRODUCTS CO., INC., 215 63rd ST., BROOKLYN 20, N. Y.

MOST COMPLETE FACILITIES FOR LARGE AND SMALL RUNS OF
**ENGINEERED SHEET METAL FABRICATION**



**ENGINEERING + TOOLING + PRODUCTION + FINISHING = KARP**

# Approval is

## *for resistors too!*

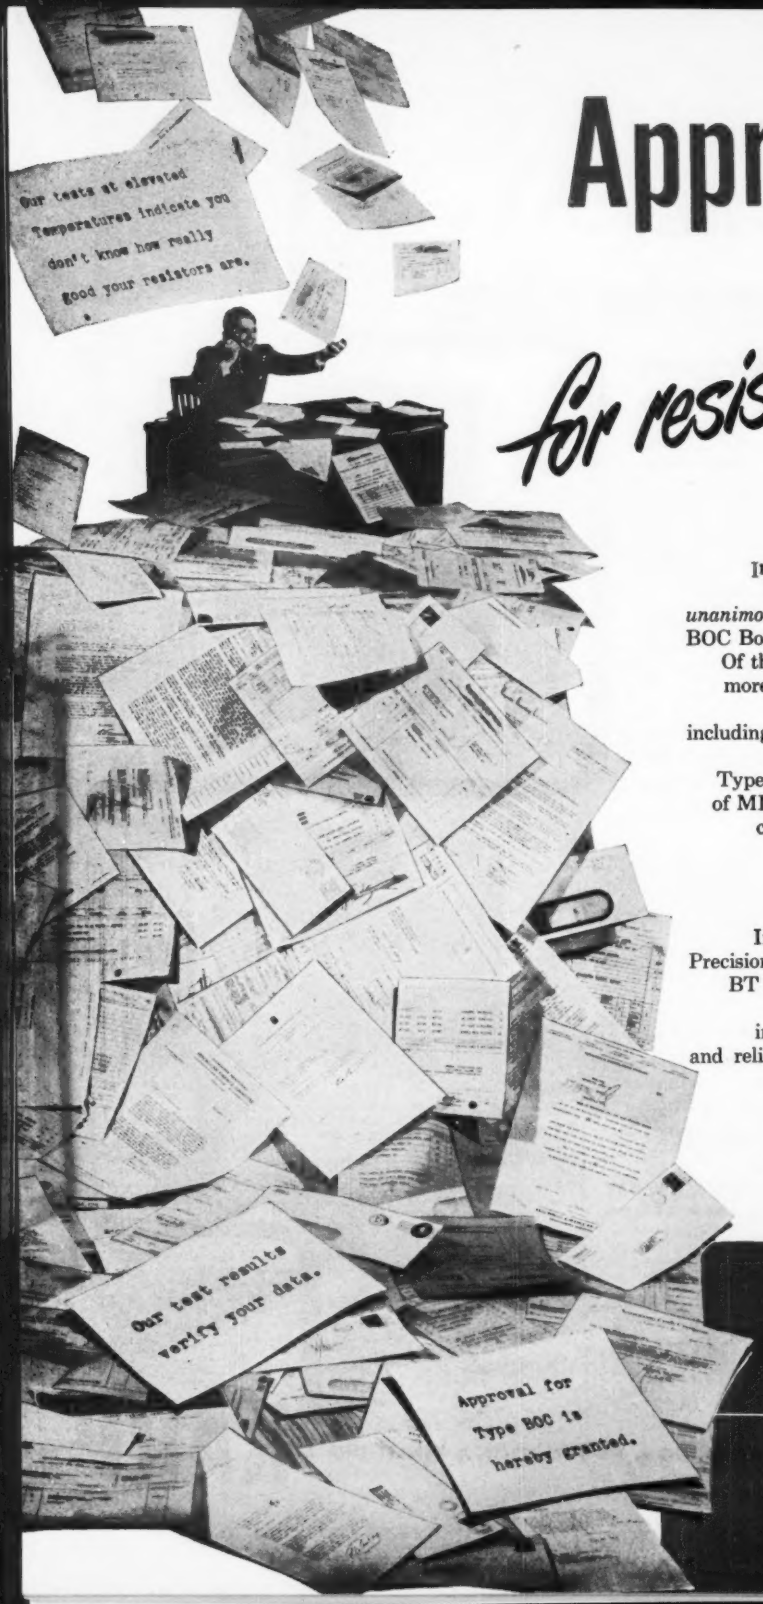
Our tests at elevated Temperatures indicate you don't know how really good your resistors are.
Our test results verify your data.
Approval for Type BOC is hereby granted.

In all our experience, no resistor has been so extensively tested—*and so unanimously approved*—as IRC's new Type BOC Boron-Carbon ½-watt PRECISTOR. Of the 3,000,000 already manufactured, more than 100,000 were given the most stringent tests-in-production, including critical temperature cycling and 500-hour load-life tests. Result:—Type BOC conforms to *all* requirements of MIL-R-10509A! Also, customers have conducted their own laboratory and field tests—and they express their approval of Type BOC in letters like those shown here.

In the case of IRC's new JAN Type Precision Wire Wounds and Advanced Type BT Resistors, too, rigid quality control and continued testing have won industry-wide approval. Most stable and reliable of all precision wire wounds, Type WW's far surpass JAN-R-93 Characteristic B Specifications. And Type BT's continue to meet and beat JAN-R-11 Specifications.

IRC

# important

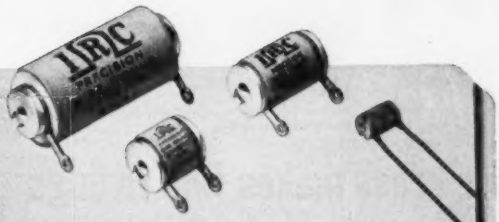


## New JAN Type Precision Wire Wound Resistors Excel JAN-R-93 Characteristic B Specifications

| | Original Resist | 1st Cycle % Chge | 2nd Cycle % Chge | 3rd Cycle % Chge | 4th Cycle % Chge | Resist at End of 100 hrs load | Total % Chge | % Chge from Last Temp Cycle to End of 100 hrs. load % | Resistance at End of 100 Hrs Load only % (no cycling) |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 100.010 | + 04 | + 04 | + 05 | + 05 | 100.050 | + 04 | — 01 | 100.040 | — 02 |
| 2 | 100.000 | + 03 | + 04 | + 03 | + 05 | 100.060 | + 06 | + 01 | 100.000 | 0 |
| 3 | 100.000 | + 01 | + 02 | + 02 | + 05 | 100.000 | 0 | + 05 | 100.050 | — 02 |
| 4 | 100.000 | + 02 | 0 | + 02 | + 02 | 100.000 | 0 | — 02 | 100.040 | — 01 |
| 5 | 100.010 | + 03 | + 04 | + 04 | + 05 | 100.000 | 0 | — 05 | 100.030 | — 03 |
| 6 | 100.000 | 0 | + 03 | + 04 | + 04 | 100.100 | + 1 | + 06 | 99.980 | 0 |
| 7 | 100.000 | + 04 | + 05 | + 04 | + 04 | 100.070 | + 07 | + 03 | 100.000 | 0 |
| 8 | 100.000 | + 03 | + 05 | + 05 | + 05 | 100.050 | + 05 | 0 | 100.000 | 0 |
| 9 | 100.000 | + 04 | + 03 | + 05 | + 04 | 100.010 | + 01 | — 03 | 100.050 | 0 |
| 10 | 100.000 | + 02 | + 02 | + 02 | + 04 | 100.010 | + 01 | — 03 | 100.000 | 0 |
| 11 | 100.000 | 0 | + 01 | + 01 | + 03 | 100.000 | 0 | — 03 | | |

**Most *reliable and stable* of all wire-wound precisions, these new Type WW's have proved their superiority in unbiased tests. Severe cycling and 100-hour load tests resulted in virtually zero changes in resistance. Other stringent tests proved JAN Type WW's high mechanical strength, freedom from shorting, resistance to high humidity. New winding forms—new winding technique—new type insulation—and new terminations assure long life, accuracy, ruggedness in service. IRC JAN Type WW's are becoming the choice of leading producers of military equipment. Get full technical data in Catalog Bulletin D-3.**



## Type BOC Boron-Carbon ½-Watt Resistor Surpasses Signal Corps Specification MIL-R-10509A

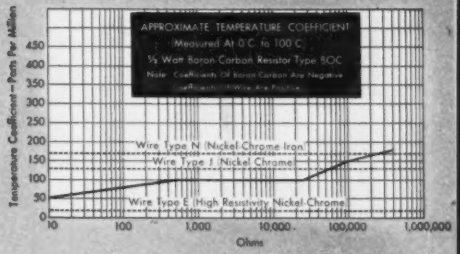


**The ultimate in *stable, reliable* non-wire-wound resistors, Type BOC's are especially designed for military electronic equipment—radar, gunnery control, communications, telemetering, computing and service instruments. Greatly improved temperature coefficients of resistance permit their use in place of costlier wire wound precisions in many critical applications. Lower capacitive and inductive reactance suit them to circuits where wire-wound stability is needed. Small size makes them ideal in limited space. *Tolerance:*—1%, 2% and 5%. *Resistance Values:*—10 ohms to ½ megohm. Send for full technical data in Catalog Bulletin B-6.**



## Type BT Advanced Fixed Composition Resistors Meet and Beat JAN-R-11 Specifications

### *Type BTS Meets and Beats Rigid G Characteristics*

**These are the famous Advanced Type BT's whose characteristics set new performance records for fixed composition resistors. They combine a unique filament-type resistance element with exclusive construction features to assure extremely low operating temperature and excellent power dissipation. Yet they are compact, light in weight, fully insulated. Intensive tests by independent agencies have proved their superiority under actual field conditions. For full technical data, send for Catalog Bulletin B-1.**

*Mail Coupon Today for Full Details of These IRC Resistors*

Boron-Carbon PRECISTORS • Power Resistors • Voltmeter Multipliers • Deposited Composition Resistors • Low Voltage Wire Wounds • Volume Controls • Voltage Dividers • Precision Wire Wounds • Deposited Carbon PRECISTORS • Ultra HF and High Voltage Resistors • Insulated Chokes • Selenium Rectifiers

*Wherever the Circuit Says* —WW—

**INTERNATIONAL RESISTANCE COMPANY**
403 N. Broad St., Philadelphia 8, Pa.
In Canada: International Resistance Co., Ltd., Toronto, Licensee

**INTERNATIONAL RESISTANCE COMPANY**
**403 N. Broad St., Philadelphia 8, Pa.**

Please send me full data on the following checked items:—

- ☐ Type BOC Boron-Carbon PRECISTORS
- ☐ Type WW Precision Wire Wound Resistors
- ☐ Type BT Advanced Fixed Composition Resistors
- ☐ Name and Address of Nearest IRC Distributor

NAME _____

TITLE _____

COMPANY _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

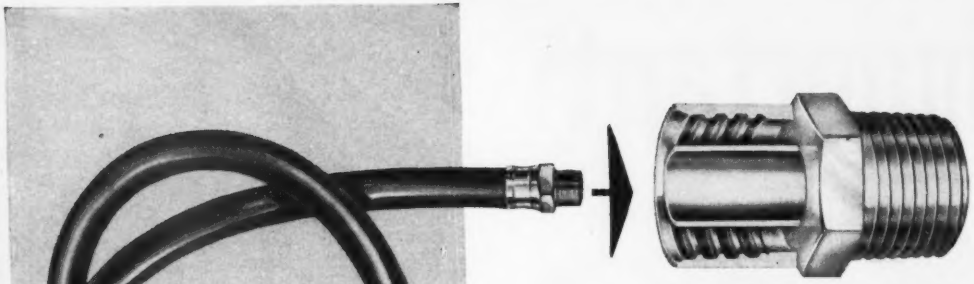

Flex-o-Tube Hose, and cross section of machined male fitting.

# FLEX-O-TUBE ...finds brass makes fine fittings

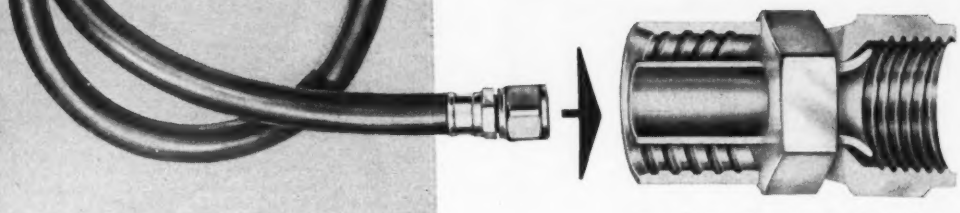

Cross Section of machined and flared female fitting.

**For quick, accurate and economical machining, free-cutting brass rod is preferred by many companies, such as Flex-O-Tube, Division of Meridan Corporation, Detroit, Mich. This company makes hose assemblies and fittings to conduct air-oil-water-gasoline and hydraulic power for the automotive, farm implement, machine tool and aircraft industries. Some of these hoses have a minimum bursting pressure of 20,000 pounds per square inch, which gives an indication of the tightness required, which can be obtained only by strength and accuracy.**

**Flex-O-Tube has found six points of superiority for brass over other metals, as follows:**

**1.** Brass "flows," or is ductile, so that no cracks result during the crimping operation required to fasten the fittings to the hose.

**2.** Ductility and strength inherent in brass act to provide a superior seat to fittings designed to control fluid flow. Competitive metals are either too hard or too soft to give positive closing and tend to leak.

**3.** Where the design of the fitting is intricate, necessitating removal of considerable metal by machining, the automatic screw machines can be run faster with free-cutting brass rod.

**4.** Brass has a high scrap value, and the scrap sold back to the mill increases brass supplies.

**5.** The break-even point between brass and other metals is especially favorable to brass in the sizes of rod that Flex-O-Tube buys.

**6.** Customer preference is for brass, which is universally recognized as a quality metal. Hence brass fittings are more readily sold, and in fact often are specified regardless of size or price differentials.

**Included in the Flex-O-Tube operations are machining, flaring, crimping, and annealing to assure the proper ductility for flaring and crimping.**

**Revere is an important supplier of brass rod to Flex-O-Tube, and has also collaborated with this customer through the Revere Technical Advisory Service.**

**If you wish information about brass and how one or more of the Revere brasses can add to the economy and saleability of your product, get in touch with the nearest Revere Sales Office. See your telephone directory or write direct.**

---

**REVERE**

**COPPER AND BRASS INCORPORATED**

*Founded by Paul Revere in 1801*

230 Park Avenue, New York 17, N. Y.

• • •

*Mills: Baltimore, Md.; Chicago and Clinton, Ill.; Detroit, Mich.; Los Angeles and Riverside, Calif.; New Bedford, Mass.; Rome, N. Y. Sales Offices in Principal Cities. Distributors Everywhere.*

**SEE REVERE'S "MEET THE PRESS" ON NBC TELEVISION EVERY SUNDAY**

# The Ideal End Closure –

## E-I END SEALS

**E-I END SEALS SIMPLIFY MANUFACTURE, SPEED PRODUCTION, LOWER UNIT COST**

No special skill is required to apply E-I seals. Assembly is rapid since all metal parts are tin-dipped for easy soldering. Rugged construction plus carefully annealed glass permits rough handling without weakening or breakage.

**E-I END SEALS PROVIDE POSITIVE HERMETIC SEALING AT ALL TIMES**

Glass of the Pyrex family, chemically bonded to metal provides a permanently air-tight seal that readily withstands drastic pressure change, shock and vibration. All seals are silicone-treated for high resistance when exposed to salt-spray or humidity.

**E-I END SEALS ARE AVAILABLE IN ALL SIZES AS STANDARD ITEMS**

Standard stock items are available to economically meet practically any requirement. Both pigtail lead and terminal connection types of seal are included. A standard, self-describing coding system affords maximum customer convenience in ordering.

*DIVISION OF AMPEREX ELECTRONIC CORP*

**WRITE TODAY FOR BULLETIN 952** containing complete information on E-I End Seals including dimensional data and coding system.

**ELECTRICAL INDUSTRIES**
44 SUMMER AVENUE, NEWARK 4, NEW JERSEY

# NEW IMPROVED G-E GERMANIUM

1. HERMETIC SEAL 2. MINIATURE SIZE

- **Hermetically Sealed** against deteriorating elements. Glass-to-metal seals throughout.
- **Miniature Size** to facilitate use in all electronic equipments, yet heat losses are dissipated efficiently.
- **Re-designed** to meet all military humidity tests and shock and vibration requirements.
- **High Output Voltage** and improved back current characteristics.

| ABSOLUTE MAXIMUM RATINGS • T=25° C • RESISTIVE LOAD | | | | |
|---|---|---|---|---|
| | 4JA1A1 | 4JA1A2 | 4JA1A3 | 4JA2A4 |
| PEAK INVERSE VOLTAGE (volts) * | 100 | 200 | 300 | 400 |
| PEAK FORWARD CURRENT (amps) * | 0.5 | 0.5 | 0.5 | 1.3 |
| D.C. OUTPUT CURRENT (Ma) * | 150 | 150 | 150 | 400 |
| D.C. SURGE CURRENT (amps) | 25 | 25 | 25 | 25 |
| FULL LOAD VOLTAGE - DROP (volts) | 0.6 | 0.6 | 0.6 | 0.7 |
| OPERATING FREQ. (kc) | 50 | 50 | 50 | 50 |

*Typical absolute maximum ratings. For other combinations refer to Fig. 1.

Model 4JA2A4 designed for use in TV power supplies. DC output voltage 10 to 15 volts higher than with comparable selenium rectifiers in typical voltage doubler circuit.

# DIFFUSED JUNCTION RECTIFIER

**Suggested Applications Noted**

Originally developed for military use, the new JA1A and JA2A Rectifiers may be adaptable to fields other than radar and military communications. Among these: Computers, magnetic amplifiers, TV receiver power supplies, telephone switchboards. Application Information on other uses can be supplied. Write, or wire us!

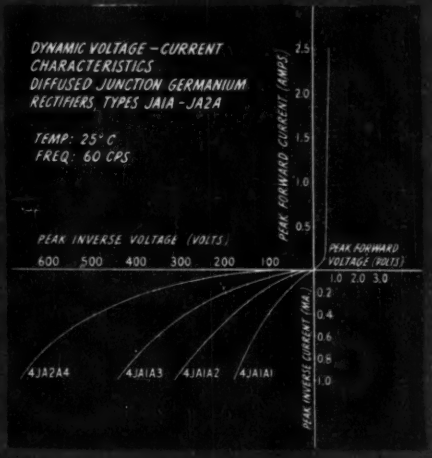


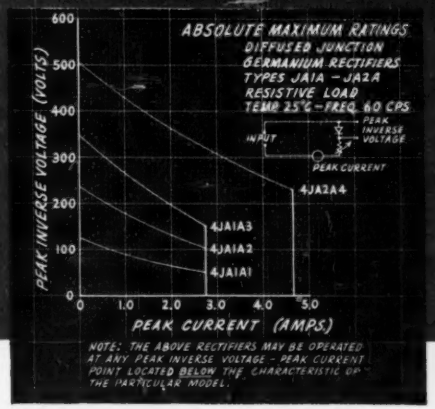


**FIG. 1**

**NEW BULLETIN**—Complete specifications on the diffused junction rectifier are contained in this illustrated bulletin. It's yours on request. Write: General Electric Company, Section 412, Electronics Park, Syracuse, N. Y.



# GENERAL ELECTRIC



110
Type J
Bradleyometers

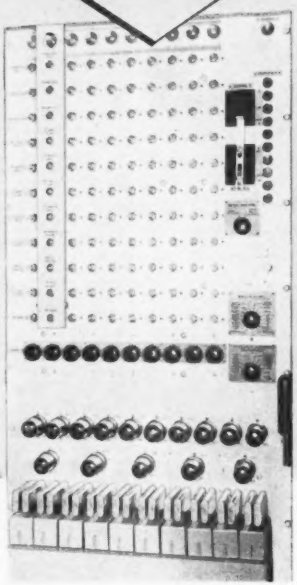

**CLOSE-UP OF SERVO PANEL**

The above panel contains 110 Allen-Bradley Type J potentiometers, each of which may be adjusted to meet transmitter operating requirements.

Type J Bradleyometers can be supplied in single, dual, or triple unit construction, with or without line switch.

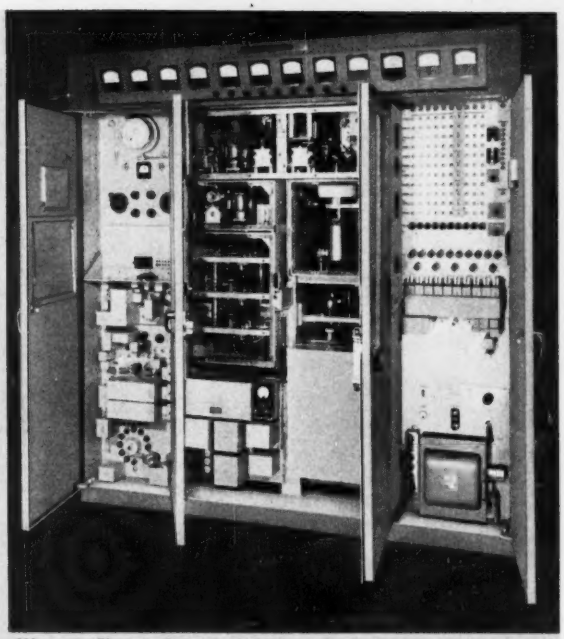

Western Electric Overseas Radio Telephone Transmitter Panel

# OVERSEAS TRANSMITTER has 110 Type J Bradleyometers

The Bradleyometers used in this Western Electric panel board assure stability of transmitter performance because the solid molded resistor elements of these Bradleyometers are not affected by heat, cold, moisture, or age. The contact brush, which actually improves with age, is always noiseless in operation.

Bradleyometers can be built to produce any resistance - rotation curve. During manufacture, the materials entering into the molded resistor can be varied in resistance throughout the circumference of the ring to meet your special electronic circuit requirements.

If you have a critical rheostat or potentiometer problem, be sure to investigate the Type J Bradleyometer.

Allen-Bradley Co., 110 W. Greenfield Ave., Milwaukee 4, Wis.

A-B Quality

**ALLEN-BRADLEY**

**FIXED & ADJUSTABLE RADIO RESISTORS**

Sold exclusively to manufacturers — QUALITY — of radio and electronic equipment

it's news!

# EAI's Dataplotter . . .

## An Electronic System That Converts Digital Data To An Analog Plot . . .

Here is a system that will save countless man-hours and costs, and will insure accurate and clear presentation of data.

This new Dataplotter, designed and developed by Electronic Associates Inc., will automatically plot a cartesian curve composed of incremental points or symbols from IBM card data at maximum machine reading speed.

It will accept data from other inputs — Magnetic tape, keyboards, digital computers, etc.

It will retain at all times the basic accuracy of the digital system.

Here's what the Dataplotter system consists of:

Variplotter Model 205G
Digital-to-analog converter, Model 417
Data input keyboard

For further information, clip out and mail the coupon below. No obligation.

ELECTRONIC ASSOCIATES Incorporated

Electronic Associates Inc.
Long Branch
New Jersey

Gentlemen: Would you be kind enough to send me detailed information on your Dataplotter.

Name .....
Company ..... Title .....
Address .....
City ..... Zone ..... State .....

write ↗

# Kenyon
## TRANSFORMERS
**for standard and special applications**

Kenyon quality transformers have always represented the highest standards of performance and durability. For more than a quarter century discriminating engineers who will settle for nothing but the best have consistently specified Kenyon.

**KENYON TRANSFORMERS FOR**

**MIL Applications**

**Radar**

**Broadcast**

**Atomic Energy Equipment**

**Special Machinery**

**Automatic Controls**

**Experimental Laboratories**

*Write for details*

**KENYON TRANSFORMER CO., Inc.**

**840 Barry Street, New York 59, N. Y.**

# TUNG-SOL®

## flashers

**new,**
**low-cost**
**circuit control devices**
**for electronic equipment**

see other side for additional information

# Tung-Sol flashers protect against voltage overloads—facilitate intermittent operation—regulate automatic switching

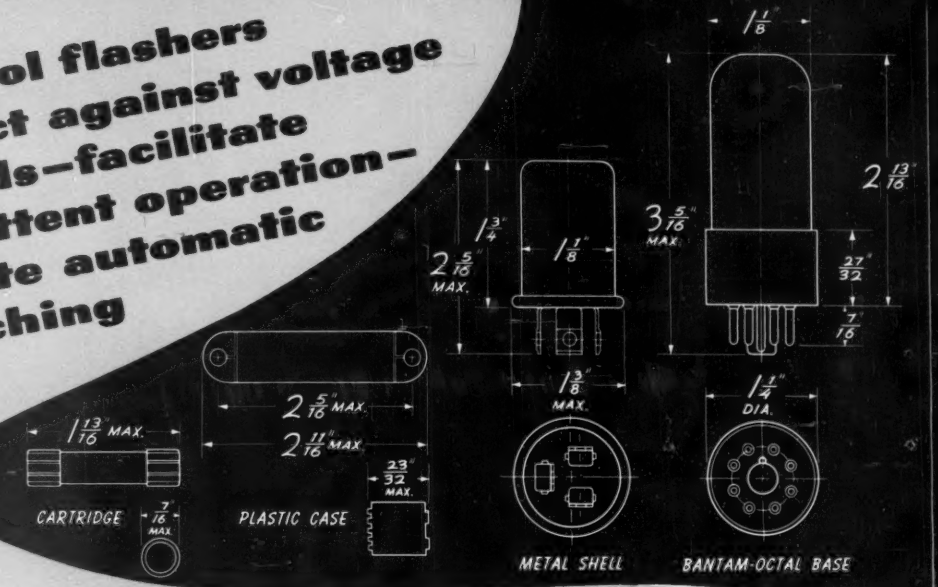


**"Flasher"** is the automotive name for this Tung-Sol product. Actually, it is the most simplified, most reliable thermal-operated relay ever developed.

If you own an automobile made since 1939 and it has directional signals, then you have already witnessed first-hand the virtually unfailing performance of the Tung-Sol Flasher. Tucked away under the instrument panel, this tube-size mechanism makes the turn signal lights blink on and off.

After 13 years, the 13 million flashers in automotive use have demonstrated that this device usually outlasts the car it is on, and the average life of a car is 7 years! Tung-Sol Flashers not only are more reliable than conventional types of relays—they are more compact and they cost less.

Now then, where can you use a "circuit breaker" or "fuse" or "relay" in your electronic equipment?

***As a circuit breaker?*** For this type of application, Tung-Sol Flashers are built with normally closed contacts. Under the effect of a short or overload, there is an almost instantaneous response and the contacts are opened. With equal rapidity the device cools and the contacts close. As long as the disturbance within the circuit exists the Flasher will continue automatically to sample the condition of the equipment, thus providing absolute safety against costly, damaging burn-out.

***As a voltage limiter?*** When an overload surge raises voltage to a damaging level, the Tung-Sol Flasher will throw in a protective resistance. When the voltage returns to normal, the resistance is shorted out.

***As a cycling control?*** Where it is desirable that equipment operate intermittently, the Flasher will cycle on and off at a predetermined rate.

***As a time delay relay?*** This type is non-operative until a given voltage or current is reached, when the Flasher will make contact and activate a switch.

***As a warning device?*** Tung-Sol Flashers provide for visual or audible warning, as well as mechanical protection through use of a pilot light, horn, or siren which may be installed on the equipment or at a remote point.

The circuit protection, freedom from service interruptions and lower maintenance which you could offer your customers by installing Tung-Sol Flashers in the equipment you make, will certainly warrant your obtaining complete information. Our staff will be glad to work with your engineers. Write today.




SINGLE CIRCUIT - SERIES ELEMENT




SINGLE CIRCUIT - SHUNT PILOT

## TYPICAL SINGLE CIRCUIT FLASHER DIAGRAMS




SINGLE CIRCUIT - SHUNT ELEMENT




SINGLE CIRCUIT

## FLASHERS FOR APPLICATIONS WITH VOLTAGES BETWEEN 3 and 32 VOLTS AC or DC.

| LOAD | CARTRIDGE | PLASTIC CASE |
|---|---|---|
| 150 ma. | | 627 |
| 175 ma. | 606 | |
| 175 ma. | | 625 |
| 200 ma. | | 617 |
| 220 ma. | | 634 |
| 250 ma. | | 633 |
| 300 ma. | | 623 |
| 400 ma. | | 619 |
| 600 ma. | | 624 |
| .05 amp 110V (6W lamp) | 608 | |
| .2 amp 110V (25W lamp) | 607 | |
| Switching relay | | 609 |

# TUNG-SOL FLASHERS

**TUNG-SOL ELECTRIC INC., Newark 4, New Jersey**

Sales Offices: Atlanta, Chicago, Culver City, Dallas, Denver, Detroit, Newark, Philadelphia

TUNG-SOL makes All-Glass Sealed Beam Lamps, Miniature Lamps, Signal Flashers, Picture Tubes, Radio, TV and Special Purpose Electron Tubes.

NOVEMBER, 1953

A COMPLETE

# STANDARD LINE



MIDGET FRAME SIZE—OPEN TYPE FOR 28 VOLT, 400 CYCLES, SINGLE PHASE DUTY; 0-28 VOLTS, 4 AMPS. OUTPUT

1 KVA FRAME SIZE—OPEN TYPE FOR 115 VOLTS, 400/800 CYCLES, SINGLE PHASE SERVICE; 0-115 VOLTS, 3.0 AMPS. OUTPUT

1 KVA FRAME SIZE—OPEN TYPE FOR 230 VOLTS, 400/800 CYCLES, THREE PHASE DUTY; 0-230 VOLTS, 3.0 AMPS. OUTPUT





MIDGET FRAME SIZE—ENCLOSED TYPE FOR 120 VOLTS, 400 CYCLES, SINGLE PHASE DUTY; 0-120 VOLTS, 1.0 AMPS. OUTPUT

1 KVA FRAME SIZE—ENCLOSED TYPE FOR 115 VOLTS, 380/1600 CYCLES, SINGLE PHASE INPUT, 0-130 VOLTS, 4.0 AMPS. OUTPUT



# POWERSTAT



## *Variable Transformers*



2 KVA FRAME SIZE—ENCLOSED TYPE FOR 115 VOLTS, 400/800 CYCLES, SINGLE PHASE INPUT, 0-130 VOLTS, 15 AMPS. OUTPUT

## FOR 400-800 CYCLE OPERATION

. . . SHIPBOARD, AIRBORNE, GROUND, MOBILE EQUIPMENT WHERE SPACE AND WEIGHT SAVINGS ARE VITAL



### THREE BASIC FRAME SIZES

| MIDGET | 1 KVA | 2 KVA |
|---|---|---|
| ENCLOSED AND OPEN CONSTRUCTION IN RATINGS UP TO 1/2 KVA | ENCLOSED AND OPEN CONSTRUCTION IN RATINGS UP TO 1-1/2 KVA | ENCLOSED AND OPEN CONSTRUCTION IN RATINGS UP TO 2-1/2 KVA |

*Weight and space must be conserved in shipboard, airborne and allied equipment for national defense needs. By operating electrical apparatus at 400 cycles and higher frequencies, this is accomplished. Since variable transformers are a necessary component in much of this equipment, a complete standard line of POWERSTAT variable transformers is now available. A wide range of types is offered to meet BU Air, BU Ships, Air Corps and Signal Corps specifications. Standard types are built to fulfill the demands of adverse operating conditions including excessive shock, vibration, bounce; high humidity; low and high ambient temperatures.*

*Standard types are described in Bulletin P552H. Send for your copy today. If a standard assembly does not meet your exacting requirements, our engineering department will work with you to build a POWERSTAT to your specifications.*

**WRITE TO:**
**211 THURE AVENUE,**
**BRISTOL, CONNECTICUT**

**THE SUPERIOR ELECTRIC CO.**
BRISTOL, CONNECTICUT

• STABILINE AUTOMATIC VOLTAGE REGULATORS • POWERSTAT VARIABLE TRANSFORMERS • VARICELL D-C POWER SUPPLIES • VOLTBOX A-C POWER SUPPLIES • SUPERIOR 5-WAY BINDING POSTS • POWERSTAT LIGHT DIMMING EQUIPMENT

# Announcing the NEW Federal SELENIUM RECTIFIER...with 36 VOLT (RMS) CELLS

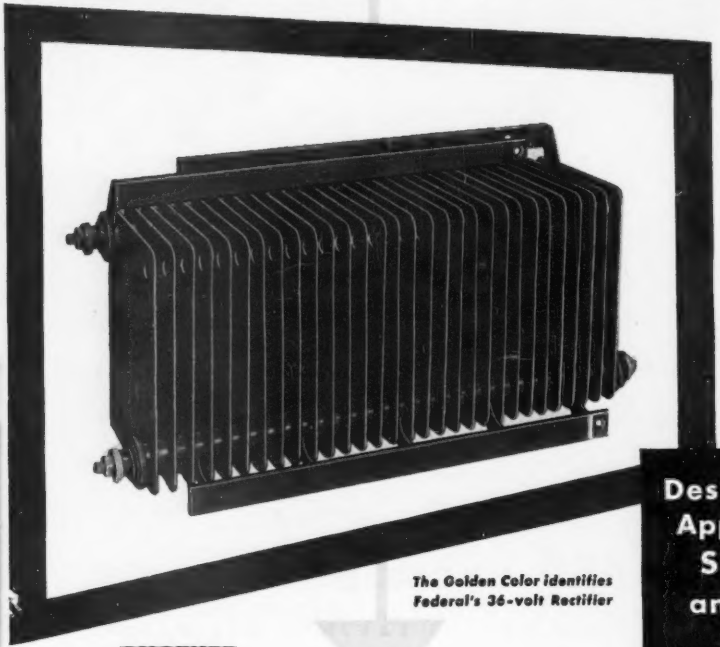

The Golden Color identifies Federal's 36-volt Rectifier

**Designed for Special Applications where SIZE—WEIGHT and EFFICIENCY are TOP CONSIDERATIONS**

**ANOTHER *Federal* CONTRIBUTION**

- Fewer plates
- Lighter weight
- Smaller size
- Greater Over-all Efficiency
- Dependable "Federal Performance"

HERE'S THE ANSWER to your selenium rectifier stack requirements . . . for applications where *space* is at a premium . . . where *weight* is of prime importance. This is the ideal rectifier for many military end-use equipments . . . for aircraft . . . for compact, portable units.

Developed by America's *first* manufacturer of selenium rectifiers, you can depend on its quality, efficiency and economy.

*Wherever* you need DC from an AC source—look to Federal . . . *from milliwatts to kilowatts!* For details on Federal's new 36-volt rectifier cells of various sizes—or any other DC power requirement—write to Dept. F-113.

***America's oldest and largest manufacturer of selenium rectifiers***

## *Federal Telephone and Radio Corporation*

FEDERAL TELECOMMUNICATION LABORATORIES, Nutley, N. J. . . . . a unit of IT&T's world-wide research and engineering organization.

SELENIUM-INTELIN DIVISION
100 KINGSLAND ROAD, CLIFTON, NEW JERSEY

*In Canada:* Federal Electric Manufacturing Company, Ltd., Montreal, P. Q.
*Export Distributors:* International Standard Electric Corp., 67 Broad St., N.Y.

# Ready for Your Circuit

**Basic Foundation Components, Plug in, Connecting, Fastening Devices for the**
**ELECTRONIC CONTROL INDUSTRY**

**Making it possible to build quickly *any* electronic circuit into practical production design (you supply the circuit — we supply the components).**

— by giving you basic components of tremendous flexibility which simplify layout time in production of your equipment.

— by providing you a technique to solve mechanical, space, connecting, interconnecting, fastening, sensing and indicating problems for you.

**Giving you equipment that is easy to operate and maintain**

— so that — with spares — your equipment never needs to be out of operation more than 30 seconds.

— so that non-technical personnel can set up, operate and maintain your equipment.

WORKING WITH "ALDEN'S HANDBOOK", THE DESIGN ENGINEER AUTOMATICALLY CREATES *PRACTICAL PRODUCTION DESIGN*, as follows —

**1. Anything electrical or electronic usually operates with an *outside source of power* and may be connected to outside circuits.** So Alden provides for this with the efficient Detachable Line Cord for bringing in 110V AC power. Available in lengths to your specs for making a neat connection. Sure grip plug is self-piloting for quick mating.

**SEE "ALDEN HANDBOOK" PAGES 4A & B FOR COMPLETE DETAILS**

**2. A great deal of equipment will have a front panel with such things as sensing controls, jacks for testing and fuseholders.** For this Alden provides a basic slide-in chassis with a detachable front and back panel so that rheostats, indicator lights, test jacks, interwiring, etc. are all easy-to-work subassembly operations.

**SEE "ALDEN HANDBOOK" PAGES PI-1E thru G FOR COMPLETE DETAILS**

**3. Sensing Units — telltales that all is well or not — in simple indicator light — fuse holders that glow when blown — memory or pulse circuits including *Static Magnetic Memory* that sense — or command — or keep on repeating so that units or elements almost assume brain functions.**

**SEE "ALDEN HANDBOOK" PAGES ES-5A & B; DL-5A & B; TE-3A & B; CO — all pages**

**4. The telephone, telegraph, electric light companies have always brought the incoming circuits to a bus bar or terminal board so that the *incoming circuits* could *always be checked at one point* — and equipment connected not being condemned because of imperfect outside circuits.** So Alden provides in its Back Connectors and supporting Back Plates the one area in which all incoming circuits can be checked.

**SEE "ALDEN HANDBOOK" PAGES PI-2A & B; 4D FOR COMPLETE DETAILS**

**5. The next problem is to house the components and have them do the electrical or electronic work required.** Any such circuitry will have certain main functions and branching from it other functions. Many of these functions can be layered—so circuits go direct from back connector to front panel. Alden provides: simple component mounting panels for putting any circuit in layers. (And incidentally such component panel simplify the thinking, should the circuits give sufficient volume to be printed.) So Alden has the Terminal Panel Boards to make equipment easy to lay out by putting any function in one plane—plus the unit cables of correct lengths with stripped ends ready for interconnecting the Terminal Panels.

**SEE "ALDEN HANDBOOK" PAGES PI-1B thru D FOR COMPLETE DETAILS**

**6. Not all circuits can be a simple, straight circuit from back connector to front panel because there are auxiliary functions and branches that have to be in the main functions.** The usual chassis carries tubes, transformers and components that rise vertically from the chassis, often leaving vacant spaces. In these spaces can be placed the plug-in units which have these secondary circuits; using the plug-in technique usually removes the congestion of the wiring below the chassis, provides automatically for shielding and heat dispersion and yet gives you largest amount possible circuitry per cubic space, the circuits free from interaction.

**SEE "ALDEN HANDBOOK" PAGES PI-1A thru H FOR COMPLETE DETAILS**

**7. Again these techniques often lead to putting one function such as a *power supply* and amplifier on separate chassis and so the back connectors or the chassis itself may need interconnecting unit cables to either chassis or racks.** Alden provides sufficient variety of connectors to choose from—and designed so that any cable, no matter how involved, cannot be wrongly plugged in.

**SEE "ALDEN HANDBOOK" Sec. PC - Sec. MPS FOR COMPLETE DETAILS**

**8. To design so that no equipment — whether plug-in unit or slide-in chassis — needs to be out of operation for more than 30 seconds (having adequate spares on hand), Alden provides quick detaching and quick fastening devices for chassis.** The Serve-a-Unit locks that will move chassis against weight or the resistance of gaskets. There is the Target Screw (coin operated), a Tool-less screw—the Captive Screw which becomes part of the equipment.

**SEE "ALDEN HANDBOOK" PAGE PI-11 FOR COMPLETE DETAILS**

**9. Government designers and those in the electronic control industry want elements of equipment so that they can be portably operated or tested, can be carried by one man with spares, parts easily sent by mail or airborne and also prefer that the same design equipment can be used in conventional racks.** Those designing for field operation use, at sea, prefer to have the equipment so it can be unloaded by two people, set up and immediately interconnected. This is provided by the Alden Basic Chassis using Back Connectors, Unit Cables and for the last purpose, the Uni-Rack which can be set on top of one another and immediately interconnected with each other.

**SEE "ALDEN HANDBOOK" PAGE PI-11 FOR COMPLETE DETAILS**

## *Suggestion to your Lab or Research Dept.*

Numerous labs have seen the advantages of using Alden's components to build the particular test circuits needed for the experimental or test circuits that they engineer and operate. It may be an assortment of over-and-under chassis, power supplies, amplifiers, oscillators, modulators, sensing circuits, etc. to handle and monitor connecting these on your bench and more expensive probe. Alden provides the components which are ready-to-plug in. With using shelf ready-to-plug in. With completely assembled, experimental any you avoid essentially unlike anything you've had to work on before, Alden systems will have right from scratch instead, you're able to operate directly what your units which will be like: meeting your specs, production standards, servicing standards, appearance standards.

Avoid floorful of over-length cords.

Avoid midget cords that compel added extension cords.

Front panel (various sizes) carries controls, indicators, sensing elements, with their interwiring.

Detachable front panel hinged giving accessibility for ease of assembly and servicing.

Fuses that indicate when blown.

Indicator lamps always easily replaced so always functioning.

Insulated test point jacks for pinto voltages up to 6,000V.

Plug-in Memory or Pulse Circuits.

Alden Back Connectors, color coded, with accessible uncongested solder terminals — permit easy servicing and rapid circuit checks at central point.

Back Connectors permit direct efficient wiring — avoid conventional rat's nest wiring.

Back Connectors mount on Back Plate to give one point to check all chassis connections.

Terminal Panel Board with all components mounted in one plane, and Alden Unit Cable for interconnecting all panel elements with leads.



Layering of circuits using Alden Terminal Panels to segregate each main function and associate elements in one plane—for ease of assembly and check.



Massing of essential electronic elements yet with efficient heat dispersion and freedom from interaction, in a Basic Chassis.

How Alden Terminal Panel groups main functions and how plug-in units have parallel functions for largest amount circuitry per cubic space.

Alden "20" Package house plug-in Units give independent shielding and heat dispersion.

Separate chassis may be stacked in Alden Un-i-rack Cabinet. Cabinet can be interconnected within by Alden unit plug-in cables.

Alden Unit Cable — with variety of plug-in connectors. Carries wiring from chassis to chassis or rack to rack.



A turn of the Serve-a-Unit Lock handle—located in front panel — draws in unit against pressure—reverse turn ejects.

Alden Target Screw The Toolless Screw

The Captive Screw, never lost.



Chassis in carrying or serviceman's case or case to house spare.



Same chassis fits in Uni-Rack Cabinet for field or permanent use. In field all elements can be connected as fast as you can unlock them.

**SEND FOR the Alden Handbook—your key to *practical production design*—with components already tooled—yet can be modified—ready for volume production without delays or procurement headaches.**

ALDEN PRODUCTS COMPANY 127 North Main Street, Brockton, Massachusetts

# E + TH and

**ZENITH RADIO CORPORATION**

ZENITH RADIO

PHONE BERKSHIRE 7-7500

6001 DICKENS AVENUE CHICAGO 39, ILLINOIS

CABLE ADDRESS "ZENITHRAD" ALL CODES

August 14, 1952

Antara Chemicals Division
General Dyestuff Corporation
435 Hudson Street
New York 14, N. Y.

Gentlemen:

We consider our new "Super-Z" radio chassis to be the finest, most dependable in radionic history — second to none for power and sensitivity. For all our IF circuits we make our own IF Units — using threaded cores molded of G A & F Carbonyl Iron Powders. We use your E and TH types — as we have for some 10 years.

In our Armstrong FM Core Tuning Units we have recently switched from your HF type to your newly developed "J" Powder. We find that we get the same stability with a higher Q value.

We are always on the search for finer materials. We are happy to acknowledge and give credit, when we find them.

Very truly yours,
ZENITH RADIO CORPORATION

G. E. Gustafson
Vice President in Charge of Engineering

GEG:EF

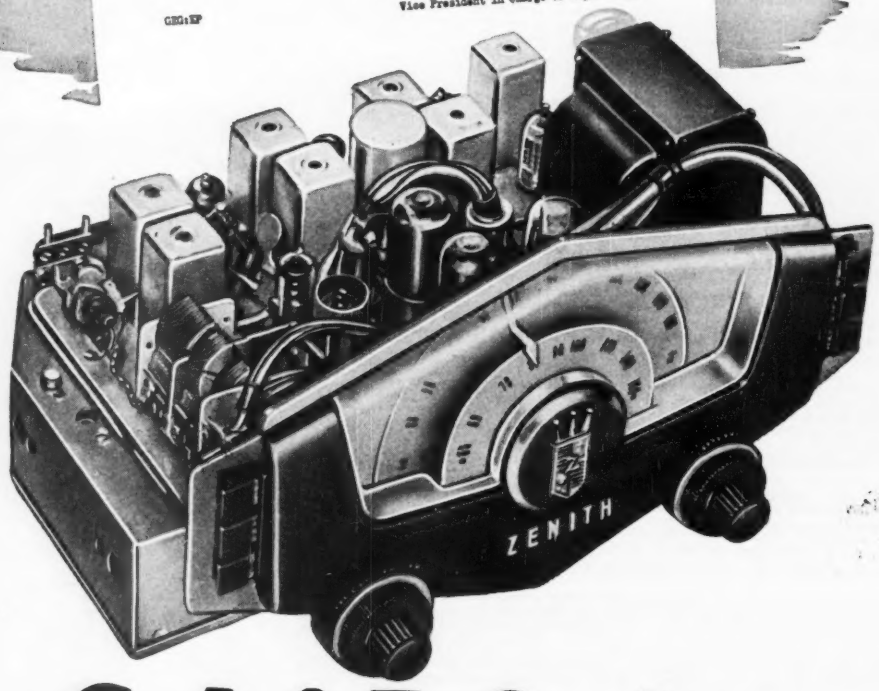


# G A & F® Carbonyl

# SF VS J

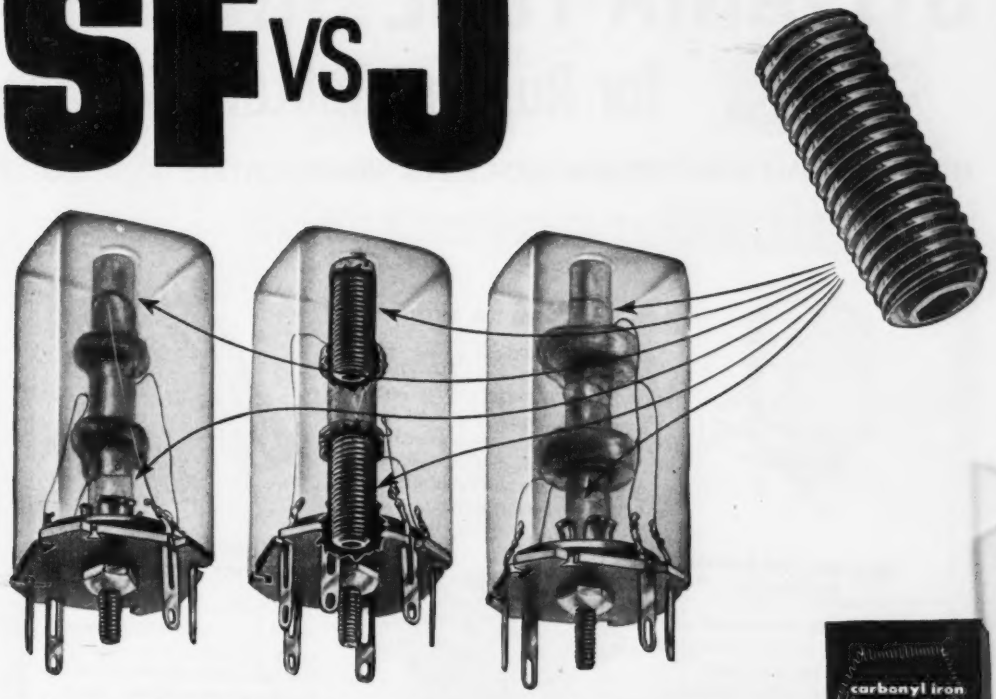

GA&F Carbonyl Iron Powders are used to produce cores for transformer and inductor coils of every form—to increase Q values, to vary coil inductances, to reduce the size of coils, to confine stray fields and to increase transformer coupling factors.

For use in TV and in Radio, including FM, the extremely small size of the particles is of enormous value, since eddy currents develop only within each particle—proportional to the square of the particle diameter. In core-making, the particles are insulated from each other by coating them, before compounding, with an efficient insulating agent.

These powders are microscopic, almost perfect spheres of extremely pure iron. They are produced in seven carefully controlled types, ranging in average particle-size from three to twenty microns in diameter.

Similarly, their properties vary, making them useful in many different applications. Engineers have commented on the fact that cores made from these powders lend themselves to smoothness of adjustment and to ease of grinding. The new Ferromagnetic Powder "J" was designed for high Q cored coils at VHF. At high frequencies, it has the lowest losses for its relatively high permeability.

* * *

We are proud to serve the Zenith Radio Corporation . . . We urge you to ask your core maker, your coil winder, your industrial designer, how GA&F Carbonyl Iron Powders can increase the efficiency and performance of the equipment or product you make, while reducing both the cost and the weight.




**THIS WHOLLY NEW 33-PAGE BOOK** offers you the most comprehensive treatment yet given to the characteristics and applications of GA&F Carbonyl Iron Powders. 80% of the story is told with photomicrographs, diagrams, performance charts and tables. For your copy — without obligation—kindly address Department 33.

gdc ANTARA gaf

## ANTARA® CHEMICALS

DIVISION OF

## GENERAL DYESTUFF CORPORATION

435 HUDSON STREET • NEW YORK 14, NEW YORK

# Iron Powders . . .

MEMBER mpa METAL POWDER ASSOCIATION

# SYLVANIA TUBE SOCKETS

## for Rugged Military Service

**HIGH QUALITY SYLVANIA SOCKETS IMMEDIATELY AVAILABLE**



**JAN 7- AND 9-PIN MINIATURE TUBE SOCKETS**

These sockets are available in grade L-4B or better ceramic, or type MFE low loss plastic. The contacts are either phosphor bronze or beryllium copper, silver plated. Contacts and center shield tab are hot tin dipped. Nickel plated brass shields equipped with sturdy springs are available for all 7- and 9-pin sockets.

**JAN OCTAL TUBE SOCKETS**

Saddles of these sockets are nickel plated brass, either top or bottom mounted, with or without ground lugs. Body and contacts are of the same materials as the JAN miniature tube sockets. Contact tabs and saddle ground lugs are hot tin dipped.





**BUTTON TYPE SUBMINIATURE (T3) TUBE SOCKETS**

These sockets are available for round 8-pin subminiature tube types. Insulation is type MFE low loss plastic and contacts are beryllium copper silver plated with gold flash covering. Contacts especially designed for positive connection and high pin retention even after many insertions. Sockets are of rugged construction for long life.

When you order Sylvania Tube Sockets you get the extra value of Sylvania's experience and know-how at no extra cost. Designed for maximum strength and optimum electrical properties, Sylvania Sockets assure high tube retention and tube pin contact even under severe vibration. Highest quality is guaranteed by Sylvania's own exacting quality control.

For full information on the complete line of Sylvania Tube Sockets write: Sylvania Electric Products Inc., Dept. A-1011, Parts Sales Division, Warren, Pa.

# SYLVANIA

RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

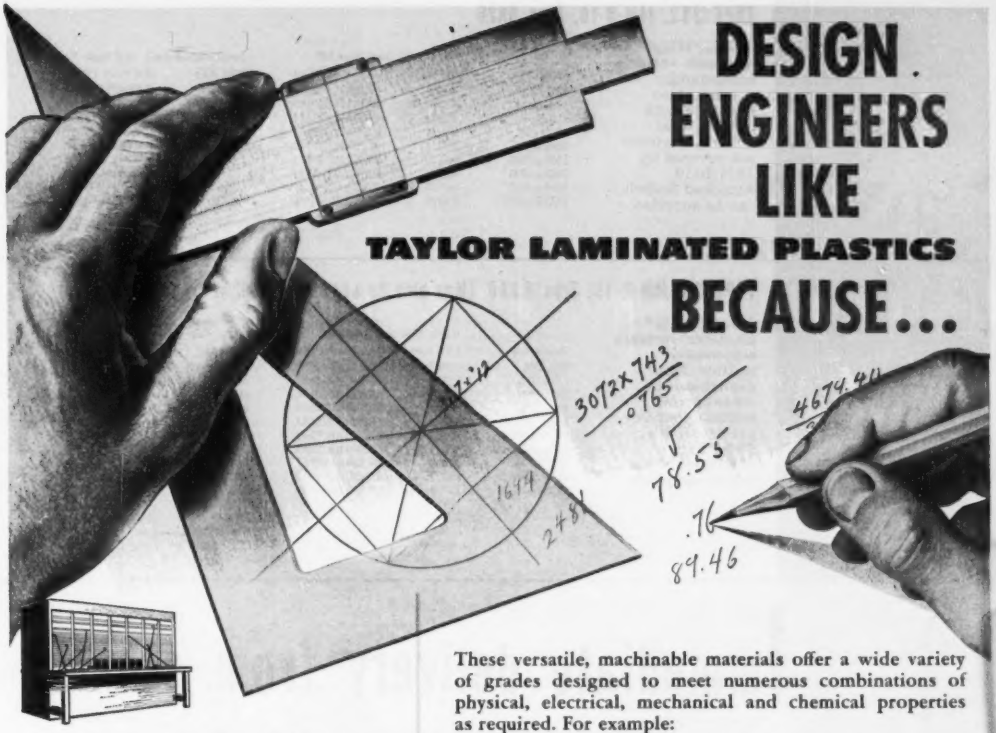


# DESIGN ENGINEERS LIKE TAYLOR LAMINATED PLASTICS BECAUSE...

*In the communications industry . . .*

Parts made from Taylor Laminated Plastics are doing vital jobs in panel boards, insulation blocks and thousands of allied applications because of their excellent electrical characteristics and their resistance to moisture absorption. Have you considered these basic materials for making *your* product better?

*This 62-page Taylor catalog describes how the many Taylor Laminated Plastics are made, how and where they're used, and more important, how you can use these basic materials to make your product better . . . at lower cost! Write today for a copy of catalog* **E11.**

These versatile, machinable materials offer a wide variety of grades designed to meet numerous combinations of physical, electrical, mechanical and chemical properties as required. For example:

Taylor *Phenol* Laminates meet the need for waterproof insulation possessing outstanding electrical properties and great mechanical strength. They are unaffected by normal ranges of heat and cold and are resistant to oil and chemicals.

Taylor *Melamine* Laminates are especially suited for resistance to flame, heat and corrosion, have excellent electrical qualities, and are particularly good in arc resistance.

Taylor *Silicone* Laminates have very high heat resistance, excellent mechanical and electrical properties, and offer great resistance to acids and alkalies.

Combinations of these laminates can be used to produce a material with the particular property or group of properties desired.

Why not explore the possibilities of designing Taylor Laminated Plastics in your product today? Write for complete engineering data and a generous assortment of samples. Ask, too, about Taylor Vulcanized Fibre, Taylor Insulation, and the cost-cutting Taylor Fabricating Service.

SINCE 1891
Taylor
LAMINATED PLASTICS

**TAYLOR FIBRE CO.**
NORRISTOWN, PA. • LA VERNE, CALIF.

VULCANIZED FIBRE • TAYLOR INSULATION

PHENOL, SILICONE & MELAMINE LAMINATES • FABRICATED PARTS

## TYPE 252, JAN-R-19, Type RA20

2 watt, 1 17/64" diameter variable wirewound resistor. Also available with other special military features not covered by JAN-R-19. Attached Switch can be supplied.

| Resistance | RA20, JAN Shaft Type SD | | RA20 High Torque, JAN Shaft Type SD | |
|---|---|---|---|---|
| | CTS Part | JAN-R-19 TYPE | CTS Part | JAN-R-19 TYPE |
| 50±10% | B8079 | RA20A1SD500AK | X3496 | RA20A2SD500AK |
| 100±10% | W6929 | RA20A1SD101AK | L9388 | RA20A2SD101AK |
| 250±10% | X3497 | RA20A1SD251AK | M9879 | RA20A2SD251AK |
| 500±10% | W6931 | RA20A1SD501AK | X3498 | RA20A2SD501AK |
| 1000±10% | W6932 | RA20A1SD102AK | X3499 | RA20A2SD102AK |
| 1500±10% | W6933 | RA20A1SD152AK | M9809 | RA20A2SD152AK |
| 2500±10% | W6934 | RA20A1SD252AK | L9103 | RA20A2SD252AK |
| 5000±10% | W6935 | RA20A1SD502AK | L9104 | RA20A2SD502AK |
| 10,000±10% | W6936 | RA20A1SD103AK | H8979 | RA20A2SD103AK |



## TYPE 25, JAN-R-19, Type RA30 (May also be used as Type RA25)

4 watt, 1 17/32" diameter variable wirewound resistor. Also available with other special military features not covered by JAN-R-19. Attached Switch can be supplied.

| Resistance | RA30, JAN Shaft Type SD | | RA30 High Torque, JAN Shaft Type SD | |
|---|---|---|---|---|
| | CTS Part | JAN-R-19 TYPE | CTS Part | JAN-R-19 TYPE |
| 50±10% | X3502 | RA30A1SD500AK | W2837 | RA30A2SD500AK |
| 100±10% | X3503 | RA30A1SD101AK | X3504 | RA30A2SD101AK |
| 250±10% | X3505 | RA30A1SD251AK | X3506 | RA30A2SD251AK |
| 500±10% | X3507 | RA30A1SD501AK | M7566 | RA30A2SD501AK |
| 1000±10% | X3508 | RA30A1SD102AK | S2444 | RA30A2SD102AK |
| 1500±10% | X3509 | RA30A1SD152AK | X3510 | RA30A2SD152AK |
| 2500±10% | X3511 | RA30A1SD252AK | S2736 | RA30A2SD252AK |
| 5000±10% | Q1409 | RA30A1SD502AK | X3512 | RA30A2SD502AK |
| 10,000±10% | X3513 | RA30A1SD103AK | R1561 | RA30A2SD103AK |
| 15,000±10% | X3514 | RA30A1SD153AK | L9107 | RA30A2SD153AK |

# Immediate delivery from stock

JAN-R-94 AND JAN-R-19 TYPE MILITARY VARIABLE RESISTORS

# 167 types

Preference given to orders carrying military contract number and DO rating. Other JAN items or special items with or without associated switches can be fabricated to your specifications. Please give complete details on your requirements including electrical and mechanical specifications.

UNPRECEDENTED PERFORMANCE CHARACTERISTICS

Designed for use in military equipment subject to extreme temperature and humidity ranges including jet and other planes, guided missiles, tanks, ships and submarines, telemetering, microwave, portable or mobile equipment and all other military communications.

*For further information, write for Stock Sheet No. 162*

**REPRESENTATIVES**

Henry E. Sanders
John B. McClatchy Bldg.
69th & Market St.
Upper Darby, Penna.
Phone: Flanders 2-4420

W. S. Harmon Company
1638 So. La Cienega Blvd.
Los Angeles 35, Calif.
Phone: Bradshaw 2-3321

John A. Green Co.
6815 Oriole Drive
Dallas 9, Texas

**IN CANADA**
C. C. Meredith & Co.
Streetsville, Ontario

**SOUTH AMERICA**
Jose Luis Pontet
Buenos Aires, Argentina
Montevideo, Uruguay
Rio de Janeiro, Brazil
Sao Paulo, Brazil

**OTHER EXPORT**
Sylvan Ginsbury
8 West 40th Street
New York 18, N. Y.



NEW 38-PAGE ILLUSTRATED CATALOG—Describes Electrical and Mechanical characteristics, Special Features and Constructions of a complete line of variable resistors for military and civilian use. Includes dimensional drawings of each resistor. Write today for your copy.

**CHICAGO TELEPHONE SUPPLY Corporation**

*specialists in precision mass production of variable resistors*

**FOUNDED 1896 • ELKHART, INDIANA**

SHAFT TYPES AVAILABLE ON STOCK CONTROLS

CTS SHAFT TYPE LT-2

LOCKING BUSHING
.125 ±.001"
SCREW DRIVER SLOT
.040 ±.003" WIDE x .04 ±.010" DEEP
¼-32 P - NEF 2 THD
MOUNTING HARDWARE ASSEMBLED
MOUNTING NUT ¼ HEX x ⅛
LOCK NUT ¼ HEX x ⅛
LOCK WASHER #1914A

CTS SHAFT TYPE RE



## TYPE 65

½ watt 70° C, ¾" diameter miniaturized variable composition resistor.

| Resistance | CTS Part CTS Shaft Type RE | CTS Part Locking Bushing CTS Shaft Type LT-2 |
|---|---|---|
| 250±10% | X3516 | X3530 |
| 500±10% | X3517 | X3531 |
| 1000±10% | X3518 | X3532 |
| 2500±10% | X3519 | X3533 |
| 5000±10% | X3520 | X3534 |
| 10,000±10% | X3521 | X3535 |
| 25,000±10% | X3522 | X3536 |
| 50,000±10% | X3523 | X3537 |
| 100,000±10% | X3524 | X3538 |
| 250,000±10% | X3525 | X3539 |
| 500,000±10% | X3526 | X3540 |
| 1 Meg±20% | X3527 | X3541 |
| 2.5 Meg±25% | X3528 | X3542 |

## TYPE 95, JAN-R-94, Type RV4

2 watt 70°C, 1⅛" diameter variable composition resistor. Also available with other special military features not covered by JAN-R-94. Attached Switch can be supplied.

| Resistance | JAN-R-94 TYPE RV4 JAN Shaft Type SD | JAN-R-94 TYPE RV4 JAN Shaft Type RJ | CTS Part Non-JAN Locking Bushing CTS Shaft Type LT-1 |
|---|---|---|---|
| 100±10% | RV4ATSD101A | RV4ATRJ101A | W3160 |
| 250±10% | RV4ATSD251A | RV4ATRJ251A | W3161 |
| 500±10% | RV4ATSD501A | RV4ATRJ501A | W3162 |
| 1000±10% | RV4ATSD102A | RV4ATRJ102A | W3166 |
| 2500±10% | RV4ATSD252A | RV4ATRJ252A | W3163 |
| 5000±10% | RV4ATSD502A | RV4ATRJ502A | W3164 |
| 10,000±10% | RV4ATSD103A | RV4ATRJ103A | W3167 |
| 25,000±10% | RV4ATSD253A | RV4ATRJ253A | W3168 |
| 50,000±10% | RV4ATSD503A | RV4ATRJ503A | W3169 |
| 100,000±10% | RV4ATSD104A | RV4ATRJ104A | W3170 |
| 250,000±10% | RV4ATSD254A | RV4ATRJ254A | W3171 |
| 500,000±10% | RV4ATSD504A | RV4ATRJ504A | W3172 |
| 1 Meg±20% | RV4ATSD105B | RV4ATRJ105B | W3173 |
| 2.5 Meg±20% | RV4ATSD255B | RV4ATRJ255B | W3165 |
| 5 Meg±20% | RV4ATSD505B | RV4ATRJ505B | W3159 |

## TYPE 45, JAN-R-94, Type RV2

¼ watt, 15/16" diameter variable composition resistor. Also available with other special military features not covered by JAN-R-94. Attached Switch can be supplied.

| Resistance | RV2, JAN Shaft Type SD CTS Part | JAN-R-94 TYPE | CTS Part Non-JAN Locking Bushing CTS Shaft Type LT-1 |
|---|---|---|---|
| 100±10% | A5876 | RV2ATSD101A | A5922 |
| 250±10% | A5877 | RV2ATSD251A | A5923 |
| 500±10% | A5878 | RV2ATSD501A | A5924 |
| 1000±10% | A5879 | RV2ATSD102A | A5925 |
| 2500±10% | A5880 | RV2ATSD252A | A5926 |
| 5000±10% | A5881 | RV2ATSD502A | A5927 |
| 10,000±10% | A5882 | RV2ATSD103A | A5928 |
| 25,000±10% | A5883 | RV2ATSD253A | A5929 |
| 50,000±10% | A5884 | RV2ATSD503A | A5930 |
| 100,000±10% | A5885 | RV2ATSD104A | A5931 |
| 250,000±10% | A5886 | RV2ATSD254A | A5932 |
| 500,000±10% | A5887 | RV2ATSD504A | A5933 |
| 1 Meg±20% | A5888 | RV2ATSD105B | A5934 |
| 2.5 Meg±20% | A5889 | RV2ATSD255B | A5935 |

## TYPE 35, JAN-R-94, Type RV3

½ watt, 1¼" diameter variable composition resistor. Also available with other special military features not covered by JAN-R-94. Attached Switch can be supplied.

| Resistance | RV3, JAN Shaft Type SD CTS Part | JAN-R-94 TYPE | CTS Part Non-JAN Locking Bushing CTS Shaft Type LT-1 |
|---|---|---|---|
| 100±10% | A5861 | RV3ATSD101A | A5907 |
| 250±10% | A5862 | RV3ATSD251A | A5908 |
| 500±10% | A5863 | RV3ATSD501A | A5909 |
| 1000±10% | A5864 | RV3ATSD102A | A5910 |
| 2500±10% | A5865 | RV3ATSD252A | A5911 |
| 5000±10% | A5866 | RV3ATSD502A | A5912 |
| 10,000±10% | A5867 | RV3ATSD103A | A5913 |
| 25,000±10% | A5868 | RV3ATSD253A | A5914 |
| 50,000±10% | A5869 | RV3ATSD503A | A5915 |
| 100,000±10% | A5870 | RV3ATSD104A | A5916 |
| 250,000±10% | A5871 | RV3ATSD254A | A5917 |
| 500,000±10% | A5872 | RV3ATSD504A | A5918 |
| 1 Meg±20% | A5873 | RV3ATSD105B | A5919 |
| 2.5 Meg±20% | A5874 | RV3ATSD255B | A5920 |
| 5 Meg±20% | A5875 | RV3ATSD505B | A5921 |

JAN SHAFT TYPE SD




MOUNTING HARDWARE ASSEMBLED
MOUNTING NUT ⅜ HEX x 1/32
LOCK WASHER #1920A

JAN SHAFT TYPE RJ




MOUNTING HARDWARE ASSEMBLED
MOUNTING NUT ⅜ HEX x 1/32
LOCK WASHER #1920A

CTS SHAFT TYPE LT-1
LOCKING BUSHING

MOUNTING HARDWARE ASSEMBLED
MOUNTING NUT ⅜ HEX x 1/32
LOCK NUT ⅜ HEX x 1/32
LOCK WASHER #1920A

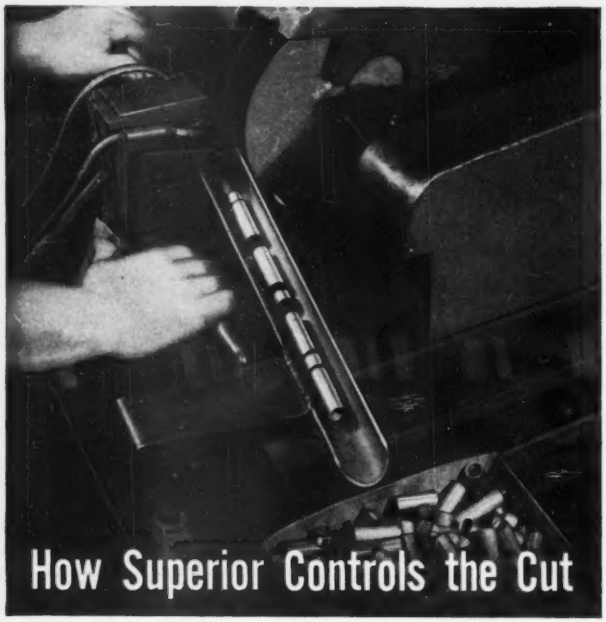

# How Superior Controls the Cut

## to give you better tubular parts

● Cutting tubing into exact lengths as the first step in the fabrication of tubular Electronic parts is a simple operation. Or is it?

Complications set in when the temper of the tubing is changed to meet customer specifications; when the tubing to be cut has a wall .010" or thinner; when length tolerances as close as .010" are required; when a 3° to 10° angle cut with a tolerance of ± ½° is called for; and when flattening, denting or other distortion must be prevented.

But overcoming complications in simple operations . . . and finding ways around them in other basically more difficult ones, is a specialty of the Electronics Division of Superior.

Our customers for Electronics parts have come to expect us to deliver the goods, exactly to specifications, whether standard production or complex experimental parts. What's more, they frequently ask us for suggestions about improvement on their designs and specifications . . . and they get them.

There is nothing unusual about all this—it's our job and we know how to do it. If you are a manufacturer or experimenter in the Electronics Industry and you need a tubular part that presents a problem, tell us about it. We'll probably be able to help and will gladly do so. Write The Superior Tube Company, 2500 Germantown Ave., Norristown, Pennsylvania.



**Cutting and Tumbling.** Cutting machines and jigs of many types and sizes are combined with extensive tumbling equipment to permit fast accurate production of quantities of parts at Superior.



**Fabrication:** Parts can be readily rolled at either or both ends, flared, flanged, expanded, or beaded (embossed) as required. The anode above is one of many such parts we produce at high speed and low cost.

**The Finished Part.** Final stage in the fabrication of the part shown above at three stages of production is a bend nicely controlled for both precise angle and freedom from other, unwanted distortion.

***This Belongs in Your Reference File***

**. . . Send for It Today.**

**NICKEL ALLOYS FOR OXIDE-COATED CATHODES:** This reprint describes the manufacturing of the cathode sleeve from the refining of the base metal. Includes the action of the small percentage impurities upon the vapor pressure, sublimation rate of the nickel base; also future trends of cathode materials are evaluated.

**Superior**

THE BIG NAME IN SMALL TUBING

*All analyses .010" to ¾" O.D.*
*Certain analyses (.35" max. wall) Up to 1⅜" O.D.*

***SUPERIOR TUBE COMPANY** • Electronic products for export through Driver-Harris Company, Harrison, New Jersey • Harrison 6-4800*

**SPRAGUE®**

**WORLD'S LARGEST**

**CAPACITOR MANUFACTURER** now offers you—in one compact catalog—all the information you need to specify transmitter-type mica dielectric capacitors for military uses. Thirty-two easy-to-read pages give you illustrations, engineering drawings, and full characteristics of each unit.

For your copy of Sprague's new catalog No. 31, just send a letterhead request to Application Engineering Department, Sprague Electric Co., 35 Marshall Street, North Adams, Massachusetts.

# Obvious choice in the power supply of Ward Leonard's revolutionary Chromaster

*Rectifier Model H1C2N2B*

*Chromaster Model A-20*

Seletron

SELENIUM RECTIFIERS

Ward Leonard Electric Co.'s compact new unit for industrial chrome plating of cutting tools, gauges, etc., within the shop is a miniature powerhouse. It embodies all the necessary electric controls, and power in DC form is delivered across the bath by a full wave, metallic selenium rectifier.

Because Chromaster's performance depends on component quality, rectifier choice of Ward Leonard engineers is SELETRON — famous for ruggedness and dependability... for its "Safe Center" contact construction and decreased bulk . . . for its high standard of quality control.

Wherever rectification is the key to your new or established products, it will pay to investigate SELETRON. Available in a large range of sizes for radio, TV and industrial electronic circuits from a few mils up to thousands of amps.

SELETRON application engineers will be glad to assist you in selection of the right rectifier for that job on the board. Drop us a line today!

A SELETRON Selenium Rectifier, Model H1C2N2B Full Wave Center Tap, helps Ward Leonard's A-20 Chromaster maintain accurate chrome deposits from .00005" to several thousandths.

***Seletron and Germanium Division***

**RADIO RECEPTOR COMPANY, INC.**

*Since 1922 in Radio and Electronics*

Sales Dept.: 251 W. 19th St., New York 11, N. Y. • Factory: 84 N. 9th St., Brooklyn 11, N. Y.

# Polarad

## PRECISION LABORATORY INSTRUMENTS

*All Band, Direct Reading*

## SPECTRUM ANALYZER

**10 MC to 21,000 MC**

The Model LSA is the result of years of research and development. It provides a simple and direct means of rapid and accurate measurement and spectral display of an rf signal.

**Outstanding Features:**

- Continuous tuning.
- One tuning control.
- 5 KC resolution at all frequencies.
- 250 KC to 25 MC display at all frequencies.
- Tuning dial frequency accuracy 1 percent.
- No Klystron modes to set.
- Broadband attenuators supplied from 1 to 12 KMC.
- Frequency marker for measuring differences 0-25 MC.
- Only three tuning units required to cover entire range.
- Microwave components use latest design non-contacting shorts for long mechanical life.
- Maximum frequency coverage per dollar invested.
- 5 inch CRT display.

**Model LSA**

The instrument consists of the following units:

Model LTU-1 RF Tuning Unit—10 to 1000 MC.
Model LTU-2 RF Tuning Unit—940 to 4500 MC.
Model LTU-3 RF Tuning Unit—4500 to 10,750 MC.
Model LTU-4 RF Tuning Unit—10,000 to 21,000 MC.
Model LDU-1 Spectrum Display Unit.
Model LPU-1 Power Unit.
Model LKU-1 Klystron Power Unit.

## MICROWAVE RECEIVERS

**1000—10,750 mc**

Four microwave receivers of high sensitivity, wide tuning range and selectivity. Image rejection is greater than 60 db. Gain stability better than ±2 db, permits application as a field intensity meter. Extra large dials enable frequency to be clearly read to an accuracy of 2%. Video bandwidth is 3.0 mc. Input power required is 105-125 v, 50/1000 cps.

**Features:**

- Single Dial Tuning
- Low Noise Figure
- Tracked R. F. Preselection, Triple-Tuned
- Linear Db Output Indication
- AM-FM Reception
- Video Output — 10 v Pulse across 100 ohms
- Recorder Output
- Provisions for Using External Attenuators in I.F. Channel
- Frequency Calibration Accuracy — 2%
- Separate Audio & Video Channels
- AFC
- Calibrated Tuning Dial

## WIDE BAND VIDEO AMPLIFIER

**Model VT 10 CPS to 20 MC**

Designed for use as an oscilloscope deflection amplifier for the measurement and viewing of pulses of short duration and rise time. Excellent for TV, both black and white and color applications.



Model VT

**Features:**

- Flat frequency response from 10 cps to 20 mc ±1.0 db.
- Uniform time delay of .02 microseconds.
- Gain of 40 db.
- Frequency compensated high impedance attenuator calibrated in 10 db steps from 0-60.
- Fine attenuator covers a 10 db range.
- Phase linear with frequency over entire band.

## MICROWAVE SIGNAL SOURCES

**Models SSR, SSL, SSS, SSM, SSX**

**634 MC to 10,750 MC**

For use as a reliable source of microwave energy in transmission loss measurements, standing wave determination, etc. Unidial Control for accuracy and ease of operation. Direct reading (no mode charts to consult). Frequency determination accurate to 1% through use of present calibration and temperature compensated klystrons.

Five Microwave Signal Sources are available to cover the frequency range from 634 MC to 10,750 MC. Units ruggedly constructed, mounted on aluminum castings to insure mechanical stability. Klystron reflector voltage automatically tracked with tuning of the klystron cavity to provide unidial control. Signal sources supplied complete with klystrons.

## MICROWAVE SIGNAL GENERATOR

***Model MSG-4***

**7,000 mc — 10,750 mc**



Polarad's Microwave Signal Generator, Model MSG-4, is an ideal source of an accurately known signal voltage, precisely modulated. Sensitivity, frequency and performance of radio and radar equipments in the frequency range from 7 to 10.75 kmc can be readily measured on this continuously variable, direct reading signal generator.

**Features:**

- Continuous tuning
- One tuning control
- Tuning dial accuracy — 1%
- No Klystron modes to set
- Accurate stable power
- Non-contacting shorts guarantee long life
- Modulation — Internal Pulse, FM and external
- Sync output — delayed and undelayed

**Polarad**
Electronics Corporation

100 METROPOLITAN AVE., BROOKLYN 11, N. Y. • STagg 2-3464

# Triple-thick plastic tape

## It tames high voltage in Motorola TV shields

All plastic tapes are not alike! "Scotch" Electrical Tape No. 21 is *three times thicker* than ordinary plastic tape. That's why Motorola engineers find it ideal for insulating high-voltage shields.

Triple thickness means remarkable dielectric strength (22,500 volts). It means added mechanical protection—a cushion against shocks and scrapes.

And still this is a *tape* that sticks quickly, easily—right off the roll. Adhesive grips tight and *holds*.

No wonder that more and more manufacturers are turning to tapes—"Scotch" Electrical Tapes for all kinds of insulating and protecting jobs. Tape's a new tool, and "Scotch" Brand is America's most complete tape line.

Think of tape for *your* job! And for the *right* tape for your job, write Minnesota Mining & Mfg. Co., Dept. ES-112, St. Paul 6, Minn.

The term "Scotch" and the plaid design are registered trademarks for the more than 200 pressure-sensitive adhesive tapes made in U.S.A. by **Minnesota Mining & Mfg. Co., St. Paul 6, Minn.**—also makers of "Scotch" Sound Recording Tape, "Underseal" Rubberized Coating, "Scotchlite" Reflective Sheeting, "Safety-Walk" Non-slip Surfacing, "3M" Abrasives, "3M" Adhesives. General Export: 122 E. 42nd St., New York 17, N. Y. In Canada: London, Ont., Can.

*Tests show*

# 100 TIMES GREATER FATIGUE ENDURANCE

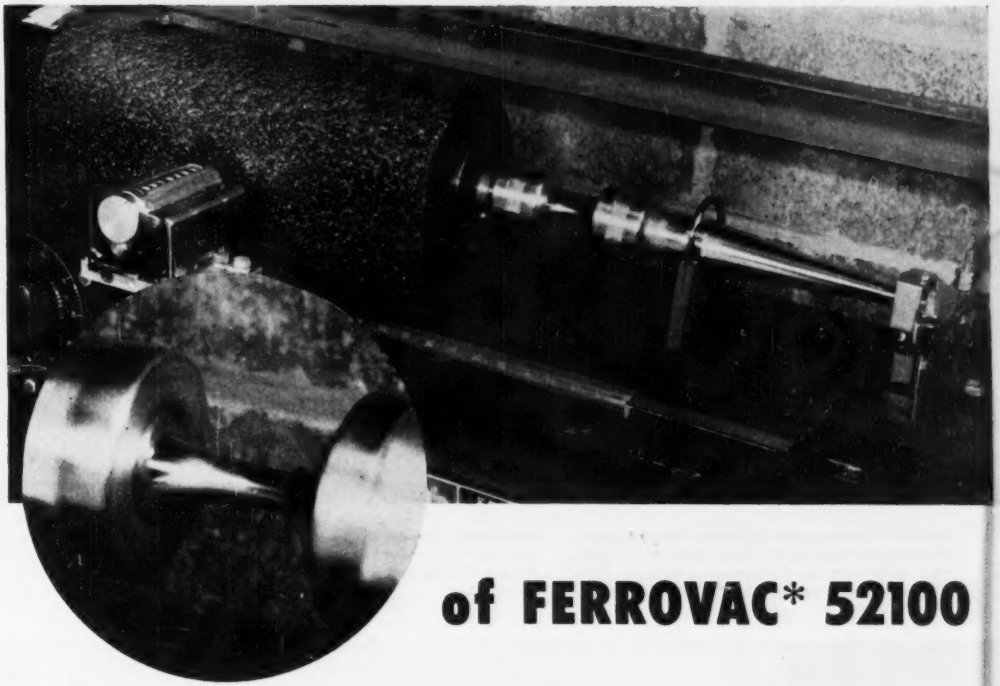

## of FERROVAC* 52100

Fatigue tests conducted in the laboratories of the National Research Corporation on Ferrovac* 52100 showed that vacuum melting increases endurance limits over 100 times that of commercial grade SAE 52100 steel.

Improved performance characteristics such as these are typical of the products of Vacuum Metals Corporation. Vacuum melting removes gases and oxide inclusions and permits new standards of composition tolerance.

The result — improved physical, chemical, and electrical properties. These high performance characteristics may eliminate the need for redesign or be the answer to the "impossible-to-do" specifications that have been handed to you.

Commercial quantities of ferrous and non-ferrous metals and alloys are now being vacuum cast at pressures as low as one millionth part of atmospheric by Vacuum Metals Corporation. They are now available in either billet or fabricated forms. We may have the answer to some of your metals problems. Write us for more information.

*T. M. appl'd for.

**VACUUM METALS CORPORATION**

*Subsidiary of National Research Corporation*

70 MEMORIAL DRIVE · CAMBRIDGE 42, MASSACHUSETTS

HIGH PURITY METALS · HIGH VACUUM CASTING · SPECIAL ALLOYS · GF (Gas Free) METALS

**ONE OF U. S. A's LEADING MAKERS OF ELECTRONIC TUBES AND MICROWAVE COMPONENTS**

# *Bomac* is 100% High-Vacuum-Equipped by NATIONAL RESEARCH

**Type 710 Thermocouple-Ionization Gauge Control.** One instrument for scientific and industrial vacuum gauging. Incorporates two thermocouple gauges. (1-1000 microns) and one ionization gauge ($10^{-3}$mm to $10^{-9}$mm. Hg. range) in one control.

**Alphatron* Vacuum Gauge.** Accurate gauging from 10 mm. to 1 micron. Specially fabricated for low leak rate and calibrated for hydrogen.

**Vacuum Seals.** For connecting pump and manifold.

As one of U.S.A.'s fastest growing electronic tube manufacturers, Bomac has established severe standards for their production equipment to assure an uninterrupted flow of tubes with minimum rejects.

National Research high vacuum equipment meets these rigid standards so well that it was again specified exclusively in Bomac's recent expansion of facilities.

When you want the same — a single source for all your high vacuum equipment needs . . with a single unexcelled standard of quality — look to National Research. For further details write National Research Corporation, Memorial Drive, Cambridge, Massachusetts.

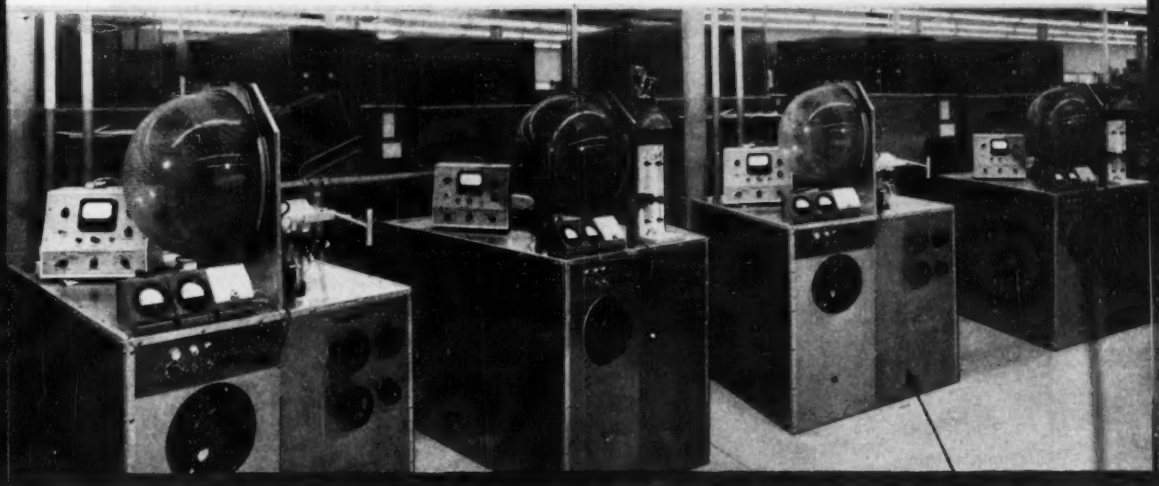

**Standard Vacuum Furnace.** A versatile packaged unit to melt, pour, heat treat, degas, sinter, and anneal under high vacuum or controlled atmospheres. Temperatures up to 2000°C.

**H-2-P Purifying Diffusion Pump.** Over 50 liters per second from $10^{-3}$ to $10^{-6}$ mm. range. Operates against forepressures as high as 0.300 mm. Blank-off 2 x $10^{-7}$ mm.

INDUSTRIAL RESEARCH · PROCESS DEVELOPMENT
HIGH VACUUM ENGINEERING AND EQUIPMENT

METALLURGY · DEHYDRATION · DISTILLATION
COATING · APPLIED PHYSICS

# National Research Corporation

## *Equipment Division*

SEVENTY MEMORIAL DRIVE, CAMBRIDGE, MASSACHUSETTS

*Reg. U.S. Pat. Off.

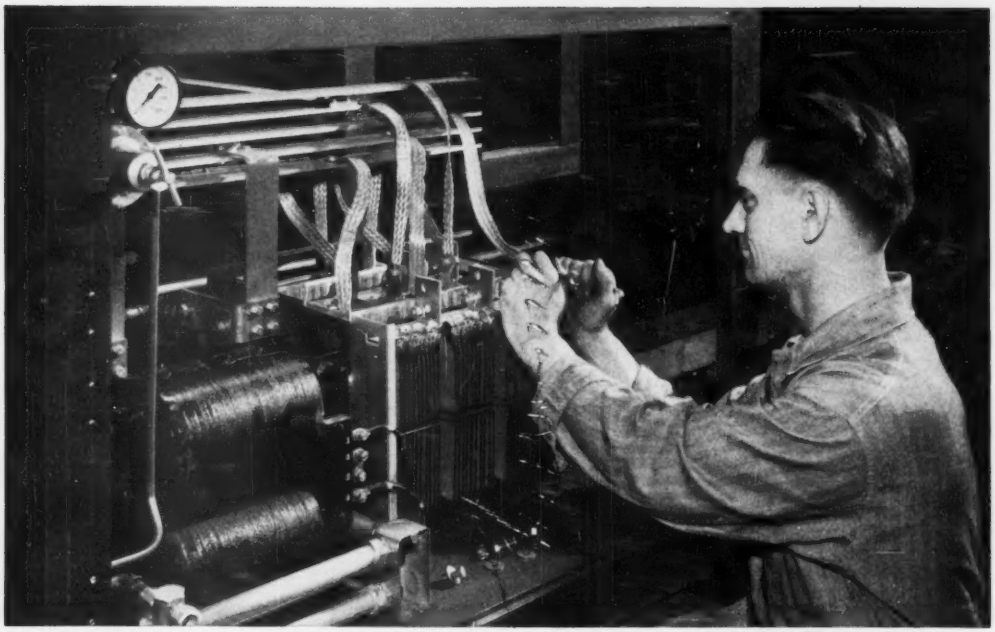

G-E COPPER-OXIDE RECTIFIER STACKS, BEING INSTALLED BY MAGNAFLUX' H. E. SCHREIBER, PROVIDE HIGH CONVERSION EFFICIENCY.

# Magnaflux Corp. Relies on G-E Rectifiers

**STABLE ELECTRICAL CHARACTERISTICS** of General Electric copper-oxide rectifier stacks help maintain customer good will, says W. D. Reid, Magnaflux second vice-president and plant manager.

## COPPER-OXIDE STACKS MEET SEVERE SERVICE REQUIRED BY MAGNAFLUX TESTING EQUIPMENT

As pioneer developer and world leader in the manufacture of non-destructive testing equipment, the Magnaflux Corporation insists on dependable rectifiers.

These rectifiers supply the d-c current that sets up the magnetic field for detecting sub-surface defects. G-E copper-oxide rectifier stacks were selected because tests proved that they can take heavy current overloads for short periods without over-heating or deteriorating.

Mr. W. D. Reid, second vice-president and plant manager at Magnaflux, enthusiastically reports, "In our application, rectifiers are subjected to extremely severe service because of the high currents drawn from them for the magnetization of parts to be inspected. They must have the highest conversion efficiency to assure maximum voltage output with lowest losses in operation. G-E copper-oxide rectifie meet all these requirements."

"We have several thousand copper-oxide rectifiers in service. Failures have been almost unknown."

**YOUR PRODUCT,** too, will benefit from the many operating advantages and extremely long life of G-E copper-oxide rectifiers. For information on how to apply them, contact your nearest G-E Apparatus Sales Office, or write Section 461-23, General Electric Co., Schenectady, N. Y.

GENERAL ELECTRIC

Ag. PUBLÉDITEC-DOMENACH

*From the*

**HAMMARLUND LABORATORIES**

*The* **SP-600-JX**

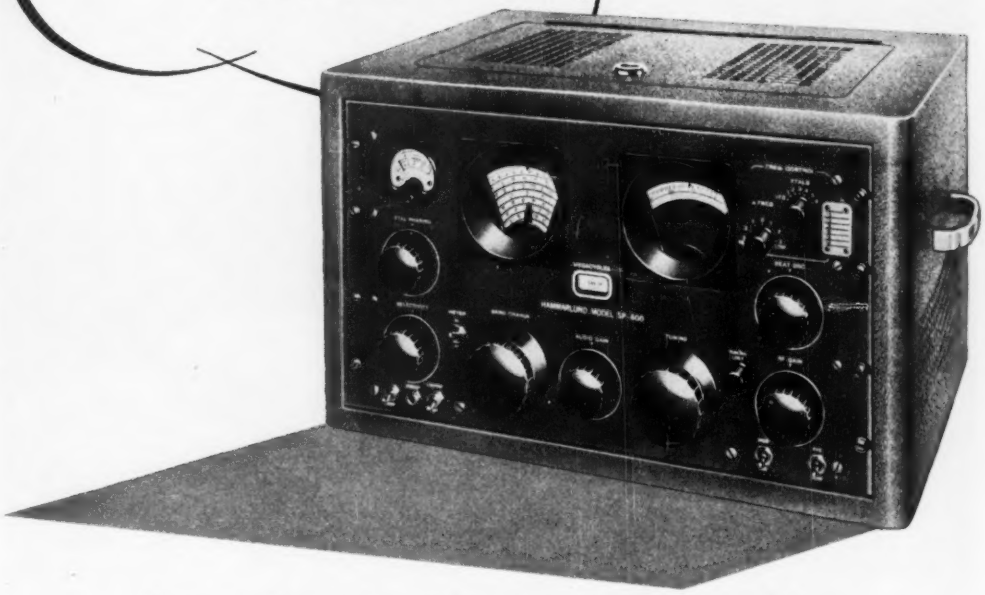

# for selective channel operations

With its six crystal-controlled fixed-frequencies, the "SP-600" is the perfect receiver for point-to-point and network applications. Pre-arrange day and night fixed-frequencies. With crystal control you can select your desired channels immediately without searching. You'll always be on the nose because of crystal control.

The "SP-600-JX," built to JAN specs and specially ruggedized to provide years of day-in-day-out competent performance, is the most carefully engineered receiver available anywhere for selective channel operation.

But whether you want to operate on a fixed-frequency for contact with an individual station or network, or roam the entire receiver range from 540 Kc to 54 Mc in search of other contacts, you just can't operate a finer receiver than the "SP-600-JX."

Write to the Hammarlund Manufacturing Company for further details.

# HAMMARLUND

**HAMMARLUND MANUFACTURING COMPANY, INC.**

**460 WEST 34th STREET • NEW YORK 1, N. Y.**

# GLASSMIKES

**the capacitors with the exclusive glass housing and plastic dielectric film**

Glassmike capacitors are wound with the plastic film which accentuates the electrical characteristics you require, and results in capacitor design of minimum size. The metal ferrules, soldered to silver bands at each end of the hermetically-sealed glass tubes, eliminate mounting problems.

*Applications:*

**audio and RF coupling**
**pulse forming and de-spiking networks**
**radio frequency bypass**
**low and high pass filter networks**
**audio frequency coupling**
**electronic computers**
**electrometer and oscillator circuits**
**etc.**

*Send us your requirements and we will recommend the proper capacitor.*

**MANUFACTURERS**
*Glassmike Capacitors*
*Plasticon Capacitors*
*HiVolt Power Supplies*
*Pulse Forming Networks*

**Condenser Products Company**
**Division of New Haven Clock & Watch Co.**

**7517 North Clark Street • Chicago 26, Illinois**

• ***Glassmikes*** **. . . an exclusive capacitor line originally designed by our engineers**

## ACME ELECTRIC CORPORATION REDUCES TRANSFORMER SIZE

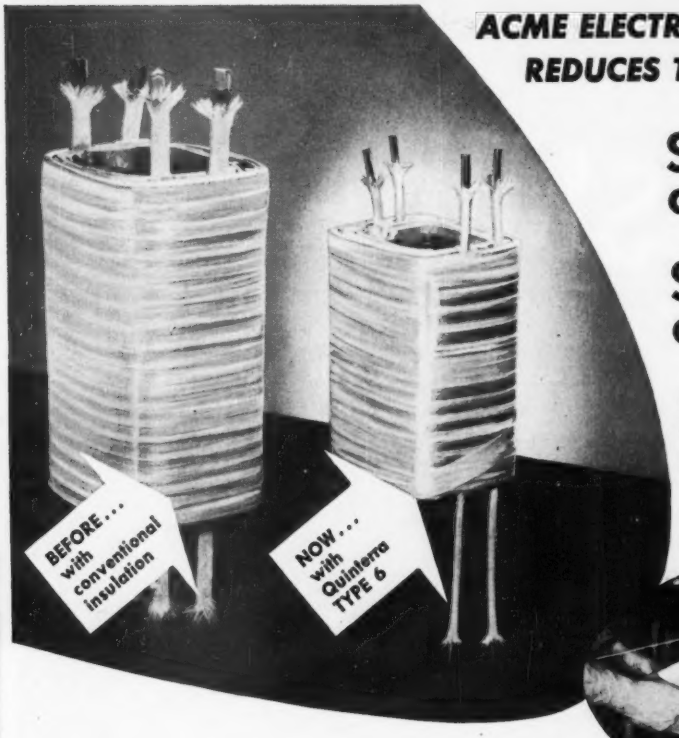


Saves 40% on steel...

Saves 42% on copper...

Saves 44% on weight...

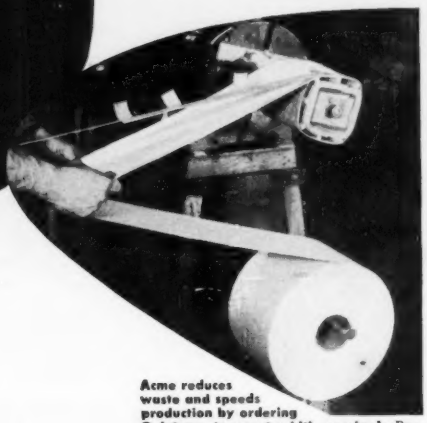

**Acme reduces waste and speeds production by ordering Quinterra to exact width required** – Production efficiency has been increased and waste has been reduced to an absolute minimum – without equipment changeover – by using Quinterra Type 6, factory-cut to Acme's dimensional specifications.

**—by insulating coils with**

# Quinterra® TYPE 6

***the purified asbestos electrical insulation***

How have these tremendous savings in critical materials, weight, space, and production time affected the quality of Acme transformers?

*The manager of Acme's Dry Type Transformer Division advises that not a single failure in operation of an Acme Quinterra-insulated transformer has been reported in the two years that they have been produced. Since several thousands of these units have been manufactured in this time, their quality is evident.*

Here are the reasons why this Johns-Manville purified asbestos insulation has helped the Acme Electric Corporation, and many other well-known manufacturers, turn out better products and at the same time lower production costs.

Quinterra Type 6 possesses high thermal stability and lasting dielectric strength. It is a twin-ply, polyvinyl, acetate-treated, purified asbestos insulation with a dielectric strength of 300 VPM. Even when its saturant is baked out by continuous exposure to 200 C, it retains the inherent dielectric of the base sheet which is at least 200 VPM . . . and it remains a dielectric up to 400 C.

Type 6 has high mechanical strengths because it is made by combining and calendering two layers of Quinterra together into a dense, smooth-surfaced insulation. Its good tensile and bursting strengths enable operators to achieve favorable production rates. Further economies result from its large square-foot-per-dollar coverage.

If you are a manufacturer of magnetic or resistance devices, Quinterra Type 6 . . . or one of the other Quinterras . . . may enable you to lower production costs and also to improve your product's performance. For samples and additional information, write to Johns-Manville, Box 60, New York 16, New York.

JOHNS MANVILLE JM PRODUCTS **Johns-Manville ELECTRICAL INSULATIONS**

# PRECISION

# Controls



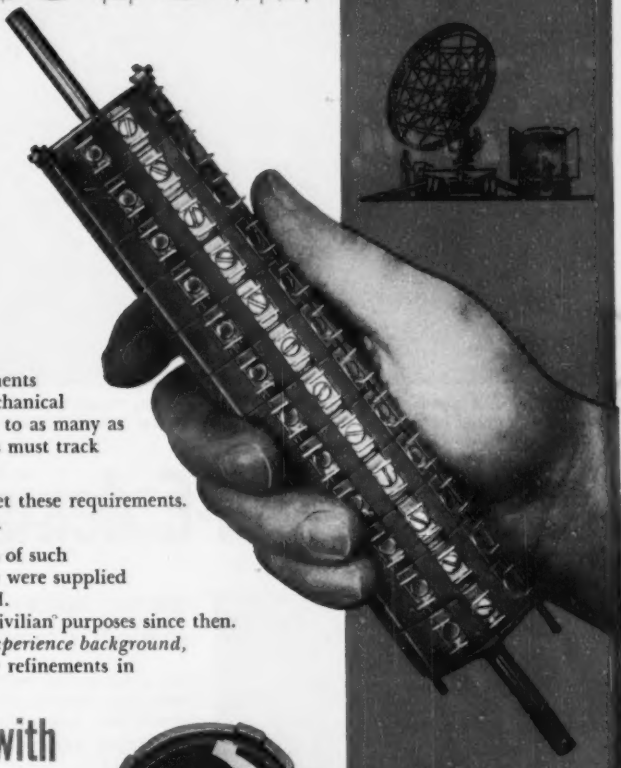

At the *very heart* of highly critical equipment such as electronic computers, electronic gunsights and radar assemblies, the control requirements call for outstanding electrical and mechanical precision. Indeed, from single section to as many as twenty sections, the precision controls must track with mathematical accuracy.

Clarostat Series 42 Controls fully meet these requirements. Thus *the climax in precision controls.*

Clarostat has made the major portion of such precision controls in use today. Many were supplied to the armed forces in World War II. Many more have been supplied for civilian purposes since then. And now, *based on an unparalleled experience background,* Clarostat engineers offer you further refinements in their latest Series 42 design.

## You can stand pat with CLAROSTAT

Engineering Bulletin No. 142 sent on request. And remember, when your control or resistor requirements call for *quality, quantity* and *economy,* you can meet them with Clarostat's engineering and production facilities. *Submit that problem!*



New Clarostat Series 42 potentiometer. Available in single and multiple assemblies up to 20 sections. Precision windings to plus/minus 0.5% and better. Positive contact rotor, smooth rotation, minimum wear. Perfect tracking of all units in assembly. No backlash or play. Rotor of each potentiometer mounted on centerless-ground shaft passing through all sections.

**Controls and Resistors**

CLAROSTAT MFG. CO., INC., DOVER, NEW HAMPSHIRE

In Canada: Canadian Marconi Co., Ltd., Toronto, Ontario

CLAROSTAT

## CAST-PERMAFIL TRANSFORMERS

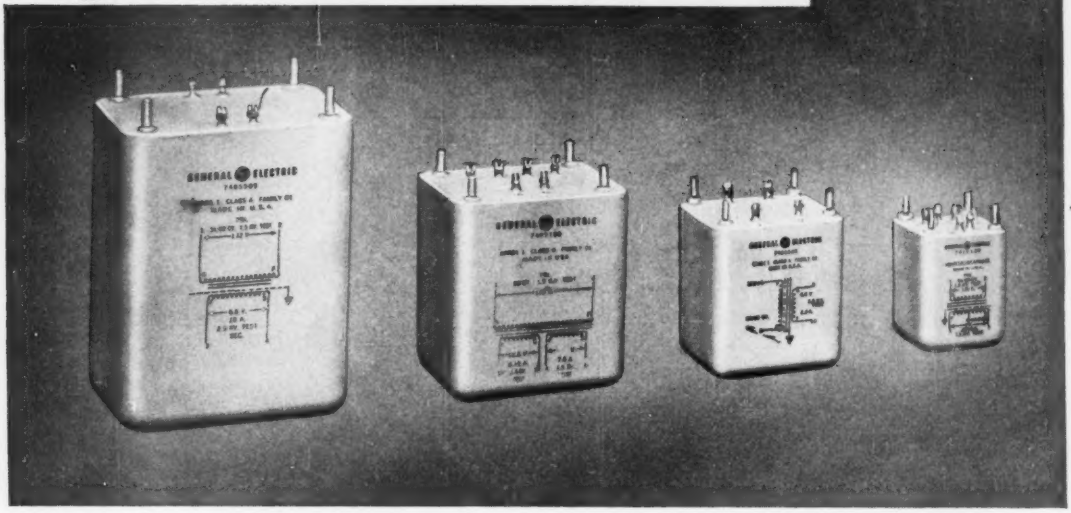

**NEW LINE** of G-E cast-permafil electronic transformers does away with the need for hermetically sealed metal enclosures. Cast construction, lighter weight and smaller size offer the designer greater flexibility in many types of electronic designs.

# New G-E designs available

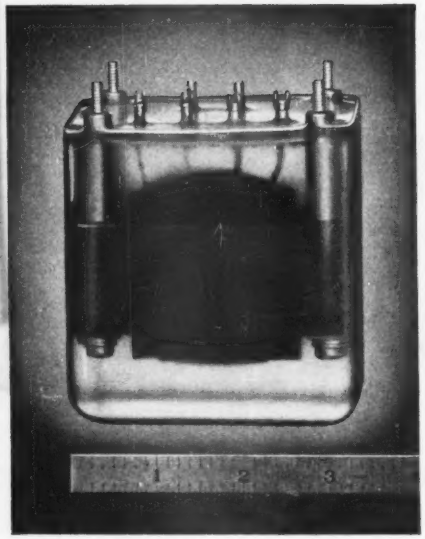

**SIMPLER CONSTRUCTION** of G-E cast-permafil transformers shows up dramatically in this model cast in clear resin. Note how the resin anchors the terminals, eliminating need for a steel enclosure.

### Smaller, Lighter Cast-Permafil Transformers Designed to MIL-T-27 "Specs"—Need No Fungus-Proof Coatings

Interchangeable with existing hermetic designs, General Electric's new line of cast-permafil transformers—solventless resin type—offer many design advantages.

**MOISTURE PROOF**—"Cast-in" construction seals transformer permanently against moisture as required in MIL-T-27 Grade 1 Performance Specifications. Permafil forms a tough, shatter-resistant, solid casing.

**AVERAGE 20% SMALLER** because they eliminate metal enclosures, and because their terminals can be anchored directly in permafil mixture, the new G-E cast-permafil transformers are smaller and lighter weight. The complete line—which includes 11 sizes, 9 of them in two heights—averages about 20% smaller than previous models.

**MORE FLEXIBLE** with fewer machined and punched parts, greater flexibility in design and construction is possible. Terminal arrangements can be varied. Color can be "built in" by adding pigment to the permafil mixture. Permafil makes fungus-proof coatings unnecessary.

**ACCELERATED LIFE TESTS** indicate that G-E cast-permafil transformers will stand up as long as Class A hermetics at 105 C. And at 130 C. ultimate, they have an expected life of 1000 hours or more.

For complete information on the application, ratings and availability of G-E cast-permafil transformers, write to *Section 411-102, General Electric Company, Schenectady 5, N. Y.*

## AUTOMATIC VOLTAGE STABILIZERS

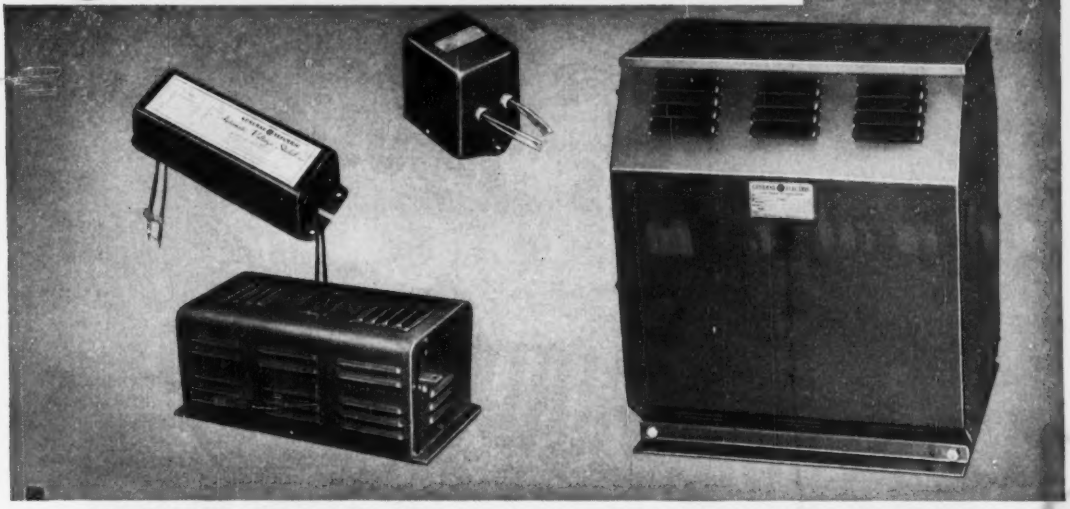

**NEW LINE** rated from 15 VA to 5000 VA. Stabilizers feature totally enclosed, single-core construction, reduced weight and greater flexibility for designs involving voltage ratios other than 1:1. A wide range of voltage correction is offered.

# for electronics use

### Lighter G-E Automatic Voltage Stabilizers Feature Inherent Input-Output Isolation—More Voltage Ratios

**SINGLE-CORE CONSTRUCTION** in General Electric's new standard line of 60-cycle automatic voltage stabilizers provides inherent input-output isolation—eliminates the need for an additional isolating transformer. You get substantial weight reduction over previous units in the 1000 to 5000 VA ratings.

**TOTALLY ENCLOSED** construction of the new design cuts down stray magnetic fields—allowing use near sensitive electronic devices like oscilloscopes.

**VOLTAGE RATIO FLEXIBILITY** has also been increased in the new line. Standard stabilizers—with ratings from 1000 VA through 5000 VA—are provided with series multiple input and series multiple output.

**IN ADDITION,** these new units offer a wide-range of voltage correction, plus rapid stabilization, ease of installation and maintenance-free operation.

For further information on this new line of standard automatic voltage stabilizers call your local G-E distributor. Or write for bulletin GEA-5754 G-E Automatic Voltage Stabilizers. *Section 411-102, General Electric Co., Schenectady 5, N. Y.*

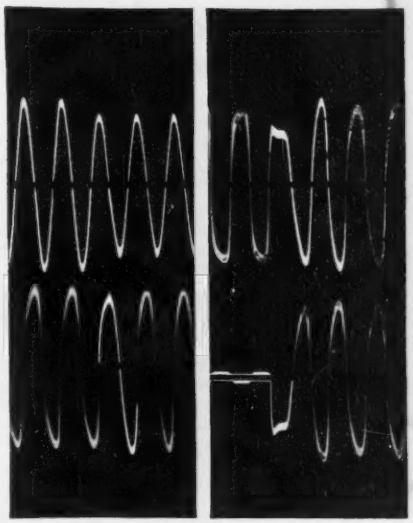

**RAPID RESPONSE** of G-E Automatic Voltage Stabilizers. *Left:* Stabilization within 1½ cycles as input drops from 130 to 95 volts. *Right:* Stabilization in 2 cycles as load current jumps from 0 to full load.

GENERAL ELECTRIC

**...your product also deserves custom-built metal cabinets...by BALTIC**

It's only natural that an important part of your product should be a sheet metal housing or enclosure fabricated to individual needs by master craftsmen.

**CUSTOM-BUILT** cabinets by Baltic permit your own exclusive styling, correct dimensions, special design features that make the equipment function efficiently and afford easy access to components for servicing.

**CUSTOM-BUILT** cabinets by Baltic are completely uniform in every detail, making the units easier and less costly to assemble.

Our large collection of standard and special die combinations can save unnecessary tooling charges and speed production. Our modern facilities include careful welding of all types and expert finishing. We work in any metal, any gauge. Our estimates are in line.





*"Perfectioneers" in Sheet Metal Fabrication*

**BALTIC METAL PRODUCTS CO.**
**120 SUTTON ST., BROOKLYN 22, N. Y.**

# An Open Letter To—

# TOP MANAGEMENT

## Of Industrial Concerns


A. W. FRANKLIN
43-20—34th Street
Long Island City 1, N. Y.
*Phone:* STillwell 4-1059


Subject: LICENSE AVAILABLE—
FRANKLIN STAMPED WIRING PROCESS

Gentlemen:

Top Management should thoroughly investigate the so-called printed techniques—photo-etching; spraying; printing; etc.; and compare them with the 10 Important Advantages of the Franklin Stamped Wiring Process.

THERE IS NOW AVAILABLE TO A LIMITED NUMBER OF MANUFACTURERS, A LICENSE AND KNOW-HOW ON A NOMINAL ROYALTY BASIS.

The Franklin Stamped Wiring Process is a proven method and has been successfully used, producing millions of parts for the past 5 years. It is covered by numerous patents in the United States, Europe, Canada and South America with many patent applications pending on new and improved methods, tools, applications, etc.

All that is required is a press equipped with an automatic device for feeding the copper and the insulated material. The circuits are stamped out in this machine at the rate of 1800 per hour. The scrap is automatically reclaimed and no other operations are necessary.

There is no need for your company to expend large sums of money on development work on other methods that require many operations because the Franklin Stamped Wiring method is now available to you.

One of the leading manufacturers in electronics is presently licensed on a non-exclusive basis.

Further information including all details will be given to responsible manufacturers.

Yours very truly,

Albert W. Franklin

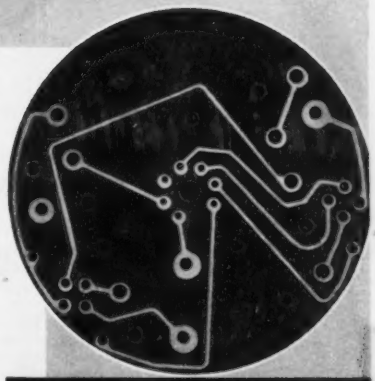

This FRANKLIN STAMPED WIRE CIRCUIT is shown in actual size.

## 10 IMPORTANT ADVANTAGES

- Low Cost
- High Speed Production
- All Scrap Copper Reclaimed Automatically
- Insulated Material Not Subjected to Acid Deterioration
- Tinned or Plated Copper Can Be Used for Ease of Soldering
- Metal Can Be Drawn into Holes for Connection to Reverse Side
- Limited Space and Equipment for Manufacturing
- Fabrication of Insulated Piece and Embossing Circuit Made Automatically in One Operation
- Made with Tools—All Parts Identical in Performance and Quality
- Strong Adhesion for Dip Soldering


**PATENTS**

**UNITED STATES**

| | |
|---|---|
| 2401472 | 6/4/46 |
| 2431393 | 11/25/47 |
| 2431725 | 10/19/48 |
| 2533674 | 12/26/50 |

**FOREIGN**

| | | |
|---|---|---|
| Argentine | 62605 | 12/27/49 |
| Australia | 129783 | 3/24/45 |
| Canada | 453181 | 1/23/51 |
| Great Britain | 610058 | 3/23/45 |
| France | 918687 | 11/4/46 |
| Italy | 420375 | 4/26/47 |

**BIBLIOGRAPHY**

| | | | | | |
|---|---|---|---|---|---|
| Communications | P. 62 | Nov. '45 | Nat. Bur. of Standards Circular | P. 468 | Nov. 15, '47 |
| Business Week | P. 50 | May 31, '47 | Tele-Tech | | Sept. '48 |
| Electronics | P. 82 | June '47 | Tele-Tech | P. 26 | Oct. '48 |
| N. Y. Herald Tribune — Sec. 4 | P. 7 | June 8, '47 | Electronics | P. 76 | Sept. '48 |
| Electrical Manufacturing | P. 98 | July '47 | Tele-Tech | P. 47 | Nov. '48 |
| McGraw-Hill Digest | P. 11 | July '47 | Nat. Bur. Standards Publication | P. 192 | Nov. '48 |
| Life | | Sept. 8, '47 | Popular Science Monthly | P. 221 | June '49 |
| Popular Science Monthly | P. 91 | Oct. '47 | Westinghouse Engineering Highlights of 1949 | | P. 29 |

Stanford Research Institute
Office of Naval Research—Task Order #3—Terminal Report June 1, 1950
Wright Air Development Center—Interim Report #1 Project 597 May 1952
Wright Air Development Center—Final Report—Project 413 Feb. 15, 1952
Bureau of Ships—Pacific Division of Bendix Aviation—Electronic Subminiaturization
Navships 900.174 March 1951

*announces its most significant compound development of the decade*

# RANDAC

## the thermosetting encapsulating plastic

**In the past ten years Mitchell-Rand has developed a great many electrical insulating compounds for the protection of electronic and electrical components. However, in RANDAC Mitchell-Rand makes its most significant contribution to the electrical and electronic industries... the development of RANDAC is an outstanding achievement!**

**RANDAC is a 100% solid resin for encapsulating and sealing electrical and electronic components... its sharp thermoplastic melting point permits "hot melt" dip-coating in thicknesses from 25 mils to more than ¼ inch without danger of resin flow or damage and without the use of a cast or mold. After a single cure the RANDAC becomes tough and infusible contributing everlasting protection to the equipment it encases.**

### RECOMMENDED APPPLICATIONS for RANDAC

1. Coating and encapsulating for purpose of moisture resistance, mechanical shock resistance, and electrical insulation on: Transformers, Resistors, Rectifiers, Capacitors, Transistors, Printed circuitry, Electronic assemblies.
2. Corona control by void filling and coating high voltage transformers, parts, and assemblies.
3. Sealing parts such as capacitors resistors, and rectifiers, into metal, ceramic, and plastic cases.
4. Cast embedment of electronic parts and assemblies.

### RANDAC features

**RESISTANCE TO THERMAL SHOCK**
Transformers coated with RANDAC have withstood thermal shock tests from room temperature to –65 C.

**HIGH TEMPERATURE STABILITY**
Maximum unit operating temperatures of above 150 C are indicated for RANDAC encapsulated units.

**ELECTRICAL PROPERTIES**
RANDAC exhibits a high dielectric strength and is well suited for corona suppressing applications.

**LOW MOISTURE ABSORPTION**

**ADHESION**
RANDAC shows excellent adhesion to most metals, ceramics, and plastics.

**LOW SHRINKAGE AFTER GEL**

**RANDAC HERMETICALLY SEALS AND ENCASES ELECTRONIC AND ELECTRICAL PARTS IN THICKNESSES FROM 25 MILS TO MORE THAN ¼ INCH WITHOUT THE USE OF CASTS OR MOLDS OR THE NECESSITY TO EMPLOY MULTIPLE DIP AND CURE CYCLES.**

*A working sample of RANDAC will be sent on letterhead request.*

MITCHELL-RAND
M-R
Electrical Insulation Headquarters
SINCE 1889

**A PARTIAL LIST OF M-R PRODUCTS:** FIBERGLAS VARNISHED TUBING, TAPE AND CLOTH • INSULATING PAPERS AND TWINES • CABLE FILLING AND POTHEAD COMPOUNDS • FRICTION TAPE AND SPLICE • TRANSFORMER COMPOUNDS • FIBERGLAS SATURATED SLEEVING • ASBESTOS SLEEVING AND TAPE • VARNISHED CAMBRIC CLOTH AND TAPE • MICA PLATE, TAPE, PAPER, CLOTH, TUBING • FIBERGLAS BRAIDED SLEEVING • COTTON TAPES, WEBBINGS AND SLEEVINGS • IMPREGNATED VARNISH TUBING • INSULATING VARNISHES OF ALL TYPES • EXTRUDED PLASTIC TUBING

# NEW

## *To AM Broadcasting*

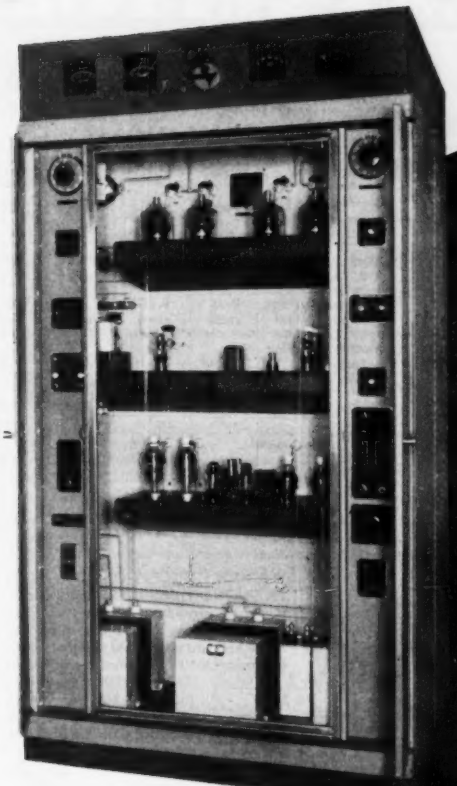

Continental Electronics type 314-2 transmitter

**Continental Electronics'**
**One kilowatt transmitter**
**goes**
**On the Air**
**with**
**Eimac Tetrodes**

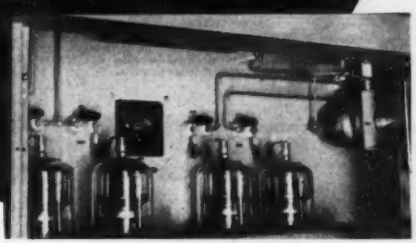

Eimac 4-400A's in high level stages.

**By employing** 4-400A radial-beam power tetrodes, and other up-to-the-minute developments in its one kilowatt transmitter, Continental makes a significant advancement in the field of AM broadcasting.

**As power amplifiers** a pair of Eimac 4-400A tetrodes give outstanding performance. Only two RF amplifiers are used in the 314-2, including the output stage which takes advantage of the low driving power requirements, high power gain and stability of Eimac 4-400A's.

**As modulators** two 4-400A's are driven by a high quality, resistance coupled audio amplifier with fixed audio feed-back. As in the power amplifier these tetrodes make possible the adaptation of simple, straight-forward circuitry.

**For data about the 4-400A write Eimac's Application Engineering department.**

Follow the Leaders to Eimac TUBES

**EITEL-McCULLOUGH, INC.**
**SAN BRUNO, CALIFORNIA**
Export Agents: Frazar & Hansen, 301 Clay St., San Francisco, California

# CHATHAM
## ELECTRONIC TUBES

## Hydrogen Thyratrons
—for Pulse Voltage Generation

**TYPE VC-1257**
Hydrogen filled, zero bias thyratron with hydrogen generator for generation of pulse power up to 40 megawatts.

**TYPE 5948/1754**
Hydrogen filled, zero bias thyratron with hydrogen reservoir for generation of peak pulse power up to 12.5 megawatts.

**TYPE 5949/1907**
Hydrogen filled, zero bias thyratron with hydrogen reservoir for generation of peak pulse power up to 6.25 megawatts.

ELECTRICAL DATA*

| Type | VC-1258 | 5949/1907 | 5948/1754 | VC-1257 |
|---|---|---|---|---|
| Maximum Peak Forward Anode Potential | 1000 volts | 25000 volts | 25000 volts | 38000 volts |
| Maximum Peak Anode Current | 20 amps | 500 amps | 1000 amps | 2000 amps |
| Maximum Average Anode Current | 0.05 amps | 0.50 amps | 1.0 amps | 2.0 amps |
| Maximum Heating Factor (epy x prr x ib) | $1.0 \times 10^8$ | $6.25 \times 10^9$ | $9.0 \times 10^9$ | – |
| Nominal Filament Power | 12.6 watts | 95 watts | 190 watts | 230 watts |
| Hydrogen Reservoir | No | Yes | Yes | Yes |

*More detailed information on electrical and mechanical data will be supplied on request.

**TYPE VC-1258**
Zero bias miniature hydrogen thyratron for the generation of peak pulse power up to 10 KW.

● **A NEW CONCEPT OF HYDROGEN THYRATRON DESIGN!** The tubes illustrated represent a departure from conventional hydrogen thyratron designs and are a result of several years of concentrated development work. They are primarily employed in the generation of peak voltages with durations in the order of microseconds.

## Custom-built Electronic Equipment

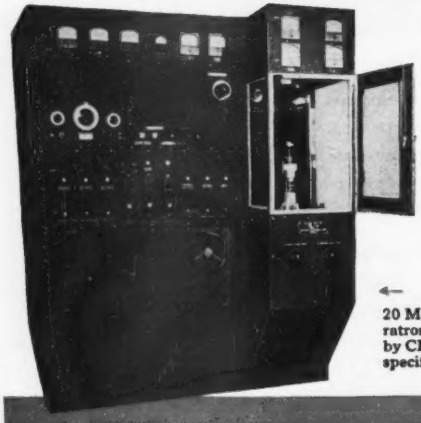

● **CHATHAM specializes in the development, design, and construction of custom-built electronic equipment to exactly meet customers' requirements. Our capable staff of engineers will furnish prompt estimates or, if desired, will call to discuss your problem personally. Call or write today.**



5 Megawatt radar modulator built by CHATHAM to rigid government standards.

Pulse life test equipment built by CHATHAM checks receiver type tubes under pulse conditions. →



← 20 Megawatt Hydrogen Thyratron Test Equipment built by CHATHAM to customers' specifications.

# ELECTRONICS AND EQUIPMENT

## Electronic Tubes

### Ruggedized Type Tubes

● The following tubes are JAN approved and can be supplied promptly, usually direct from stock:

| | |
|---|---|
| 5R4WGY | 2D21W |
| 6AL5W | OC3W |
| 6H6WGT | OD3W |
| 25Z6WGT | 2050W |

### TYPE 719-A HIGH VACUUM CLIPPER DIODE

This tube is used primarily for clipper diode service in hard tube modulator circuits. Filament 7 volts, 7 amps... Inverse peak anode voltage 25 kv, Max., peak anode current 10 amps, Max., anode dissipation 75 watts.

### TYPE 1Z2 RECTIFIER

A small bulb high voltage vacuum rectifier. Low cathode heating power and low dielectric losses make tube suitable for radio frequency supply circuits. Filament 1.5 volts, .290 amps... Inverse peak anode voltage 20,000, average plate current 2 ma.... peak plate current 10 ma.

### TYPE 1B46 REGULATOR

A cold cathode glow discharge tube designed for voltage stability. DC operating voltage 82 volts, operating current range 1 ma minimum, 2 ma maximum. Regulation 3 volts.

### TYPE 395-A COLD CATHODE GAS TRIODE

Requires no filament supply and is used in many grid controlled rectifier and relay applications. Maximum D.C. anode current— 10 ma. Maximum D.C. anode voltage—150 volts

### TYPE 4B32 RECTIFIER

A rugged half-wave Xenon filled rectifier. Operates in any position throughout an ambient temperature range of −75°C to +90°C. Filament 5 volts, 7.5 amp... Inverse peak anode voltage 10,000 average anode current 1.25 amps.

### TYPE 394-A THYRATRON

A Mercury vapor and Argon filled thyratron for grid controlled rectifier service. Operates over wide ambient temperature range. Heater 2.5 volts, 3.2 amps... Inverse peak anode voltage 1250, average anode current 640 ma.

### TYPE 3B28 RECTIFIER

This rugged half-wave Xenon filled rectifier will operate in any position and throughout an ambient temperature range of −75°C to +90°C. Filament 2.5 volts, 5.0 amps... Inverse peak plate voltage 10,000, average anode current .25 amp.

## Chatham Vacuum Switches

● TYPE 1S22 (illustrated) is a mechanically actuated, single-pole, double-throw, glass vacuum switch. This and other types can be supplied.

SPECIFICATIONS

**HOLD OFF VOLTAGE:** Internal—10,000 volts rms; External* (at 27,000 feet altitude)—10,000 volts rms; External* (at 40,000 feet altitude)—7,500 volts rms.

**INTERRUPTING RATING, RESISTIVE LOAD:** 1,000 operations life at 10,000 v, ac, rms—10 amp, ac, rms; 1,000,000 operations life at 10,000 v, ac, rms — 2 amp, ac, rms; 500,000,000 operations life at 10,000 v, ac, rms—0.1 amp, ac, rms.

**NET WEIGHT** (approx.)..... 2 ozs.
**MAXIMUM LENGTH** (overall)..... 3⅛ ins.
**MAXIMUM WIDTH** (overall)..... 4½ ins.
**MAXIMUM THICK.** (overall)..... 1½ ins.

*at 50% humidity





### HIGH VOLTAGE VACUUM FUSES

Can be supplied by Chatham to exact customers' specifications if ordered in adequate quantity. Call or write for full particulars and quotes.

**CHATHAM ELECTRONICS CORP.**
475 WASHINGTON STREET • NEWARK 2, NEW JERSEY

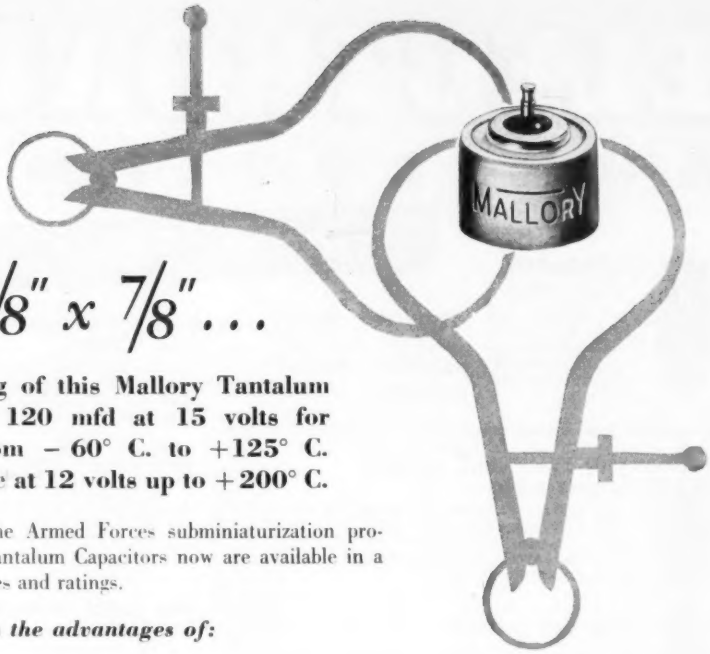


# *Just 5/8" x 7/8" . . .*

**yet the rating of this Mallory Tantalum Capacitor is 120 mfd at 15 volts for operation from − 60° C. to +125° C. It will operate at 12 volts up to + 200° C.**

Developed for the Armed Forces subminiaturization program, Mallory Tantalum Capacitors now are available in a wide range of sizes and ratings.

***They offer you the advantages of:***

Compactness

Continuous performance over a temperature range of −60° C. to +200° C.

High resistance to shock and vibration

Proof against thermal shock from −60° C. to +200° C. without damage

Double sealing for absolute protection under all operating conditions

Now that Mallory Tantalum Capacitors are available in quantity, check their advantages for your equipment. Don't hesitate to consult Mallory on any problem involving the application of capacitors, the development of special types or the simplification of related circuits.

***Get complete information . . .***

Write for your copy of the Technical Information Bulletin on the Mallory Tantalum Capacitor. It is complete with sizes, mounting arrangements, surge voltages and performance curves.

P.R. MALLORY & CO. Inc.

**MALLORY**

**SERVING INDUSTRY WITH THESE PRODUCTS:**

**Electromechanical**—Resistors • Switches • Television Tuners • Vibrators
**Electrochemical**—Capacitors • Rectifiers • Mercury Dry Batteries
**Metallurgical**—Contacts • Special Metals and Ceramics • Welding Materials

P. R. MALLORY & CO., INC., INDIANAPOLIS 6, INDIANA

# CROSS TALK

► **SWITCH . . .** Most economists see good business ahead through this winter and next spring. Certainly all the signs point that way in the field of electronics.

Along about mid-summer on the 1953 calendar there appears to be a veil that even the keenest eyes cannot completely penetrate. One of the components of the veil is possible tapering off of military orders if the stretched-out procurement program gets on schedule and passes its peak.

Perhaps this is the reason why so many manufacturers to whom we have talked in the last month seem to be thinking about civilian rather than military equipment business, why so many are searching for new things to build at prices the public can pay, and why so many are increasing sales pressure behind items already designed.

It seems like the thing to do.

► **GROWTH . . .** West Coast electronics industry is rapidly coming of age. Noted on our most recent editorial swing through the area was the particularly heavy attendance at the Long Beach convention, substantial growth in the size of many plants visited less than a year before and a continued though more modest influx of new companies.

Even more significant from a long-range point of view is the far west's growing interest in the mid-west and even the east-coast market for its goods; manufacturing capacity in some instances already far exceeds the needs of local aircraft plants that gave many people in our field their start. Most significant of all, the first substantial signs of a west-coast component-parts business can now be seen; parts are in the main rather specialized, but new manufacturers must start where competition is not too keen and where required investment is not too large.

An indication of growth particularly visible to us is the sharp increase in the number of technical papers emanating from the west coast; ELECTRONICS itself has published 18 since January in its feature pages alone.

► **TWINS . . .** Use of the airplane in surveying and mapping has been one of the outstanding developments in that phase of civil engineering, according to the ASCE. "Furthermore," says the Society, "the use of electronics will be one of the dominant developments in the next quarter century."

► **MECHANIZATION . . .** Just a few short years ago people frequently asked us why so-called printed circuits, already widely used in military electronic apparatus, had not yet made a deep dent in civilian equipment design. We told them that in our opinion the chief reason was because they were inflexible; it was too hard or too expensive to modify existing circuits.

Now there are signs that all this is changing. Several manufacturers of radio and television sets are using such circuitry extensively in equipment already on the market. What has happened to bring about the change? Designers are beginning to concentrate upon the machinery for producing circuits, rather than upon the circuits themselves. And they are seeing to it that the machinery is sufficiently flexible so that the boss is not nailed to the cross for dies or other appurtenances every time the engineering department wants to alter wiring.

At least one large independent research organization is known to have an important contract calling for development of machinery for the production of printed circuits, and setup and alteration time is to be the criterion. The program still has a long way to go, but it is well on its way.

► **BAGS . . .** At this, the height of the convention and trade-show season, we are reminded that a friend of ours once had occasion to check the contents of bags provided for literature collectors. Estimating the cost of circulars contained therein at rock-bottom prepartion, printing and paper prices, he came up with the startling statistic that the average bag contained printed matter valued at $17.50!

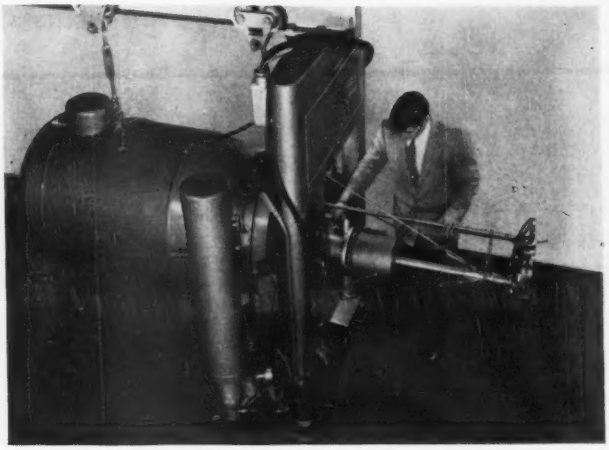

Commercial version of small electron-beam sterilizer for research and limited production. Mounting 2,000,000-volt generator on its side permits use in average-height room

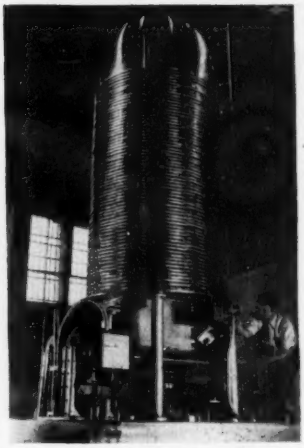

High-intensity 3,000,000-volt electron sterilizer with three charging belts and two acceleration tubes. Electron power is 12 kw

# ELECTRON BEAMS

**High-current coils sweep electron beam through 8-deg arc in air 200 times per second to give uniform sterilization of sealed products moving through beam on high-speed conveyor belt. Scanning circuit includes elaborate fail-safe provisions**

THE USE of high-energy electron beams for the sterilization of foods, pharmaceuticals and sanitary products is being made practical by the Van de Graaff electron accelerator with a scanned electron-beam output. There are many inherent advantages in the electron-sterilization process, as shown in the considerable amount of research[1] that has been conducted to develop techniques for treating materials with ionizing radiations.

An electron accelerated by potentials of several million volts is capable of penetrating substances to a considerable depth. As it passes through the material, this high-energy electron upsets the natural electrostatic balance of the atoms or molecules, ionizing them so that their chemical relationships are momentarily altered. The complex high-molecular-weight chemical structures essential to living organisms are particularly sensitive to this type of ionization. Its results are accordingly fatal under treatment conditions producing far less, and often negligible, effect on nonliving material.

### *Advantages of Process*

Interest in this method of preserving and purifying foods and drugs centers around the following characteristics:

(a) Electron sterilization of a product can be done in the final sealed package without damage to the container and with no possibility of recontamination prior to use.

(b) The temperature rise in the irradiated product, caused by the bombarding electrons, is negligible in comparison to the temperatures needed for normal heat sterilization; foods can be electron-sterilized while frozen.

(c) The packaged or bulk material to be sterilized can be conveyed in an uninterrupted flow beneath the electron beam, as contrasted with the normal batch-processing method.

(d) With a properly regulated electron beam, complete sterility can be reproducibly assured in each product.

(e) The electron dose received by each product can be metered, thereby providing a continuous record and control of sterility.

### *Electron Accelerator Design*

A continuous, well-collimated beam of high-energy electrons is produced by a Van de Graaff electrostatic accelerator. This apparatus has been developed to commercial practicality out of the results of years of research at Massachusetts Institute of Technology and University of Wisconsin[2]. In principle, a controllable constant potential of millions of volts is generated by transferring electric

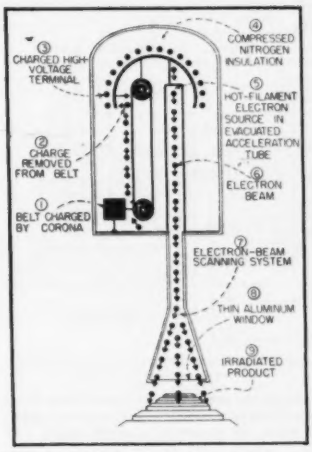
4 COMPRESSED NITROGEN INSULATION
3 CHARGED HIGH VOLTAGE TERMINAL
5 HOT-FILAMENT ELECTRON SOURCE IN EVACUATED ACCELERATION TUBE
2 CHARGE REMOVED FROM BELT
6 ELECTRON BEAM
1 BELT CHARGED BY CORONA
7 ELECTRON-BEAM SCANNING SYSTEM
8 THIN ALUMINUM WINDOW
9 IRRADIATED PRODUCT

FIG. 1—Operating principle of Van de Graaff electron accelerator as used for sterilizing packaged products

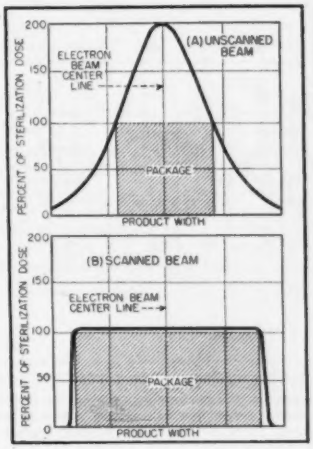


FIG. 2—Effect of scanning on distribution of ionization intensity. Area under both curves is the same

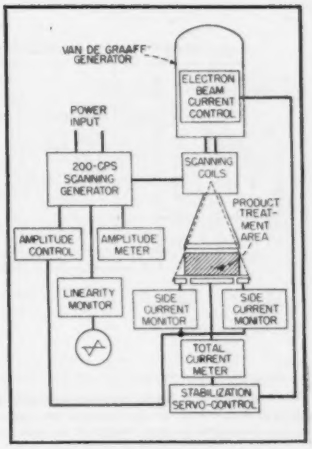


FIG. 3—Complete electron-irradiating system. Manual and automatic monitoring insures uniform sterilization

# Sterilize Food and Drugs

By E. ALFRED BURRILL and A. JOHN GALE

*Physics Department*
*High Voltage Engineering Corporation*
*Cambridge, Massachusetts*

charges on a rapidly moving belt from ground to the inside of a high-voltage terminal, as shown in Fig. 1. By balancing the current into the terminal with that flowing back to ground through potential-dividing resistors and an evacuated acceleration tube, a direct current of electrons is accelerated to a homogeneous energy by the voltage drop established between the well-insulated high-voltage terminal and ground. This type of equipment has been widely used for the acceleration of electrons and positive ions and for the production of x-rays and neutrons. It finds applications in cancer therapy, industrial radiography, nuclear research, radiation chemistry, biology and food technology. Over one hundred of these electrostatic accelerators are in active use today in research laboratories throughout the world.

A compact, two-million-volt Van de Graaff electron accelerator has been developed for use in sterilization research and for small production-line irradiation of foods and drugs. This unit consists mainly of a voltage generator contained in a pressurized housing 6 feet long and 3 feet in diameter, mounted horizontally for installation in a room with nominal ceiling height. A pressure of 25 atmospheres of nitrogen and carbon dioxide is used to insulate the high voltages generated within the relatively small pressure vessel. Protruding from the base of the generator is the grounded end of the acceleration tube, through which high-energy electrons are impelled by the high voltage inside the tank. For the production of penetrating x-rays, these electrons are stopped by a thick gold target at the end of the tube. This target can be retracted, however, to permit the electrons to emerge, with negligible loss in energy, into the atmosphere through a thin aluminum window.



Electron-beam scanner being used for irradiation of glass vials containing powdered pharmaceuticals at rate of about 2 a second using small 2-mev machine

The accelerator produces 0.5 kw of monoenergetic electron power at 2-mev energy, with an input power of 4 kw. About half the input

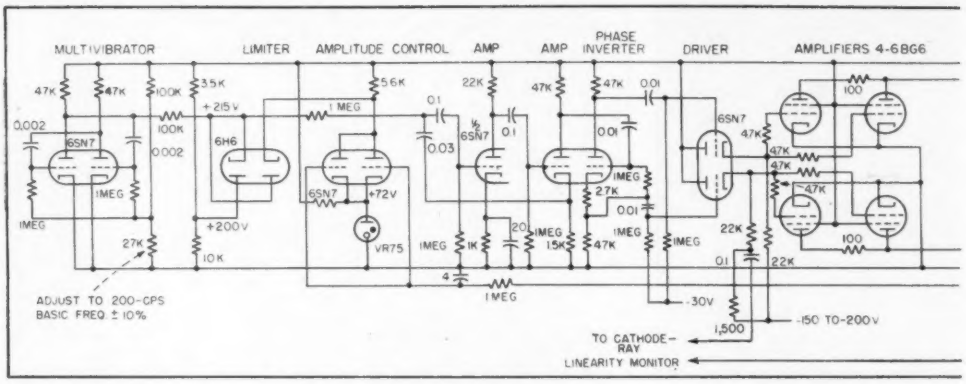


**FIG. 4—Scanning circuit used for generating 3-ampere, 200-cps sawtooth current for sweeping electron beam through controllable angle up to 8 degrees to obtain uniform irradiation without wasting electron-beam power beyond outlines of the product. The conveyor-belt motion provides the equivalent of vertical scanning. To protect aluminum window against burning by stationary electron beam, full-**

power is required for controls and for evacuating the electron-acceleration tube. The output power produces in materials an ionization equivalent to over 50 million gram-rep (roentgen-equivalent-physical units) per second, and can completely sterilize over 200 pounds of foods or drugs per hour. The 2-mev electrons have a practical penetrating range of about 0.3 inch in water. This range can be increased to 0.7 inch by the technique of bombarding the product from both sides. In general, the range of high-energy electrons in material is proportional to the electron energy and inversely proportional to the density of the material.

### Electron-Beam Scanner

The high-energy electron beam, as it is normally propagated into the atmosphere, has a lateral intensity distribution that is roughly Gaussian, as shown in Fig. 2A. To deliver electron energy adequate for sterility to all regions of the product, some portions must receive an overdose, sometimes as high as a factor of four. If only the central region of the beam is used, the remainder is wasted energy, causing the process to be uneconomical. To irradiate a product with any appreciable lateral dimension, the beam must be allowed to be scattered by the atmosphere or by thin foils, to broaden the intensity distribution for adequate coverage. The scattering process is extremely wasteful in energy.

By magnetically deflecting the electron beam rapidly back and forth before it emerges from the aluminum window, the lateral intensity distribution can be controlled. Accurate regulation can be applied only to a continuous beam of monoenergetic electrons, obtainable with a Van de Graaff accelerator. A desirable mode of scanning is the linear sawtooth waveform, which causes the electron beam to be painted on the moving product in even strokes. Figure 2B shows the uniform intensity distribution obtained across the product when a scanned, concentrated electron beam irradiates the material directly below the window.

The scanning circuit is shown in Fig. 3 and 4. A driver supplies the alternating current to a pair of coils surrounding the electron beam in much the same manner as in a television set. The amplitude is manually controllable, so that the scanned beam can fit the type of product being irradiated.

### Scanning System

The most straightforward check on the performance of the scanning circuit is to monitor the linearity. The extent of the scan is measured by differentiating the signal from the scanning-coil driver and reading the rectified signal on a milliammeter. The linearity can be checked by observing the differentiated signal on an oscilloscope. Details of the scanning-coil assembly and electron window are shown in Fig. 5.

An oscillation frequency of 200 cps is sufficiently rapid to prevent intensity striations on materials moving under the window as fast as 30 feet per minute. Higher frequencies would require heavy-duty electron tubes to drive the scanning coils. At 200-cps scanning frequency the coils carry about 3 amperes, sufficient to deflect a 2-mev electron beam through 8 degrees. The scan is limited to this value to prevent excessive penetration distortion by electrons entering the product at an angle. At 8 degrees, the effective penetration is reduced by only 1 percent.

For practical purposes the width of scan on the product depends only




**FIG. 5—Scanning assemble for 3-mev beam. Electron currents as high as 6 ma have been scanned and brought into the atmosphere through the window**

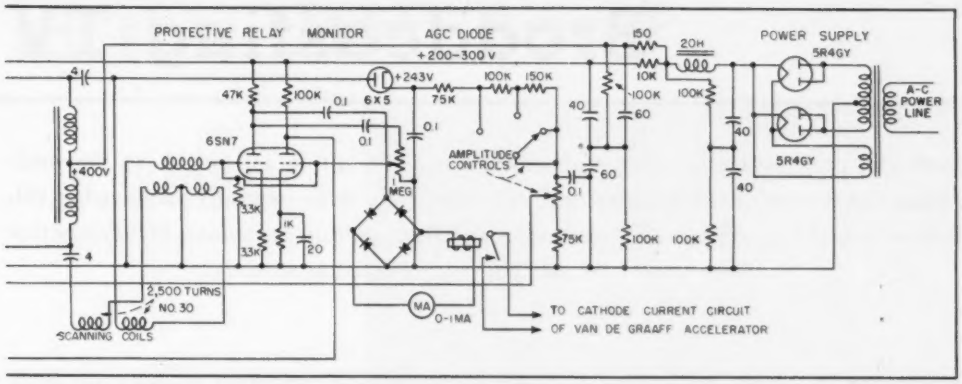


**wave dry-disk rectifier releases relay when scanning current fails, thereby breaking cathode circuit of accelerator. Tachometers on conveyor system generate power to energize other protective relays: if the belt stops for any reason, these relays similarly break accelerator cathode circuit. If product becomes jammed under electron beam, switches activate fail-safe protective relay system**

on the distance between the scanning coils and the electron window. Scanned widths of over 10 inches are reliably obtained. The thin aluminum of the window is preformed into a semicylindrical configuration to withstand the atmospheric pressure without strain. The width of the window is one inch, which is ample to permit the 3/16-inch diameter beam to emerge.

### *Practical Electron Sterilization*

The reduction to practice of the electron-sterilization process depends on careful research on individual products, because of the many characteristics which must be maintained or improved to satisfy the consumer and to meet the standards of the Food & Drug Administration. The potential advantages of the electron-sterilization process are attractive from both the economic and the packaging viewpoints. Products that cannot normally be sterilized today because of their heat sensitivity may be effectively processed by high-energy electrons in their final packages.

A complete Van de Graaff electron accelerator for sterilization research and small production-line use is being designed as shown in Fig. 6, with radiation protection surrounding only the product-treatment area. Interlocks in the generator circuits will shut the equipment off in the event of faulty operation, poor vacuum or extraneous radiation outside the protected zone. Larger accelerators, for heavier duty and the irradiation of thicker products, are under development. The most recent achievement in this field is a 3-million-volt Van de Graaff accelerator that produces more than 12 kw of scanned electron power into the atmosphere, a continuous ionizing radiation output greater by more than a factor of two than any other machine-produced source in the world. This equipment is capable of sterilizing over 5,000 pounds of material per hour, and can kill weevils and their larvae in over 340,000 pounds of flour per hour.

With apparatus of this scope, and with the technique of distributing the ionizing energy by a scanned beam, the electron-sterilization process is, for many products, in the range of commercially acceptable sterilization costs. Even at the present stage of development, total treatment costs, including capital amortization, are now resolved to a few cents per pound for the small units, and to a few tenths of a cent per pound for the largest.

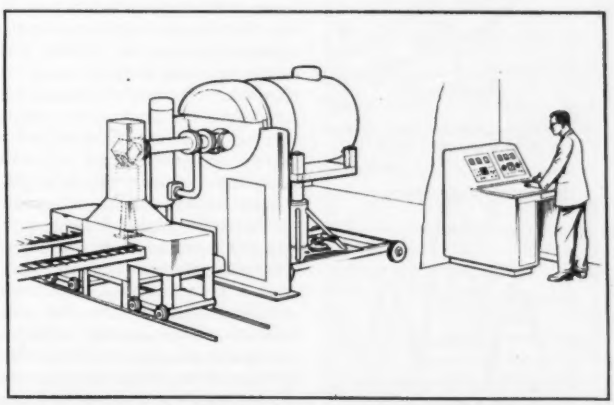

**FIG. 6—Horizontally mounted Van de Graaff accelerator and electron sterilizer for research and small-scale production, rated at 2 mev and 0.5 kw electron output. Control console is located in adjoining room. With automatic electronic control, this accelerator is capable of continuous stable operation over extended periods of time**

#### REFERENCES

(1) B. E. Proctor and S. A. Goldblith, Electromagnetic Radiation Fundamentals and Their Application in Food Technology, *Advances in Food Research*, Vol. III, edited by E. Mrak and G. F. Stewart, Academic Press Inc., New York, 1951; 78 pages containing 174 references.

(2) R. J. Van de Graaff, J. G. Trump, and W. W. Buechner, Electrostatic Generators for the Acceleration of Charged Particles, *Reports on Progress in Physics*, Vol. XI, Physical Society, London, 1948.

# Broadcasting TV

**Survey of propagation data including experiments with tilting antenna shows that techniques for successful uhf broadcasting will differ from those currently employed at vhf. Lack of available power may require unidirectional transmitting antennas. Field distortion indicates need for small-aperture receiving antennas**

How can radio energy be effectively broadcast in the hitherto unexploited ultrahigh frequency range?

Specifically the problem is to study propagation effects between 470 and 890 mc and to determine how to achieve an effective as well as efficient and economical television broadcasting service. This leads to a consideration of the use of high-gain transmitting antennas and examination of electric field-intensity conditions at probable receiving sites.

It has been shown that the disparity of such measured field strengths with respect to the predictions of simple theory increases with frequency.[1,2,3,4] Theoretical predictions, which must therefore be used with considerable caution, are useful in serving as a reproducible reference and to help explain some of the observations in a general way.

Important theoretical differences will be clarified by first examining theoretical field-intensity relations in both the lower vhf and the upper uhf ranges. The theoretical relations so oversimplify the case that practical field situations do not usually yield field strengths as high as predicted. A field survey will be cited to illustrate a practical comparison of measured with theoretical data. It is then shown that the vertical beam of the transmitting antenna may become so sharp as to reduce the effective gain of the antenna except at distance ranges where the maximum of the beam is employed.

This is illustrated in another theoretical comparison of propagation at a high and a low frequency with antennas of the same vertical dimensions and with respective vertical beams either horizontal or tilted downward. Experimental verification of the improvement in field strength available from tilting is then offered in a field survey. The data is divided into two distance ranges, a close range (1 to 5 miles) with important effects from antenna beam sharpness and tilt and a far range (5 to 21 miles) which is less affected by these factors.

It is helpful to review propagation theory curves for two widely separated frequencies, 85 mc and 850 mc. Because the theoretical relations are complicated by changes with frequency, there is no strictly fair comparison where there is wide separation of frequencies. Antenna power gain (for a given horizontal radiation pattern) is obtained by compression of the vertical radiation pattern into a narrow vertical angle. This is accomplished by distributing radiation sources over a vertical aperture with power gain linearly related to the length in wavelengths. The comparison of widely separated frequencies is difficult because two mutually exclusive criteria need to be satisfied.




**FIG. 1—Field intensities predicated upon a smooth spherical earth**




**FIG. 2—Free-space vertical field pattern for omnidirectional antennas at 530.25 mc**

In such a comparison the beam widths should be the same to make the effects of pattern shape identical. It seems fair to give the higher-frequency antenna the same vertical physical dimension as the low thereby making the power gain proportional and the vertical beam width inversely proportional to the frequency. The first choice penalizes the higher frequency with a smaller antenna than that of the lower frequency and consequently less power gain than it could justly have. The second choice inflicts a penalty, again on the higher frequency, by sharpness of the beam which may adversely affect close-in coverage.

It will be assumed that transmitting antennas have the same heights above smooth spherical earth and the same vertical, effective apertures. Both antennas consist of uniform, cophased current sheets. Transmitter power outputs are equal, and filters, diplexers, and transmission lines are assumed to

# in the UHF Band

By JESS EPSTEIN
and D. W. PETERSON
*RCA Laboratories Division*
*Radio Corporation of America*
*Princeton, N. J.*

Tilting antenna boom was mounted vertically on Success Hill tower near Bridgeport, Conn.

be lossless. Because the 850-mc antenna is ten times as many wavelengths in its vertical dimension as the 85-mc antenna, the high-frequency antenna free space gain will be theoretically 10-db greater than that of the low-frequency antenna. Thus, in Fig. 1 curves (A) and (B), very substantially higher fields are shown for the higher frequency, 10 db of which is attributable to antenna gain.

### Phasing Improvement

In addition to the improvement from greater transmitting antenna gain (10 db) there is theoretical improvement from more favorable phase relations at the higher frequency. This occurs because at a given receiving antenna height (within the range of heights that are of concern) the earth-reflected and direct rays are more nearly in phase at the higher frequency. Thus according to Fig. 1, curves (B) and (C), the higher-frequency antenna yields greater fields even when both antennas have the same gain.

To evaluate the theoretical curves of Fig. 1 it is assumed further that the receiving antennas have the same effective apertures, in which case equal field strengths produce equal receiver terminal voltages. The receiving transmission lines are assumed lossless, and the receivers have the same noise factors.

Under the idealized postulated conditions, television receiver performance with respect to thermal noise in the picture is predicted by the two field-strength curves. Thus the difference of the two curves (A) and (B) represents improvement of theoretical performance of 850 mc over 85 mc. Along a line between one and twenty miles range, theoretically the median 850-mc field strength will be 28 db greater than the corresponding median for 85 mc for the specified conditions.

### Smooth-Earth Calculation

The theoretical field-strength curves have been calculated for smooth spherical earth,[5,6] by K. A. Norton and others. The measured field data[7] more closely approach this smooth-earth theoretical data at 85 mc than at 850 mc. This may be taken as evidence that the postulated theoretical conditions are more adequately satisfied under practical operating conditions at 85 mc than at 850 mc. However, sufficient smoothness to corroborate simple theory has also been obtained under special conditions at 530.25 mc and 850 mc.

Other data measured under more typical receiving conditions have shown wide departure from smooth spherical earth theory. An analysis of data shown in "Comparative Propagation Measurements; Television Transmitters at 67.25, 288, 510, and 910 megacycles"[7] will show that for a specified effective radiated power the median field intensity is actually inversely proportional to frequency under some conditions.

Because of the present difficulty in obtaining high transmitter power at ultrahigh-frequencies and the apparent propagation handicaps, it seems reasonable to make a

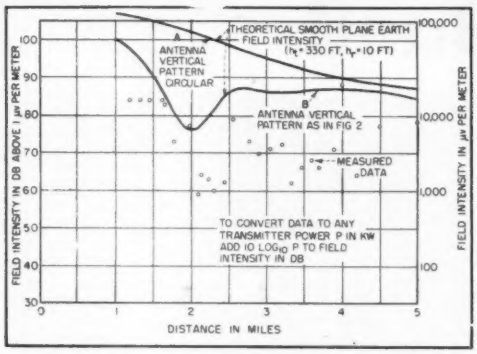
THEORETICAL SMOOTH PLANE EARTH FIELD INTENSITY (h_t = 330 FT, h_r = 10 FT)
ANTENNA VERTICAL PATTERN CIRCULAR
ANTENNA VERTICAL PATTERN AS IN FIG 2
MEASURED DATA
TO CONVERT DATA TO ANY TRANSMITTER POWER P IN KW ADD 10 LOG10 P TO FIELD INTENSITY IN DB
FIELD INTENSITY IN DB ABOVE 1 μv PER METER
FIELD INTENSITY IN μv PER METER
DISTANCE IN MILES

FIG. 3—City field intensity for 1 kw erp (based on actual 13.9-kw erp) at 530.25 mc

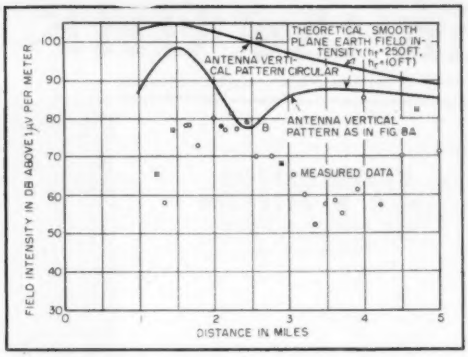
THEORETICAL SMOOTH PLANE EARTH FIELD INTENSITY (h_t = 250 FT, h_r = 10 FT)
ANTENNA VERTICAL PATTERN CIRCULAR
ANTENNA VERTICAL PATTERN AS IN FIG. 8A
MEASURED DATA
FIELD INTENSITY IN DB ABOVE 1 μV PER METER
DISTANCE IN MILES

FIG. 4—City field intensity for 1-kw effective radiated power at 850 mc

careful study at ranges relatively close to the transmitter. A distance range of one to five miles was chosen for special study since this range has special interest and can encompass a city in the order of several hundred thousand population. The frequencies used are 530.25 mc and 850 mc. The 530.25-mc transmitting antenna, which was described in a previous investigation[5] of the performance of KC2XAK, is omnidirectional and has a gain of 12.4 db referred to a half-wave dipole. The vertical radiation pattern is shown in Fig. 2. The 850-mc antenna, illustrated, is unidirectional and has a gain of 19.2 db. The horizontal radiation pattern is 65 degrees at the half-field points and the vertical pattern is shown in Fig. 8A.

The theoretical smooth-plane-earth fields for the two frequencies and the respective antenna heights are shown in Fig. 3 and 4. The curves designated (A) in the two figures were calculated by assuming that the antennas had no vertical directivity and adding in db the respective nominal antenna gains. An antenna with gain independent of vertical angle is thus supposed. Such a procedure might have been valid at low frequencies for apertures commonly used.

Because of the vertical directivity of the antennas, however, it will be necessary with the 530.25-mc and 850-mc antennas to reduce the theoretical fields by an antenna-pattern factor as has been done for curves designated (B), Fig. 3 and 4. The field intensities were measured along a line through Bridgeport, Connecticut, at the maximum of the pattern, using a method to be described below. The normalized measured fields are also shown in Figs. 3 and 4. The 530.25-mc measured data is lower than the theoretical curve by a median value of 13 db along the one-to-five-mile line.

The 850-mc measured data is correspondingly 17 db below its theoretical curve. This means that 50 per cent of the measured field strengths are lower than the smooth - plane - earth theoretical curves by the specified value or more. It should be remembered in comparing measured data of the two frequencies with their respective theoretical curves that propagation from the 530.25-mc antenna may have been favored by its greater height.

Although exhibiting reduction of field strength at the distance range of the null of the vertical pattern, the close-in coverage of KC2XAK was quite adequate. The erp was 13.9 kw or 11.4 db above 1 kw. By adding 11.4 db to the measured data of Fig. 3, the null of the vertical pattern yielded close to grade-A service of 74 db above 1 μv per meter.


45 λ ANTENNA, 850 MC (17.75 DB FREE SPACE GAIN)
4.5 λ ANTENNA, 85 MC (7.75 DB FREE SPACE GAIN)
FIELD INTENSITY IN DB ABOVE 1 μv PER METER
DISTANCE IN MILES

FIG. 5—Theoretical curves for 1-kw transmitter using 250-foot antenna and receiver at 10 feet. Curves *A* and *D* are vertical pattern for maximum field at all distances; curves *B* and *E* are for zero tilt; *C* is for 1.25-degree downward tilt

### *Effective Power Concept*

The importance of the antenna's vertical directivity has been shown in Fig. 3 and 4. Substantial reduction in theoretical field strength results from sharpness of the vertical beam of the transmitting antenna. There is evidently need to review the meaning of effective radiated power. The effective radiated power is commonly considered to be the transmitter power increased by the free-space maximum gain of the transmitting antenna and is not, under the conditions here described, really *effective* radiated power.

The theoretical data of Fig. 3 and 4 suggest beam tilting for improving coverage in a limited distance range by aiming the maximum of the vertical radiation pattern at some point within the range served by the transmitter. In this manner the nominal effective radiated power becomes actually realized within some limited but useful range. Such a beam-tilting procedure has been used in a number of instances but usually there has been no opportunity to study the results.

To look into the possibilities of




FIG. 6—Tilting-beam antenna with 6-minute period of oscillation

beam tilting, another comparison of the theoretical fields at 850 mc and 85 mc will be made. Assume an 850-mc antenna of 45λ vertical dimension and an 85-mc antenna of 4:5λ vertical dimension. The vertical radiation patterns will be as calculated for a constant co-phased current sheet, Fig. 11. The gains will be 17.75 db and 7.75 db respectively with the vertical physical dimensions the same for the two antennas.

Calculating the smooth-plane-earth fields in the 1-to-5 mile range produces curves (A) and (D) of Fig. 5. It has been assumed that the antenna gain is fully realized as it would be if the antenna maximum were aimed by tilting at the receiving antenna in every instance.

If the beam is aimed horizontally as in conventional practice, the field-strength curves are shown in Fig. 5B and 5E. At 85 mc the resulting reduction in field is negligible, but at 850 mc the field is considerably below that obtainable by tilting the beam.

Since for a broadcast service, the antenna cannot be tilted a different amount for every distance along the 1-to-5 mile radial line, there must be a compromise. Suppose the 850-mc antenna is arbitrarily tilted down 1.25 deg., then curve (C) describes the theoretical field. It can be seen in Fig. 5 that in a 1.1-to-4.3-mile range the theoretical field is increased by tilting the antenna down 1.25 deg. At greater distance there will be reduction of field, which is the price paid for improved field from 1 to 4.3 miles.

### Beam Tilting Experiments

To learn if the improvement in performance predicted by the theory can in fact be realized in a practical situation, beam-tilting patterns were made at 530.25 mc and 850 mc. The antennas, mounted as in Fig. 6, were 49 feet in height, which is 26.4λ at the lower and 42.3λ at the higher frequency. The 850-mc antenna has been described above. The 530.25-mc antenna consisted of another set of dipoles previously mounted on the same frame with the horizontal pattern nearly the same as that for the 850-mc antenna and the vertical pattern as shown in Fig. 7A. Unidirectional antennas were used to eliminate supporting tower effects. Mechanical rather than phase-shift tilting was used for ease of measurement of tilt angles. This involved a single measurement of the vertical radiation pattern and a simply obtained tilt calibration.

Similar beam tilting could have been accomplished by phase shifting with the attendant complications not warranted for this experiment. To facilitate measurements the beam was tilted periodically ± 6 deg over a 6-minute period. The transmitter was keyed off 10 seconds once during each tilting cycle to communicate to the receiving site the time of an exactly predetermined angular position of the transmitting antenna. In this manner recordings of relative field strength as a function of time could be made at any receiving site with a recorded time reference. From a tilt-angle-versus-time calibration of the transmitting antenna, the relative field intensity as a function of tilt angle could thus be readily determined.

Data obtained in this manner for both frequencies are shown in Fig. 7 and 8. It was found that in the city and at distances up to about 20 miles the field intensity maximized with the free-space beam aimed at the receiving antenna. It was also learned that at distances well beyond line-of-sight, 90 miles and 140 miles, the field maximized with the transmitting antenna beam aimed horizontally. Figure 9 shows the 90-mile patterns, which were recorded under unusually high field-strength conditions.

To profit from these facts the 850-mc antenna beam was tilted down 1.3 deg to direct horizontally the first null above the main beam. The improvement in field strength

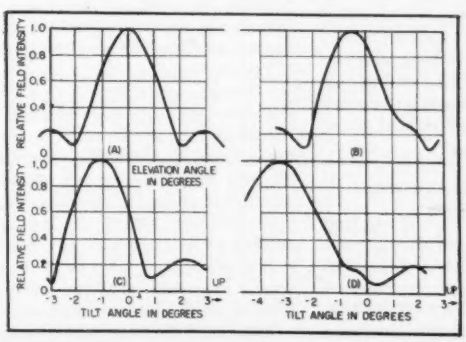


FIG. 7—Unidirectional 530.25-mc antenna free-space field pattern for (A) elevation 60 feet at 12 miles (B) at 3 miles (C) and 1.1 miles (D) from the transmitter

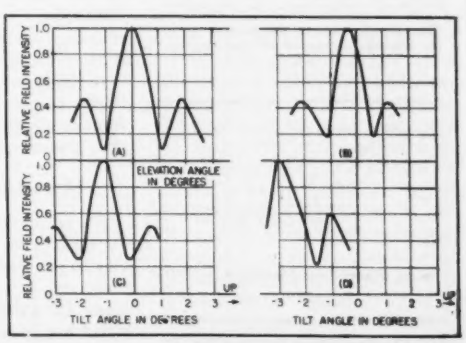


FIG. 8—Unidirectional 850-mc antenna free-space field pattern (A) elevation 20 feet at 15 miles (B) 120 feet at 3.7 miles (C) and 60 feet. 1.2 miles (D)




FIG. 9—Tilt pattern, 530.25 mc at 90 miles, elevation 50 feet (A) and for 850 mc (B)




FIG. 10—Effect of beam tilting from antenna 330 feet high tilted downwards 1.3 deg




FIG. 11—Free-space radiation patterns for constant cophased current distribution




FIG. 12—Propagation curves of Fig. 13 are based upon these antenna characteristics

in the 1-to-5-mile range from tilting is shown in Fig. 10. The median value of improvement was 11 db. From recordings of field strength at 90 miles the tilting also yielded a reduction of troposphere-propagated field in the order of 12 db because the vertical radiation pattern null was directed horizontally.

### Beam Tilting In Free Space

The tilt patterns of Fig. 7 and 8 look somewhat like free-space theoretical patterns that would be measured in an imaginary plane in free space below the transmitting antenna. In Fig. 11 are free-space calculated patterns for various apertures. Relative field versus distance for these theoretical patterns as calculated for a plane $h$ feet below the transmitting antenna, see Fig. 12, are shown in Fig. 13.

The antenna pattern for a 45$\lambda$ aperture and the transmitting antenna height 250 feet cooresponds approximately to the pattern and height for the 850-mc surveyed radial. A reasonable correspondence for improvement from tilting between measured data of Fig. 10 and the free-space theoretical data of Fig. 13 will be seen. Reference to the plane-earth theoretical data of Fig. 4 may also be made.

The propagation curves of Fig. 13 illustrate the range of array apertures and heights for which the sharpness of the vertical radiation pattern may be of concern. The limitations of beam tilting are also evident.

It may be concluded from foregoing measured data and theoretical considerations that for limited-area coverage of improved efficiency and for reduced tropospheric signals (at least some of the time) uhf transmitting antennas can be designed to take advantage of narrower vertical beams than heretofore used.

### Shaped Beam Antennas

The field intensity throughout the area to be served should probably be constant. This assumes that there will be no high interference zones. The experience with vhf television has been that the downtown city areas require higher field strengths than the suburban areas. The lessened interference at higher frequencies from local sources makes it appear likely that the same requirement need not be imposed on uhf television.

The beam-tilting experiments show how average field distributions in an area the size of a fair-sized city depend on vertical beam shape. It follows that one may sometimes use specially shaped vertical beams to obtain constant field strength in a limited area. A somewhat idealized free-space vertical radiation pattern is shown in Fig. 14A, which in a plane 500 feet below the antenna yields nearly constant field from 0 to 6 miles, as in Fig. 15A and reduction of troposphere propagated field.

A similar but conventional radiation pattern main beam is also shown in Fig. 14B and the resulting field as a function of distance for $h = 500$ feet and tilt angle $= 0$ is given in Fig. 15B. This would be the coverage data of conventional practice. The efficiency of the shaped pattern for limited-area coverage is quite apparent by comparison in Fig. 15 with curve (B) and the coverage data of Fig. 15C for a tilted conventional beam. The additional feature of reduction of tropospheric propagated fields could be advantageous in allocations.

### Unidirectional Telecasting

In the establishment of any broadcast service the choice of the radiation pattern is governed both by the location of the antenna and the service area that it is desired to cover. In the vhf range the common practice has been to use an omnidirectional antenna placed on the highest available structure centered in the service area.

Although one might conclude that the same factors would govern the choice of a site for the uhf range there are several reasons that strongly indicate some use of unidirectional radiating systems. The most obvious reason is that a number of stations will be forced to find locations on one side of their service area because of the lack of suitable structures centrally located or because of the financial problems associated with constructing one. Although we lack a comprehensive

study of all the propagation factors involved in such a situation we do have sufficient experimental data to indicate that adequate coverage can be obtained with such an arrangement.

In general the technical and constructional problems of building a high-gain uhf unidirectional antenna are considerably easier than for an omnidirectional antenna.

Because tilting for improved coverage in a limited-distance range may be accomplished with either uni- or omnidirectional antennas mechanical or phase-shift tilting can readily be used with the former types while the latter antennas will usually require phasing networks.

The concept of designing a telecasting system to serve a specified area with constant field strength can be employed with either type but the indications are that it can more easily be accomplished with a unidirectional type of antenna.

It cannot be emphasized too strongly that the problems associated with uhf coverage should be approached without bias. Experience and practice of vhf are not an adequate guide for procedures in this new range. The compelling reason that makes serious consideration of unidirectional telecasting as well as other innovations advisable is the present technical difficulty of obtaining sufficient radiated power to perform on a par with vhf systems.

### Measurements Beyond Five Miles

Field-strength measurements beyond five miles are shown separately from the 1-to-5-mile data because with the conventional practice of aiming the beams horizontally the received signals come from on or near the maximum of the vertical pattern. This was the result of the choice of transmitting antenna heights and the vertical beam widths. From 5 to 20.7 miles the average terrain elevation was 80 feet. The 530.25-mc antenna was 340 feet and the 850-mc antenna 260 feet above the average 5-to-20.7-mile terrain elevation.

The smooth spherical earth theoretical field strengths and the measured data are shown in Fig. 16 and 17. The 530.25-mc measured data have a median value of 19 db below the theoretical curve. The 850-mc data are correspondingly 25 db below the theoretical curve. The difference between 19 and 25 db may be in part due to more favorable propagation conditions from the higher 530.25-mc antenna because of its greater height.

Also shown in Fig. 17 are the measured field-strength data with the 850-mc beam tilted down 1.3 deg. The median value of reduction cost of the 11-db increase in median field strength that was measured in mile range was 5 db. This is the the 1-to-5-mile range.




FIG. 14—Free-space vertical field patterns for 50-wavelength aperture

### Method of Making Survey

The ultimate objective in field surveying is to study the capability of a given transmitter and transmitting antenna to serve the homes of the area in question with useful television signals. For this purpose no fully satisfactory method of sampling fields in a uhf survey has been devised. A method used in vhf surveys is to make continuous recordings from which sector medians are plotted. The radial plots of sector medians are used to derive constant-field contours. Experience indicates that the use of these methods in the uhf range will be misleading.

Some observations about the nature of uhf fields in and above a residential area will help to choose a sensible method of making the survey measurements and show inadequacies of vhf methods. Of great importance is the fact that even in sparsely settled residential areas the field distributions are exceedingly complicated. Every object in sight apparently contributes to the net field either by reflection or diffraction. In a locality consisting of well-spaced one-story houses relative receiver terminal voltages as a function of position along a straight line are shown in Fig. 18A. At a 40-foot height, which is 25 feet or more above the roof tops, there is apparently as much varia-

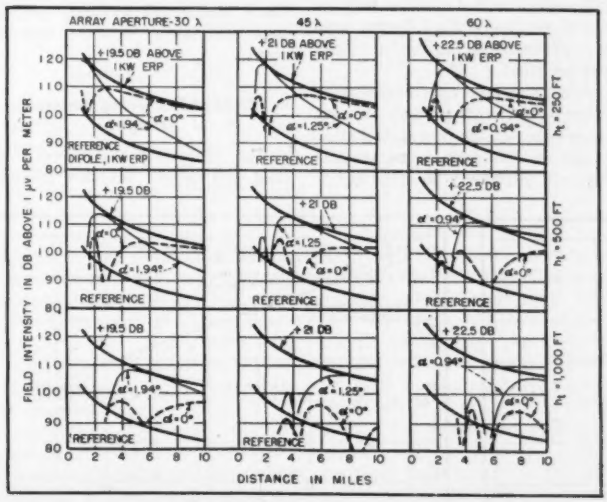


FIG. 13—Free-space propagation for antenna characteristics shown in Fig. 12 and explained in text




**FIG. 15—Free-space field intensity in plane 500 feet below antenna**

tion as at 10 feet. These data are typical; in fact, one may usually expect comparable or greater variations in a city. Terminal voltage as related to height in Fig. 18C shows similar quite unpredictable variations.

An ideal receiving site would have field strength proportional to height, substantially constant field strength in any horizontal plane, and constant phase in a plane normal to the line of propagation. Under these conditions the field strength indicated by either a dipole or an array will be the same provided the ratio of the height of the array to its vertical aperture is large.

With distorted fields as usually encountered, a dipole indicates a field strength that is extremely variable with position. An array exhibits normal gain only with the ideal receiving conditions. Thus, the two antennas will indicate different apparent field strengths.

A little consideration of the nature of reflections from a simple planar reflector in free space will help to show why the effectiveness of receiving antennas diminishes with frequency. Such a reflector, if perpendicular to the line of propagation, produces standing waves with maxima every half wavelength in space. The reflector acts like a uniformly excited antenna and thus the standing wave produced will exist in a space corresponding in shape to the radiation pattern of such an antenna. Thus, a given reflector produces a beam of standing waves that increases in sharpness with frequency.

The evidence from probing at receiving sites at say 850 mc, is that the field distributions are exceedingly complicated configurations as if many reflecting objects made contributions to the net field. To again compare 850 mc and 85 mc, one may reasonably consider a half wavelength 85-mc dipole as a standard. An 850-mc antenna to deliver the same terminal voltage if exposed to a uniform field distribution requires 10 times the area (in square wavelengths) of uniform field as the 85-mc antenna.

### Antenna Comparisons

Having started with an antenna that was practical at 85 mc because it required a relatively small area of uniform field (in square wavelengths) it becomes evident that in fields as commonly distorted by reflecting objects and diffraction the comparable 850-mc antenna will suffer from field distortion because it will require a much larger area of uniform field (again in square wavelengths).

At a given receiving site one may either probe with a small antenna for maxima of the field distribution or use an unwieldly, large antenna that will ordinarily be subjected to fields so far from the uniform field for which it was designed as to be rendered almost useless. A small unidirectional antenna like a half-wave dipole employing a sheet reflector appears to be a reasonable compromise and such antennas were used in all measurements described. This antenna may reduce many reflected components of field and does not require a large area of uniform field.

The amount of probing done at each site in a field survey is arbitrary and, of course, will affect the results. The maximum receiver terminal voltage obtainable along a 25-foot line 10 feet above the ground has been chosen as a practical value from which to compute effective field strength. A similar amount of probing may ordinarily be done on the roof of a house in actual installations if found necessary.

The receiving antenna for the survey should be on the roof tops but since this is impractical, it appears that a ten-foot height above ground is as good a value as can be used and has the advantage of convenience for automobile measurements. Peak values are here used instead of the more usual medians because peaks are available for use in practical installations and the ineffectiveness, bulk, and cost of large-aperture antennas make it likely that small antennas will be used ultimately in most installations.

### Field vs Receiving Antenna Height

The theoretical relationship of field and height becomes increas-

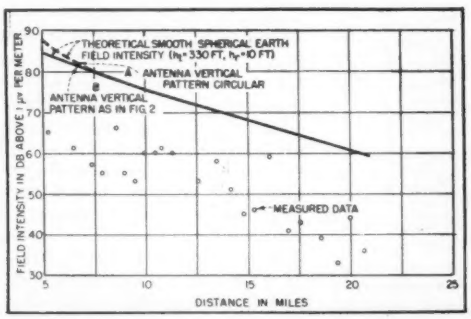


**FIG. 16—Country field intensity for 1 kw erp at 530.25 mc**

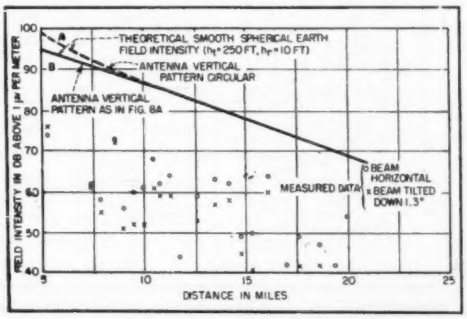


**FIG. 17—Country field intensity for 1 kw erp at 850 mc**

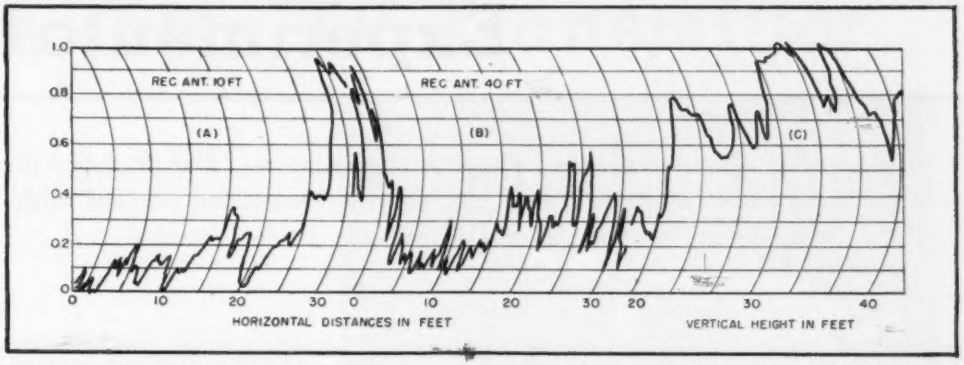


**FIG. 18—City field-intensity distribution for receiving antenna at 10 feet (A) at 40 feet (B) and with vertical height at a fixed location (C)**

ingly complicated at heights and distances that here concern us, as frequency is increased. Smooth, curved-earth theory yields the curves of Fig. 19 for 850 mc and 85 mc. Transmitting antennas having the same vertical radiation patterns of circular form have been assumed.

Field measurements under the most ideal conditions confirm the theoretical relations but with surroundings ordinarily encountered at receiving sites no such simple relations exist.[8] If there is any connection at all between the idealized theory and the actual field-height relations commonly existing, it is well obscured by diffraction and reflection from nearby objects.

### Summary of Tests

The establishment of television broadcasting service in the uhf range must contend with different fundamental limitations than those of vhf broadcasting: (1) uhf propagation is demonstrably poorer under practical receiving conditions than predicted by smooth-spherical-earth theory; (2) vertical beam sharpness reduces the effectiveness of the power gain of large-aperture high-frequency broadcasting antennas; (3) field distortion reduces the effectiveness of large-aperture receiving antennas.

Important differences with respect to lower frequencies that may be advantageous for uhf telecasting are: (1) unidirectional telecasting is more easily accomplished in the uhf range than previously at lower frequencies so that unidirectional antennas will probably find increasing application; (2) The lack of man-made interference in the uhf range is of importance and may affect the approach to uhf telecasting by relaxing the usual requirement of higher field strength in built up areas.

To compensate for inherent




**FIG. 19—Smooth-spherical-earth field intensity based upon 1 kw erp from a dipole antenna**

limitations of conventional practice, beam tilting and shaping can evidently be employed. Tilting and shaping techniques may be desirable for three reasons: (1) improved system efficiency (more receiving sites get usable signals); (2) field strength may be made independent of distance in the service area; (3) troposphere-propagated signals may be reduced. Vertical half-field beam widths in the order of two degrees become possible and may be practical if properly employed, to improve system performance in the uhf range.

There are still unresolved questions about uhf broadcasting. We can be assured, however, that there will be uhf television service on a large scale. The feasibility has been convincingly demonstrated by KC2XAK in Bridgeport. Proper use of high towers, high transmitting antenna gains, and shaped, tilted beams will be of increasing importance.

### Acknowledgment

The field tests in the Bridgeport area were conducted with the co-operation of John L. Seibert of the National Broadcasting Company. The special transmitter used was built by George Olive and William Behrend of RCA Laboratories. Transmitters were operated by Victor Bary and others of the National Broadcasting Company.

#### References

(1) Edward W. Allen, Jr., UHF Propagation Characteristics, ELECTRONICS, p 86, Aug. 1949.
(2) R. N. Harmon, UHF Coverage in Pittsburgh, *FM-TV Radio Communication*, p 14, May 1950.
(3) Joseph Fisher, Field Tests of UHF Television, ELECTRONICS, Sept. 1949.
(4) Harry Fine, UHF Propagation Within Line of Sight, T.R.R. Report No. 2.4.12 of FCC Technical Research Division.
(5) K. A. Norton, Ground Wave Field Intensity, *Proc. IRE*, p 623, Dec. 1941.
(6) Frederick W. Smith, Calculating UHF Field Intensities, ELECTRONICS, p 110, Oct. 1950.
(7) G. H. Brown, J. Epstein, and D. W. Peterson, Comparative Propagation Measurements 67.25, 288, 510, and 910 mc, *RCA Review*, p 177, June 1948.
(8) R. F. Guy, Investigation of UHF TV Transmission and Reception in the Bridgeport, Conn., Area, *RCA Review*, p 98, March 1951.
(9) John F. Dreyer, Jr., Technique for TV Field Surveys, ELECTRONICS, p 82, Oct. 1949.

# Experimental

**A low-power uhf television transmitter installed at Stratford, Conn., near Bridgeport for propagation and antenna tests uses a triode grounded-grid power-output tube and single-tuned cavity. Neutralization suitable for cavity circuits is detailed**

LATE in 1949, RCA and NBC put into operation in Bridgeport, Connecticut, an experimental uhf television transmitter, Station KC2XAK, operating in the frequency band 529-535 mc.[1] In the period of over two years that it was in operation a great deal of information about many phases of uhf television has been obtained.[2,3] In the case of the beam-tilt experiments by Peterson and Epstein, the data from the low end of the uhf television band was obtained using the KC2XAK transmitter. It was felt desirable to continue these experiments in the upper end of the band for the purpose of obtaining comparative data. Accordingly a television transmitter for the upper end of the band was built and installed, under the call letters KC2XCY, in the same building as KC2XAK. The carrier frequencies were 850.00 mc visual and 854.50 mc aural.

### *Final Stage*

The type 5588 tube was selected for the final power amplifier, because at the time of construction of the transmitter it was the tube with the highest power capabilities at 850 mc that was readily available. Although it is a triode requiring neutralization it was decided that this disadvantage compared to the multiple operation of tetrodes was outweighed by the advantage of the compactness and convenience of a single-tube cavity. Before the transmitter was finished, however, a new tube, the type 6161, was made available. The type 6161 tube is electrically similar and mechanically identical to the 5588, the difference being that the 6161 has an improved cathode that makes possible higher maximum plate voltage and higher maximum cathode-current ratings. The type 6161 triode is used in the Bridgeport transmitter. It has a coaxial construction that makes it suitable for use in cavity type circuits.

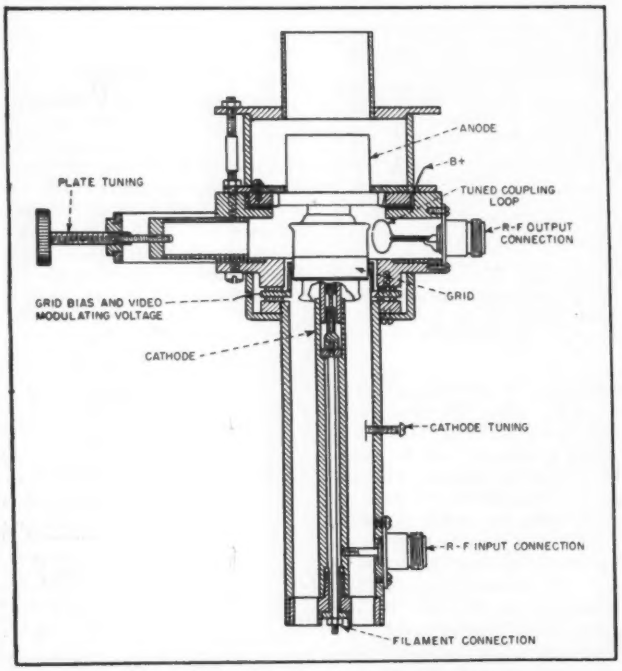


**FIG. 1—Cross-section of final power amplifier stage**

The final stages in both visual and aural transmitters are identical and consist of one type 6161 tube operated with grounded grid. The final stage in the visual transmitter is grid modulated.

A cross-sectional view of this stage is shown in Fig. 1. The input (cathode) circuit is a shorted three-quarter-wavelength coaxial line, foreshortened by tube capacitance. The output (plate) circuit is a re-entrant cavity. The driving power is coupled directly to the inner conductor of the cathode tank at a point that gives a nominal 50-ohm input impedance. The output power is taken from the plate cavity by means of a tuned coupling loop.

The cathode circuit is tuned by means of a movable plate that changes capacitance at a point of maximum voltage in the cathode

# 850-Mc TV Transmitter

**By G. A. OLIVE**
*RCA Laboratories Division*
*Radio Corporation of America*
*Princeton, N. J.*

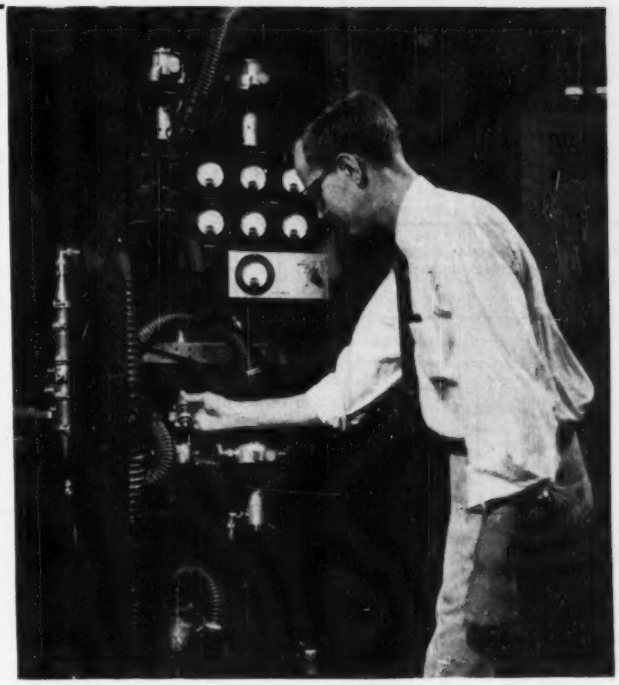

Bridgeport experimental transmitter final amplifiers. Ducts blow air into r-f cavities

circuit. The plate circuit is tuned by means of cylindrical plungers that move radially into the plate cavity.

### Neutralization

It is known that a grounded-grid amplifier cannot easily be plate modulated 100 percent. With the plate voltage zero there are intervals during the r-f cycle when the cathode is negative with respect to the plate and grid owing to the driving voltage. During these intervals pulses of plate current flow to the plate and develop r-f power in the load. The source of this power is the driver of the stage. It is characteristic of grounded-grid amplifiers that a portion of the driving power appears in the load.

In Fig. 2 is an equivalent circuit of a grounded-grid amplifier, which is useful in a qualitative way. It is seen that the load impedance $Z_0$ is in series with the driving voltage and that unless $r_p$ can be made very large by the action of a modulating voltage, deep modulation cannot be obtained. Conventional plate modulation alone will not increase $r_p$ sufficiently to secure 100 percent modulation. Normally, if a grounded-grid amplifier is to be plate modulated, its driver must be modulated simultaneously.

If the grounded-grid amplifier is to be grid modulated, as in Fig. 3, it is possible to make $\mu$ go to zero and $r_p$ go to infinity by the action of a modulating voltage on the grid simply by swinging it sufficiently negative to cut the tube off regardless of the cathode swing. It is therefore possible to grid modulate a grounded-grid amplifier and obtain 100-percent modulation, without the necessity of simultaneously modulating the driver amplifier stage.

Considering the interelectrode capacitances of the tube, it is seen that with the tube cut off there is still the network shown in Fig. 4A connecting the input and output circuits. In general it is necessary to neutralize the plate-cathode capacitance, for it adversely affects the performance of the modulated amplifier in three ways. It prevents the attainment of 100 percent modulation, causes the phase of the carrier to vary with power level and decreases its stability. There are several methods by which complete neutralization can be achieved.[4, 5] In this transmitter a system of partial neutralization[5] was used that is particularly well adapted for single-tube cavity circuits for grounded-grid operation.

In Fig. 4B the interelectrode capacitances are arranged in their equivalent wye. In Fig. 4C there is inserted a neutralizing inductance, $L_n$, between grid and ground, which effectively isolates the input and output circuits under cutoff conditions. The neutralization is not complete however for an element has been introduced that causes a voltage to appear in the input circuit in response to a current in the output circuit and vice versa. The addition of this neutralizing inductance has made 100 percent amplitude modulation possible. The effect of the inductance on the stability and incidental phase modulation will be analyzed further.

Consider the equivalent circuit in Fig. 5. Here are included the interelectrode capacitances in their equivalent wye form and a neutralizing inductance. This network




FIG. 2—Grounded-grid amplifier (A) and equivalent circuit (B)




FIG. 3—Grid-modulated grounded-grid amplifier

is solved at a single frequency $\omega_o$, where $\omega_o^2 L_a C_2 = 1$, $\omega_o^2 L_1 C_1 = 1$, $\omega_o^2 L_2 C_2 = 1$ and $Y_1$ and $Y_2$ are pure conductances.

The stability under more general conditions will be discussed later.

Corollaries of the above restrictions are

$$E_3 = 0$$

$$E_g = -\left[\omega_o^2 L_a C_1 E_1 + \omega_o^2 L_a C_2 E_2\right] = -\left[\frac{C_1}{C_2} E_1 + \frac{C_2}{C_2} E_2\right]$$

Since $E_3 = 0$, the system is described by the equations

$$E_1\left[Y_1 + \frac{1}{j\omega_o L_1} + j\omega_o C_1\right] + (E_1 - E_2)\, g_p + (E_1 - E_g)\, g_m = I_1 \quad (1)$$

$$E_2\left[Y_2 + \frac{1}{j\omega_o L_2} + j\omega_o C_2\right] + (E_2 - E_1)\, g_p - (E_1 - E_g)\, g_m = 0 \quad (2)$$

$$E_g = -\left[\frac{C_1}{C_2} E_1 + \frac{C_2}{C_2} E_2\right] \quad (3)$$

By substituting Eq. 3 in Eq. 1 and Eq. 2

$$E_1\left[Y_1 + g_p + g_m + \frac{C_1}{C_2} g_m\right] - E_2\left[g_p - \frac{C_2}{C_2} g_m\right] = I_1 \quad (4)$$

$$-E_1\left[g_p + g_m + \frac{C_1}{C_2} g_m\right] + E_2\left[Y_2 + g_p - \frac{C_2}{C_2} g_m\right] = 0 \quad (5)$$

The solution of Eq. 4 and Eq. 5 for $E_2$ is

$$\Delta = \left[Y_1 + g_p + g_m + \frac{C_1}{C_2} g_m\right]\left[Y_2 + g_p - \frac{C_2}{C_2} g_m\right] - \left[g_p + g_m + \frac{C_1}{C_2} g_m\right]\left[g_p - \frac{C_2}{C_2} g_m\right]$$

$$= Y_1\left[Y_2 + g_p - \frac{C_2}{C_2} g_m\right] + Y_2\left[g_p + g_m + \frac{C_1}{C_2} g_m\right] \quad (6)$$

$$\Delta \times E_2 = I_1\left[g_p + g_m + \frac{C_1}{C_2} g_m\right] \quad (7)$$

Equations 6 and 7 can be written in terms of the tube interelectrode capacitances as follows:

$$\Delta = Y_1\left[Y_2 + g_p - \frac{C_{pk}}{C_{gk}} g_m\right] + Y_2\left[g_p + g_m + \frac{C_{pk}}{C_{gp}} g_m\right] \quad (8)$$

$$\Delta \times E_2 = I_1\left[g_p + g_m + \frac{C_{pk}}{C_{gp}} g_m\right] \quad (9)$$

The equations describing an amplifier using an ideal tube, that is, one with no plate-cathode capacitance (and no neutralizing inductance) can be obtained from Eq. 8 and Eq. 9 by setting $C_{pk} = 0$

$$\Delta = Y_1\left[Y_2 + g_p\right] + Y_2\left[g_p + g_m\right] \quad (10)$$

$$\Delta \times E_2 = I_1\left[g_p + g_m\right] \quad (11)$$

We can now draw several conclusions about the operation of the properly tuned amplifier from Eq. 8, 9, 10 and 11. If the amplifier is to be stable the system determinant, $\Delta$, must not be zero. Equation 10, where $\Delta$ can never be zero, is a mathematical expression for a fact we already know, namely that a grounded-grid amplifier with no plate-cathode capacitance in the tube is absolutely stable. If the amplifier has plate-cathode capacitance in the tube and has a neutralizing inductance, the determinant is modified by the addition of the terms

$$-Y_1 g_m \frac{C_{pk}}{C_{gk}} + Y_2 g_m \frac{C_{pk}}{C_{gp}}$$

as in Eq. 8. The negative term indicates the possibility of instability. However the added terms tend to cancel and moreover the ratios $\frac{C_{pk}}{C_{gk}}$ and $\frac{C_{pk}}{C_{gp}}$ are usually very small; in the type 6161 they are $\frac{C_{pk}}{C_{gk}} \leqq \frac{C_{pk}}{C_{gp}} \leqq 0.025$ so that the likelihood of the neutralized stage taking off is quite remote.

Equation 3 is the grid voltage developed across the neutralizing inductance. It is seen from Eq. 3 that a plate voltage $E_2$ causes a grid-cathode voltage that reinforces $E_g$. The neutralizing inductance is therefore a regenerative impedance.

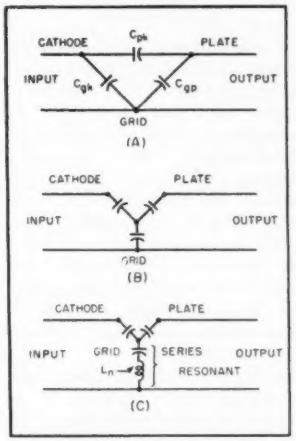


FIG. 4—Tube interelectrode capacitances (A) arranged in equivalent wye (B) with input and output decoupled with inductance (C)

By comparing Eq. 9 and 11 it can be seen (with tubes for which $C_{pk}/C_{gp}$ is small) that the regeneration is small. This is consistent with the conclusion that the neutralized amplifier is stable. A further conclusion that can be drawn, since all terms of $\Delta$ and $\Delta \times E_2$ are real, is that the addition of the neutralizing inductance does not cause incidental phase modulations.

We will now investigate the stability of the amplifier under more general conditions. Referring to Fig. 5, if, because of the limited tuning range of the input and output circuits, we assume that any

sustained oscillations have a frequency close to the carrier frequency, $\omega_o$, then (with tubes with $C_{pk} \ll C_{ap}$ and $C_{pk} \ll C_{gk}$) we can neglect $E_g$ as we did before. The feedback voltage is a function of frequency

$$E_g = -\frac{\omega^2}{\omega_0^2}\left[\frac{C_1}{C_3}E_1 + \frac{C_2}{C_3}E_2\right]$$

We can further simplify the solution by letting $\omega^2 L_1 C_1 = 1$ and $\omega^2 L_2 C_2 = 1$ at all frequencies and making $Y_1$ and $Y_2$ complex functions of frequency.

The system determinant under these conditions becomes

$$\Delta = Y_1\left[Y_2 + g_p - \frac{\omega^2}{\omega_0^2}\frac{C_{pk}}{C_{gk}}g_m\right] + Y_2\left[g_p + g_m + \frac{\omega^2}{\omega_0^2}\frac{C_{pk}}{C_{ap}}g_m\right]$$

For oscillations to exist, $\Delta$ (both real and imaginary parts) must be zero. This indicates again that oscillations are unlikely, at least near the carrier frequency.

This analysis gives no information about parasitic or higher-mode oscillations that might occur at frequencies far removed from the carrier frequency. However oscillations of these types are not likely to occur in small single-tube cavities.




FIG. 5—Neutralized grounded-grid amplifier (A) and equivalent (B)

In practice, the neutralizing inductance is quite small. In the type 6161 amplifier in this transmitter, contact was made to the grid terminal of the tube by a number of spring fingers. To insert an inductance between grid and ground these fingers were bent away from the grid terminal (thus increasing the inductance) one at a time until neutralization was achieved.

It should be emphasized that the foregoing discussion based on equivalent circuits is useful in a qualitative way only. With large signals a vacuum tube is decidedly nonlinear, and can be represented by an equivalent circuit only approximately. Furthermore, at high frequencies, transit-time effects become important. Transit-time effects cause an increase in driving power requirements and cause the cathode current pulses to be unsymmetrical. The degree of symmetry of these pulses varies over the modulating cycle, resulting in some incidental phase modulation of the carrier. The unsymmetrical pulses also cause some peculiar operating conditions. For example, the maximum efficiency and power

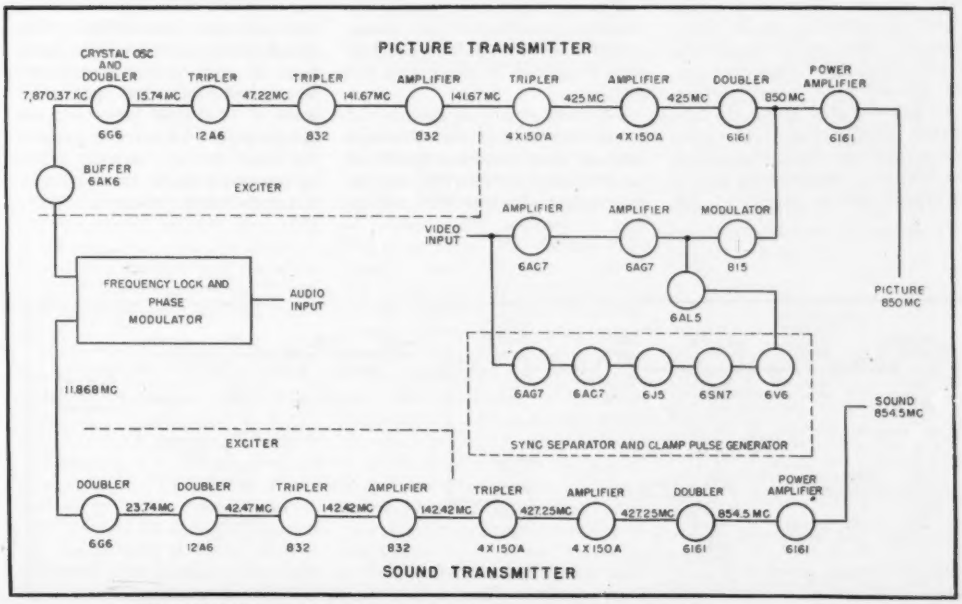


FIG. 6—Block diagram of the picture and sound transmitter frequency control

do not occur when the plate is tuned for a plate-current dip.

### Cooling

The type 6161 is a forced-air-cooled tube. The following provisions were made in the tanks for circulation of cooling air. Air is forced into the air chamber at the top of the tank. From there all the air flows through the cooling fins on the anode of the tube into the plate cavity. Most of the air in the plate cavity flows out through the hollow tuning plungers. A portion of the air in the plate cavity flows into the cathode cavity through holes at the base of the spring fingers on the grid connector. These holes are at such an angle that the air stream is directed at the glass seal on the cathode terminal of the tube. The air leaves the cathode cavity through holes in the bottom of the cavity.

### Power

The aural transmitter runs with a power output of 150 watts into an antenna with a gain of 16.2 db, giving an effective radiated power of 6.2 kw. When modulated with a video signal the visual transmitter has a peak power output of 300 watts into an antenna with a gain of 19.2 db, giving an erp of 25 kw. However, like most commercial transmitters, this transmitter cannot put out peak power continuously and still stay within the tube ratings. During most of the propagation tests the visual transmitter has been run unmodulated with a continuous power output of 200 watts. At this power the final power amplifier stage has a plate circuit efficiency of about 58 percent and the tube is operating well within its ratings.

### Drivers

The block diagram of the transmitter is shown in Fig. 6 and 7. The two stages using type 4X150A's and the doubler stage using a type 6161 all of which drive the finals are of the resonant-cavity type. The type 6161 doublers are operated grounded grid and have plate cavities identical with those on the final stages. The cathode cavities are resonant half-wave coaxial lines.

The 4X150A cavities are operated grounded cathode. The plate cavities are identical and are a type that is best described as being the transition between foreshortened coaxial and re-entrant cavities. The grid tanks of the 4X150A amplifiers are resonant half-wave coaxial lines. The final power-amplifier stages were the only cavity type amplifiers that required neutralization. The rest of the transmitter utilizes conventional lumped-constant circuits.

### Generation of Carriers

The frequency lock and phase modulator portion of the transmitter deserves special discussion both because of its advantages and pitfalls.

Receivers employing intercarrier sound require that the difference between picture and sound carriers be accurately maintained at the transmitter. Present FCC regulations require that the picture carrier be maintained within 1 kc of its assigned value and that the difference between picture and sound carriers be 4.5 mc ± 5 kc. The frequency stabilities corresponding to these tolerances on the upper vhf channels are approximately ±0.0005 percent for the picture carrier and ±0.002 percent for the sound carrier. The frequency stabilities required for the upper uhf channels are four times as great or approximately ±0.0001 percent for the picture carrier and ±0.0005 percent for the sound carrier.

The frequency lock is a circuit, shown in Fig. 7, that causes the picture and sound carriers to drift together, always maintaining the difference accurately. The picture carrier is generated by a chain of frequency multipliers (×108) following a crystal oscillator at 7,870.370 kc. This picture crystal frequency is also used in the frequency lock in generating the sound carrier. On the frequency lock chassis a 100-kc crystal oscillator is doubled to 200 kc and phase modulated.

This 200-kc signal is mixed with a signal from a second crystal oscillator at 1,798.843 kc. The upper sideband of 1,998.843 kc is selected and doubled to 3,997.686 kc. This signal is then mixed with a signal from the picture crystal oscillator in a second mixer. The upper sideband of 11,868.056 kc is selected and multiplied 72 times to produce the sound carrier. A little arithmetical manipulation will show that this process has reduced the sensi-

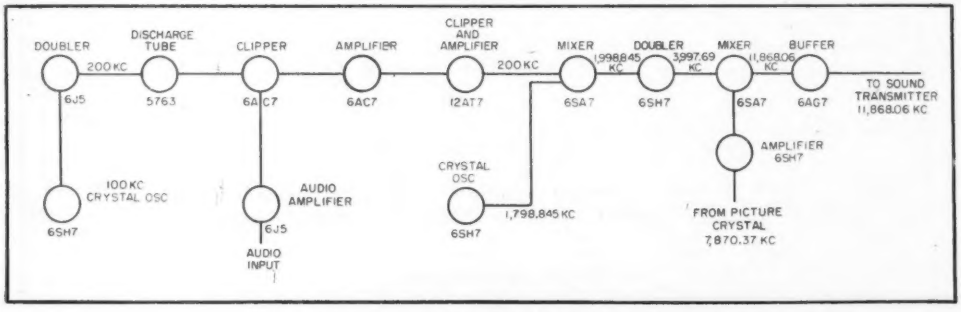


FIG. 7—Frequency-lock and phase modulator for sound transmitter

tivity of the difference between picture and sound carriers to drift in the picture crystal by a factor of one third.

There are other arrangements of the frequency lock that give more stability to the difference between picture and sound carriers. For example, it can be seen that if the frequencies in the frequency lock are chosen such that the multiplying factor following the second mixer is the same as the multiplying factor following the picture crystal that the difference between picture and sound carriers is entirely independent of drift in the picture crystal. This possibility dictates a different arrangement of the block diagram to circumvent the limited selectivity obtainable in mixer plate circuits. Since only the difference between the two auxiliary crystal frequencies is of interest, we have a great deal of leeway in choosing these frequencies. Furthermore, the block diagram can be arranged in many ways that further increase the leeway in the design of the frequency lock. That it is desirable to have several possibilities from which to choose will be shown below.

### *Undesired Modulation*

One unfortunate and unanticipated difficulty was encountered in the frequency-lock unit. It was found that the sound carrier was frequency modulated with a large frequency deviation at a modulating frequency of 125 kc. This undesired modulation of the sound carrier caused noticeable bars in the picture on receivers, especially if the receivers were not properly tuned. The trouble was found to arise in the second mixer in the frequency lock portion of the transmitter.

In this mixer a 3,997.686-kc signal is mixed with a 7,870.370-kc signal to produce an 11,868.056-kc signal that is multiplied up to obtain the sound carrier. Now there also appears in the plate circuit of this mixer an 11,993.058-kc signal derived from the product of 3× 3,997.686 and an 11,743.054-kc signal, the product of 2×7,870.370—3,997.686. Both of these differ from the desired frequency by 125 kc. The presence of these higher-order mixer components results in a phase modulation of the desired signal.

Furthermore, this undesired phase modulation must be kept to a very small value in order not to affect adversely the performance of the transmitter. This is especially true if the beat is at an audio rate. In this transmitter the frequency deviation at the sound-carrier frequency due to this beat in the mixer was nearly 2 megacycles.

There are at least three methods by which trouble from higher order mixer components can be minimized. The first, of course, is by adequate filtering, although in many cases selectivity requirements will be too great for practical circuits. A second method is by selecting the mixer frequencies so that all higher order components fall far away from the desired frequency. This is why, as is pointed out above, it is desirable to have several methods from which to choose. There are a great many possible ways of laying out the block diagram so that this can be done. The searching for the right frequencies is greatly facilitated by the use of a mixer frequency chart.[6] A third method is by the use of true square-law mixers. This condition, like the adequate filtering, is also usually difficult to achieve in practice.




FIG. 8—Audio modulation with crystal sawtooth superimposed showing slicer action (A) sliced wave (B) differentiated (C) and resultant pulses of slope portion

The sound transmitter is frequency-modulated by a phase-modulation system. The audio modulating voltage is passed through an inverse-frequency network so that true f-m results. The method of phase modulation that was used for the sound transmitter has been described previously[7,8,9] but will be briefly explained here. References will be made to Figs. 7 and 8.

### *Serrasoid Principle*

The output of the discharge tube is a 200-kc sawtooth wave whose frequency is controlled by the 100-kc crystal oscillator. This sawtooth wave superimposed upon the modulating voltage, Fig. 8A, is fed to the 6AC7 clipper which takes a thin slice, amplitudewise, out of the sawtooth. The position of this slice in the sawtooth varies according to the audio modulating voltage. This slice is amplified. The output of the amplifier is a trapezoidal wave, Fig. 8B, with width varying according to the audio modulating voltage. The edge of the trapezoidal wave corresponding to the steep side of the sawtooth wave has a relatively constant phase.

The edge of the trapezoidal wave corresponding to the sloping side of the sawtooth wave has a phase that varies up to nearly 180 deg from its center position, depending on the amplitude of the audio modulating voltage. A pulse is derived from the phase-modulated edge of the trapezoidal wave by means of differentiators, as shown in Fig. 8C, and clippers, Fig. 8D, and is used to drive a 200-kc amplifier. This phase-modulated signal is used in the generation of the sound carrier as described above. The inverse-frequency network is contained in the audio amplifier.

#### References

(1) J. R. Bennet, and L. S. Lappin, A New Ultra-High-Frequency Television Transmitter, *RCA Review*, June 1950.
(2) R. F. Guy, Investigation of UHF TV Transmission and Reception in the Bridgeport, Conn., Area," *RCA Review*, March 1951.
(3) D. W. Peterson and Jess Epstein, Effective UHF Television Broadcasting, p 102 this issue.
(4) C. E. Strong, The Inverted Amplifier, ELECTRONICS, July, 1940.
(5) P. A. T. Bevan, Earthed Grid Power Amplifiers, Wireless Engineer, June 1949.
(6) R. S. Badessa, Mixer Frequency Charts, ELECTRONICS, Aug. 1946.
(7) R. D. Kell, U. S. Patent No. 2,061,734.
(8) G. H. Brown, and W. C. Morrison, The RCA Antennalyzer, *Proc. IRE*, Dec. 1946.
(9) J. R. Day, Serrasoid F-M Modulator, ELECTRONICS, Oct. 1948.

# Transistors Operate at 300 MC

**With proper control of germanium resistivity and spacing between the emitter and collector, point-contact transistors have been made to oscillate as high as 302 mc. This development opens the field for high-frequency transistor applications**

**By G. M. ROSE and B. N. SLADE**

*Tube Department*
*Radio Corporation of America*
*Harrison, N. J.*

MANY engineers, as well as laymen, have an impression that transistors are simple to make. This impression of simplicity has led to a considerable amount of impatience because transistors are not more readily available.

Inside the transistor, however, is a complex electrical system that is as yet far from being fully understood. Many investigations are currently being made to determine the nature and cause of a variety of phenomena observed during transistor operation. It is apparent that transistors intended for use in certain classes of applications should be specifically designed for those applications. For example, transistors designed for r-f systems will probably be different from those for computer applications because the basic requirements for the two uses are not altogether similar.

Requirements for transistors used in r-f systems are gradually being met in developmental types.[1] This article discusses recent progress made in this direction on developmental point-contact transistors.

For use in r-f systems, transistors must meet two primary requirements. They must amplify substantially at the intended operating frequency and they must be electrically stable. Other desirable characteristics such as low noise, long life and low power drain are important but are of necessity secondary to the two primary requirements—frequency response and stability.

### *Frequency Response*

Power gain of 20 db or more can readily be obtained at frequencies of a few hundred kilocycles with point-contact transistors. As the operating frequency is increased to megacycles or tens of megacycles, however, maintenance of gain becomes an important problem for consideration.

At elevated frequencies, gain is affected by several factors. Some of these factors are included in the expression given by Shockley[2] for the transit time of electrons or holes through the germanium of




**FIG. 1—Effect of variation in point spacing on frequency response of a point-contact transistor**




**FIG. 2—Effect of variation in point spacing and germanium resistivity on equivalent base resistance**




**FIG. 3—Effect of variation in point spacing on frequency response and equivalent base resistance**

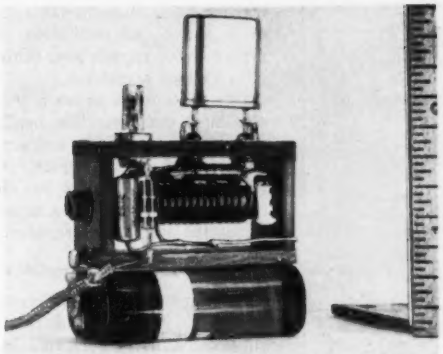

A crystal-controlled 110-mc transistor oscillator. Developmental point-contact transistor (left), quartz crystal in metal can (right)

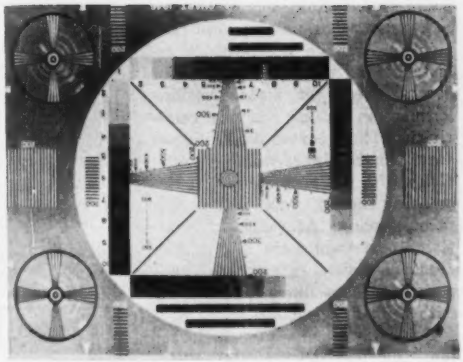

Test pattern illustrating frequency response of developmental point-contact transistor in a 20-mc video amplifier system

point-contact transistors. In this expression $T = \frac{S^2\sigma}{\mu I_e}$, T is the time in seconds required for the holes or electrons to travel from the emitter to the collector, $S$ is the contact spacing or the distance between the emitter and collector in centimeters, $\sigma$ is the conductivity of the germanium in reciprocal ohm-centimeters, $\mu$ is the mobility of the holes or electrons in centimeters squared per volt-second and $I_e$ is the emitter current in amperes.

Qualitatively, this expression indicates that the spacing between the emitter and the collector plays a major role in determining the frequency response of transistors. Other factors remaining constant, the transit time decreases rapidly as the spacing is decreased and the frequency response increases to a corresponding degree.

Because actual power gain involves considerations of circuitry, it has been found more informative to express the frequency response of transistors in terms of a current amplification factor $\alpha$ which is a characteristic of the transistor alone. The cutoff frequency is then defined as the frequency at which the current amplification factor is three db down from or 70 percent of, its low-frequency value.

Figure 1 shows a curve giving the variation of frequency cutoff with point spacing for germanium specimens having resistivities within the range of 1.2 to 4 ohm-centimeters. It would appear from the expression for transit time that, as the germanium resistivity increases, the frequency response also increases. Actual measurement, however, indicates that an increase in resistivity from 1.2 to 4 ohm-centimeters has little effect on the frequency response. These measurements were made by varying the spacing of two point contacts on specimens of single-crystal germanium.

The curve in Fig. 1 follows the $S^2$ function fairly closely. Because the frequency-cutoff values increase rather rapidly as the contact spacings become relatively narrow, it might be assumed that there would be almost no limitation to frequency response if extremely narrow spacings could be achieved. Extremely narrow spacings, however, introduce both mechanical and electrical problems. The mechanical problem lies in the difficulty of maintaining adequate control of such small spacings. The electrical problem involves considerations of transistor gain and stability.

### Stability

Both the stability and the frequency response of point-contact transistors are affected by the characteristics of the germanium as well as by the contact spacings. These transistors have a tendency to become unstable and to oscillate in amplifier circuits in which there is little or no impedance in series with the emitter or the collector. This oscillation is undesirable in r-f stages having parallel-tuned circuits in both the input and output of the transistor because the impedance of the tuned circuits approaches zero during off-resonance.

### Feedback Considerations

The instability of the point-contact transistor is due to an internal positive feedback that is a function of both the current amplification factor and an internal feedback resistance. The value of this feedback resistance is a measure of the effect of the output current on the input voltage. The stability of the transistor can be improved by reducing either the feedback resistance or the current amplification factor. If the latter becomes equal to or less than unity, the transistor is unconditionally stable.

In junction transistors, the current amplification factor is always equal to or less than unity and, therefore, there is no problem of instability. In point-contact transistors, however, it is not practical to obtain very low values of current amplification factor because a corresponding loss in power gain would result. Current-amplification-factor values for point-contact transistors usually are greater than two. By properly controlling the resistivity of the germanium, the feedback resistance may be maintained at sufficiently low values to permit stable amplifier operation at

radio frequencies.

Figure 2 shows a measured relationship between the feedback resistance and the point spacing for several pieces of monocrystalline germanium having varying resistivities. These curves illustrate two facts. At the higher values of resistivity, the feedback resistance increases rapidly with decreasing point spacing. At values of resistivity of two ohm-cm or less, the feedback-resistance values approach a more linear relationship with the point spacing.

For a given value of point spacing, the feedback resistance decreases with decreasing resistivity values. If Fig. 1 and 2 are superimposed, as shown in Fig. 3, it becomes apparent that if a very small value of point spacing (say 0.001 inch) is selected in order to get a high value of frequency cutoff, it would be necessary to use a low value of germanium resistivity to maintain a low value of feedback resistance.

A feedback resistance of 100 ohms or less will usually be sufficiently small to assure stable transistor amplifier operation. With a spacing of 0.001 inch, a resistivity less than 2 ohm-cm would be necessary to obtain such a value of feedback resistance. Figure 4 shows the frequency-response characteristic of a stable transistor having a frequency cutoff of 30 mc made using these techniques.

### Switching Circuits

Although the technique of proper selection of point spacing and germanium resistivity discussed is used primarily to produce the stable transistors required for r-f applications, this technique is also useful in the design of point-contact transistors for certain other applications such as switching circuits. In such applications the internal feedback of the transistor can be high because short-circuit stability is not required. Suitable values of resistivity and point spacing for this type of application may also be selected by this technique.

Transistors will oscillate at frequencies somewhat higher than the frequency at which the current amplification factor drops three db.




FIG. 4—Frequency-response characteristic of developmental point-contact transistor




FIG. 5—Schematic diagram of transistor oscillator circuit

For instance, a transistor having a frequency cutoff of four mc may oscillate at frequencies as high as 10 megacycles or more because the current amplification factor and the power gain at these higher frequencies would be sufficient to enable oscillations to occur. By utilizing point spacings of less than 0.001 inch, it is possible to achieve cutoff frequencies of 30 mc or more and thus make possible oscillations at even higher frequencies.

With spacings of approximately 0.0005 inch, transistors have been made that will oscillate at frequencies well above 100 mc. A number of units have oscillated at frequencies greater than 200 mc and the highest oscillation frequency reached to date has been 302 megacycles.

### Oscillator Circuit

Figure 5 shows the schematic diagram of the oscillator used in these tests. This circuit is interesting in that the emitter is apparently isolated for r-f by the 5,000-ohm resistor. The feedback required for oscillation is provided by the internal capacitance between emitter and collector. The bypassed resistance in the base circuit together with the series resistance in the emitter circuit determines the emitter bias. With suitable choice of $L$ and $C$, an oscillation range from 5 to 300 mc has been achieved, with a single transistor.

One photograph shows a crystal-controlled demonstration oscillator that operates at 110 megacycles. The seventh-overtone quartz crystal, operating in its low-impedance mode, replaces the bypass capacitor across the series base resistor.

### Transistor R-F Amplifier

Performance of transistors in r-f amplifiers is more difficult to evaluate than oscillator performance because of the more complicated circuitry. There are indications, however, that stage gains of 20 db at frequencies well above five mc are possible with no instability arising from internal feedback in the transistor.

Developmental point-contact transistors have been tested in a wideband video system. A second photograph shows a television test pattern after transmission through a 20-mc chain, one stage of which was a point-contact transistor. The gain of this stage was not maximized and was only slightly greater than the $\alpha$, or current amplification factor of the transistor. Nonstandard scanning rates were used to give an equivalent balanced resolution of almost 900 lines. The presence of the transistor stage did not visibly degrade the pattern.

From the data given in this paper, it is apparent that the point-contact transistor can be successfully used in r-f applications. At the present time, junction transistors are somewhat superior to point-contact types with respect to stability and thus promise greater flexibility in amplifier applications. So far, point-contact transistors are capable of operation at higher frequencies than junction transistors, particularly as oscillators. With the proper control of point spacings and germanium resistivity, point-contact types can be made having a high degree of stability in suitable applications.


REFERENCES

(1) B. N. Slade, The Control of Frequency Response and Stability of Point-Contact Transistors, *Proc. IRE*, Nov. 1952.

(2) W. Shockley, "Electrons and Holes in Semiconductors", D. Van Nostrand, 1950.

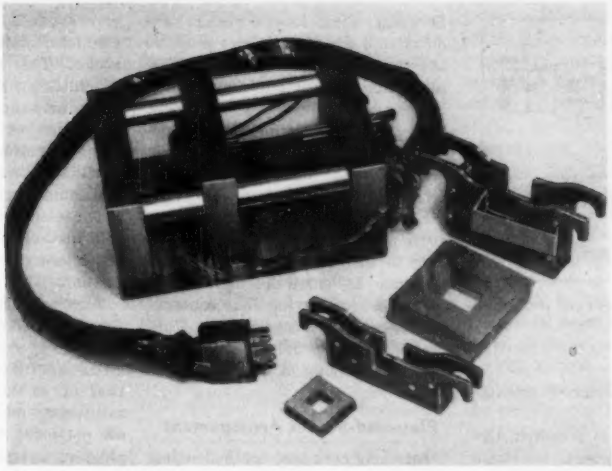

Fixture incorporating the four-contact plug. Two sizes of cores of square gapless laminations together with the appropriate jigs for holding them are shown

# Magnetic-Amplifier Gapless-Core Tests

**Production test method approximates actual amplifier operating conditions without requiring use of test coils on closed cores. Provides basis for matching sets of cores for balanced amplifiers as well as for acceptance or rejection of individual cores**

**By J. R. CONRATH**
*Vickers Electric Division*
*Vickers, Inc.*
*St. Louis, Missouri*

AN IDEAL METHOD of testing cores for magnetic amplifier reactors would be one providing sufficient data to predict accurately the control characteristic of the amplifier.

Some early analyses replaced the actual B-H relationship in the core with the normal d-c magnetization curve while others employed simplified curves consisting of three straight-line portions. Neither of these assumptions gives satisfactory results for materials having rectangular hysteresis loops since they do not predict maximum output for zero control current.

A more realistic analysis[1] employs the d-c hysteresis loop of the core material in predicting the control characteristic of a self-saturating amplifier. It is assumed that the flux at the start of the supply-voltage cycle, the premagnetization, varies along the back flank of the d-c hysteresis loop as the control current is varied. Although there is a substantial correlation between predicted and measured curves, this method is in error because it neglects the effect of eddy currents. When high-permeability core materials are used, the eddy-current effect is important even with lamination thicknesses of a few thousandths of an inch and at a frequency of 60 cycles.

It has been shown[2] that the premagnetization in a self-saturated magnetic amplifier is indicated not by the back flank of the d-c hysteresis loop nor by the symmetrical a-c loop, but by an intermediate curve. This has been called the control magnetization curve. It is the locus of the tips of the biased dynamic hysteresis loops through which the core material is driven




**FIG. 1—Core test circuit (A) and half-wave amplifier circuit (B)**

when the control current of the amplifier is varied.

If the foregoing is accepted, the choice of an efficient core-test method may be reduced to consideration of the most convenient way of measuring the control magnetization curve. This can be done readily by operating the reactor in an actual half-wave self-saturating amplifier. The voltage induced in a pickup coil can be integrated by an R-C network to provide the flux wave and permit the tracing on a cathode ray oscilloscope of the dynamic hysteresis loops.

### Test-Winding Requirements

The foregoing method, in common with other test methods involving hysteresis curve tracing, requires a pickup coil of a considerable number of turns. The induced voltage at 60 cycles is only a few millivolts per turn for small magnetic amplifier reactors, particularly those employing core materials such as Mumetal, which has a low value of saturation induction. Since there is necessarily a high attentuation in the integrating networks of circuits for hysteresis curve tracing, the need for a pickup coil of many turns is apparent.

This requirement may present no serious difficulty in the case of cores in which an air gap is present because the laminations may be stacked around coil forms on which any desired number of turns have been wound. If only a limited number of closed cores are to be tested, the expense of winding the requisite number of turns might not be too great. Where thousands of amplifiers employing closed cores are produced and where each core must be individually tested, it is impractical to provide a winding of many turns. Instead of using coils for these closed cores a winding for test purposes may be obtained by passing a plug through the window of the core and into a socket.

Since it is necessary in the production of Vickers magnetic amplifiers to test cores having window openings as small as about $\frac{3}{8}$-in. square, a plug having four contacts was deemed the most practical. This can be used to provide one or more windings having a total of four turns.

### Plug-and-Socket Arrangement

An early core test method using the plug-and-socket arrangement involved measuring the normal a-c magnetization curve. Two of the turns were used as an excitation winding through which a specified sinusoidal alternating current was passed. The other two turns were employed as a pickup winding and the voltage induced in them was measured with a vacuum-tube voltmeter. In this way several points on the magnetization curve were obtained.

A single four-turn winding could have been used for both excitation and pickup, but the isolated windings are better because they avoid errors due to voltage drop in the contact resistance of the plug and socket. This type of test is useful in matching sets of cores for balanced amplifiers and provides some indication of the performance of cores in self-saturating amplifiers. The correlation between test results and amplifier characteristics was not considered satisfactory since this method gives no indication of either coercive force or residual induction.




**FIG. 2—Correlation of core test data with performance of half-wave magnetic amplifier. Pickup voltage in core test at 60 cycles (curve A), maximum supply voltage to amplifier for cutoff (curve B) and d-c output voltage times 2.2 of amplifier with supply voltage of 13.2 mv per turn (curve C)**

Another circuit requiring only a few turns to test a magnetic amplifier core is shown in Fig. 1A. The circuit configuration here resembles that of an actual half-wave self-saturating magnetic amplifier. An a-c potential of a few volts is applied to an excitation circuit consisting of a half-wave rectifier and a current-limiting resistor. Voltage is held to a low value so that rectifier leakage will be negligible. A control winding is provided through which an adjustable amount of pure d-c is caused to flow. This circuit contains a high impedance to prevent appreciable current from flowing as a result of voltage induced in the control winding. A vacuum-tube amplifier and a germanium diode rectifier voltmeter permit the measurement of the voltage induced in the pickup winding.

### Control Current

The control current sets the initial value of flux in the core. A half-wave current flows in the excitation winding which, during each cycle, drives the flux from this initial value into saturation and back again. The amplitude of this flux wave is indicated by the diode voltmeter since it measures the average value of the induced voltage. By measuring the flux change for several values of control current and subtracting it from the saturation flux, points on the control magnetization curve may be obtained. It is more convenient, however, to plot the induced voltage per turn against the control ampere-turns.

The pickup voltage curve is a good indication of the maximum supply voltage which can be used in an actual half-wave magnetic-amplifier circuit, Fig. 1B, as a function of control ampere-turns at cut-

off. An experimental illustration of this is offered in Fig. 2. Curve *A* represents the pickup voltage per turn at 60 cps of a AEM4750 core having a cross-section of 0.08 square inch and a mean-length magnetic path of 3 inches, when an average half-wave excitation of 1.3 ampere-turns is applied. Curve *B* shows the measured value of supply voltage per turn in the amplifier of Fig. 1B which for each value of control allows a load current to flow whose mmf corresponds to that used in testing the core. The fact that the measured supply voltage slightly exceeds the pickup voltage can be ascribed mainly to the forward voltage drop of the rectifier in the amplifier circuit.

The control swing required to drive the amplifier from cutoff to full output with a given supply voltage may be determined from this type of core test, if rectifier leakage is negligible. The control ampere-turns for cutoff are determined from the pickup voltage curve, Fig. 2, curve *A*, knowing the supply voltage per turn of the output winding and making a suitable allowance for rectifier forward voltage drop. The control ampere-turns for full output of the amplifier can be found by taking the abscissa of a point at the lower knee of the pickup voltage curve.

The control characteristic of a half-wave self-saturating amplifier using the same core appears as curve *C* of Fig. 2. In this case, the output is plotted on a voltage-per-turn basis and the load resistance is assumed to include the output winding resistance. Sufficient cells were used in the rectifier to insure negligible leakage current.

A definite correlation can be noted between the shape and position of the control characteristic and the pickup voltage curve. This can be seen from the fact that in the amplifier, the sum of the reactor voltage, the output voltage and the rectifier forward voltage drop should equal the supply voltage. Therefore, the output voltage of the amplifier increases as the reactor voltage decreases and the knee of the control characteristic occurs at the same value of control mmf as the lower bend of the pickup voltage curve.

The difference between the amplifier full output voltage and the supply voltage is due to rectifier forward voltage drop and to the fact that the reactor still possesses appreciable inductance at points above the knee of the control characteristic.

To get a direct comparison of curves *A*, *B* and *C* of Fig. 2, certain conventions must be observed. The vacuum-tube amplifier and diode voltmeter combination is calibrated on sine wave a-c, therefore the voltmeter indications show 1.1 times the average value of the induced voltage. The load voltage for curve *C* was obtained by multiplying by




**FIG. 3—Correlation of core test data with performance of half-wave magnetic amplifier with Deltamax core. Pickup voltage in core test at 60 cycles (curve A) and d-c output voltage times 2.2 of amplifier with supply voltage of 52.8 mv per turn (curve B)**

2.2 the actual load voltage as measured with a d-c meter. The use of these factors results in the comparison in Fig. 2 of 1.1 times the average value of each voltage taken over the forward half cycle of supply voltage.

Figure 3 shows the pickup-voltage curve obtained in the core test and a control characteristic for a half-wave amplifier using a reactor wound on a core of square Deltamax laminations. The cross-section of this core is 0.174 square inch and the mean length of magnetic path is 4.4 inches. The output winding has 700 turns. As before, there is a good correlation of results in the core test and the amplifier characteristic.

It should be pointed out that operating conditions in this core test circuit differ in at least two respects from those in the actual amplifier. In the amplifier the core excitation varies with control signal; at cutoff the core is driven only slightly beyond the knee of the hysteresis curve, while at full output it is driven far into saturation.

In the core test, a constant excitation was used for all values of control. It corresponds to that at cutoff in the amplifier. For this reason, the pickup voltage curve as measured in the core test has a somewhat lower value than the induced voltage in the amplifier for the full output condition. It would probably be worth while to increase the excitation in obtaining points at the lower end of the curve in the core test.

Since the reactance of the excitation winding is negligible compared with the current-limiting resistor, the excitation current will have the waveform of a rectified sine wave. This means that if the excitation is sufficient to drive the core considerably beyond the knee of the hysteresis curve, the core will traverse the steep part of the curve in a relatively short part of the cycle. The flux wave in the core test circuit will then be much steeper than that in the amplifier circuit, and the induced voltage wave will be sharply peaked instead of being a sine wave or portion of a sine wave. The more sudden change of flux will evidently modify the effect of eddy currents in the core test circuit as compared with the actual amplifier circuit. However, in view of the test results obtained, this difference in the eddy-current effect is not thought to be of great importance.

It is believed that the method described in this paper provides a test which satisfactorily approximates actual amplifier operating conditions without requiring the use of test coils on closed cores. It provides a basis for matching sets of cores for balanced amplifiers as well as for the acceptance or rejection of individual cores.

### References

(1) W. J. Dornhoefer, Self-Saturation in Magnetic Amplifiers, *AIEE Transactions*, **68**, 1949.

(2) Henry Lohman, Predetermination of Control Characteristics of Half-Wave Self-Saturated Magnetic Amplifiers, AIEE Technical Paper No. 51-387.

# Diode Limiters Simulate




FIG. 1—Basic amplifier-diode circuits




FIG. 2—Idealized diode circuits


**By C. D. MORRILL and R. V. BAUM**

*Goodyear Aircraft Corp. Akron, Ohio*


THERMIONIC DIODES are useful in analog computers for simulation of nonlinear characteristics. Amplifier-diode circuits may be used to represent systems having two or more discrete operating regions. They may be made accurate and precise and their speed is better than that of corresponding relay circuits. Standard stabilized computing amplifiers may be used.

### Basic Circuits

Figure 1 shows four basic amplifier-diode circuits that will be used as prototypes of other electronic switching circuits to be described. Input limiters are amplifier-diode circuits employing one or more diodes in the input circuit. Output limiters are those employing one or more diodes in the feedback circuit. Shunt limiters decrease current through the summing node by diode conduction. Series limiters increase current through the summing node by diode conduction.

The shunt-input limiter shown in Fig. 1A is probably most familiar to users of electronic differential analyzers. Normal scale changing is provided until the input voltage reaches a certain value above or below which one or the other diode conduets. For inputs in excess of this limiting value, output is nearly constant. Similar performance is obtained with the series-output limiter which is approximately the dual of the shunt-input limiter. The advantage of the shunt-input limiter is that single-ended, low-impedance bias sources are easily furnished. An advantage of the series-output limiter is its higher switching speed and greater operational flexibility. The circuit of Fig. 1D may have extremely high gain for small signals and almost zero incremental gain for large signals. This type of operation is less feasible with the circuit of Fig. 1A.

The circuits of Fig. 1B and 1C perform similar operations. Incremental gain is small for small signals and large for large signals. The series limiter, however, offers greater flexibility since, by eliminating the resistor shunting the diodes of Fig. 1C, zero gain for small signals is possible.

Many variations of the four basic circuits are possible. A resistor may replace a short circuit, or a short or open circuit may replace a resistor. One important variation is shown in Fig. 2, which illustrates a method of idealizing the characteristics of a thermionic diode. The departure from the ideal, neglecting leakage, is twice the voltage across the diode divided by the gain of the amplifier. This error will usually be on the order of tens of microvolts. The idealized diode will be applied in some of the computing circuits to follow.

The circuit shown in Fig. 3A is a dead-space simulator. Its operation is analogous to devices having a definite threshold of sensation or activity. The circuit of Fig. 3B has similar characteristics but offers

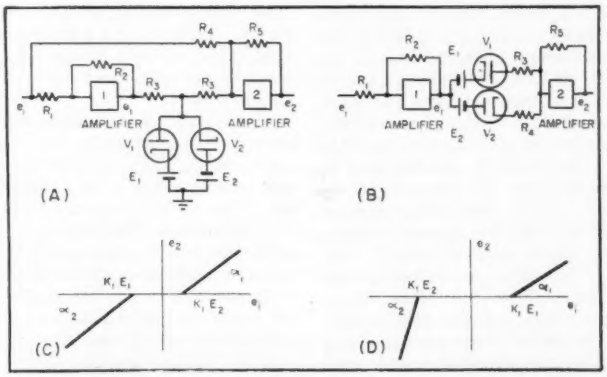


FIG. 3—Electronic dead-space simulator is analogous to mechanical devices having definite threshold of sensation or activity

# Mechanical Phenomena

**Analog computers use diode limiters to simulate apparatus characterized by two or more discrete operating conditions. Basic limiter circuits are described. Applications are shown in study of cam-operated engine valve and simulation of static and coulomb friction**

two advantages. First, no resistor matching is required to produce zero gain at small input signals. In some applications, mismatched resistors in the circuit of Fig. 3A may cause an undesirable drift. Second, in the series limiter it is more convenient to control independently the gains for positive and negative signals. This effect is shown in Fig. 3D.




**FIG. 4—Dead-space simulator presents analogy of backlash in gear assembly**

Figure 4A illustrates a circuit for simulating backlash as may occur in a gear assembly. It employs the dead-space simulator. Assume that $R_1$, $R_2$, $R_3$, $R_4$ and $R_5$ are equal and that the time constant $R_4C_1$ is very small. Assume further that the voltage across $C_1$ is initially zero. If the input voltage is zero and increasing positively, the output voltage $e_3$ will remain zero until the input voltage is equal to $E_2$. At this point, $V_3$ conducts, and amplifier 3 integrates until the output voltage $e_3$ is just large enough to cause $V_3$ to cut off. Further increases in $e_1$ result in equivalent decreases in $e_3$, and voltage $e_3$ may be said to follow $e_1$. This action continues until $e_1$ reverses direction; $e_3$ then remains constant until $e_1$ has changed by a quantity sufficient to turn on $V_1$. The action continues in this way, tracing a loop or loops, as shown in Fig. 4B.

Figure 5A is a simple comparator circuit. Amplifier gain is sufficiently high that the output $e_3$ is limited by either $V_1$ or $V_2$ except for negligibly small inputs. Thus, $e_3$ must be either $E_1$ or $E_2$, depending on the sign of $(e_1 + K)$. The circuit has high gain during the transition from one state to another and almost zero gain in either of the stable states. The voltages $e_A$, $e_B$ and $e_C$ are shown in Fig. 5B, 5C and 5D respectively. Any one of the three output voltages may be used to switch other amplifier-diode circuits or may be applied to an integrator for initiating a timing operation. It should be noted that $K$ may be replaced by a variable to obtain an indication or initiate a process when one variable exceeds another.

The comparator is applied in a bistable multivibrator as shown in Fig. 6A. Comparison voltage is zero. Positive feedback is provided by amplifier 2 during the transitions and stability is reached when $e_1$ is either $E_1$ or $E_2$. If $R_2$ is equal to $R_3$, switching will occur whenever $e_1$ is equal to $e_3$. A graph of the output voltage is given in Fig. 6B.

### *Sweep Generator*

The bistable multivibrator is used in the sweep generator shown in Fig. 7A. Assume all resistors are equal, and that $E_1$ is equal to $E_2$. If $e_1$ is positive, the output of amplifier 3 will decrease until it is equal in magnitude to $e_1$. At that point, $e_3$ changes sign and $e_1$ steps to a negative voltage, reversing the process. Steady-state waveforms are shown in Fig. 7B.

Figure 8A is a precision version of the sweep generator shown in Fig. 7. It shows that precision versions of amplifier-diode circuits are generally possible. The trick in

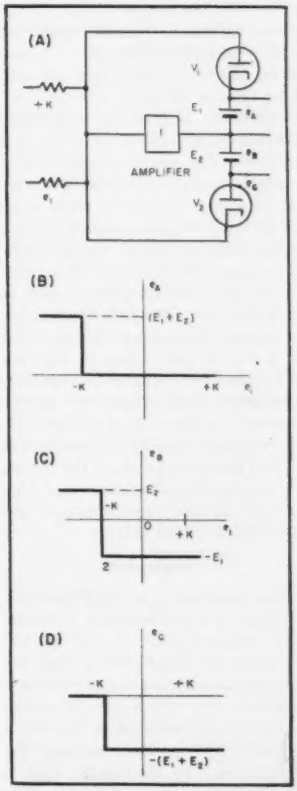


**FIG. 5—Comparator circuit shows diodes used in another switching operation**




FIG. 6—Bistable multivibrator uses comparator circuit

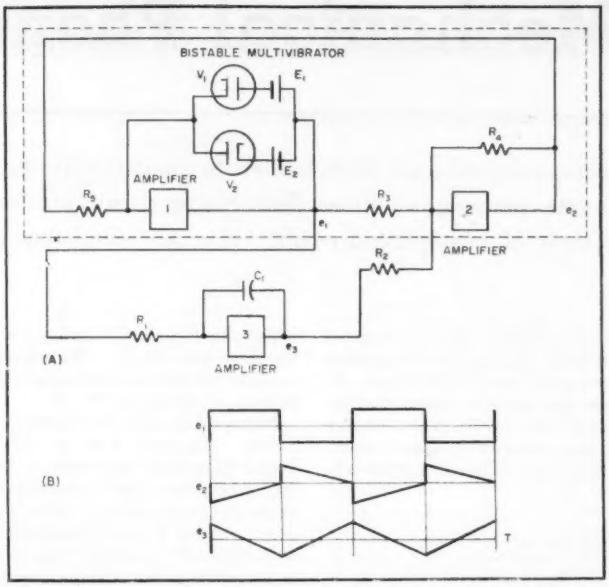


FIG. 7—Sweep generator employs bistable multivibrator circuit. Steady-state waveforms are shown

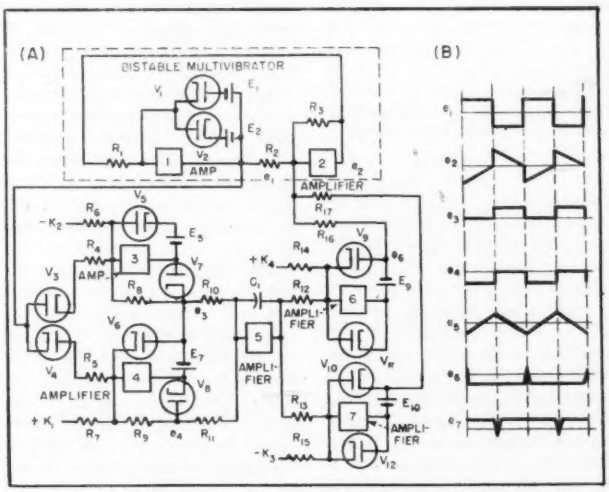


FIG. 8—Precision sweep generator uses ordinary diodes as switches to control idealized diodes

such applications is to use ordinary diodes as switches to control idealized diodes. This basic method may be used to turn a variable voltage on or off as a result of coincidence of two other variables.

Usually the use of the idealized diode to secure precise operation will require more equipment. Quite often, however, precision circuits may require no more, or even less, equipment. Figure 9A is a modification of the idealized diode and produces the absolute value of a variable voltage. Amplifier 1 is called a sign-separator since each of the two outputs, *A* and *B*, furnishes only one sign of the variable. The output of amplifier 1 is applied to the input of amplifier 2 only if $e_i$ is positive. The gain from input to output through amplifiers 1 and 2 is +2 if the input is positive and zero if the input is negative. The gain from input to output through amplifier 2 is always −1. Under these conditions the output is the absolute value of the input, as in Fig. 9D. Variations of this circuit permit the rotation and translation of the origin.

### Examples

One application of amplifier-diode circuits is the simulation of static and coulomb friction. A typical situation is illustrated in Fig. 10. Two cases are considered: the first involves use of a double-acting spring that provides a restoring force for both positive and negative deflections. In the second case, a single-acting spring is used. The equations of motion for each case are shown. These equations imply statements such as: the frictional force is equal and opposite to all applied forces as long as the velocity of the block is zero, and until the sum of the applied forces is equal to or greater than some fixed value.

The circuit for solving the double-acting spring problem is shown in Fig. 11. It is assumed that stiction is equivalent to infinite viscosity, a condition which may be simulated by a short circuit across $C_1$ for zero velocities. A very close approximation to a short circuit across $C_1$ is effected by a high-gain negative-feedback path around

amplifier 1 provided by amplifiers 3 and 5. The effective resistance across $C_1$ is then $R_1$ divided by the gain through amplifiers 3 and 5. Since this gain may easily be 10,000 or more, the effective resistance across $C_1$ may be approximately 100 ohms. The error due to this approximation is less than that which would be caused by an amplifier 2 grid current of $10^{-9}$ ampere.

### Spring Problems

When the velocity, $\dot{X}_o$, is zero, all diodes are off. As $X_i$ is increased, a point is reached when the output of amplifier 3, which is following $X_i$, is limited by either $V_1$ or $V_2$. At this point the large damping is removed and the velocity is free to change. A very small change in $X_o$ turns on one diode of each pair. Diodes $V_3$ and $V_4$ prevent overloading of amplifier 3. When $V_3$ or $V_4$ is on, $V_5$ and $V_7$ or $V_6$ and $V_8$ are also on, and the limited outputs of amplifiers 3 and 4 provide a steady opposing voltage corresponding to the coulomb friction. Voltage dividers have replaced the batteries used with diodes in previous illustrations.

The input and output functions are also shown in Fig. 11. No motion occurs until the wheel has moved sufficiently far to break static friction. There is overshoot and restoring action due to the spring. The block comes to rest with a small positive force still applied. In this particular example, sliding friction was approximately half static friction.

Figure 12 shows the single-acting spring problem. Amplifier 5 is sensitive only to positive errors. Because of gating action of amplifier 5, a separate feedback path must be provided for frictional forces. This is accomplished by amplifier 6. Results of this simulation are also shown in Fig. 12. The block moves in spurts and although there is overshoot, there is no restoring action.

### Cam Problems

As a second example of the use of diodes in computing circuits, consider the motion of a valve operated by a cam. This problem involves stiffness ratios on the order of 2,000 to 1. The data for this problem were obtained from the HAL engine, well known in the racing engine field. Top speed of this engine is about 4,000 rpm.

Figure 3 illustrates the problem, defines the quantities and lists three




FIG. 9—Idealized diode gives absolute value of variable voltage

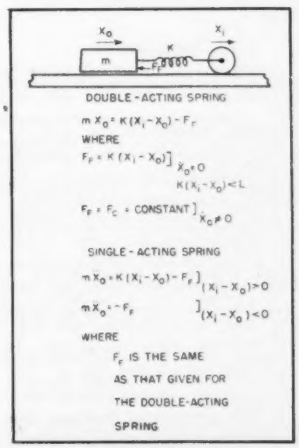


FIG. 10—Problem requiring simulation of static and coulomb friction

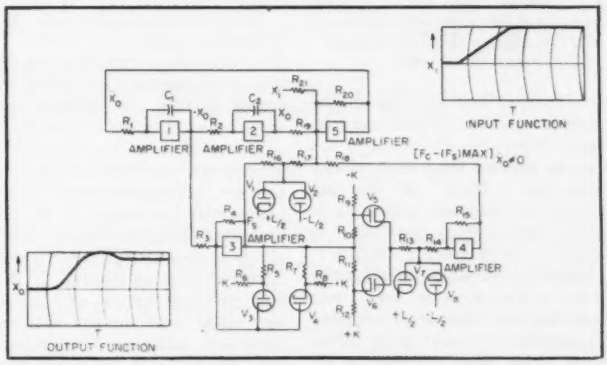


FIG. 11—Solution for case wherein block is accelerated from rest by force applied through double-acting spring

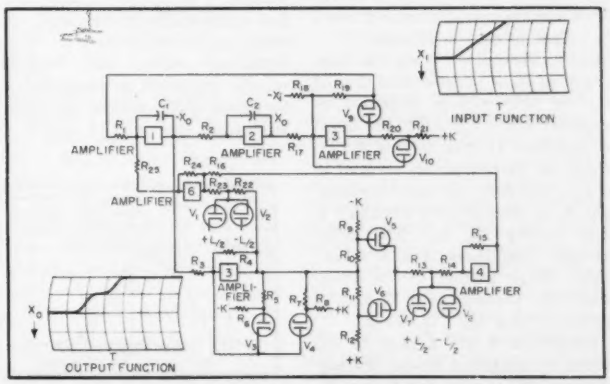


FIG. 12—Solution for case wherein block is accelerated from rest by force applied through single-acting spring

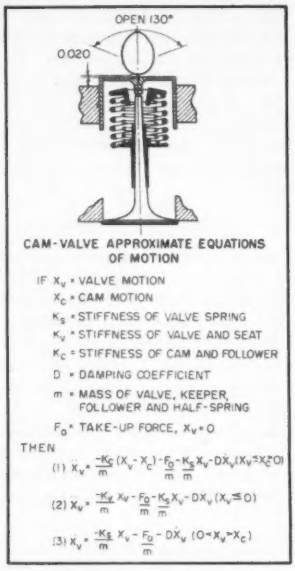
OPEN 130°
0.020
CAM-VALVE APPROXIMATE EQUATIONS OF MOTION
IF $X_V$ = VALVE MOTION
$X_C$ = CAM MOTION
$K_S$ = STIFFNESS OF VALVE SPRING
$K_V$ = STIFFNESS OF VALVE AND SEAT
$K_C$ = STIFFNESS OF CAM AND FOLLOWER
D = DAMPING COEFFICIENT
m = MASS OF VALVE, KEEPER, FOLLOWER AND HALF-SPRING
$F_0$ = TAKE-UP FORCE, $X_V = 0$
THEN
(1) $\ddot{X}_V = \frac{-K_C}{m}(X_V - X_C) - \frac{F_0}{m} - \frac{K_S}{m}X_V - D\dot{X}_V \; (X_V \leq X_C < 0)$
(2) $\ddot{X}_V = \frac{-K_V}{m}X_V - \frac{F_0}{m} - \frac{K_S}{m}X_V - D\dot{X}_V \; (X_V \leq 0)$
(3) $\ddot{X}_V = \frac{-K_S}{m}X_V - \frac{F_0}{m} - D\dot{X}_V \; (0 < X_V < X_C)$

**FIG. 13—Problem involving cam-operated engine valve**

equations of motion only one of which is valid at any particular instant. When the $X$-position of the cam is greater than that of the valve, Eq. 1 holds. If the cam follower and cam are not engaged, Eq. 3 holds unless the valve is seated, in which case Eq. 2 holds.

These equations are solved as shown in Fig. 4. Amplifiers 1 and 2 are the two integrators required for solution of second order equations. The terms common to all three equations, those due to the valve-spring, are provided by amplifier 3 and the potentiometer marked $F_0$. Cam motion is provided by a function generator. When the magnitude of $X_C$ is greater than that of $X_V$, the difference is amplified by amplifier 5 and applied to the input of amplifier 1, thus solving Eq. 1. When the valve position is equal to or less than zero, the valve is seated and $X_V$ is amplified by amplifier 4, thus solving Eq. 2. The gains through amplifiers 4 and 5 are high. When neither of the above conditions pertain, both $V_1$ and $V_2$ are cut off and Eq. 3 is solved.

Amplifiers 4 and 5 may be replaced by idealized diodes thereby eliminating the need for $V_1$ and $V_2$. This further shows that the more precise method will often be the simpler one.

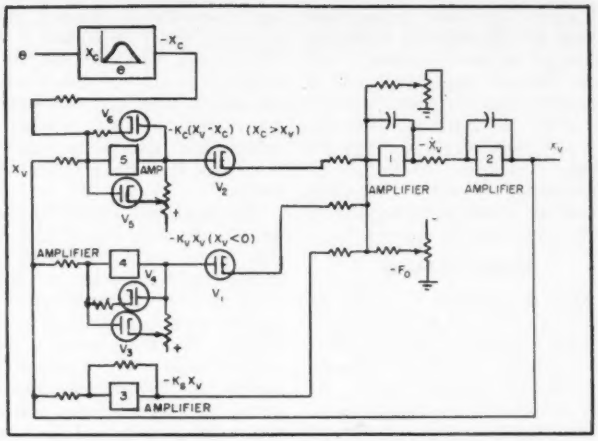


**FIG. 14—Solution of cam-operated engine-valve problem using amplifier-diode circuits. Cam motion is provided by function generator**

The results of the cam-valve simulation are shown in Fig. 15. The solid line is a development of the cam surface and is also the path traced by the cam follower and valve. As the speed of the engine is increased, a point is reached beyond which the valve cannot follow the cam. Hammering, override and bounce result as shown by the broken line. Since this was part of a racing engine, it was running near top speed much of the time. It had been observed that the cam showed very little wear on one side and there was evidence of hammering near the peak of the cam. This fact had not previously been explained. Furthermore, valve stems had occasionally broken, due, perhaps, to the final bouncing. In the simulated valve, the bouncing rapidly increased in magnitude as the speed of the engine was raised. Increasing the engine speed by about 10 percent increased the height of bouncing about 300 percent.




**FIG. 15—Results of cam-valve simulation**

## Conclusions

The thermionic diode is a useful circuit element in simulating nonlinear characteristics. Amplifier-diodes may be used to simulate systems characterized by two or more distinct operating regions or conditions separated by abrupt boundaries. They can be made quite accurate and precise. Their speed is at least of an order of magnitude faster than that of corresponding relay circuits and standard stabilized computing amplifiers may be used.

### Bibliography

J. R. Ragazzini, R. Randall and F. A. Russell, Analysis of Problems in Dynamics by Electronic Circuits, *Proc IRE*, May 1947.

G. A. Korn, Elements of D-C Analog Computers, ELECTRONICS, Apr. 1948.

G. A. Korn and T. M. Korn, "Electronic Analog Computers", McGraw-Hill Book Co., New York, 1952.

G. D. McCann et al., Electrical Analogy Methods Applied to Servomechanisms Problems, *Trans AIEE*, p 91, Feb. 1946.

G. D. McCann and C. H. Wilts, Analysis of Nonlinear Control System with the Analog Computer, *Electronic Eng.*, p 1,104 Nov. 1948.

G. D. McCann et al., Electronic Techniques Applied to Analog Methods of Computation, *Proc IRE*, p 954, Aug. 1949.

E. L. Harder and G. D. McCann, A Large-Scale General-Purpose Electric Analog Computer, *AIEE Tech Paper* 48-112, 1948.

D. Fidelman, Electronic Computer Applications, *Radio-Electronic Eng*, p 3, March 1949 and p 6, Apr. 1949.

G. A. Philbrick, Designing Industrial Controllers by Analog, ELECTRONICS, p 108, June 1948.

A. C. Cook and F. J. Maginniss, More Differential Analyzer Applications, *GE Review*, p 14, Aug. 1949.

E. Lakatos, Problem Solving with the Analog Computer, *Bell Labs Record*, March 1951.

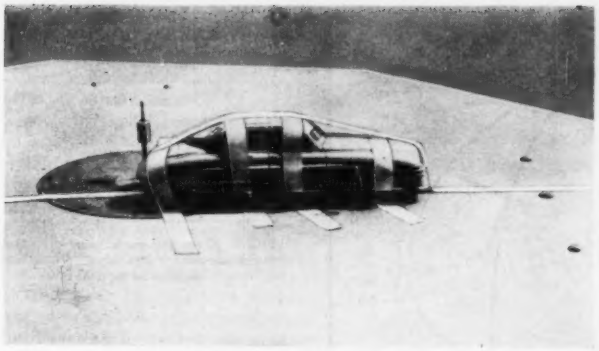

Toy auto provides scaled-down vehicle for antenna measurements using microwaves to check vhf and uhf systems

Turntable ground plane permits use of stationary measuring equipment

# Investigating Antennas For UHF Mobiles

**Scale-model test setup using inexpensive toy car mounted on turntable ground plane yields useful information on radiator characteristics for mobile services in present 150-mc band and new 450-mc band**

**By EDWARD F. HARRIS**
*Chief Engineer*
*Mark Products Company*
*Lincolnwood, Illinois*

WHEN the mobile services were confined to frequencies below 30 megacycles the antenna problem was mainly one of providing enough physical length to obtain a reasonable degree of radiation efficiency. Pattern considerations were secondary and almost nonexistent since there was little choice in the mode of operation.

The move to higher frequencies in the 150-mc region came as the mobile services were about to experience a large expansion and vehicular antennas seem to have evolved from their low-frequency predecessors to the familiar quarter-wave roof mounted whip. Recently, units such as the bumper mounted coaxial dipole have seen application but so far as is known there has been no real effort to manufacture more useful radiators or even to investigate thoroughly the pattern properties of those in general use with a view toward an evaluation of system efficiency.

### 450-Mc Mobile

At this time the field is about to experience another expansion to still higher frequencies in the 450-mc region. Early experimenters have carried the old antenna techniques a step further and are employing the quarter-wave whip antenna with fair results. The physical length of this unit is now about 6 inches overall and it becomes apparent that some means of increasing the aperture and thus gain is generally to be desired. The physical length of an 18-inch whip has been well accepted and it is possible that even longer units would not be objectionable from an appearance standpoint.

This paper approaches the an-

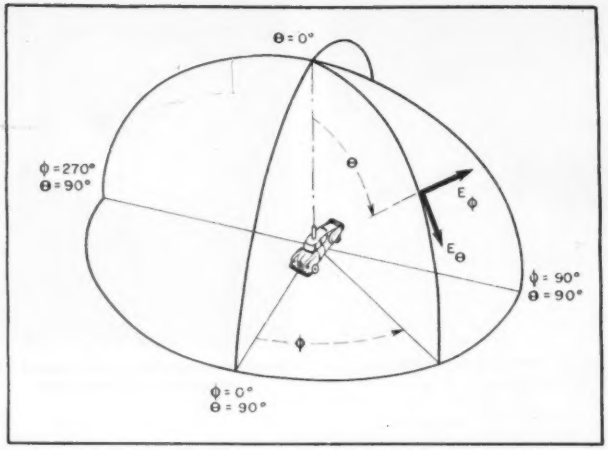


FIG. 1—Vehicle is assumed to be in center of co-ordinate system as shown




| d MILES | d FEET | θ DEG-MIN |
|---|---|---|
| 0.5 | 2,640 | 2° 10' |
| 1.0 | 5,280 | 1° 5' |
| 2.0 | 10,560 | 0° 34' |
| 10.0 | 52,800 | 0° 6.5' |
| 20.0 | 105,600 | 0° 3.5' |
| 30.0 | 158,400 | 0° 2.5' |

FIG. 2—Over flat earth, most direct-ray communication takes place within one degree of horizon

tenna problem from the standpoint of an analysis of systems in use today with the thought that an understanding of the properties available at the present state of the art will point the way to avenues of attack in an effort to improve performance. Such antenna design work is now feasible in view of the small wavelengths involved and the opportunities for the antenna engineer to exercise his ingenuity are unlimited.

The problem generally involves vertical polarization exclusively, omniazimuth coverage in general, with land station to mobile unit and mobile unit to mobile unit communications. Figure 1 shows the generalized coordinate system used and the positioning of the mobile unit and antenna within the co-ordinates.

In considering the primary coverage area of a central station communicating with mobile units, refer to Fig. 2 which shows a simplified flat earth consideration of the path of propagation. Although the direct and reflected ray are to be considered, the important point is that at ranges over a mile, communication via the direct ray takes place within an angle of plus or minus one degree from the horizon.

In a service that requires uniform or omniazimuth coverage, the only avenue for the increase in gain is that which narrows the beam width in the vertical or θ-plane. To provide for the analysis of arrays which might produce a narrow vertical pattern, and also illustrate the effects of beam width in the vertical plane upon the gain for the omniazimuth radiator, Fig. 3 has been prepared. A hypothetical radiation pattern has been assumed which is completely omniazimuth in its radiation and furthermore its vertical pattern is uniform between specified limits ($\theta_1$ to $\theta_2$) and then drops off immediately to zero beyond these limits.

This radiator will be termed to have an isovertical pattern which is unattainable in practice but is very convenient for analysis. The table in Fig. 3 permits evaluation of the theoretical system gain to be expected under several conditions of reduction in the total vertical beamwidth of the omniazimuth radiator.




$$G_o = \frac{2}{\int_{\theta_1}^{\theta_2} \sin\theta \, d\theta}$$

| $\theta_1^\circ - \theta_2^\circ$ | BEAM | $G_o$ ISOTROPIC | G-OVER DIPOLE |
|---|---|---|---|
| 50-130 | 80° | 1.94 DB | -0.22 DB |
| 60-120 | 60° | 3.0 DB | 0.84 DB |
| 70-110 | 40° | 4.66 DB | 2.5 DB |
| 80-100 | 20° | 7.6 DB | 5.44 DB |
| 85-95 | 10° | 10.62 DB | 8.46 DB |

FIG. 3—Gain analysis for hypothetical omniazimuth isovertical radiator

From the data shown in Fig. 2 it may be concluded that it is entirely practical and desirable to confine the radiation within 10 degrees or even less. Such a radiation pattern should produce somewhat over 8-db gain over an ideal dipole. In practice an array which produces a 10-degree vertical beam width would not be isovertical by any means and its actual gain must be evaluated by other means. Figure 3 however is an excellent guide in the discussion of system improvements by restriction of vertical radiation.

### Scale Models

Radiation patterns of mobile units have been investigated by conventional scale model techniques. The average automobile is about 20 feet long. A scale model auto was obtained at the local dime store, which was 1 foot long or 1/20 the full size. Therefore a scale frequency of 20 times 150 or 3,000 mc was employed (9,000 mc for the 450-mc band) for the model pattern measurements.

The auto was mounted at the center of a large ground plane and both the quarter-wave whip and the rear bumper mounted coaxial dipole were modeled and measured. There are limitations to this technique in that the ground plane is finite and that the conductivity of the ground

has not been modeled perfectly, however, surprisingly good results were obtained. The measurements shown are necessarily a first approach to the problem.

The photographs show the model auto in position on the ground plane and the assembly mounted on the tower for measurements. Figure 4 contains sets of the principal plane patterns for the two cases of the roof-mounted quarter-wave whip antenna and the bumper-mounted coaxial dipole. These are relative patterns in that the relative values of voltage are recorded at each angle. Note that in both cases a large proportion of the radiation is propagated at the higher angles and that a rather small part is in the useful directions as shown in Fig. 2.

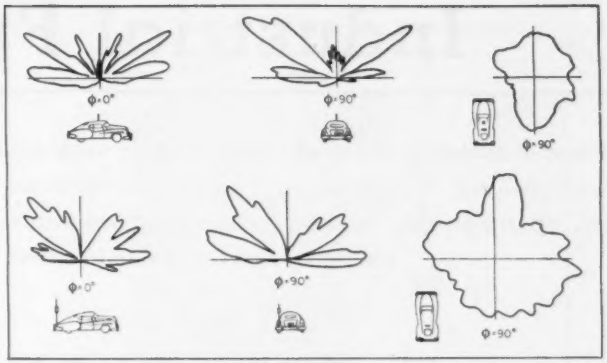


FIG. 4—Typical patterns of roof-top quarter-wave and bumper-mounted coaxial vehicular antennas scaled 20 to 1

### Test Results

To reduce the data to an absolute basis so that actual gain figures may be assigned to the patterns it is necessary to take a complete set of integration patterns to show the space distribution of radiation. This has been done for the case of the roof-mounted quarter-wave whip antenna and the set consisting of $\phi$ patterns taken for ten-degree steps in $\theta$ from zero to 90 degrees is shown in Fig. 5. Referring to the $\theta = 90$ degree pattern of Fig. 5, the gain of this pattern varies from 1.1 db above a dipole at the maximum of the pattern to 6 db below a dipole at the minimum point of the pattern. These figures of gain result from planimeter integrations of the $\theta$ pattern areas and the proper numerical summations to reduce the pattern data to absolute values. Due to the high angle radiation and the power lost at these unusable angles, the gain in the $\theta = 90$ degree plane (the azimuth or horizon plane) suffers considerably. The fact that the pattern is not perfectly circular is of secondary importance since there is appreciable radiation in all directions of azimuth. However the fact that the level is down due to the higher angle radiation is a serious consideration in design.

On the basis of the data presented it is felt that proper design of the mobile-mounted antenna can produce effective gains over presently used systems of the order of 6 to 10 db at those angles which are effective in the communication zone. From past experience it is known that the factors causing high-angle radiation will become more severe at the new 450-mc range than at the 150-mc range studied so that the need for improvement of the vehicular antenna system becomes even more important and the possibilities for improvement proportionately greater.

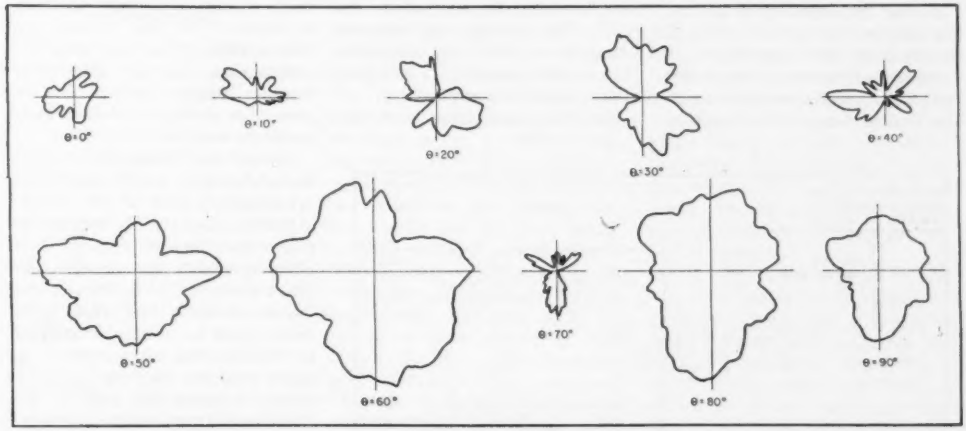


FIG. 5—Typical patterns for roof-top quarter-wave whip at different vertical angles made with scaled system agree closely with measurements on full-size equipment

# Industrial Frequency

**Locked oscillator-divider synchronized directly with 5-mc carrier from WWV provides inexpensive but accurate source of frequencies for industrial or communications laboratory. System depends upon trf receiver equipped with selective input filter and clipper-limiter to make device independent of noise**

SYNCHRONIZED directly by the 5-megacycle carrier received from WWV, Beltsville, Maryland, a novel type of frequency standard has been placed in operation in a laboratory of the General Electric Company at Schenectady. The 5-mc carrier received from WWV is divided to 1 mc by use of a locked-oscillator-divider. The output from this divider is then reduced to lower frequencies by means of conventional multivibrator dividers.

This standard eliminates the necessity of maintaining crystal-frequencies that must be regularly checked and which at best serve as subfrequency standards. The system preserves the original stability obtained by the Bureau of Standards for the 5-mc carrier that is maintained at $\pm 1$ cycle in $10^8$ cycles.

During the course of developing this unit, an extended recording of signals from WWV was made. A tuned-radio-frequency receiver with limiter was used in making records. The limited 5-mc, radio-frequency signal was rectified by a crystal diode and the output fed to a d-c amplifier. A photoelectric recorder was connected in the plate circuit of the d-c amplifier and the gain of the amplifier adjusted until the limited value approached full scale of the recorder. The receiver contained three stages of trf with a three-stage input filter.

### Reception Characteristics

The recordings show appreciable signal level over a twenty-four hour period. There are short-period fades around midday and more numerous short-period fades between the hours of 10 p.m. and 5 or 6 a.m. Throughout the working day, however, the signals were substantially up to the limited value.

The antenna used was a 5-mc dipole mounted 30 feet above the roof. The antenna was oriented broadside to Beltsville, Maryland. It was delta-matched to 300-ohm, ribbon-type transmission line.

Since the signal levels were substantial over normal working hours, it was decided to proceed further with the system. In the development, it was foreseen that it would be desirable to employ limiters to clip approximately 90 percent of the receiver output envelope, thus giving a wide range of agc and elimination of unwanted modulation, which in this case consists of the clock ticks, audio tones and voice modulation of WWV.

It will be noted from the block diagram that an audio-frequency branch is taken from the trf output for purposes of aural monitoring and to furnish audio signal service to the various parts of the plant requesting it. This signal does not pass through a limiter.

Owing to the noise level of industrial equipment operating in the plant, a high degree of selectivity is required. For this reason, a selective input filter was carefully designed and matched. Further to increase the selectivity, it was decided to employ a 5-mc crystal filter in the trf amplifier.

Certain fast transients of noise had a tendency to get through to the synchronizing grid of the locked-oscillator - divider at amplitudes higher than the limiting level. This effect seemed to depend upon the time constant of the limiter. It was found, however, that such transients could be greatly attenuated by the insertion of a resistor in series with the coupling capacitor to the synchronizing grid of the locked - oscillator - divider. Practically all momentary loss of synchronization was, by this means, eliminated.

The photograph shows a top view

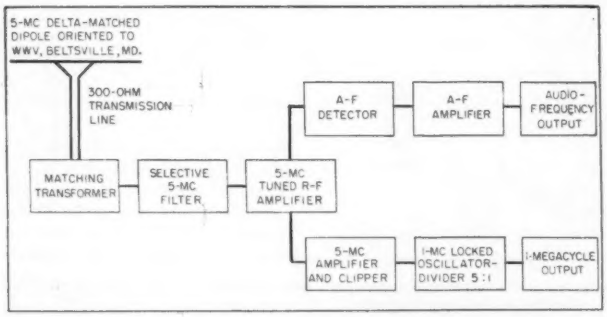


**Block diagram of the standard-signal synchronizing system showing audio tone output for general plant use and 1-mc output for further frequency division**

# Standard

**By H. W. KLINE**
*General Engineering Laboratory*
*General Electric Co.*
*Schenectady, N. Y.*

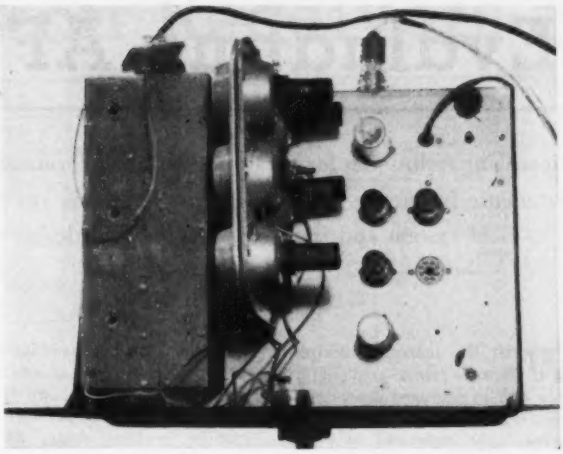

**Top view of model synchronized standard with three-stage filter at left, trf receiver in center and locked oscillator-clipper components at right**

of the equipment containing all essentials up to the locked, 1-mc output. Equipment for further division of the 1-mc output is not shown. It consists essentially of conventional multivibrator dividers or multipliers, as desired at lower frequencies. It is practicable to reduce the 1-mc output to 10 kc, multiply by 3 to 30 kc and by a chain of multivibrators divide by 500 to get 60 cycles. This output could be used to operate a clock directly synchronized by WWV.

The standard, including multivibrators providing outputs of 1 mc, 100 and 10 kc or other frequencies, can be built as compactly as the better class of communication receiver and with about equivalent weight.

### Synchronization

In normal operation, during instants when the signal-to-noise ratio becomes unfavorable, there are instantaneous losses of synchronization that do not seriously interfere with employing the output for accurate frequency measurements. Such periods would affect the operation of a clock, however, and where clock operation is the end result desired, antenna equipment should be erected in quiet zones and where sufficient signal level is available.

It is also possible to multiply directly the 5 or 1-mc outputs of the unit to higher frequencies for use in calibrating microwave equipment throughout the spectrum.

Another application of the system when good signals from WWV are obtained could be in the direct control of transmitting stations by means of the emissions direct from WWV. For example, radio broadcast station WGY transmits on a carrier frequency of 810 kc. The 10-kc output of a synchronized frequency standard could be reasonably multiplied by 81 to produce 810 kilocycles for directly regulating the transmitter frequency.

In practice, a receiver, with bfo tuned to 1 megacycle, is used to pick up the 1-mc signal from the locked-oscillator-divider. Synchronization is observed by slowly varying the frequency of the oscillator within a small audio tolerance. When synchronous frequency is attained, the oscillator abruptly falls into step giving a constant beat note over part of its vernier scale.

A further test of synchronization can be obtained by disconnecting the antenna line. The first oscillator then operates unsynchronized and a change in beat-note is observed at the receiver. Further observations have been made employing a 1-mc commercial frequency standard. The frequency beats between the commercial standard and the synchronized oscillator of the standard could be reduced to zero only by extremely careful tuning of the zero-set of the commercial standard. It was found that adequate stability in standards of this type was not reached until after more than two hours of continuous run. This disadvantage is not present in the synchronized frequency standard.

### Limits of Usefulness

Certain limitations of this system should be pointed out. Reliability of operation depends upon adequate signal strength being obtained from WWV. Thus, it should not be installed until it is known for certain that the signal intensity will be sufficient. Furthermore, reliability depends upon freedom from interfering signals of injurious strength in the 5-mc channel used for the frequency standard emissions. One of the major problems involved in the design of the input filter to this equipment was the elimination of broad interference from experimental telephone signals on an adjacent channel.

The major problem is, of course, to obtain that degree of selectivity necessary to produce a favorable signal-to-noise ratio owing to the level of industrial plant noise. However, the system has been installed to operate under probably the most adverse conditions that would be encountered. The most favorable conditions would be in isolated regions using an antenna of good directional characteristics and possibly diversity pick-ups.

# Evaluating AFC Systems

**Measuring techniques for obtaining useful performance data on various types of horizontal automatic frequency control systems. Resulting curves and values facilitate comparison of system and improve evaluation of design changes in a given receiver**

With the increased desire to improve fringe-area performance and to decrease the cost of a television receiver, it has become increasingly important to the designer to be able to evaluate quantitatively the operation of a receiver's individual circuits. This paper presents some essential characteristics of a horizonal afc system and a means to measure and examine them.

### Typical System

A block diagram of an afc system is shown in Fig. 1. It represents a conventional system in which the relative time of occurrence of the incoming sync-signal information $T_i$ is compared to the relative time of occurrence of the system's output $T_o$ and applied to a phase detector. The phase detector output is a d-c voltage $E$, which is proportional to the relative difference $T_d$ in time of occurrence of $T_i$ and $T_o$. The voltage $E$ controls the frequency of the local oscillator and under proper operating conditions locks it to the incoming sync-signal frequency.

The low-pass filter serves to integrate out horizontal sync pulses and noise, and thereby improve the system's noise immunity. Balanced phase detector operation, in which the sync pulses and associated noise tend to cancel out, will make further improvement in noise response.

The phase detector characteristic $\theta$ is the change in the d-c output voltage $E$ due to a change in the relative time difference $T_d$ between local oscillator and transmitter. The value of $\theta = dE/dT_d$ may be measured in volts per microsecond.

The video amplifier, sync clippers and horizontal output circuits will alter the relative time of occurrence of picture-to-sweep information by adding a constant though different time delay to each. However, the change in time delay, with the small frequency changes (15,750 cps $\pm$ 5 percent) that are involved, will be very small for all the circuits except the afc and therefore may be neglected.

The value of $T_d$ may be measured as the difference in relative time of occurrence of two events, the sync-signal information at any point before the afc circuit and the sweep information at any point after the afc circuit.

The static time delay $T_s$ may be defined as the relative time difference of the sync-signal information at the cathode-ray tube and the sync-signal information at the input to the afc system. It is well to keep this value small, for the afc system must compensate for it to keep the picture information properly phased in the raster.

The local oscillator characteristic $\beta$ may be defined as the change in the local oscillator frequency due to a change in the phase detector output voltage $E$. The value of $\beta = df/dE$ may be expressed in cps per volt.

The overall transfer function $\alpha$ may be defined as the change in the local oscillator frequency $f$ due to a change in $T_d$. The value of $\alpha = df/dT_d$ may be expressed in cps per microsecond. It is the product of the oscillator characteristic and the phase detector characteristic, hence

$$\alpha = \beta\,\theta = \left(\frac{df}{dE}\right)\left(\frac{dE}{dT_d}\right) = \frac{df}{dT_d}$$

The concept of $\alpha$, $\beta$ and $\theta$ may be used only when the local oscillator is in synchronism with the transmitter. They represent the steady-state characteristics of the system.

### Picture Phasing

Some idea of the values of $\alpha$ necessary may be gotten by a simple calculation. Assuming that the maximum return time of the horizontal trace is 8.5 microseconds and the transmitted sync-signal has minimum allowable horizontal blanking of 10.15 microseconds as recommended by the Federal Communications Commission,[1] the amount of picture phasing allowable is 1.65 microseconds. Since the FCC does not specify the allowed horizontal sync-signal frequency tolerances, the recommendations of $\pm$ 1 percent by the RTMA Studio Facilities Subcommittee[2] may be used. There-

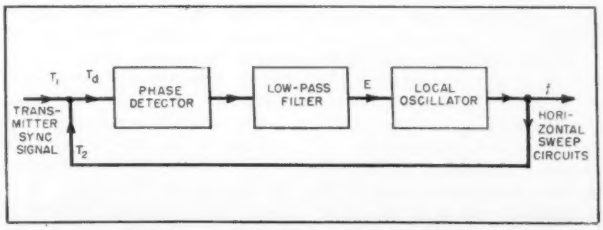


FIG. 1—Block diagram of typical afc circuit used in television receivers

# for Television Receivers

**By GEORGE HOWITT**
*Television Receiver Division*
*Allen B. DuMont Labs., Inc.*
*E. Paterson, N. J.*

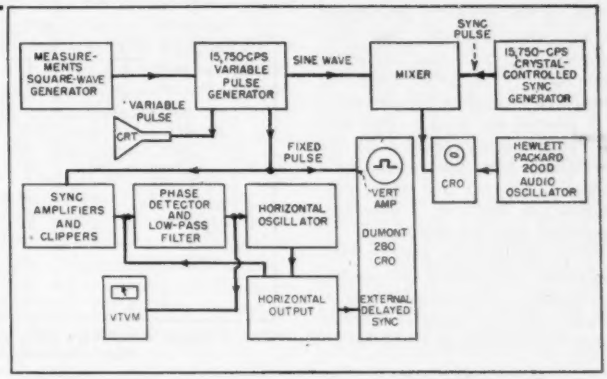


**FIG. 2—Arrangement of equipment for measuring performance of afc systems**

fore the value of $\alpha$ necessary to produce no picture foldover is 191 cps per microsecond. If it is desired to restrict the amount of phasing to a $\frac{1}{16}$-inch shift on a 21-inch cathode-ray tube, $\alpha$ must be approximately 1,700 cps per miscrosecond.

The above values assume no attempted change in local oscillator frequency. When changes in the oscillator try to take place, due to temperature, voltage, humidity or time effects, the value of $\alpha$ must be increased. It is possible to lower the value of $\alpha$ required, by either allowing foldover to occur and applying a pulse to the cathode-ray tube to blank it out or by using a front-panel horizontal hold control.

Typical values of $\alpha$ used in the field are approximately 100 cps per microsecond for the Synchro-guide type of afc, 200 cps per microsecond for the balanced phase detector-multivibrator type of afc and 700 cps per microsecond for the sine-wave oscillator-reactance tube type of afc.

### *Lock-in Range*

The lock-in range may be defined as the difference between the maximum and minimum frequency that the system will always synchronize to from the nonsynchronized state. The value of the lock-in range required depends on the amount of change of transmitter sync-signal frequency allowed and the amount of local oscillator drift due to the causes listed above. Ideally, the lock-in range should allow the system to synchronize over the full range of expected frequency variations. However, it is possible to reduce the amount of lock-in range required by using a front-panel hold control.

If the lock-in range is greater than the $\pm$ 1 percent transmitter frequency stability recommendation plus the expected local oscillator drifts, and if the transfer function $\alpha$ is great enough to prevent foldover from occurring during the lock-in range, then a horizontal hold control that is readily available to the customer is not necessary.

If sufficient lock-in range is available, but the $\alpha$ of the system is low enough so that foldover can occur within the lock-in range, then a front-panel hold control is necessary. The system need not drop out of synchronization for any setting of this control and it is essentially a phase correction control.

However, if sufficient lock-in range is not available, then it is necessary that the system go out of synchronization for some setting of the front-panel hold control range if proper operation of the receiver is to be expected without service adjustments.

In addition, a front-panel hold control will allow the consumer to minimize horizontal shape distortions due to field frequency components or other frequency transients in the input sync-signal wave-form.

The following range may be defined as the difference between the maximum and minimum frequency at which the system will remain in synchronism, starting from a synchronized state. The ratio of the following range to lock-in range will give an indication of the relative noise immunity of the system as compared with other systems of the same type. The low-pass filter must pass some information at the difference frequency between the received horizontal frequency and the local oscillator frequency for the system to be brought into synchronism. The higher the cutoff frequency of the filter, the closer the lock-in range will approach the following range. However, with a high cutoff frequency, the filter will pass more noise components and consequently the noise immunity of the system will be poorer.

### *Noise Response*

The response of the low-pass filter is only one factor affecting the noise response of the system. The ratio of the time interval during which the incoming transmitter signal has an effect on the circuit, to the total period and any balancing effects such as occur in bilateral type phase comparators will influence the noise immunity of the afc system. The effects of noise are usually evaluated by subjective tests, generally involving compari-

sons of the systems of interest under the same conditions.

The response of the afc system to a square-wave frequency modulation of the incoming sync-signal is of great interest. The FCC recommendation is that the maximum rate of transmitter horizontal frequency change to be allowed is 0.15 percent per second. This rate of change is often greatly exceeded, particularly when the transmitter is locked to a power line whose generators are driven by a governor-controlled gasoline engine.

If all transmitters used crystal-controlled sync-signal generators, the problems of transient response, lock-in range and transfer function would be considerably simplified.

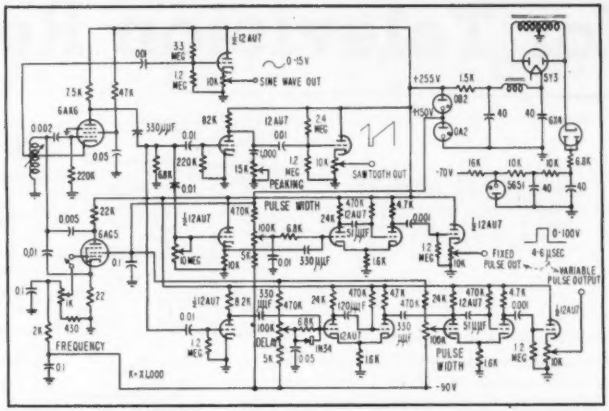


FIG. 3—Circuit of 15,750-cps pulse generator suitable for use as source of sync signals for measurements of afc performance

### Measuring Setup

To measure the characteristics of an afc system, the setup of Fig. 2 is used. A pulse generator is the source of the sync-signal. It should be able to cover the frequency range of 15,750 cps ± 10 percent with good stability. The pulse width should be adjustable over the range of maximum to minimum allowable sync pulse width.

The pulse generator circuit of Fig. 3 is useful in this application. The frequency of a very stable sine-wave oscillator is controlled by varying the bias of an associated reactance tube. The output of this oscillator is used to control a variable pulse-width cathode-coupled multivibrator whose output is fed to a cathode-follower output and is used to supply the sync-signal. The sine-wave output is also applied to a similar chain as above, but with a delay multivibrator to provide another pulse occurring after the sync-signal pulse to be used for monitoring on the face of the picture tube. In addition, a sine-wave output for frequency-monitoring purposes and a saw-tooth output with variable peaking are provided.

The sync-signal pulses from a crystal-controlled 15,750-cps sync generator are used as the primary frequency source in the frequency monitoring system. These pulses control a reactance-tube sine-wave oscillator afc system in the mixer (Fig. 2). The output of this sine-wave oscillator is mixed with the sine-wave output from the pulse generator and the beat frequency is measured by displaying a Lissajous pattern on a cro.

The fixed pulse output from the pulse generator is applied to the sync chain in the receiver to provide suitable synchronizing information for the afc system. The fixed pulse is also applied to the vertical amplifier of a DuMont type 280 cro. The flyback pulse from the deflection yoke or some other suitable source is applied to the external delayed sync input of this cro. The calibrated delay is then used to obtain the time difference between the sync-signal pulse and the flyback pulse.

The phase detector output is measured by the vtvm attached to the output of the filter. In addition, a square-wave generator may be applied to the reactance tube in the pulse generator for square-wave checking of the afc system.


Δf = 0 AT f = 15,750 CPS
ΔT = 0, NO BLANKING OR FOLDOVER AT RIGHT-HAND SIDE OF RASTER
ΔV = 0 AT E = +1 VOLT
LOCK-IN RANGE, HOLD CONTROL CLOCKWISE
NO FOLDOVER
OSCILLATOR CURVE
Δf IN CPS
ΔV IN VOLTS
PICTURE PHASES TO RIGHT
LOCK-IN RANGE, HOLD CONTROL COUNTER-CLOCKWISE
TRANSFER FUNCTION CURVE—HOLD CONTROL CLOCKWISE
PICTURE PHASES TO LEFT
TRANSFER FUNCTION CURVE—HOLD CONTROL COUNTERCLOCKWISE
ΔT IN MICROSECONDS
ΔV IN VOLTS

FIG. 4—Typical performance curves of afc system, showing operating ranges

### Characteristic Curves

To describe the data which may be obtained from this measuring setup, it is best to refer to the curves of Fig. 4. The relative difference in phase $\Delta T$ between sync pulse and flyback pulse is measured throughout the following range and $\Delta T$ is plotted as the abscissa. It is convenient to make $\Delta T = 0$ when there is no foldover or blanking visible on the right-hand side of the raster. The frequency difference between 15,750 cps and the actual incoming sync-signal frequency is $\Delta f$ and is zero when the sync-signal frequency $f$ is 15,750 cps.

In this example, the afc system is aligned so that $\Delta f = 0$ when $\Delta T = 0$. This means that when the incoming frequency is 15,750 cps the picture is phased such that no foldover or blanking is apparent on the right-hand side of the raster. Plotting $\Delta f$ vs $\Delta T$ gives curve $A$. The slope of this curve at any point is the transfer function $\alpha$ at that point.

If the system has a front-panel hold control, a family of curves of $\Delta f$ vs $\Delta T$ may be plotted, each curve representing a different setting of the hold control. Curves A and B of Fig. 4 are obtained with the hold control at its extremes, representing the limits of the system.

The lock-in range may be ob-

tained by measuring the maximum and minimum frequency at which the system falls into lock. These points are indicated on the graph for both the clockwise and counterclockwise settings of the hold control.

The relative voltage output $\Delta V$ from the low-pass filter is shown as zero when $\Delta f = 0$. This is done for simplicity of plotting. Actual values of the voltage $E$ at the output from the filter, when the incoming frequency is 15,750 cps, are approximately 0 volt for balanced phase detectors and in the order of 50 volts for unilateral phase detectors such as are used in the Synchro-guide.

When $\Delta f$ vs $\Delta V$ is plotted as in curve C of Fig. 4, the slope of this curve at any point is the oscillator characteristic $\beta$ at that point. The phase detector characteristic $\theta$ may be gotten at any point by dividing the $\alpha$ of the point by the $\beta$ of the point.

The static time delay $T_s$ may be obtained by measuring the time difference, at any locked-in frequency, between the sync-signal at the input to the afc system and the fly-back pulse, then getting the same data for the sync-signal at the cathode-ray tube and the flyback pulse and taking the difference between these measurements.

Since the horizontal blanking interval and the horizontal retrace time are known, the amount of phase shift without foldover occurring may be indicated on the graph in Fig. 4. For this example, as was calculated above, the value is 1.65 microseconds. This afc system will be able to lock-in to a maximum sync-signal frequency of $\Delta f = +$ 500 cps and a minimum sync-signal frequency of $\Delta f = -$ 600 cps. A picture without fold-over can be obtained, by adjustment of the hold control, from a maximum frequency of $\Delta f = +$ 310 cps and to a minimum frequency of $\Delta f = -$ 320 cps.

### Performance Data

Figure 5 shows the values of $\alpha$, $\beta$ and $\theta$, for the curves of Fig. 4, plotted against $\Delta f$. The maximum value of $\alpha$ within the lock-in range occurs at $\Delta f = -$ 600 cps and is 145 cps per microsecond for the hold control full counterclockwise. For the hold control full clockwise, the corresponding values are $\Delta f = +$ 100 cps and $\alpha = 113$ cps per microsecond. The maximum value of the oscillator characteristic $\beta$ within the lock-in range occurs at $\Delta f = -$ 600 cps and is 222 cps per volt. The phase detector characteristic is a constant over the frequency range covered. This is generally true of the typical afc systems now in use. Its value in this case is 0.666 volt per microsecond.

An increase in transmitter sync-signal frequency corresponds to an attempted decrease in local oscillator frequency and vice versa, so that these curves may be used to find the effect of a frequency change at either location or both. The direction moved along the curve with a given change in incoming frequency is the same direction that the picture information on the face of the cathode-ray tube will phase.

To check the transient response of the system, the reactance tube in the pulse generator is modulated at a 20-cps rate with a square wave of sufficient amplitude to give a total frequency deviation of 100 cps. The phase displacements are viewed on the face of the cathode-ray tube as shown at the upper right in Fig. 6A. These displacements may be converted into time when the sweep width and sweep time are known, and may be plotted as in Fig. 6. The transient lock-in point is the point at which the maximum phase excursion, with a given square wave of frequency modulation, remains in synchronism. This point is found by varying the front-panel hold control.


α IN CPS PER μSEC
β IN CPS PER V
θ IN V PER μSEC
Δf = 0 AT 15,750 CPS
OSCILLATOR CHARACTERISTIC β
TRANSFER FUNCTION α
PHASE DETECTOR CHARACTERISTIC θ
LOCK-IN RANGE HOLD CONTROL COUNTERCLOCKWISE
LOCK-IN RANGE HOLD CONTROL CLOCKWISE
Δf IN CPS

FIG. 5—Curves obtained by plotting frequency change against values obtained from curves of Fig. 4


PHASE EXCURSION IN μSEC
TO RIGHT
TO LEFT
HOLD CONTROL AT CLOCKWISE TRANSIENT LOCK-IN POINT
HOLD CONTROL AT COUNTERCLOCKWISE TRANSIENT LOCK-IN
TIME IN MILLISECONDS
(A) SYNCHRO-GUIDE AFC
HOLD CONTROL AT COUNTERCLOCKWISE TRANSIENT LOCK-IN POINT
HOLD CONTROL AT CLOCKWISE TRANSIENT LOCK-IN POINT
(B) BALANCED PHASE DETECTOR-MULTIVIBRATOR AFC

FIG. 6—Transient response of two types of afc systems to 100 cps total deviation at a 20-cps modulating frequency. Oscillogram at upper right shows phase displacement due to square-wave frequency modulation of the sync signal

### AFC Systems

Figure 6A is typical of a unilateral sync-signal input afc system such as the Synchro-guide. It is not possible to balance the phase excursions under any conditions. This means that abrupt changes of sync-signal frequency in one direction will always have a much greater effect than changes in the other direction.

Figure 6B is typical of a bilateral sync-signal input afc system such as the balanced phase detector-multivibrator type. In this case it is possible to get phase excursions that are balanced or unbalanced, depending on the setting of the hold control and the incoming sync-signal frequency.

Complete correlation between some of the characteristics, particularly transient response, and some types of field conditions has not yet been achieved. Additional work still needs to be done.

The author is indebted to E. Campbell of the Allen B. DuMont Laboratories for his constructive criticism and his continued interest, and to A. Bissonette, also of the Allen B. DuMont Laboratories, who obtained the necessary data involved in the experimental work.

REFERENCES

(1) Federal Communications Commission, "Standards of Good Engineering Practice Concerning Television Stations".
(2) RTMA Engineering Department, "Draft of Electrical Performance Standards for Television Studio Facilities."

# Ratio Meter Measures

**Measurements may be made directly and continuously while making adjustments in the line with system employing two electronic voltmeters, a conventional ratio meter movement and two directional couplers**

THE RATIO meter described consists of two vacuum-tube amplifier-voltmeter channels working into a ratio meter movement. The meter deflection depends solely on the ratio of the full rectified average values of the channel signals. In addition, the individual signals can be determined when desired by a voltmeter inserted in either channel. Attenuators in each channel adjust the signal level and at the same time extend the instrument's range.

A particularly interesting application of the instrument is for reflection-coefficient measurements on high-frequency transmission systems. The meter indication can be calibrated in reflection coefficient or voltage standing wave ratio, as desired.

### Meter Movement

The ratio meter movement as a d-c indicating instrument, has found noteworthy applications as a stretch indicator and as a temperature indicator.

Two versions of the meter movement are commercially available. Figure 1 indicates schematically their operating principles. The nonuniform air-gap instrument[1] has two coils rigidly connected together and free to rotate about the inner core axis. By keeping the spring restoring forces at a minimum, the coil currents $I_A$ and $I_B$ will produce torques which tend to move the coils to an air-gap position where the torques balance. At an equilibrium position torque side $A$ = torque side $B$ and

$$KI_A\Phi_A = KI_B\Phi_B$$

The coils will move to an air-gap position where

$$\Phi_A/\Phi_B = I_B/I_A$$

The deflection characteristic and sensitivity depend on the air-gap flux distribution. In a recent variation of this type of movement, the air gap is kept constant while the axial length of the pole pieces[2] is varied. In the Edison meter, as shown in Fig. 1, two orthogonal fields will produce a resultant field which is in the direction

$$\theta = \tan^{-1}\Phi_B/\Phi_A$$

The small magnet attached to the pointer will orient itself in the direction of the resultant field. In the actual movement, the field coils are wound so that one encloses the other. Individual coil connections allow for an improved driving circuit. The maximum sensitivity is fixed by the field-coil positions and the deflection follows an arc-tangent function. This Edison movement is employed in the described instrument.

A complete circuit diagram of the electronic ratio meter is shown in Fig. 2. Each channel consists of a pentode voltage amplifier driving a triode power amplifier. The full rectified signal current passes through the movement coil and is returned to the input of the amplifier for overall feedback. With this circuit arrangement the crystal nonlinearities are minimized and the meter is driven by a virtual constant-current source.

Without feedback, the overall circuit can be thought of as having a transconductance of

$$g_{mo} = A_o g_m$$

where $A_o$ is the gain of the first stage and $g_m$ is the output triode's transconductance.

Feedback results in a transconductance

$$g_{mf} = \frac{g_{mo}}{1 + g_{mo}R_F}$$

where $g_{mf}$ is the channel transconductance with feedback and $R_F$ is the feedback resistor. This equivalent transconductance, with 20 db

Front-panel view of the experimental model of the ratio meter. Meter indication may be calibrated in reflection coefficient or vswr

# Reflection Coefficient

By L. A. ROSENTHAL, J. L. POTTER and G. M. BADOYANNIS

*Department of Electrical Engineering*
*Rutgers University*
*New Brunswick, N. J.*

of feedback, is insensitive to tube aging and supply voltage variations and is not affected by crystal nonlinearities. The experimentally measured value of $g_{mf}$ was 0.126 mhos; 100 millivolts at the input would cause 12.6 ma of a-c feedback current. The average value of this current (assuming a sine-wave signal) is obtained by multiplying by the factor $2\sqrt{2}/\pi$.

### Coil-Current Level

The ratio meter movement requires a coil-current level of at least one ma for accurate readings. This value of current is sufficient to overcome the meter's assymmetry due to spring restoring forces and stray fields. The 5687 output tube is designed to pass a quiescent current of 37 ma. This corresponds to 26 rms ma of feedback current and 23.5 d-c ma of coil current at the clipping level, an input signal level of 0.187 volts.

The clipping level can vary with potential variations but is nearly twice the nominal full-scale sensitivity of 100 mv. For sinusoidal input signals the direct current is related to the rms input signal by

$$i = 0.113\, e_s$$

and 10 millivolts represents a minimum signal level for accurate meter indications. Further channel amplification and reduction of the feedback factor will result in higher sensitivities with the same accuracy and stability.

To equate channel gains, the feedback resistors $R_f$ are adjustable by means of the 50-ohm potentiometer which simultaneously increases $R_f$ for one channel as $R_f$ for the other channel is decreased. Each channel current is measured by means of a pair of matched precision resistors $R_v$. A 0 to 150-μa meter, connected as a voltmeter, is placed across this resistor in either channel, and the meter calibration is adjusted to correspond to the values 0 to 150 millivolts at input.

A variable resistor is placed across the inner coil of the ratio meter movement. The inner coil has a slightly stronger field than the outer coil and some of the current must be by-passed for zero scale calibration. The three adjustments described are located at the rear of the ratio meter chassis. To adjust the instrument, the same signal is fed into both channels. The feedback resistor is then set to give the same voltmeter reading (channel current) in each position. With equal channel currents, the ratio-meter indication should be zero at center scale and can be so adjusted by the coil-current shunt. The voltmeter can be calibrated by knowing the input signal level.

The input attenuator is a potentiometer type of 100,000 ohms impedance. Signals can be attenuated by a factor of 1/10, 1/100, 1/1,000 or the voltmeter reading must be multiplied by a factor of 10, 100




FIG. 1—Edison (upper) and Weston (lower) ratio meter movements

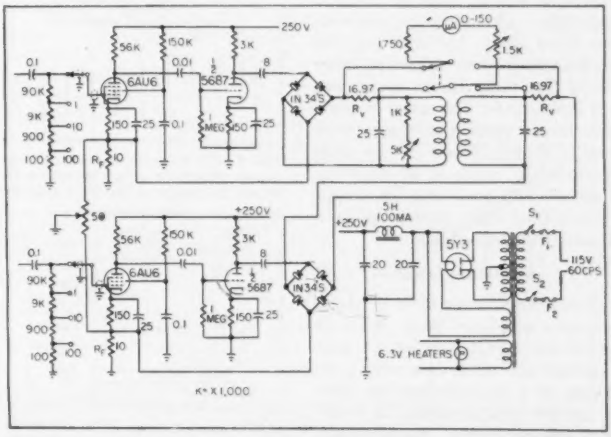


FIG. 2—Complete circuit diagram of the electronic ratio meter. Each channel consists of a 6AU6 voltage amplifier driving a 5687 power amplifier

or 1,000 for the individual voltage measurements.

The voltmeter serves two important functions. Besides measuring the individual channel voltages, it indicates the channel current level. As long as the voltmeter reads above 10 mv and is on scale, the ratio-meter coil current is above the one-ma level and below the amplifier's clipping level. The circuit power supply is conventional and capable of supplying 90 ma at 300 volts.

### Performance Characteristics

The Edison ratio-meter movement had been intended for temperature measurements and is calibrated symmetrically from −50 to +50 with the center of the scale marked 0. A calibration curve of meter reading versus coil-current ratio is shown in Fig. 3 and the meter can accommodate a ratio of 0.16/1 to 5.5/1. There is a slight assymmetry due to stray magnetic fields. In the vicinity of the center, the scale is linear to ± 7.5 db (scale reading ± 30) and the extremities of the scale correspond to ± 15 db.

Frequency response of each channel is down by one db at 40 and 200,000 cps. The input attenuator may slightly alter this response characteristic at the high-frequency end. These effects are not significant at frequencies under 100 kc.

Moderate line-voltage variations have little effect on the voltmeter indication and no effect on the ratio indication. Changing the line voltage from 100 to 130 volts resulted in a three-percent voltmeter error while the ratio meter error was not measurable. The meter is readable to one percent at center scale and is slightly poorer at the ends of the scale. Since in all cases the −50 to +50 scale will be recalibrated into other units, the final accuracy is controllable.

### Minimum Level

Signal amplitudes must be above a certain minimum level. Whereas a 100-mv signal applied to both channels will result in a ratio indication of 1.00, reducing the level to 10 mv will introduce an error of 5 percent (0.95). The error decreases rapidly above 10-mv levels and 20 mv results in an error of two percent (0.98).

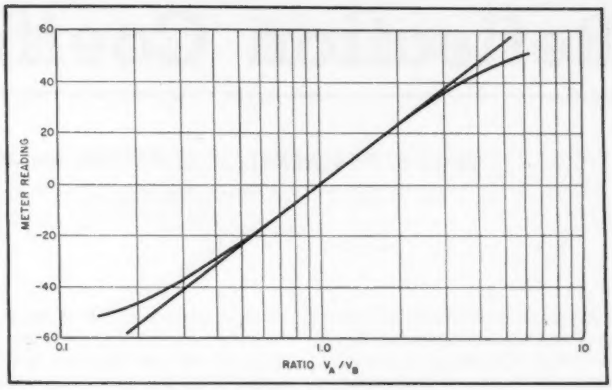


FIG. 3—Basic meter calibration curve

To extend the usefulness of the instrument to d-c applications, the accessory shown in Fig. 4 converts d-c to a-c signals. The signal at $A$ is periodically shorted to ground at $A'$ by means of the 60-cps contact modulator. The d-c component of the signal is lost in passing through the high-pass filter on to $A''$. Waveforms are shown in Fig. 4. The same operation is repeated in channel $B$, 180 deg out of phase. The signals at $A''$ and $B''$ are directly proportional to the $A$ and $B$ input signals and can be applied directly to the ratio meter.




FIG. 4—The d-c to a-c converter and resulting waveforms extend the usefulness of the instrument to d-c measurements




FIG. 5—Block diagram of the experimental setup for reflection-coefficient measurements

### Reflection Coefficients

A specific application of the electronic ratio meter is the measurement of reflection coefficient or vswr. A block diagram of the method is shown in Fig. 5. The impedance to be examined terminates a Federal Impedometer[3] (bidirectional coupler), driven by a General Radio r-f oscillator that can be amplitude modulated. Two signals that are proportional to the incident and reflected waves are obtained from the coupler, passed on to peak rectifiers and then sent into the ratio meter. It is the modulation components of the incident and reflected signals that are compared.

As shown in Fig. 6, an r-f signal with a particular modulation can yield different outputs depending on the detection efficiencies. The curves shown relate output voltage as a function of r-f amplitude. Differences in slopes $M_i$ and $M_r$ can be equalized in the ratio meter by adjusting the channel gains. It is desirable that these detection characteristics be as linear as possible.

In Fig. 7, a method of linearizing the detectors is shown. The peak rectifier will be most linear when the load resistance is large compared to the crystal resistance. Three curves taken for various loads indicate this fact. As the load resistance increases, the output current decreases while the output voltage is nearly constant.

Since the ratio meter has a high

input impedance, large load resistances can be tolerated. The highest resistance produces the most linear detector but the improvement is slight because the crystal resistance can vary through wide limits as the input voltage varies from 0 to 0.1 volts. A load of 10,000 ohms was found to be convenient.

Modulation of the r-f source may not be necessary if the signal level is sufficiently large to minimize crystal nonlinearities. In this case, the signal can be peak-rectified and then passed through the described d-c to a-c converter. In all cases, loads presenting a reflection coefficient close to zero are bound to produce errors since the reflected signal may operate the crystal in its nonlinear region.

For greatest accuracy, it is desirable to keep the power level sufficiently high so that the crystal voltages are not less than 0.1 volt in average amplitude. If the crystal nonlinearities are predictable and, for example, are square law, the scale can be recalibrated with some loss in accuracy.

To evaluate the technique, a series of loads was made by mounting small half-watt resistors coaxially in a type-N connector with the end of the fitting short-circuited. The vswr for each of these loads was first measured on a slotted line. It was observed that resistors above the characteristic impedance of the line appeared partly reactive (capacitive) and resistors below the characteristic impedance were resistive but measured larger than the d-c resistance. At one extreme




**FIG. 6—Indication of the problem of demodulation efficiency and linearity**

the mounting throws capacitance across the load and at the other extreme the short circuit losses become apparent. These loads were then measured as shown in the circuit of Fig. 5, and the results obtained are given in Table I.

The theoretical vswr is based on a pure resistance termination equal to that of the resistor value. Slotted-line results compare very favorably with those of the ratio meter. It was observed in setting up the apparatus that the Impedometer can be terminated better in an open circuit than short circuit. Results were more accurate when based on an open-circuit presetting. With no load on the bidirectional coupler, the reflection coefficient should be unity and the ratio meter should read zero, Fig. 3. This adjustment was made by setting the channels' feedback resistors $R_r$ to equalize any differences in the coupling coefficients and in the detection efficiencies.

It is practical to calibrate the ratio meter directly in vswr. By attenuating the incident signal, the center-scale position, which corresponds to a ratio of unity or infinite vswr, can be shifted off scale to the meter's right. Small vswr values would be located at the left. Since the meters full-scale ratio is fixed at about 35 to 1, the vswr scale limits are fixed. A convenient range can be readily found for the vswr readings of interest and this range is selected by the proper attenuation of the incident signal. A typical set of scales chosen for one application are 1.02 to 1.3 and 1.13 to 10.0, using the region from $-40$ to $+40$. Best resolution is obtained for small vswr values.

Application of the ratio meter to vswr measurements is practical for cases where termination adjustments are to be made on a transmission system. When permanently installed in the line, it offers a continuous performance monitor.

The authors wish to thank the Rome Air Development Center, Griffiss Air Force Base, who sponsored this work under contract AF28(099)-33.

### References

(1) "Electrical Aircraft Instruments," Weston Electrical Instrument Co. Publication, p 33.
(2) E. W. Clark, A Ratio Instrument for Resistance Thermometers, *Elec. Engr.*, p 406, May 1952.
(3) B. Parzen, Impedance Measurements with Directional Couplers and Supplementary Voltage Probe, *Proc. IRE*, 37, p 1,208, Oct. 1949.

**Table I—Standing Wave Ratios for Varying Loads**

| Load in ohms | Theoretical vswr | Slotted-Line vswr | Ratio Meter vswr |
|---|---|---|---|
| 10 | 5.2 | 3.95 | 3.90 |
| 18 | 2.88 | 2.91 | 2.88 |
| 27 | 1.92 | 1.90 | 1.96 |
| 100 | 1.93 | 2.04 | 2.01 |
| 150 | 2.88 | 2.76 | 2.67 |
| 220 | 4.23 | 3.46 | 3.45 |
| 330 | 6.35 | 5.20 | 5.25 |

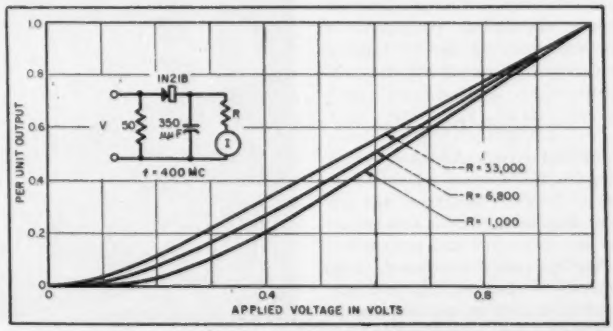


**FIG. 7—Linearity can be improved by increasing load resistance. The curves have been normalized to indicate the improvement**

# Printed Circuits for

Starting point of nearly automatic plated circuit production line is machine that forms strips containing several bases

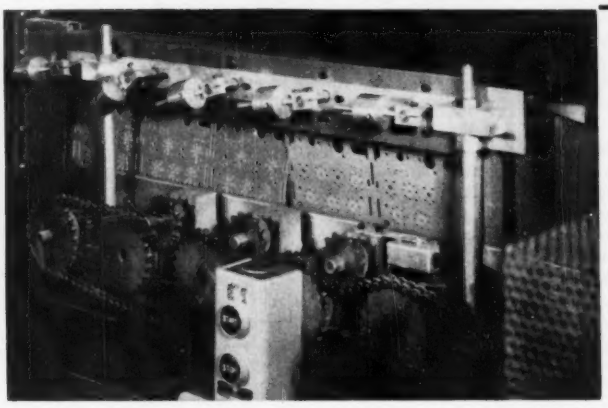

Strips proceed into processing where partial punching of holes and edges to be left unplated is achieved. Extreme accuracy in mechanical positioning is of paramount importance in the system

ALL METHODS of printing electronic circuits depend upon some means of delineating the conductor areas on an insulator. The method to be described uses a plating process (called "Pla-cir") that offers several advantages by providing through-hole metal.

In this process, foil-thickness copper is electroplated on the insulating base where conductors are desired and concurrently on the walls of previously punched holes through the base. Circuits are continuous from hole to hole, and through holes to the other side for further extensions of the circuits or to component tie points. Component leads are preformed to match hole separations. The resulting accurate mechanical placement of parts permits the use of machine soldering with its attendant advantages.

### Circuit Design

Careful circuit layout is necessary to make most advantageous use of the potentialities of the system. Conductor widths become important only when they are reduced to fine lines, as in the case of plated coils where the most compact line-space arrangement will provide the best inductance to area ratio.

Voltages encountered in the circuit dictate insulating space between conductors. Proximity of signal-carrying metal and grounded portions of the circuit must also be considered where undesirable by-passing of the signal may result from the presence of large grounded areas. Holes must be accurately placed for use as component tie points, tube sockets and conductor anchors.

As in other printed circuit techniques, layout work is greatly simplified by the use of photographic copying. The desired circuit is drawn to a large scale and photographed down to size. Circuit changes, such as route alterations and modifications of conductor sizes, may be made in this intermediate stage without going back to the original. Through this means

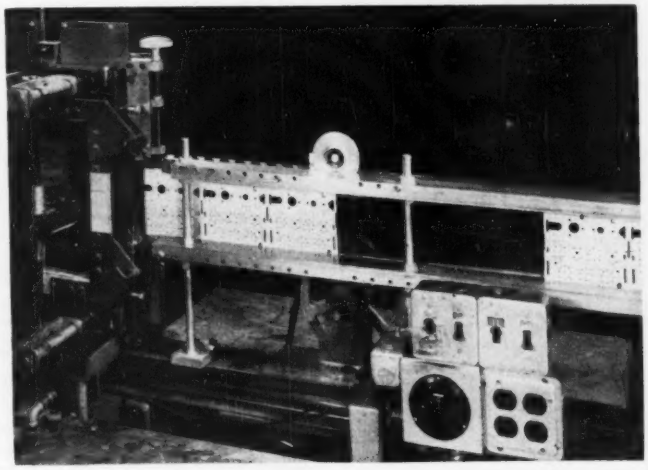

Chassis strips are fed one at a time into the printer which applies resist material to surfaces to be left unplated

# Home Radio Receivers

**Plating process passes commercial test in 5-tube superheterodyne and shows promise for future use in other equipment including tv sets. Circuits are electroplated on plastic base. Holes through base provide machine-soldering terminals for components and through-chassis paths for circuit connections**

**By ELMER WAVERLING**

*Vice-President*
*Products Division*
*Motorola, Inc.*
*Chicago, Illinois*

new circuits may be evaluated quickly and easily.

### *Fabrication*

The layout gives the punching information for making the chassis base. To produce an outline shape from flat sheet with any internal cut-outs, without having plating on the edges, the cutting machines employ partial punching and flush re-insertion while in the die, never losing orientation of internal parts to the piece or of the piece to the scrap. This technique is highly useful since it is convenient to carry pieces in a chassis-carrying strip until finished. Punched registry marks are provided in the edge of the strip, so that printing can be done without removing the chassis from the strip.

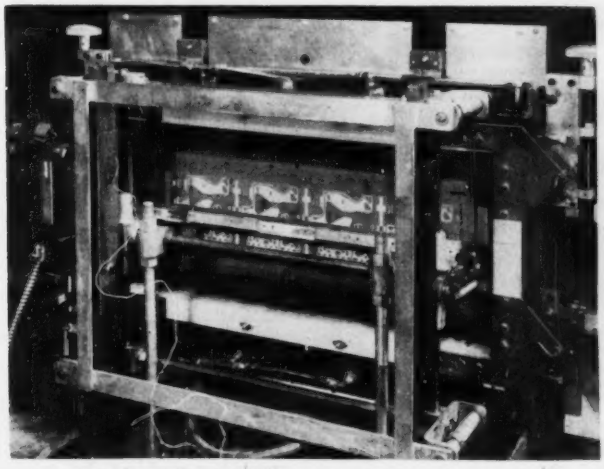

**In the printer all action is automatic. Accurately positioned strips are printed using exactly-registered precision stencils**

From the punched piece to the final chassis bases, the steps are carried out largely by machine as shown in the photographs. Strips of bases are fed from a stack into a conveyor and through stations that do all the work of surface preparation, conductive coating, and printing the resist material. Resist is stencilled in accurate registry with punching by means of a centering action in the two-sided screen printer, using the registry marks of the strip made in the punching process.

Plating follows, with a controlled process of solution maintenance, timing and current-density to form the required deposit. This forms the copper circuit. Subsequently the resist and the underlying unplated conductive coat are removed, also by travel through mechanical stages, to expose the insulator surface again. It is possible to overplate the copper with another metal, if desired, before removal of resist and coating, while all areas still are electrically joined.

The chassis and partially punched cutouts are knocked out in a die as a final operation. Pieces occupying the whole of the strip in multiple are sheared apart.

Shapes other than flat may be made on special machinery, but

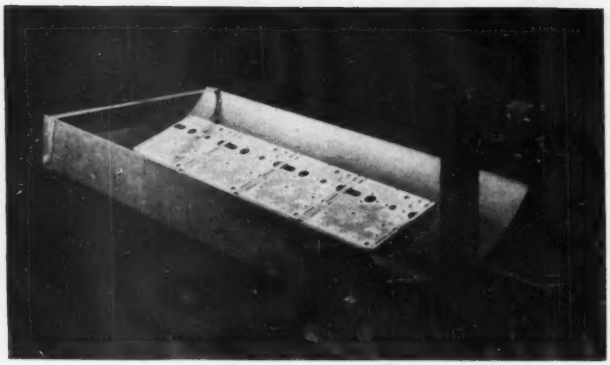

After ejection from printer, strips are ready for plating. Cylindrical trough holds strip without touching surface

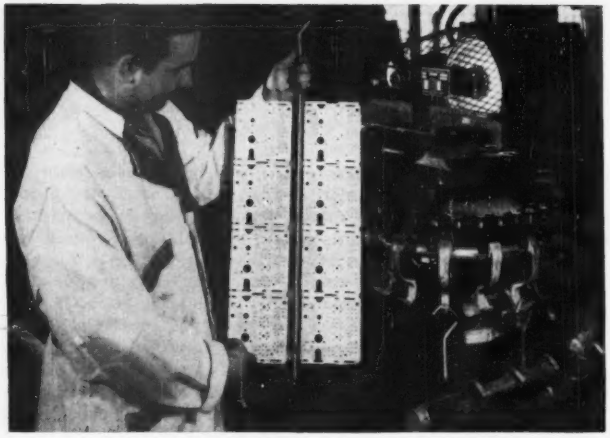

Strips are hung in dipping tank so that metal is applied to both surfaces of base and on walls of holes through base

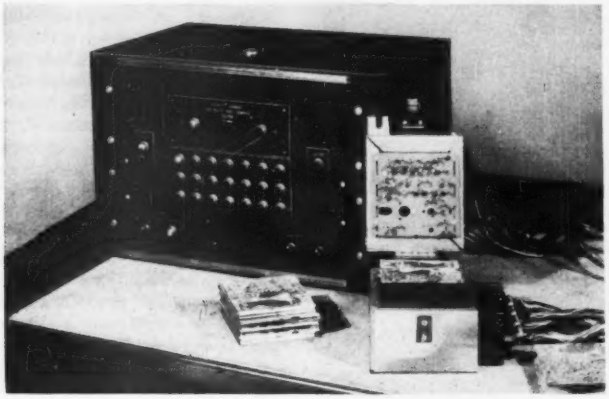

Finished cut-apart bases are checked in two seconds by a stepped test set that picks up leakage, shorts and opens

plane pieces will probably be more useful, since three-dimensional construction is obtainable by joining flat sections.

### *Assemblies*

Components used with the plated-circuits can be those now commonly in use or special new or adapted versions.

Where lugs are provided, they are plugged into appropriately spaced holes. In a volume control, reversal of lugs from the customary allows setting the control in a mounting hole with its lugs in terminal holes of the circuit. Intermediate-frequency transformers already carry terminals generally suited to the purpose. Pig-tail coils, resistors and capacitors lend themselves to dimension forming in U shapes for staple-like insertion.

Tube sockets are made up from clips which are soldered or pressed into the metal-lined circuit terminal holes.

Automatic soldering is practically a requirement for the full utilization of the system. With other methods, all parts must be arranged on one face, so that floating the plane assembly on molten solder effects the joining. The present scheme is predicated upon spot soldering, only where needed, unhampered by a rigid requirement of single-sided mounting. Metal-lined holes send the solder through to the opposite face by capillary action completely filling the hole. Spot soldering leaves room between points for projection of mechanical parts such as shafts and for placement of components at convenience even on the side presented to the soldering equipment.

### *Application*

Connection of units may be accomplished by plating interconnecting terminals along common chassis edges. The formation of perfectly identical bus-bar strips with specialized points of contact and dispersion of circuits is a further possibility for ultra-complex equipment.

Using techniques such as these, a wide variety of equipments of any conceivable degree of complexity could be produced by machine methods.

# Grey-Scale Generator

**Television studio equipment, kinerecordings and overall system performance can be standardized using a generator to produce composite synthetic grey-scale signals. Testing can be done under normal conditions for picture signal without disabling clamp circuits**

**By G. EDWARD HAMILTON and RALPH ILOWITE**

*Eastern Div. Television Engineer* *Television Recording Engineer*

*American Broadcasting Co.*
*New York, N. Y.*

IN ATTACKING the problem of measurement and control of the transfer characteristic in tv picture-signal systems[1] a means is needed for obtaining the relationship between the grey tones or brightness scale and the output—a means for determining the system or individual element performance. A standard electronic grey scale whose individual steps may be determined and measured is essential. The equipment to be described is such a device.

The function of the grey-scale generator is to produce a linear step-function signal combined with blanking and synchronizing impulses in a manner such that a synthetic television signal results. Figure 1 shows all the waveforms. Figures 1H and 1I show the composite output signal during the vertical and horizontal intervals. Figure 2 is a photographic reproduction of (A) the picture tube raster presentation, and (B) a sample strip of 16-mm control film.

From a paper presented at the Sixth Annual Broadcast Engineering Conference, NARTB, Chicago, 1952.

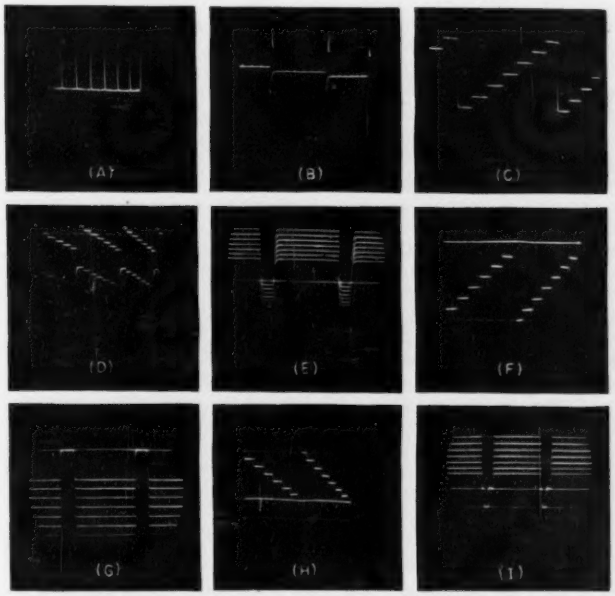


**FIG. 1—Waveforms appearing at various points in the grey-scale generator as noted on the circuit diagram (Fig. 3) and described in the text**

### *Circuit Diagram*

The manner in which the step-function, synchronizing and blanking signals are mixed, to produce the composite signal, is shown schematically in Fig. 3. Three input signals are used to control and generate the synthetic signal, namely: vertical timing pulses, composite blanking and sync pulses. The vertical timing pulses are used to trigger the step-generating oscillator and to re-establish the zero base of the step-function signal. Blanking pulses are used to provide for pedestal and clipping functions. Sync pulses are mixed with the non-composite output signal so that a complete television signal is available.

The number of steps in the grey scale is derived from a thyratron pulse generator ($V_1$), which is a controlled relaxation oscillator. Capacitor $C_1$ charges exponentially until the firing potential is reached (as a function of the bias-control potential) at which time $C_1$ is discharged through $V_1$ and $R_a$, which develops a positive pulse across $R_a$ as shown in Fig. 1A. The frequency of discharge is determined by the

thyratron bias potential, the plate circuit constants and the vertical driving pulses applied to the grid of $V_{1c}$.

The pulse is coupled through $C_4$ to a capacitive accumulator circuit consisting of two diodes $V_3$ and capacitor $C_{5c}$. The diode $V_{3A}$ reestablishes normal quiescent potential across $C_3$ while $V_{3B}$ conducts, charging $C_5$ in steps of equal increment. Capacitor $C_5$ is discharged during the vertical blanking interval by $V_{4A}$ which conducts when its grid is driven positive by differentiated vertical driving impulses from $V_{2B}$ as shown in Fig. 1B. Tube $V_{4A}$ is nonconducting during the vertical interval. A linear stair-step signal is thereby produced at the plate of $V_{4A}$ as shown in Fig. 1C.

The stair-step signal is coupled through $C_7$ to $V_{4b}$, a cathode follower with provision for control of signal amplitude by potentiometer $R_{13c}$. The other half, $V_{4B}$, serves as a mixer for blanking and stairstep signals. Negative blanking signals



FIG. 2—Photograph of picture-tube raster (A) obtained from generator and sample of 16-mm control film strip

are obtained from $V_{17A}$, which is coupled to the cathode of $V_{4B}$ while the cathode of $V_{4A}$ is coupled to the grid. The output of $V_{4B}$ contains mixed blanking and step-function signals as shown in Fig. 1D and 1E.

### Clipper System

The output of $V_{4B}$ is coupled to the clipper amplifier $V_6$ in whose plate circuit is a biased diode clipper system. The clipper waveform containing the step-function signal plus mixed blanking is shown in Fig. 1F and 1G.

The clipping level is determined by adjustment of the blanking clipper bias control $R_{32c}$. The clipped output of $V_6$ is coupled to $V_7$, which serves as video signal amplifier and phase inverter, providing an output signal of black negative.

### Sync Amplifier

Tubes $V_8$ and $V_9$ constitute a two-stage sync amplifier, the output of which comprises a complete synthetic signal composed of stair-step, blanking and synchronizing components.

Amplitude of sync is adjusted by the sync input potentiometer $R_{32c}$. The resulting synthetic signal is shown in the oscillograms of Fig. 1H and 1I.

This test signal has numerous uses. Currently it is an operations tool used for periodically testing overall system performance. As

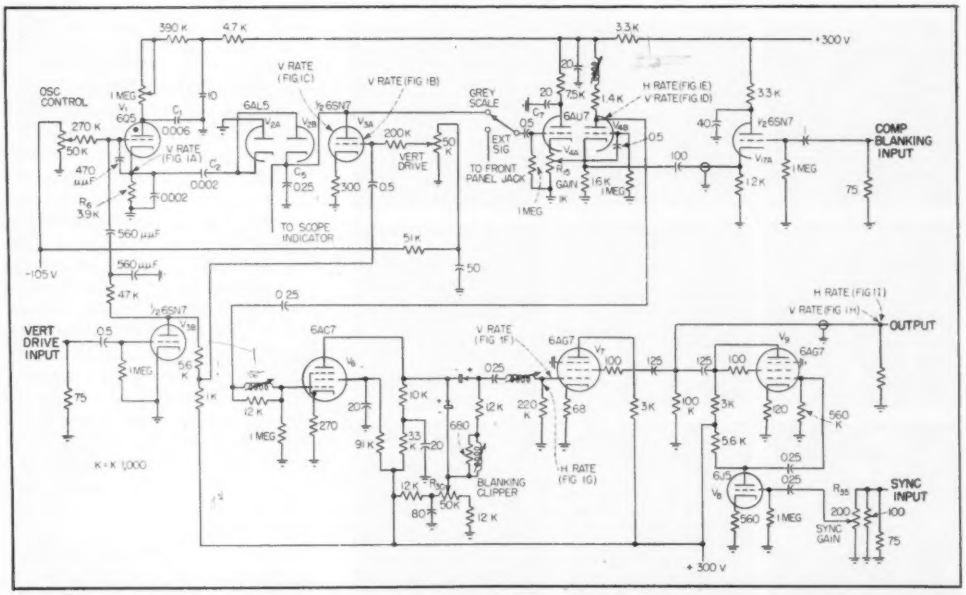


FIG. 3—Sources of detailed oscillographs shown in Fig. 1 are indicated at various points on this complete circuit diagram of the grey-scale generator

such, the signal is fed into a typical studio input and passed through all normal equipment to and including the transmitter. Since the steps may be easily adjusted to coincide with the IRE standard oscilloscope video scale, any discrepancy can be easily detected and observed either at the end of the transmission system or at any of the junction points.

### Long-Line Test

Of special value is the ability it provides to appraise the transfer characteristic of long-line circuits because any tendency of the circuit to introduce compression, frequency discrimination or phase shift is immediately apparent. Since the number of steps is adjustable and occupies a time duration in the order of 60 to 600 cycles, a relatively low-frequency square-wave test is simultaneously available which, by virtue of tilt and overshoot, describes deficiencies in the system. This, too, is useful in determining the low-frequency response of long lines since the harmonics required to pass this frequency range accurately may fall in the region of discrimination.

### Kinerecording Standards

Of prime importance for the standard grey-scale generator is its usefulness in television recording. Knowing the input characteristic, the light output characteristic of a recording kinescope may be determined. The standard input signal allows adjustment for absolute exposure control over the entire latitude.

Inclusion of the standard signal on each television recording film negative provides a means for signal control within close limits with respect to film processing. Printing the grey scale onto the positive film gives an overall control measure of the system performance.

All circuits following $V_1$ are frequency compensated. A selector switch at the input to $V_1$ permits use of an external signal input. This arrangement furnishes a means for injecting any type of test signal into the unit and deriving a composite television signal at the output. Typical special inputs are: square waves, sine waves and sweep-generator signals.

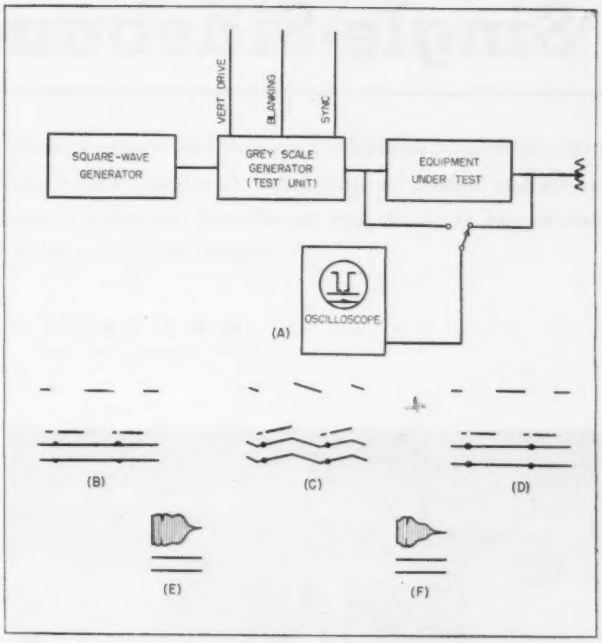


FIG. 4—Block diagram (A) shows use of grey-scale generator with conventional test signals. Input signal (B) and output signal (C) show low-frequency degradation owing to equipment malfunction. Output signal at (D) after replacing faulty component. Sweep-generator presentations (E) input and (F) output of video equipment are described in text

### Clamped Tests

The desirability for such a composite synthetic signal is immediately apparent when it is realized that under test conditions all of the television system components are operating in their normal manner. Especially does this apply to clamp circuits where it is usual practice to disable the clamp circuit while making frequency-response measurements. Figure 4A shows a block layout for determining square-wave system performance as well as the input and output characteristic of a tv studio system. The trace at (B) shows the input signal, that in (C) shows severe low-frequency degradation, and (D) shows the system performance after correction was effected. Curves of Fig. 4E and 4F show the test instrument being used as a swept frequency-synthetic-composite tv signal where (E) represents the input response to a video amplfiier and (F) shows high-frequency degradation at the output. A note of caution is injected at this point to consider the response characteristics of particular oscilloscopes used for the presentation since deficiencies therein will also be apparent by the test method described.

Appreciation is expressed to Charles A. Younger, New York supervisor of television recording and to Arthur Nace for their valuable suggestions and aid in bringing about the described generator, and to Joseph R. Lewis for the photographs.

#### Reference

(1) D. G. Fink, "Television Engineering," Second Edition, McGraw-Hill Book Co., Inc., New York, 1952.

# Single-Sideband System

**Single-sideband transmitter furnishes four voice channels for overseas telephone service. Pushbutton tuning permits rapid frequency shifts and load-control circuit minimizes interchannel crosstalk and out-of-band radiation. Copper-oxide and germanium varistors replace modulator tubes**

**By N. F. SCHLAAK**
*Bell Telephone Laboratories*
*Deal, N. J.*

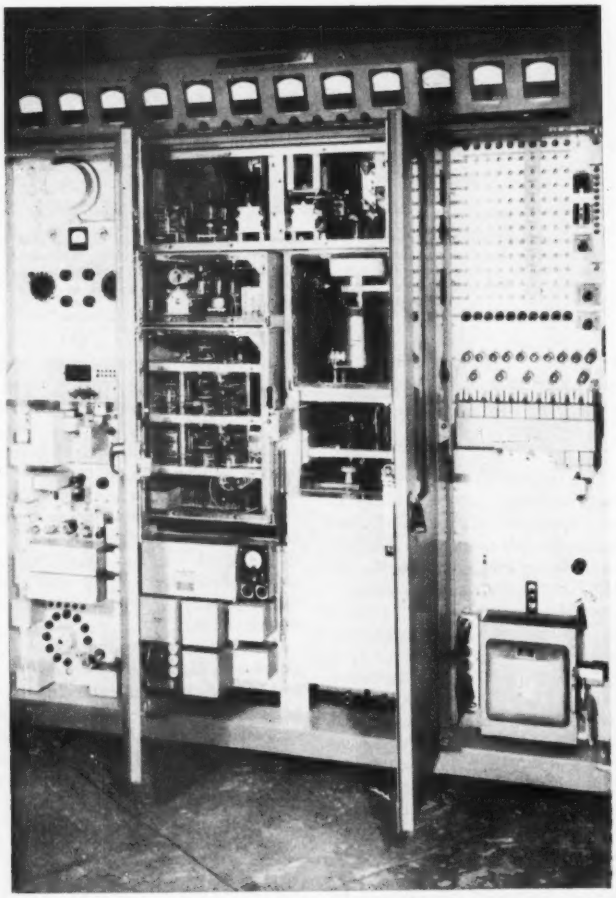

**Single-sideband transmitter consists of four bays. Modulators are at extreme left followed by the six-stage, high-frequency amplifier (center). Automatic tuning circuits fill right-hand bay**

DESIGNED to furnish long-distance, point-to-point, radiotelephone service, the multichannel, single-sideband transmitter to be described incorporates several innovations of interest to design engineers.

The transmitter provides four-kilowatts peak envelope power in the frequency range from four to 23 mc. Improvements over earlier single-sideband transmitters include: automatic selection of any of 10 preselected output frequencies, use of varistors instead of vacuum tubes for modulators, and ability automatically to utilize its full output whether transmitting only one or all four of its voice channels. The performance of the transmitter likewise has been improved with respect to out-of-band radiation and interchannel crosstalk.

### *Sideband System*

The complete LD radiotelephone system, of which the LD-T2 transmitter is one unit, includes the LD-R1 receiver and LD-B1 branching amplifier. The transmitter accepts, and the receiver delivers, two independent voice-frequency bands from 100 to 6,000 cps, which appear as upper and lower sidebands in the radio-frequency signal. A reduced carrier is transmitted for automatic frequency control and automatic volume control at the receiver.

The two voice-frequency bands may be used for program channels or for group transmission of several narrower channels for either tele-

# For Overseas Telephony

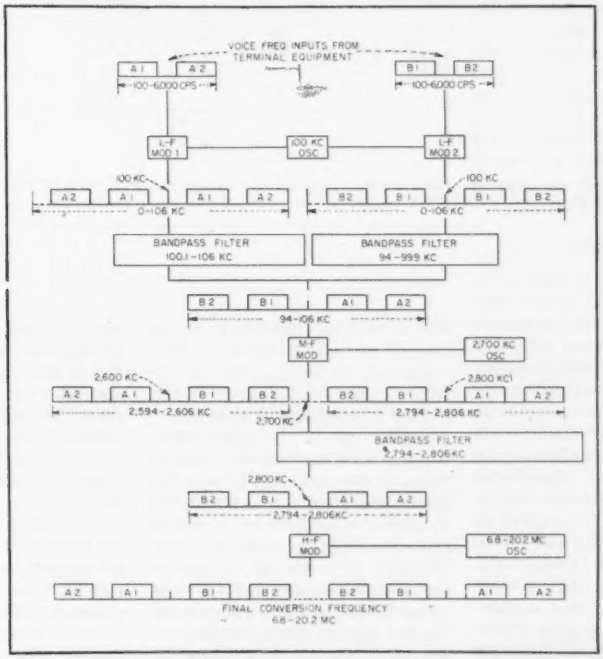


**FIG. 1—Frequency block diagram shows action of modulators and filters. High-frequency amplifiers are tuned to accept either upper or lower sideband from h-f modulator. Group-interchange relay (see Fig. 2) when actuated interchanges position of *A* and *B* bands**

phone or tone-telegraph circuits. Channel grouping must be accomplished by suitable terminal equipment. Any type of terminal equipment and speech-privacy equipment suitable for single-sideband service may be used. Rhombic antennas are usually employed for both transmitting and receiving. Figure 1 shows frequency allocations in the single-sideband system.

The transmitter employs three low-level modulation stages followed by a six-stage linear amplifier. For selection of the desired sidebands, this transmitter, like earlier equipment, uses bandpass filters because of their increased stability and greater selectivity as contrasted with the Hartley balanced-phase system[1]. Each of the 10 preselected frequencies, after calibration, will remain within ±0.003 percent of assigned frequency for long periods of time.

A block diagram of the transmitter is shown in Fig. 2. The two voice-frequency inputs are shown at the top left as Group *A* and Group *B*. A gain control, not indicated in the diagram, allows the inputs to the two modulators to be adjusted to their proper value. A relay allows them to be interchanged when necessary to comply with international practices relating to single-sideband transmission.

### *L-F Modulators*

In the low-frequency modulator, the two voice-frequency inputs modulate the 100-kc carrier in separate modulators employing copper-oxide varistors. The upper sideband extending from 100.1 to 106 kc is selected from the output of modulator No. 1 by a crystal filter while the lower sideband extending from 99.9 to 94 kc is selected from the output of modulator No. 2 by another crystal filter. This frequency allocation is portrayed in the upper part of Fig. 1.

The outputs from the filters are combined in a hybrid coil and impressed on the load-control amplifier. This is a variable gain device that operates with its gain either fixed or controlled by the magnitude of the combined sideband peaks. The gain is controlled by the grid bias. When the amplifier gain is controlled by the magnitude of the

sideband peaks, its bias is obtained from the load-control rectifier, located at the output of the transmitter. Its value, accordingly, varies with the peak amplitude of the output signal. The gain reduction rate is fast, whereas the gain recovery rate is much slower. This helps reduce cross modulation and out-of-band radiation, since it virtually prevents the transmitter from being overloaded at any time. Its effect on quality and intelligibility of speech has been found by rapid comparisons made with and without the device to be negligible.

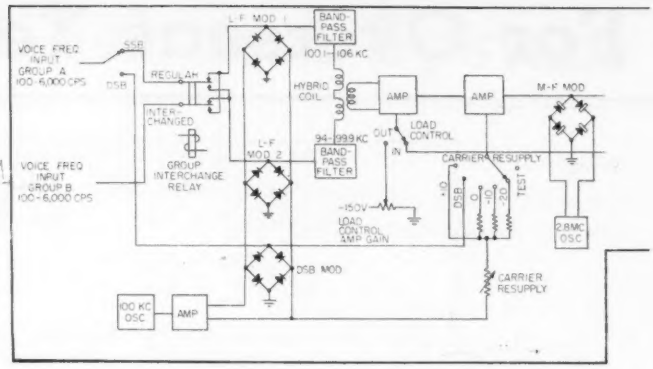


### M-F Stages

The output of the load-control amplifier is impressed on the combining amplifier where it is further amplified and combined with the desired amount of carrier. Since the carrier is introduced after the signal has passed the load-control amplifier, the action of the load-control amplifier has no direct effect on the carrier output level. One of the positions of the carrier-level control switch permits the transmitter to be used for double-sideband transmission by connection to the double-sideband modulator. The double-sideband modulator, is a copper-oxide varistor without any crystal filter in its output. Bandwidth with double-sideband transmission is limited principally by the bandwidth of the medium-frequency equipment.

Following the reintroduction of the carrier, the signal is next impressed on the medium-frequency modulator, where it is used to modulate a 2,700-kc conversion frequency. The upper sideband resulting from this modulation, centered at 2,800 kc, is selected by a series of bandpass filters in tandem with three medium-frequency amplifiers. The medium-frequency modulation products and the resulting signal are shown in the center of Fig. 1. The second modulator uses germanium varistors. All of the equipment up to this point in the circuit remains fixed, regardless of the final operating frequency.

The signal is next impressed on the high-frequency modulator where it modulates a selected conversion frequency in the range from 6.8 to 20.2 mc depending on the desired output frequency. This modulator employs germanium varistors. The correct conversion frequency is selected by a switch that connects one of 10 piezoelectric crystals into the oscillator circuit. Since, at the input to the high-frequency modulator, the original 100-kc carrier is at 2,800 kc, it will be at four megacycles when the lower sideband of a 6.8 mc conversion frequency is selected, and will be at 10 mc when the lower sideband of the 12.8 mc conversion frequency is selected. The carrier will be at 23 mc when the upper sideband of a 20.2 mc conversion frequency is selected. For conversion frequencies higher than 12.8, the second harmonic of a crystal is employed.

### H-F Amplifiers

The h-f modulator is followed by a gain-control potentiometer and a six-stage, linear amplifier. The tuned circuits associated with this amplifier are set to select either the upper or lower sideband as desired. The output of the h-f modulator is portrayed at the bottom of Fig. 1. The first three amplifier stages employ 807 tubes and the circuits are gang tuned. The fourth stage uses two 4E27s and has a $\pi$-type output circuit to permit impedance transformation. Amplifier No. 5 uses two 4-400A tubes and the final stage uses one 3X2500F3 forced-air-cooled triode operating with its grid grounded. The last two stages also employ the $\pi$-type output circuit. Each of the amplifier tuning coils is provided with eleven taps and the circuit inductance may be switched. An unbalanced to balanced line converter follows the $\pi$-type tuned output circuit of the final amplifier. A shielded dummy load, which will dissipate the full output of the transmitter, is supplied for checking transmitter performance before connection to the antenna.

A built-in monitor consisting of a simple triple-detection, single-sideband receiver utilizes the conversion frequency and carrier sources in the transmitter to demodulate the signal and recover the original voice frequencies. Figure 3 is a block diagram of the monitor. No facilities are provided in the monitor for selection of sidebands since the monitor is usually used for making two-tone distortion measurements. The monitor incorporates a carrier alarm that is actuated if the carrier amplitude falls below a predetermined value.

### Automatic Tuning

Selection of the operating frequency is by a servo system with pushbutton control. Tuning information is stored in a bank of 110 potentiometers connected into the servo system in groups of 11 by means of relays and a selector switch. Ten continuous servos and six switching servos are employed. Each of the sixteen small shaded-pole, reversible motors that are used to change circuit elements is located

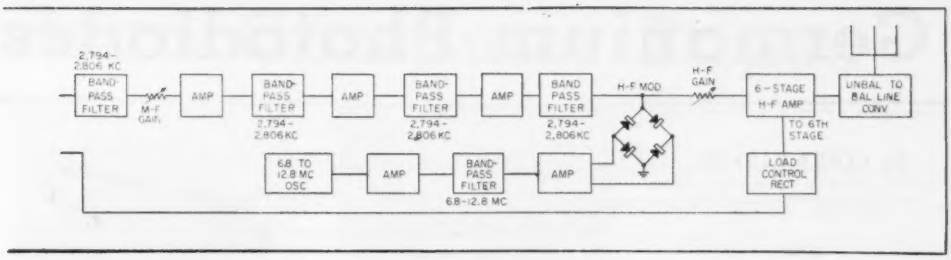


FIG. 2—Multichannel, single-sideband transmitter uses varistors instead of vacuum tubes for modulators. Double-sideband emission is available if desired. Load-control circuit minimizes interchannel crosstalk and out-of-band radiation

near the element to be switched. The servo system thus gives the designer freedom to place each circuit element in its most advantageous location from a circuit-design standpoint without regard to the problem of bringing out a mechanical control in a convenient location. About fifteen seconds are required to select any one of the ten available frequencies, and about the same time is required to put the transmitter into standby condition or to remove it from standby condition.

The transmitter will operate under temperature and humidity conditions encountered in a normal station building, including locations in the tropics. It will operate satisfactorily in ambient temperatures between 15 and 50 degrees C and at altitudes up to 5,000 ft. It requires 10 kva of three-phase power at 230 volts, 50 or 60 cycles.

### Receiver

The companion single-sideband receiver is of the triple detection type with intermediate frequencies the same as in the transmitter. This permits the same type of bandpass filters to be used as are used in the transmitter. To give adequate selectivity, the receiver has additional filters not required in the transmitter. The receiver has several novel features, such as the choice of either a crystal-controlled or variable-frequency first beating oscillator, limiters for reconditioning the received carrier, an automatic-frequency-control circuit requiring few adjustments, a squelch circuit that prevents false operation of the automatic frequency control during periods of poor signal-to-noise ratio, a common main amplifier for both sidebands and carrier, and a distribution of selectivity and automatic-volume-control action that minimizes cross modulation and maintains maximum signal-to-noise ratio. The nominal input impedance of the receiver is 75 ohms unbalanced.

The receiver is seven feet high, 21½ inches wide and 17 inches deep. It operates on 115 volts, 50–60 cycles.

### Branching Amplifier

Since it is often advantageous to connect more than one receiver to a single antenna without interaction or appreciable loss of signal-to-noise ratio, the complete equipment includes a branching amplifier. This consists of six independent, two-stage amplifiers with their input grids connected to the 75-ohm coaxial transmission line by the same type of wide-band transformer used with a rhombic antenna to transform its impedance to the 75-ohm unbalanced transmission line impedance. Six independent 75-ohm output connections are provided to connect as many as six receivers to the same antenna. More receivers can be connected by connecting branching amplifiers in tandem. The branching amplifier is 19 inches wide, 5¼ inches high and 8 inches deep. It has no controls and operates on 115 volts, 50–60 cycles.

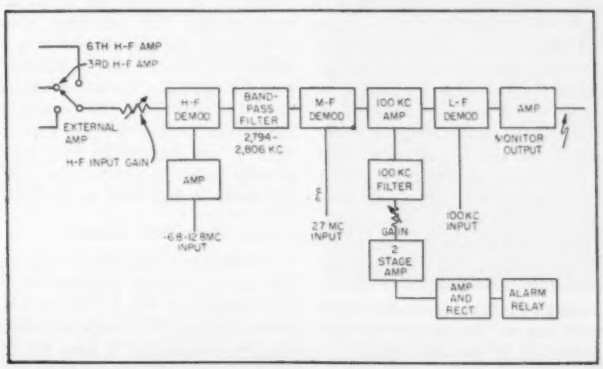


FIG. 3—Output monitor restores original voice channels. Alarm is actuated if transmitter output falls below desired level


REFERENCE

(1) U.S. Patent No. 1666206 application filed Jan. 15, 1925.

# Germanium Photodiodes

**By LEROY PACKER**
*Columbia University Engineering Center*
*Electronics Research Laboratory*
*New York, New York*

**and**

**WILLIAM J. WRAY, JR.**
*Research Activity*
*Burroughs Adding Machine Company*
*Philadelphia, Pa.*



Evidence of the small size of the 1N77 photodiode, visible here between 5 and 6



One of the six plug-in amplifier units used in the equipment

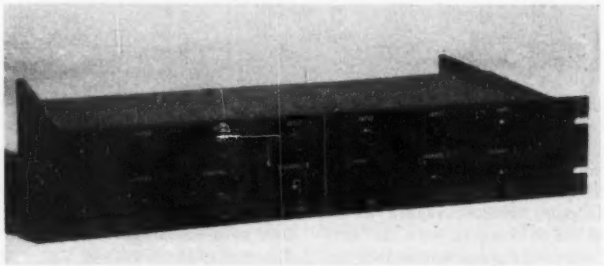

Front panel of the six-channel amplifier for the punched-tape reader

TELETYPEWRITERS are the logical choice for use as input-output units in many digital computers because of reliability, economy and availability. However, it is often desirable to feed tape into an electronic computer at speeds higher than those obtainable with the mechanical sensing elements used in such equipment. By using photoelectric sensing elements, input speeds high enough for most applications can be obtained.

The difficult task of constructing a photoelectric reader for tape has been simplified by the advent of the germanium photodiode and the photo transistor. These semiconductor transducers are much smaller and more sensitive than the smallest phototube commercially available.

A typical germanium photodiode measures 0.080 inch in diameter and 5/16 inch long. Since the incident light is applied to the 0.080-inch diameter face, six of these photodiodes can be mounted directly above six-channel tape. Such a mounting eliminates the need for lenses and reduces the problem of packaging the device. With the type of construction used, repairing is easy. If the equipment fails, it can be put back into operation simply by replacing a plug-in amplifier.

### Germanium Photodiode

The 1N77 diode used in the punched-tape reader makes use of the photo effects found in high-resistivity germanium. The photoconductivity is most pronounced in the boundary region separating *n*-type and *p*-type germanium[1]. The type 1N77 is made by doping a small layer of *p*-type germanium onto the surface of an *n*-type germanium crystal. The point contact is then made to the *p*-type layer. The photosensitive region is in the immediate vicinity of the point contact and is about 0.005 inch in diameter[2].

The back resistance of the photodiode is sensitive to the pressure of the point contact. Twelve type 1N77 diodes showed variations in back resistance of from 0.12 to 1.8 megohms. The back resistance is also quite sensitive to changes in temperature. After the initial decrease in back resistance when the light is turned on, the back resistance continues to decrease at a slow rate. When the light is turned off, the back resistance suddenly increases because of the sudden decrease in the generation of photoelectrons and then decreases more slowly, due to the decrease in the temperature of the photodiode.

Dependence of the back resistance and the quiescent operating potential of the 1N77 on temperature and contact pressure restrict its use to situations in which the presence or absence of light is important. Sensitivity of the 1N77 to chopped light has been found to be fairly constant over a wide range of quiescent operating potentials.

Variation of output signal with twelve photodiodes tested under the same operating conditions was found to be 60 percent about the mean value. The maximum noise inherent in the photodiodes was 50 millivolts. An increase in temperature did not affect the noise generation appreciably. The signal-to-noise ratio in the present application is not limited by the noise generated in the photodiode, since the mean signal level is 2.5 volts.

### Amplifier Circuit

A simplified schematic diagram for the six-channel plug-in amplifier is shown in Fig. 1. This circuit shows one amplifier with its power supply connections. It does not indicate the plug-in arrangement.

The amplifier has been designed

# Read Computer Tapes

**Light-sensitive semiconductor elements and plug-in amplifier units, together provide continuous reading of paper tapes at speeds up to 1,000 characters per second and quick, easy maintenance. Photodiodes are mounted side by side directly under the character holes of six-channel tape**

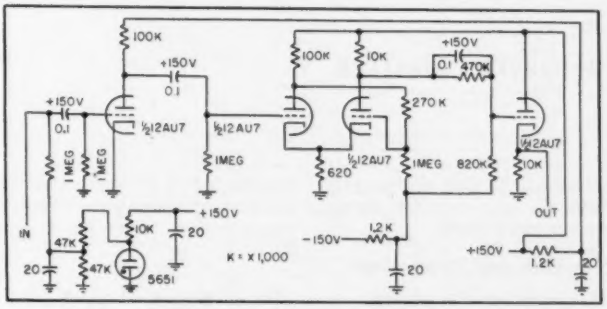


**FIG. 1—Simplified schematic diagram of an amplifier channel**

to produce a uniform output for 1N77 photodiode input pulses of varying waveforms and with peak values of from one to four volts negative. The output is a square pulse, 60 volts peak, with a rise time of about two μsec and somewhat less fall time. The input is supplied as a negative pulse to the first stage, which reverses polarity and provides an amplification of about 12.

Output from the first stage is supplied to a Schmitt trigger circuit based on feedback between two triodes. With no signal, the first triode is cut off by the voltage across the common cathode resistor, maintained by the conduction of the second triode. When the input pulse reaches a value determined by the circuit parameters, the first triode conducts and cuts off the second. This state is maintained until the input pulse falls below a value determined by the circuit parameters, at which point the second triode conducts, and the first is again cut off.

If the value of the cathode resistor is too low, both tubes conduct, the trigger action is not present and the circuit is a sensitive d-c amplifier[3]. The output from the trigger circuit is supplied to a cathode follower biased to cutoff to allow d-c coupling.



**FIG. 2—Amplifier output waveforms at input pulse repetition rate of 100 per second. Scale: ordinate is 20 v per cm and abscissa is 930 μsec per cm. Input for the upper graph is —2 v peak and for the lower is —20 v peak**

The circuit, intended for use at 100 pulses per second, operates in the range of from one to 35,000 per second. Higher repetition rates are possible with modification of the trigger circuit. With negative input pulses of from one to four volts peak at 100 per second, the square output pulse occupies 15 percent of the period. As the input increases in magnitude, the output pulse widens. At 22 volts input the output pulse occupies about 35 percent of the period, as shown in Fig. 2.

Regardless of the input, output pulses maintain the two-μsec rise time and the 60-volt peak value. For input voltages less than 0.28 volt, there is no triggering. This is the maximum allowable noise figure. In the range of from 0.28 to 0.92 volt at the input terminals, the output fails to include a percentage of the input. Above 0.92 volt, the output is reliable.

Tests indicate that in a practical device, 1.75 volts is a reasonable value of peak signal from a 1N77. A value of less than 1.5 volts indicates a poor photodiode or, what is far more likely, a poor light adjustment.

The circuit has been operated into loads from open circuit to 10,000 ohms with no change in output waveform or magnitude. At lower load resistance, the magnitude is reduced.

### Reference


(1) Terren and Whitmer, "Crystal Rectifiers," Radiation Laboratory Series, Vol. 15, McGraw-Hill Book Co., New York, p 392.
(2) George D. O'Neill, Germanium Photocells, *Proc. NEC*, 6, p 266.
(3) O. S. Puckle, "Time Bases", John Wiley and Sons, Inc., 1951.

# Universal Skin-Effect Chart

**Gives skin depth, napier depth and depth of penetration of current in various metals, solutions and ground at frequencies ranging from 1 cps to 1,000,000 mc. One use is estimating transmission between underwater loop antennas, such as for sub-to-sub or sub-to-ship radio communication through salt water**

**By HAROLD A. WHEELER**
*Wheeler Laboratories, Inc.*
*Great Neck, N. Y.*

THE CHART in Fig. 1 and the accompanying equations present the skin effect over a wide range of frequencies in various conducting mediums such as metals, water solutions and the ground.

The simple skin effect fails above a certain transition frequency depending on the product of electric ratio × magnetic ratio of the material. The 45-deg dashed lines at the top mark the corresponding upper limits of validity determined by the indicated values of these ratios.

The transmission between two loop antennas in a conductive medium may be estimated on the basis of the napier depth given on the chart, if the dimensions of the loops are much smaller than the napier depth. Add to the free-space attenuation (based on usual formulas) an attenuation of 1 napier (8.7 db) for every napier depth of distance between the loops.

All changes of conditions required for similar skin effect in scale models may be read on the chart by a simple rule. Through the point representing one set of conditions, draw a line parallel to the 45-deg dashed lines at the top. Any other point on this line represents another set of conditions for a scale model with length dimensions changed in proportion to the napier depth.

The chart is supplemented by a variety of formulas and by tables of conductivity and electric ratio (dielectric constant) for metals, solutions and ground.

### Symbols and Terminology

(mks units unless otherwise specified)
$d$ = napier depth (skin depth, depth of penetration) (meters)
$\lambda$ = Wavelength in free space (meters)
$f$ = frequency (cps)
$\omega = 2\pi f$ = radian frequency (radians per second)
$\sigma = 1/\rho$ = conductivity (mhos per meter)
$\rho = 1/\sigma$ = resistivity (ohm-meters)
$G_o = 1/R_o = 0.00265$ = wave conductance in free space (mhos)
$R_o = 1/G_o = 377$ = wave resistance in free space (ohms)
$\mu$ = magnetivity (henrys per meter)
$\epsilon$ = electrivity (farads per meter)
$k_m = \mu/\mu_o$ = magnetic ratio (unity for all nonmagnetic materials)
$k_e = \epsilon/\epsilon_o$ = electric ratio
sub-o = free space
sub-c = transition between simple skin effect and electromagnetic-wave propagation.

### Formulas

*Napier Depth* (skin depth, depth of penetration). The depth at which the current density is $1/e$ or 0.368 of its value at the surface; the effective thickness of the layer of current just under the surface. It is equal to the radian depth, at which the phase angle of the current density is retarded one radian from its value at the surface.

$$d = \sqrt{\frac{2}{\omega\mu\sigma}} = \frac{1}{\sqrt{\pi f \mu \sigma}} = \sqrt{\frac{\lambda G_o}{\pi \sigma k_m}} = \sqrt{\frac{\lambda \rho}{\pi R_o k_m}} \text{ meters} \quad (1)$$

The last two forms involve only the dimensions of length and conductance or resistance. Substituting numerical values for $G_o$ and $R_o$:

$$d = \frac{1}{2\pi}\sqrt{\frac{\lambda}{30\sigma k_m}} = \frac{1}{2\pi}\sqrt{\frac{\lambda\rho}{30 k_m}} = \frac{1}{34.4}\sqrt{\frac{\lambda}{\sigma k_m}} = 0.0291\sqrt{\frac{\lambda}{\sigma k_m}} \text{ meters} \quad (2)$$

As an example, at 1 mc $d = 0.503/\sqrt{\sigma k_m}$ meters. Units of $d$ and $\sigma$ are meters and mhos per meter or millimeters and megamhos per meter. The former units are convenient for ground and water, the latter for metals. This formula is convenient for plotting the intersections used in drawing the chart. As another example, the napier depth in copper ($\sigma$ = 58 megamhos per meter) is

$$d_{Cu} = \frac{0.066}{\sqrt{f_{mc}}} \text{ mm} = \sqrt{\frac{4.36}{f_{kmc}}} \text{ microns} = \sqrt{\frac{4.36}{f_{kc}}} \text{ mm} = \sqrt{\lambda_m}\, 3.81 \text{ microns} \quad (3)$$

$d_{Cu}$ = 0.066 mm at 1 mc
1 mm at 4.36 kc
1 mil-inch at 6.8 mc
1 micron at 4.36 kmc

*Frequency and Wavelength.*

$$f = \frac{1}{\lambda\sqrt{\epsilon_o\mu_o}}; \lambda = \frac{1}{f\sqrt{\epsilon_o\mu_o}} \quad (4)$$

*Transition Frequency.* The frequency at which the simple skin effect (at lower frequencies)

# for Conducting Materials

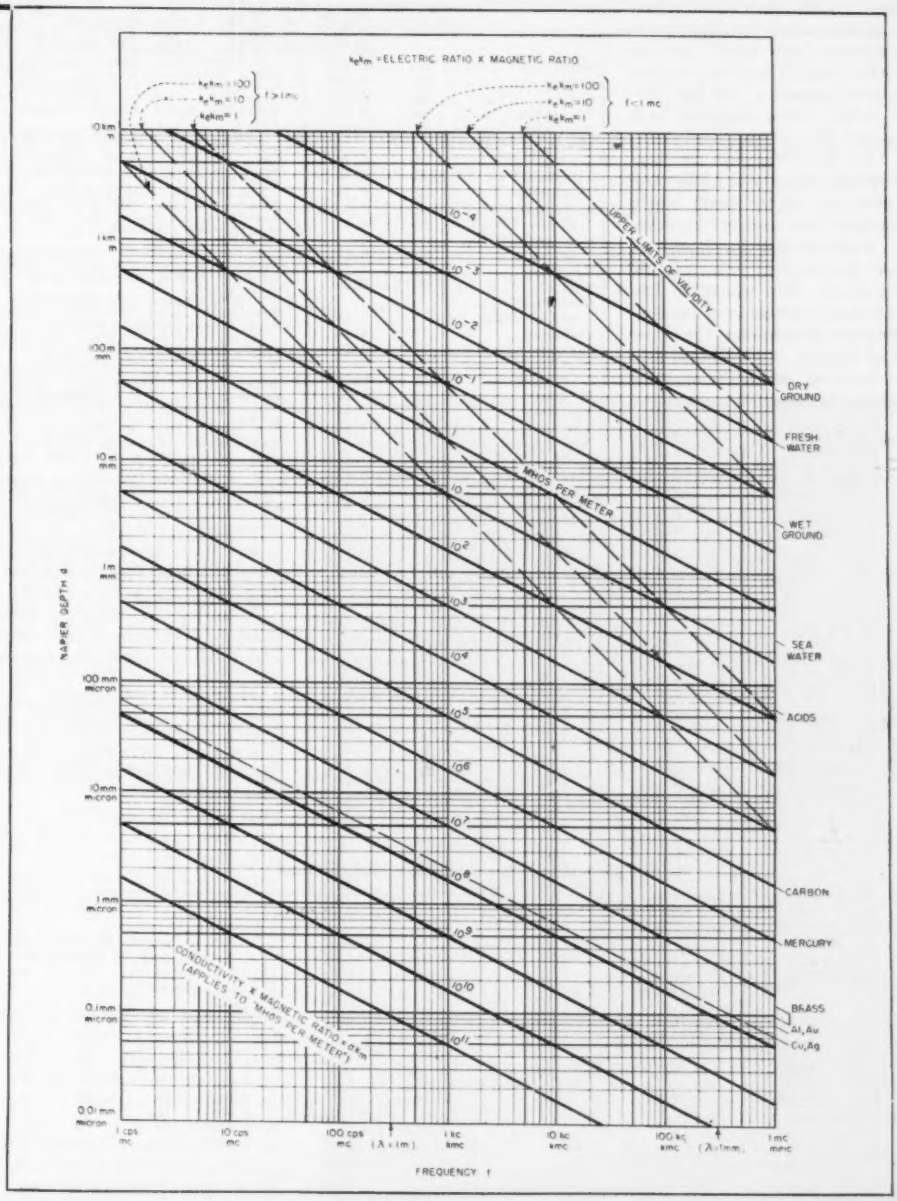


**FIG. 1—Solid lines are contours of conductivity × magnetic ratio, identified for typical materials in right-hand margin. Dashed lines give transition frequency above which dielectric currents complicate the simple conduction-current skin effect in poor conductors. Horizontal scale of frequency and vertical scale of napier depth have two sets of units, divided at 1 mc: use upper set of units for lower frequencies, and lower set for higher frequencies**

merges with wave propagation (at higher frequencies). At this frequency, the average loss tangent of the magnetic and electric fields is unity. In low (poor) conductors, it is assumed that the material is nonmagnetic and hence has no magnetic loss. Therefore, at the transition frequency, the loss tangent $(1/Q)$ of the dielectric is 2 (or $Q = 1/2$).

If the dielectric had uniform effective conductivity at higher frequencies, the napier depth would be constant, but usually the effective conductivity increases at higher frequencies, reducing the napier depth. The transition frequency in the ground is of particular interest, determining the upper limit of validity of the simple skin effect based on conduction currents exceeding the dielectric currents.

$$f_c = \frac{\sigma}{4\pi\epsilon_o k_e} \quad \text{cps} \qquad (5)$$

$$f_c = 9{,}000\,\sigma/k_e \quad \text{mc} \qquad (6)$$

$$\lambda_c = \frac{4\pi G_o k_e}{\sigma} = \frac{4\pi\rho k_e}{R_o} \quad \text{meters} \qquad (7)$$

$$\lambda_c = \frac{k_e}{30\,\sigma} = \frac{\rho k_e}{30} \quad \text{meters} \qquad (8)$$

$$d_c = \frac{\lambda_c}{2\pi\sqrt{k_e k_m}} = \frac{47.7}{f_{c(mc)}\sqrt{k_e k_m}} \quad \text{meters} \qquad (9)$$

This transition value of the napier depth ($d_c$) is equal to one radian-length in the material at the transition frequency. It is used for plotting the 45-deg dashed lines at the top of the chart for several values of the electromagnetic product $(k_e k_m)$. In the dielectric:

$$\text{Loss tangent} = \frac{\sigma}{\omega_c \epsilon} = \frac{\sigma\lambda}{2\pi G_o k_e} = \frac{P_o\lambda}{2\pi\rho k_e} \qquad (10)$$

$$\text{Loss tangent} = \frac{60\,\sigma\lambda}{k_e} = \frac{60\,\lambda}{\rho k_e} \qquad (11)$$

**Table I—Nonmagnetic Metals**

| Material (Temp 20° C) | Conductivity $\sigma$ megambos per meter | Napier Depth $d$ at 1 mc mm |
|---|---|---|
| Silver | 61 | 0.064 |
| Copper | 58 | 0.066 |
| Gold | 42 | 0.078 |
| Chromium | 36 | 0.084 |
| Aluminum | 35 | 0.085 |
| Brass (red; 91 Cu, 9 Zn) | 26 | 0.10 |
| Tungsten | 23 | 0.10 |
| Magnesium | 22 | 0.11 |
| Manganin (84 Cu, 12 Mn, 4 Ni) | 21 | 0.11 |
| Constantin (60 Cu, 40 Ni) | 20 | 0.11 |
| Rhodium | 18 | 0.12 |
| Zinc | 17 | 0.12 |
| Brass (yellow; 66 Cu, 34 Zn) | 15 | 0.13 |
| Cadmium | 13 | 0.14 |
| Phosphor Bronze | 12 | 0.14 |
| Beryllium Copper (2% Be) | 11 | 0.15 |
| Platinum | 10 | 0.16 |
| Palladium | 9 | 0.17 |
| Tin | 9 | 0.17 |
| Nickel Silver (64 Cu, 18 Ni, 18 Zn) | 3.0 | 0.29 |
| Silicon (approx) | 1.7 | 0.39 |
| Mercury | 1.04 | 0.49 |
| Carbon (approx) | 0.1 | 1.6 |


**BIBLIOGRAPHY**

C. B. Feldman, Optical Behavior of the Ground for Short Radio Waves, *Proc IRE*, p 764, June 1933; *Bell Mono.* B-746.

F. E. Fowle, "Smithsonian Physical Tables," 8th ed, 1934. (Conductivity of solutions, long tables, p 432.)

C. A. Heiland, "Geophysical Exploration," Prentice-Hall, 1940. (Excellent tables of resistivity and dielectric constant of minerals, some information on waters, p 638, 657. Chart of depth penetration, p 685.)

C. R. Burrows and M. C. Gray, Ground-wave Propagation, *Proc. IRE*, p 16, Jan. 1941; *Bell Mono. B-1285.* (Dielectric constant and conductivity of land and water, short table.)

Harold A. Wheeler, Skin Effect Chart, ELECTRONICS, Dec. 1941, p 32. First publication of this type of chart; part of report on paper presented at the 1941 Rochester Fall Meeting.

J. A. Stratton, "Electromagnetic Theory," McGraw-Hill, 1941. (Conductivity of metals, land and water, short table, p 605.)

J. R. Whinnery, Skin Effect Formulas, ELECTRONICS, p 44, Feb. 1942. (Chart of depth of penetration in metals.)

H. A. Wheeler, Formulas for the Skin Effect, *Proc IRE*, p 412, Sept. 1942. (Chart of depth of penetration in metals.)

S. A. Schelkunoff, Electromagnetic Waves," Van Nostrand, 1943. (Formulas for skin effect, p 83. Conductivity and dielectric constant of land and water, p 85.)

S. Ramo and J. R. Whinnery, "Fields and Waves in Modern Radio," Wiley, 1944. (Skin effect in conductors, chart, p 196.)

H. A. Wheeler, Radio Wave Propagation in the Ground, *Hazeltine Report* 2009W, Dec. 6, 1945. (Formulas for skin effect, wave attenuation, and transition frequency.)

H. A. Wheeler, Radio Pulse Reflection in the Ground, *Hazeltine Report* 2012W, Dec. 26, 1945. (Theory of skin effect in the ground, limits on validity imposed by dielectric constant, chart and table of depth of penetration in land and water.)

"Van Nostrand's Scientific Encyclopedia," 2nd ed., 1947. (Water, analysis of sea and river waters, p 1,553. Atlantic Ocean, 3.5% salts.)

G. P. Harnwell, "Electricity and Electromagnetism," McGraw-Hill, 2nd ed., 1949. (Conductivity of metals, p 85; solutions, p 189; excellent short tables.)

J. J. Jakosky, "Exploration Geophysics", 2nd ed., Trija Publ. Co., 1950. (Charts and tables of resistivity of minerals, p 437.)

K. McIlwain and H. Pender, "Electrical Engineers' Handbook", Wiley, 4th ed., 1950. (Conducting materials, excellent table, p 2-04.)


**Table II—Water Solutions and Ground**

| Material (Temp 20° C) | Conductivity $\sigma$ mhos per meter | Napier Depth $d$ at 1 mc meters | Electric Ratio $k_e$ | Max Freq $f_c$ mc |
|---|---|---|---|---|
| Acids (20%) HCl, $HNO_3$, $H_2SO_4$ | 70 | 0.059 | 81 (?) | 8,000 |
| Alkali (20%) NaOH | 33 | 0.086 | 81 (?) | 3,700 |
| Salt (20%) NaCl Great Salt Lake | 20 | 0.11 | 81 (?) | 2,200 |
| Salts (3.5%) Atlantic Ocean | 4 | 0.25 | 81 | 450 |
| Fresh water (approx) lakes, rivers | 0.001 | 16* | 81 | 0.11* |
| Distilled water | 0.0002 | 36* | 81 | 0.022* |
| Wet ground (max) | 0.03 | 2.9 | 25 | 11 |
| Wet soil | 0.02 | 3.6 | 32 | 5.6 |
| Fertile land | 0.005 | 7.1 | 15 | 3.0 |
| Average ground | 0.002 | 11 | 16 | 1.1 |
| Rocky ground, dry soil | 0.001 | 16 | 7 | 1.3 |
| Very dry soil | 0.001 | 16 | 4 | 2.2 |
| Dry ground (min) | 0.0001 | 50* | 9 | 0.10* |
| "Good conductors" minerals such as some sulfides and oxides | $10^5 - 1$ | | | |
| "Intermediate conductors" clay, shale, stone, rocks, ores | $1 - 10^{-3}$ | | | |

* $d$(1 mc) is not valid if $f_c < 1$ mc, but is still useful as a basis for computing $d$ at $f < f_c$.

# DIGITAL COMPUTER Plays NIM

**Engineers design glorified pinball machine in breather from classified work. Binary-counter system may be set to win regardless of opponent's skill, or to allow opponent to win if he plays a perfect game**

**By HERBERT KOPPEL**
*W. L. Maxson Corp.*
*New York, N. Y.*

AN AUTOMATIC DIGITAL computer matches wits with its human operator in playing the old game of NIM.

Only perfect play by the operator can defeat the machine and its moves are sufficiently random to minimize the possibility of defeat by mere memorization of a particular sequence of play. If desired, the starting conditions of the game can be so adjusted that it is impossible for the player to defeat the machine.

The game of NIM is played with stacks of chips, each stack having a random number of chips. The two players take turns removing chips from the stacks. The player removing the last chip from the table wins. During his turn, a player removes chips from one stack only. He may remove any desired number of chips, from one to the whole stack

### *How To Win at NIM*

The number of chips in each stack can be expressed in binary notation as the sum of different powers of two. If a safe condition is defined as one where, in the sum of all the stacks, each power of two appears an even number of times, with zero considered an even number, then[1]: Any safe condition, followed by any legal move, must bring about an unsafe condition. Any unsafe condition may be turned into a safe condition by re-

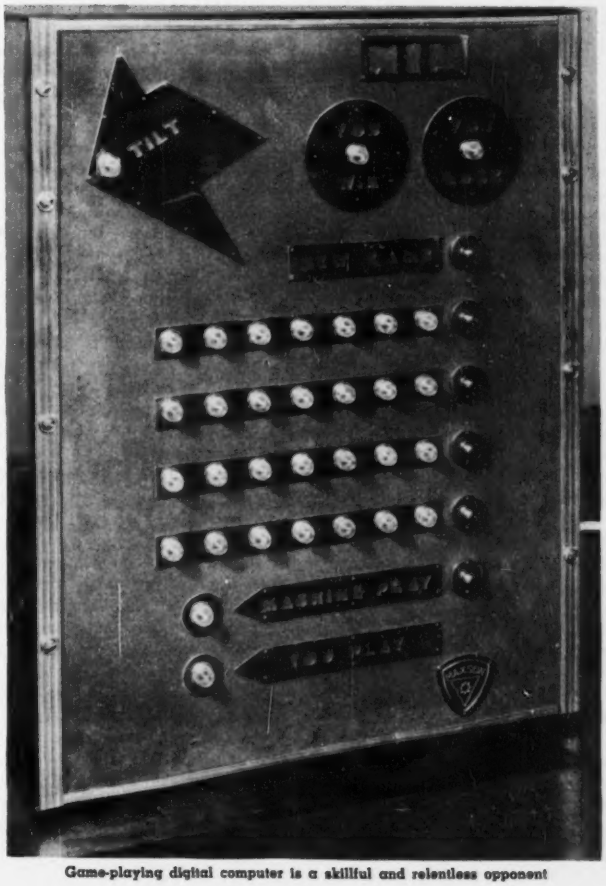


**Game-playing digital computer is a skillful and relentless opponent**

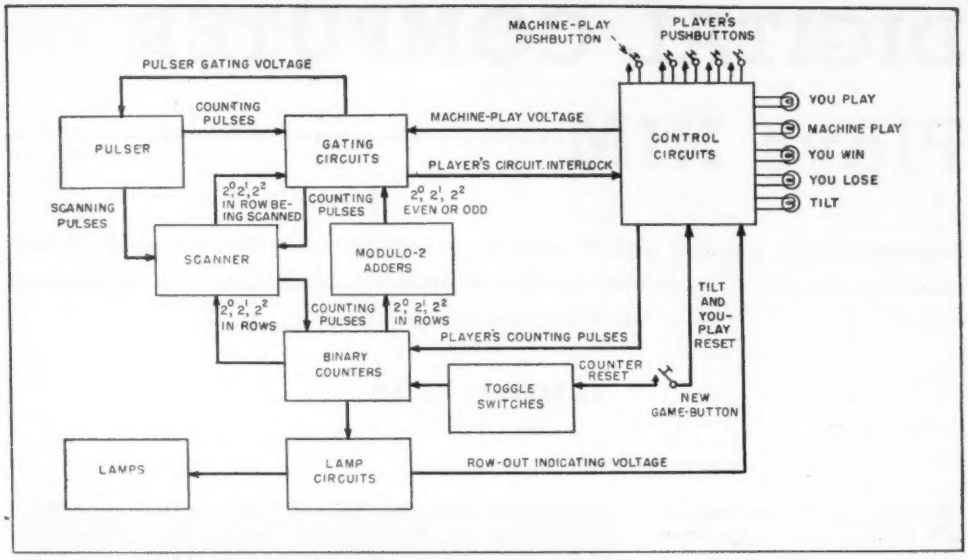


**FIG. 1—Block diagram shows circuits that comprise the NIM machine's electronic brain**

moving from any group containing the highest power of two appearing an odd number of times, a number of chips such as to cause all powers of two to appear an even number of times. The player who presents his opponent with a safe condition, and continues to do so at each turn of play, will win.

### *Operating the Machine*

The front panel of the machine contains four rows of seven neon lamps each. These serve as stacks of chips, removal of which is accomplished by extinguishing the lamps. A pushbutton is provided for each row. The player pushes the button corresponding to the row that he selects once for each lamp he wishes to extinguish. If he attempts to cheat by operating upon more than one row during any one turn of play, the TILT indicator lights and the game is automatically ended.

When the player has made his move, the MACHINE PLAY indicator lights, and the machine is ready to take its turn. When the MACHINE PLAY button is pushed, the machine automatically selects the row upon which it wishes to operate, and extinguishes a number of lamps in that row. The player's next turn is then indicated as the MACHINE PLAY indicator goes out and the YOU PLAY indicator lights.

When presented with an unsafe condition, the machine will always move to bring about a safe condition. It will read the number of lamps lit in each row as a binary number, select a row containing the highest power of two appearing an odd number of times in the total of all the rows, and remove a number of lamps from the selected row such as to cause every power of two to appear an even number of times. Since its human opponent must then convert this safe condition into an unsafe condition, the machine will consistantly maintain its advantage and eventually win the game.

When presented with a safe condition, the machine must in turn present its opponent with an unsafe condition. It therefore selects a row at random and extinguishes one lamp, thus prolonging the game in the hope that its opponent will eventually make a mistake. The entire machine-play cycle takes less than 0.4 second.

If the human player is successful in extinguishing the last of the lamps, the YOU WIN indicator lights. If the last lamp is extinguished by the machine, the YOU LOSE indicator lights.

### *Player Beaten At Start*

The NEW GAME pushbutton sets up the game by lighting certain lamps and the YOU PLAY indicator. The initial configuration of lamps is determined by the settings of a bank of toggle switches at the rear of the machine.

Since the human player must make the first move, presenting a safe condition at the start of the game will force him to lose, while starting the game with any unsafe condition will enable him to win by playing properly throughout the game. Having all lamps lit in each row constitutes a safe condition.

Interlock circuits prevent improper or unfair play, such as attempting to make the machine take two consecutive moves, or actuating the MACHINE PLAY and player's

pushbuttons simultaneously. Figure 1 is a block diagram of the NIM machine.

### Lamp and Counter Circuits

A three-stage binary counter, using the conventional Eccles-Jordan circuit, controls each of the four rows of seven lamps. The number of lamps lit in each row corresponds to the condition of the three-stage counter controlling that row. All seven lamps are lit when the counter is in zero position. The lamps are extinguished in sequence from left to right as the counter is triggered. Each lamp is connected in the plate circuit of a triode. Counter-tube plate voltage is used to bias the triodes to cutoff in proper sequence. The lamp circuit for each row also provides a "row-out" indicating voltage when the row has been completely extinguished.

Pushing the NEW GAME button causes a predetermined number of lamps to light in each row by opening the grid return circuit of one of the two tubes in each binary-counter stage. Twelve toggle switches (one for each of the three stages that actuate each of the four rows) permit selection of either of the two tubes in each stage. Thus any combination of counter settings, and therefore any desired configuration of lamps, may be chosen. In addition, the NEW GAME button de-energizes the tilt circuit if it has been activated previously.

### Control Circuits

Each time one of the player's four pushbuttons is actuated, a pulse is sent to the binary counter of the corresponding row of lamps. Thus each push of the button extinguishes one lamp. The row-out indicating voltage from the lamp circuits prevents formation of pulses for any row after that row has been completely extinguished.

The player may end his move after extinguishing only one lamp in the selected row. Therefore the first push of any of the player's four buttons actuates a change-over relay that prepares the machine to take its turn. This does not, however, prevent the player from finishing his move by putting out additional lamps in the selected row if he so desires. The row-out voltage prevents actuation of the change-over relay if the player makes his move in a row already empty. Otherwise the player could cheat by forcing the machine to make two consecutive moves.

### Tilt Circuit

If the player attempts to extinguish lamps in more than one row without allowing the machine an intervening move, the tilt relay is actuated. This lights the TILT indicator and extinguishes all other indicators.

The MACHINE PLAY button applies voltage to gating circuits, causing the machine to make its move. A relay continues application of this voltage for the duration of the machine-play cycle. The player's pushbuttons are disabled throughout this cycle. At the conclusion of the cycle, the player's pushbuttons are reactivated.

**Why Engineers Play Games**

**With most of the Maxson Corporation's computer business under security wraps, the NIM machine was designed principally as a demonstration device to show a few of the many things computer circuits can do**

Row-out indicating voltages are applied to end-of-game adder circuits. When all lamps in all rows have been put out, these adders extinguish the YOU PLAY and MACHINE PLAY indicators, and illuminate either the YOU WIN or YOU LOSE indicator, depending upon whether the player or the machine has extinguished the last of the lamps.

### Pulser and Scanner

The pulser utilizes multivibrators and shaping circuits to generate pulses used by the machine to actuate the binary counters and thus extinguish lamps. Scanning pulses are also generated. These cause the scanner to sample the rows until it finds one upon which the machine wishes to operate. The pulser is gated by a voltage from the gating circuits.

The scanner is a four-position ring counter actuated by scanning pulses from the pulser. One of four scanning relays is closed in each scanner position. Each relay corresponds to one of the four rows of lamps.

Voltages taken from the binary-counter plates are used to indicate the powers of two contained in the number of lamps lit in each row. This information is fed to the scan relays. In each scanning position, the closed scan relay conveys this information to the gating circuits. Since the number of lamps lit in any row cannot exceed seven, $2^0$, $2^1$, and $2^2$ are the only powers of two that may appear.

The scan relays serve also to connect the pulse output from the gating circuits to the input of the binary counter that extinguishes lamps in the row being scanned.

There are three sets of modulo-2 adders, one for each power of two used. Information as to whether any of these three powers of two appears in a given row is obtained in terms of voltage from each counter-stage plate circuit and fed to the adders. The adders compare these voltages and feed to the gating circuits information that indicates whether or not each power of two appears an even number of times.

### Gating Circuits

Gating circuits perform logical operations that enable the machine to play NIM with greatest possible proficiency.

The gating circuits continuously receive information as to which powers of two appear in the row being scanned, and whether each power of two appears an odd or even number of times in the aggregate of all rows. They use this information to control the transmission of pulses to the counters and to the scanner.

Design of this computer resulted from the joint efforts of several members of the W. L. Maxson Corp. engineering staff, particularly F. Alterman, J. Fishel, E. F. Grant, and S. Schmerler.

REFERENCE

(1) C. L. Bouton, "Annals of Mathematics", Series 2, III, p 35, 1902.

# Test Pulse Generator

**By ALBERT A. GERLACH**
*Armour Research Foundation*
*Illinois Institute of Technology*
*Chicago, Illinois*

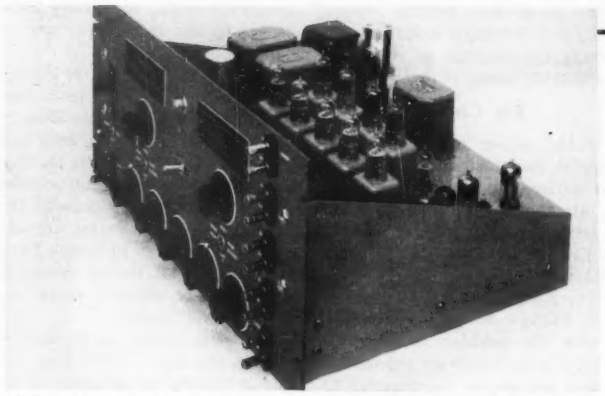

**Photograph of digital computer test pulse generator shows multiple output terminals, front-panel adjustments and plug-in units on chassis**

IN THE DEVELOPMENT and testing of digital computer components and systems, a generator which can simulate digital information becomes an invaluable tool. Such an instrument must be quite versatile to handle the many situations required in digital computer work. The pulse generator described was designed for such a purpose.

### *Available Outputs*

There are a total of five outputs, two source outputs *A* and *B*, and a clock output. The two source outputs each have a direct output and a complement output where the complement output provides a pulse (one) where the direct output has a no-pulse (zero), and a no-pulse (zero) where the direct output has a pulse (one). The clock output provides a pulse for each input trigger. Provisions have been made for random statistical output for each source.

The pulse width of each output is individually variable from about two to forty microseconds by an internal adjustment. The amplitude of each output is variable by a front panel control up to a maximum output of about sixty volts. The clock output may be advanced to occur ahead of the source outputs by as much as forty microseconds by an internal control. Statistical randomness of the *A* and *B* outputs is achieved by periodically opening and closing gates in the *A* and *B* initiating channels and the rate of this operation is controlled by two independent front panel controls from about 1,000 cps up to about 20 k.c.

Provision is made to trigger the outputs either manually (by a front-panel lever switch), from an internal sixty-cycle source, or by an external source where the rate of initiation may be varied over a wide range of frequencies.

The basic idea of the pulse generator is illustrated in Fig. 1. The trigger initiator is activated by an internal 60-cycle sine wave, by a manual lever switch, or by a ten-volt external source, and supplies a sharp output pulse to trigger the delay multivibrator. The latter is a monostable multivibrator whose pulse width is variable by a potentiometer located on the chassis. The output pulse of the delay multivibrator is differentiated and the positive leading edge pulse is used to trigger the clock output multivibrator while the negative trailing-edge pulse is first inverted and then fed to the four gates of the source *A* and *B* outputs.

By a front-panel switch, either or both pairs of gates may be left

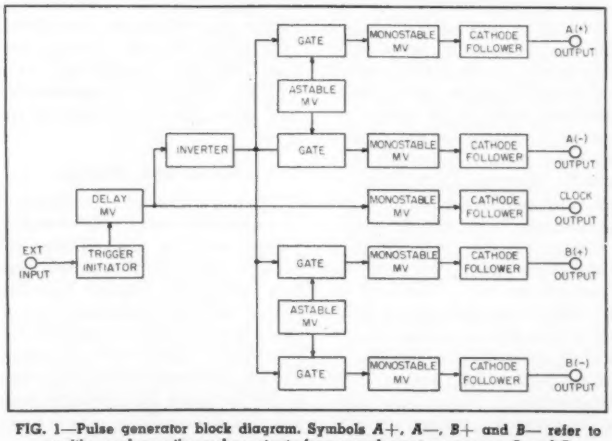


**FIG. 1—Pulse generator block diagram. Symbols *A*+, *A*—, *B*+ and *B*— refer to positive and negative pulse outputs from complementary sources *A* and *B***

# for Digital Computers

**Random pulses simulating digital information are made available for testing computer elements without tying up actual computer to produce appropriate signals. A wide variety of outputs is obtainable including a pulse coinciding with each input trigger for actuating any auxiliary test equipment**

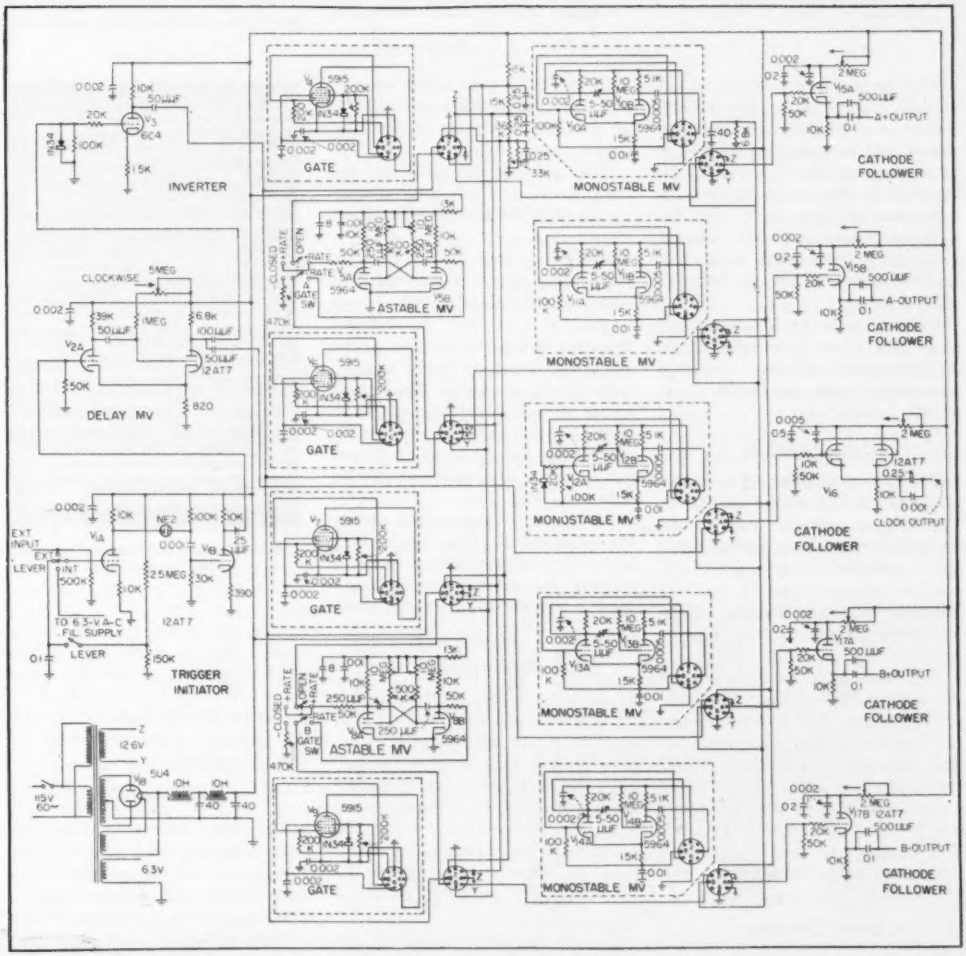


FIG. 2—Complete circuit diagram of pulse generator shows use of plug-in circuits for quick servicing and compactness. Circuit layout follows form shown in block diagram of Fig. 1



Typical plug-in units containing gate (left) and width (right) circuits. Similar plug-in assemblies are used for other circuits, as shown in Fig. 2




FIG. 3—Blocking oscillator pulse former for producing low-impedance pulses of 0.1-μsec duration for special testing purposes. Tube is a 12AU7 dual triode

always in the open position, or the astable multivibrators may be employed to alternately open and close the + and − outputs respectively at a rate determined by two independent front-panel controls. The gates that are open at the time the initiator pulse occurs will pass the pulse on to the output monostable multivibrators which produce the output pulses.

Cathode followers are employed to provide a low-impedance output. A photograph of the completed generator is shown on the first page of this article.

### Circuit Details

The circuit diagram of the pulse generator is illustrated in Fig. 2. The trigger initiator consists of an amplifier, a neon discharge tube, and a differentiating amplifier. A positive voltage input to the first amplifier will lower its plate voltage and cause the gas discharge tube to fire.

The steep wave front so created is differentiated and amplified by the second amplifier and used to trigger the delay multivibrator. This circuit is a conventional monostable multivibrator whose pulse width is variable by the potentiometer in the grid circuit of the tube. The leading and trailing edge of this pulse in differentiated and used for further triggering.

### Gate Circuits

The gate circuit utilizes a pentagrid converter as a transfer tube with the third grid acting to control the transmission or rejection of a pulse occurring at the first grid.

The gate is normally in the open position when it is disconnected from the astable multivibrator.

However, when connected to the astable multivibrator, negative pulses alternately close the + and − gates so that when one is closed the other is opened and vice versa. Thus the − output is the complement of the + output. The output pulses are generated by monostable multivibrators with the pulse width adjustable by a small trimmer capacitor in the grid circuit as shown in Fig. 2.

For layout convenience, interchangeability of components, and ease of circuit modification the gate circuits and output multivibrators were constructed as plug-in components.

### Refinements

The pulse generator has proved to be exceedingly useful as a tool for the testing of digital computer systems and components. However, with such a broad field as computers there are times when even greater versatility is desirable. One such instance in the author's experience occurred when it was desired to produce output pulses of about 0.1 microsecond width.

To get the desired pulses, the cathode follower outputs (see Fig. 2) were replaced by blocking oscillators of the type illustrated in Fig. 3. This circuit provides low-impedance positive and negative pulses of 0.1-microsecond duration and about fifty volts amplitude.

### Typical Test Signals

As an example of the statistical output of the pulse generator Fig. 4 illustrates a series of output sequences which were stored in an eighty bit sonic delay line storage register.

In each of the nine sequences there are eighty possible positions for a pulse (one) or a no-pulse (zero), each spaced one microsecond apart. The clock output of the pulse generator was used to index the positions over one microsecond, and for each clock output there was equal probability for a pulse (one) or a no-pulse (zero) entering the storage register. The resulting binary numbers may be considered random.

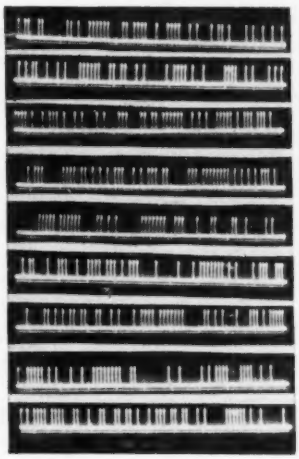

FIG. 4—Samples of random outputs from test generator

### Acknowledgments

The author acknowledges the valuable assistance of Joseph J. Miller who constructed and assisted in the final testing of the pulse generator. This work was performed under contract with the United States Department of Defense, Washington, D. C.

# Continuous Recorder Keep-Alive Circuit

**Multiple-output unit injects 10-cps signal into recording systems to improve performance by keeping pens in constant motion. High reliability and long life are ensured by conservative circuit design and construction**

By **RONALD L. IVES**
*Williamsville, N. Y.*

MORE than a decade ago, several users of chart-recording milliammeters discovered, independently, that the pen response to position changes was greatly improved if the movement was kept in oscillation.

Various-mechanical and electrical oscillation injectors were studied and applied.

Perhaps the simplest oscillator consists of an electric bell movement, with bell removed, bolted to the back of the instrument case. This supplies the desired oscillation mechanically, and also generates electrical noise detectable for several hundred feet from the instrument. Another expedient is to inject a small 60-cycle component into the meter circuit, usually by use of capacitors. This also worked after a fashion, but switching transients in the line were recorded along with the desired signal.

### Relay Oscillators

For field use, where recorders are clock-driven, and instruments battery operated, a very effective keep-alive, using a relay oscillator, was developed by S. W. Grinnell in 1942.[1,2,3] This type of keep-alive is so satisfactory, for field use, that it is being incorporated in modern field meteorological instruments.[4] Two workable relay-type keep-alive circuits, with their output characteristics, are shown in Fig. 1. Frequency is usually between five and fifteen cycles per second.

### Station Recording

Although the relay-type keep-alive is very satisfactory for field use, its life is not great enough for continuous recording at a fixed station.

The nominal life of a good telephone-type relay (10,000,000 operations) is completely used up, at ten cycles per second, in about 11.6 days (of 24 hours). In consequence, when continuous records are required for a period of months or years, some other keep-alive system is economically desirable.

Various tests indicate that the keep-alive frequency should be between five and fifteen cycles per second, and that the wave form should be nonsinusoidal, but symmetrical. Frequencies of less than five cycles per second require considerable amplitude to be effective, and insert sawteeth into the record. Frequencies of much more than fifteen cycles per second interfere with ink flow in pens of several designs, converting the recorder into a very efficient ink-thrower. When frequencies are in the range from 400 cycles per second and up, the pen makes a continuous excavation in the chart, instead of a continuous trace.

Frequency and continuity re-

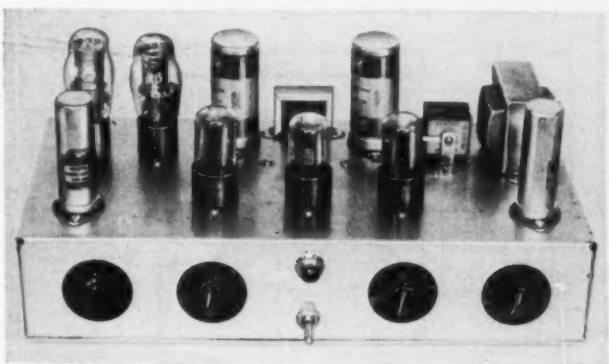

**Conventional tubes should be replaced every 1,000 or 1,500 hours. Red tubes may be used continuously for as long as 13 months**

quirements for station operation having indicted that a symmetrical multivibrator would be suitable for this use, several experimental models were made and tested. All of them worked, but only the model having the widest application will be described.

The station model keep-alive for general use consists of a symmetrical multivibrator, with a nominal frequency of ten cycles per second, and four independent cathode-follower outputs. The circuit is shown in Fig. 2.

The multivibrator, used as a square-wave generator, uses a high-mu dual triode, conventionally connected for low-frequency operation. The 100,000-ohm resistors, shunted by 0.001-μf capacitors between the grids and the plate capacitors of the opposite triodes are to limit the grid current flow without rounding the voltage peaks. If these R-C elements are omitted, the multivibrator may mode or block.

Frequency of this oscillator, determined by actual test, is found from

$$F = \frac{1}{4.5\,RC}$$

$R$ being in ohms and $C$ in farads.

So that the outputs will not interact, four separate cathode-follower outputs are provided, each being one half of a 6SN7 or 5692. Output peaks are approximately 100 volts, exact waveform being a function of the properties of the load, and an almost perfect square wave when the load is a pure resistance of more than 0.25 meg.

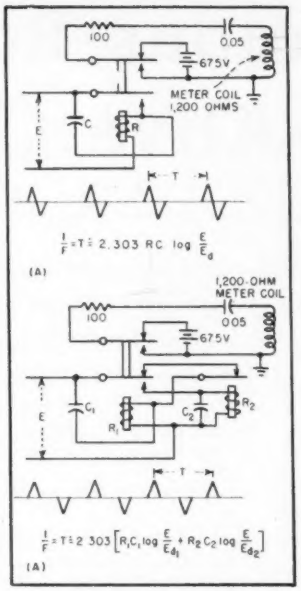


**FIG. 1—Relay keep alive's have disadvantage of short life. Typical circuits are shown with waveforms and equations for frequency of operation in terms of supply voltage $E$ and relay drop-out voltage $E_d$**

The two halves of each triode buffer tube are connected in opposite phase to equalize the load on the power supply. With the circuit used, almost any number of dual triodes can be controlled by a single multivibrator. Practical limitations, such as the capacity of standard power transformers, space available on a standard chassis, and heat dissipation suggest that not more than a dozen dual triodes (24 outputs) be embodied in a single unit.

The power supply consists of a conventional voltage doubler isolated from the line, a pair of OD3 tubes in series to provide a regulated voltage for the multivibrator, and a single-section L-C filter in the plate supply for the buffer tubes. Filter capacitors are made much larger than theoretically necessary to reduce the effects of line surges and switching transients, and so that the filter will still be effective after the electrolytic capacitors age.

Allowing for heat radiation and servicing ease, a completely self-contained four-channel keep-alive can be constructed on a 3 x 9 x 15-inch chassis, as shown in the photographs. Eight channels can be built in the same space without undue crowding or overheating in use. Because uninterrupted service was important, rugged constructional methods were used, with all components rigidly tied down, and connections cabled. In general, any shock that will not damage the tubes will not hurt the other components. Smaller components were mounted on socket turrets, making terminal strips unnecessary.

### Performance

Operational tests of this keep-alive indicate that its performance leaves little to be desired. Its versatility makes it suitable for a large number of instrument applications.

Test runs of a square wave, both

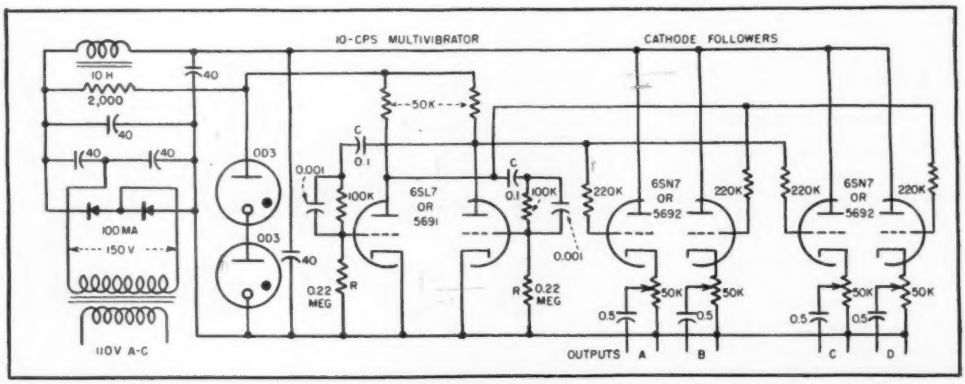


**FIG. 2—Complete circuit of electronic keep alive. Additional outputs may be obtained by adding cathode followers**

with and without a keep-alive are shown in Figs. 3 and 4. Similar results were obtained by West[4] and both of these parallel findings by Grinnell.[1] Note, in Fig. 3, the rounded noses on the leading edges of the curves, and the asymptotic approach of the tops of the waves to their ultimate maximum position. In Fig. 4 the maximum values are reached in much less time, and retained thereafter until the current through the instrument changes. Both curves were run on the same instrument, an Esterline-Angus 0-to-1 recording milliammeter, that had been adjusted for optimum operation prior to running the curve of Fig. 3.

Connections are quite simple. Instruments that have one side grounded are connected across any desired output, with the hot side of the instrument connected to the hot side of the output, from which it is isolated with respect to d-c by a capacitor in the keep-alive chassis. When both sides of the instrument are hot with respect to ground, as in a difference amplifier, each side of the instrument is connected to a hot output terminal, the phases of the terminals being opposite. As constructed, adjacent hot output terminals are of opposite phase.

With continuous recording, standard tubes should be checked weekly, and replaced when they test about 10 percent low. An average tube life of 40 days of continuous service is to be expected from manufacturers' ratings (1,000 hours), and actual tube life, when operation is truly continuous, usually exceeds 1,500 hours if the tube survives its first 200 hours of service. When red, or 10,000-hour, tubes are used, testing once a month is indicated, and replacement every 13 months is suggested by manufacturers' ratings.

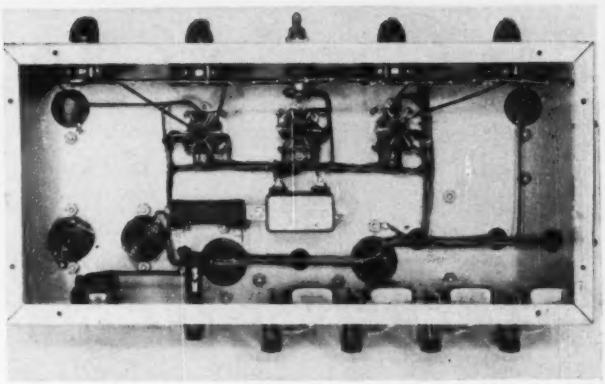

Under chassis view shows simplicity of electronic keep alive. Turret-type tube sockets hold small parts

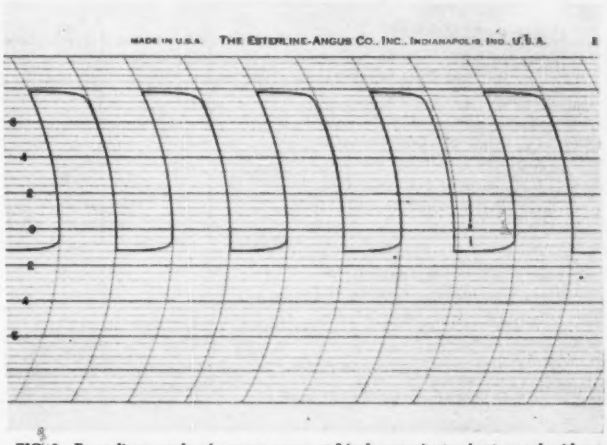


FIG. 2—Recordings made of square wave at 3-inch per minute chart speed without keep alive

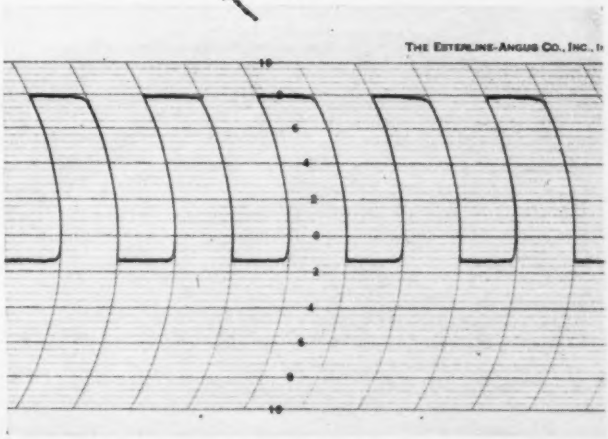


FIG. 4—Recording made under same conditions as Fig. 3 but with keep alive

## REFERENCES


(1) S. W. Grinnell, "Some Instruments Used by Division 10, NDRC, at Dugway Proving Ground for the Continuous Recording of Micrometerological Conditions," OSRD 6088, 1945.

(2) R. L. Ives, The Relay Oscillator and Related Devices, *Jour. Franklin Inst.*, 242, p 243, 1946.

(3) Similar developments were independently arrived at by Philip Nourse, of Douglas Aircraft Corp., and Wardell M. Smith, now of Thomas A. Edison, Inc.

(4) George West, Wind Recorder for Microclimatology, ELECTRONICS, 26, p 136, June 1952.

# Air-Cooling Nomograph

**Gives cubic feet per minute of air flow needed to keep temperature rise in electronic equipment at specified value when wattage dissipation and air density are known. Supplementary graph gives air density at any altitude and temperature**

**By EUGENE SLUSSER**
*Northeast Electronics Corp.*
*Tuckahoe, N. Y.*

AT SEA LEVEL under standard conditions (760 mm mercury, 0 deg C and 0.079 lb per cu ft air density) the temperature rise in deg F is approximately 3,000 $P/Q$, where $P$ is the power dissipated in the unit in kw and $Q$ is the air flow through the unit in cubic feet per minute. The nomograph gives this rise on a dual Centigrade-Fahrenheit scale.

Variation of air density with pressure and temperature is shown in the graph. For operation at high altitude, the air density at the maximum altitude should be used to compute the maximum temperature rise or the blower capacity.

As an example, it is desired to determine the blower capacity required to cool a unit which dissipates 420 watts. To maintain a minimum wattage derating on certain resistors and selenium rectifiers, temperature rise must be held to 18 deg C. The equipment must be designed to operate at 10,000 feet and 30 deg C. For these conditions, the graph gives an air density of 0.05 lb per cubic ft, and the nomograph gives a minimum air circulation of 60 cfm.

The temperature at a given altitude can be estimated by assuming a dry adiabatic lapse rate of 3 deg C per thousand feet. On this basis a sea-level temperature of 20 deg C would correspond to −10 deg C at an altitude of 10,000 ft.

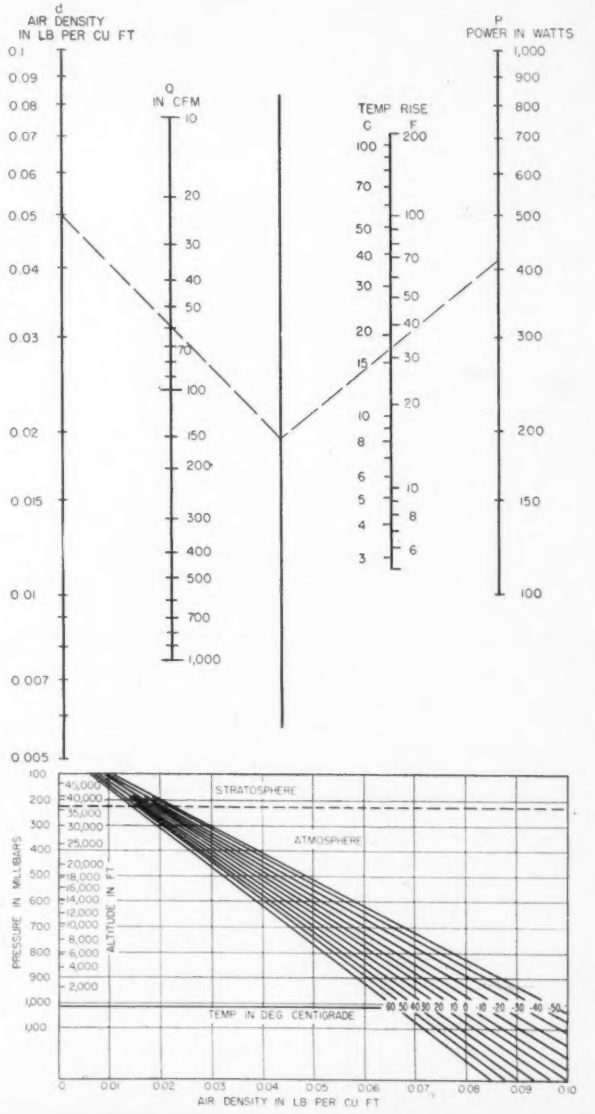

STANDARD ELECTRONIC COMPONENTS
For the past quarter of a century CINCH Components have filled the requirements developed by the rapid changes in the Electronics industry. Today, judged by demand and performance, CINCH is producing the STANDARD metal plastic assembly.
Consult Cinch
Cinch components are available at leading Electronic jobbers—everywhere
Cinch
ELECTRONIC COMPONENTS
CINCH MANUFACTURING CORPORATION
1026 South Homan Ave., Chicago 24, Illinois
Subsidiary of United-Carr Fastener Corporation, Cambridge, Mass.

# High Q Measurement

**Decay of oscillations in pulsed resonant circuit is measured oscillographically, and result is applied to nomograph to obtain Q directly. Technique has been applied to measure values of Q of resonant circuits at frequencies as high as 15 mc**


**By WILLIAM J. SPAVEN**

*Government Division*
*Fada Radio and Electric Company*
*Belleville, New Jersey*


HIGH VALUES of Q (in excess of 1,000) cannot easily be determined under steady-state conditions, however, the transient characteristics of a resonant circuit suggest a method.

When a series resonant circuit is excited by a unit impulse, a train of damped oscillations is generated, as indicated by the waveform shown on the accompanying nomograph. The amplitude of the envelope of this wave train at time $t_1$ may be expressed as

$$A_1 = A_0 \epsilon^{-\frac{R t_1}{2L}} \qquad (1)$$

where $A_1$ = the amplitude of the envelope at time $t_1$, $A_0$ = the amplitude of the envelope immediately following excitation, $R$ = total equivalent series resistance of the circuit, and $L$ = the equivalent series inductance of the circuit.

The Q of a shock-excited series circuit may be expressed by

$$Q = \frac{2\pi f_0 L}{R} \qquad (2)$$

where $f_0$ is the natural series resonant frequency. Combining Eq. 1 and 2 and choosing an excitation pulse repetition frequency such that

$$prf = 1/t_1$$

then

$$Q = \left(-\frac{\pi}{\ln (A_1/A_0)}\right)\left(\frac{f_0}{prf}\right) \qquad (3)$$

The accompanying nomograph solves this equation.

### *Sample Measurement*

The laboratory equipments required to obtain the necessary data are a signal generator to set the prf, a pulse generator, and an oscilloscope to measure the train of damped oscillations.

The equipment is arranged so that the signal generator drives the pulse generator at the required prf. The pulse generator drives the circuit under test, and the oscilloscope reads the output of the circuit, as shown in the block diagram on the nomograph.

A high-Q circuit, resonant at 20 kc, was to be tested. The ratio $A_1/A_0$ was determined from the oscilloscope pattern to be 0.90. The prf was 250 cps, or $f_0/prf$ = 80. A straight line drawn from $A_1/A_0$ = 0.90 to $f_0/prf$ = 80 intersects the Q line at Q = 2,500. Verifying with Eq. 3,

$$Q = \left(-\frac{\pi}{\ln 0.90}\right)(80) = 2,420$$

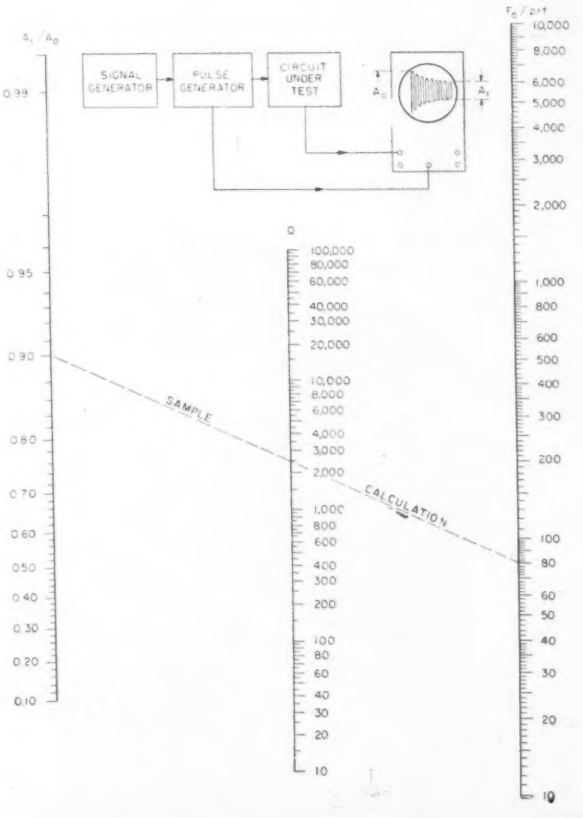

# *To avoid vibrator power supply troubles...*

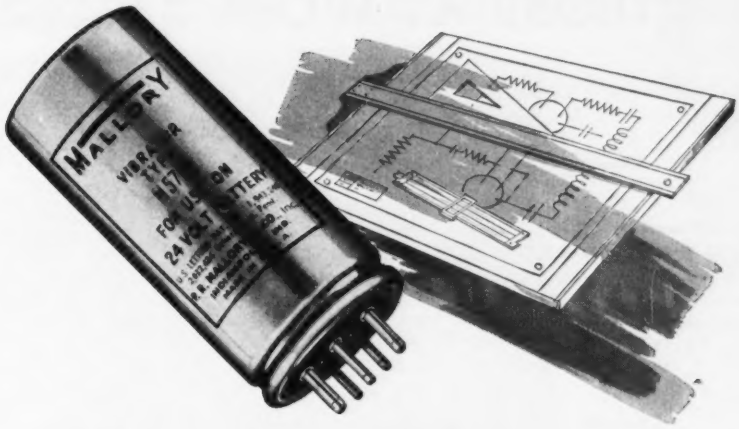


# Call on MALLORY in the design stage

Vibrator power supplies need the best in design to meet the tough performance requirements of battery-operated electronic equipment. Experienced engineering must go into the selection of each element . . . transformer, vibrator, buffer capacitor . . . so each will perform its own function and operate with the others to provide maximum performance.

You can end your power supply worries by calling on Mallory to translate your power needs into a precisely engineered design. You'll save engineering time and reduce production costs. And you'll be assured of getting the power performance your equipment needs.

In vibrator design and production, Mallory offers you . . .

**EXPERIENCE** gained through years of working with leading manufacturers on a broad variety of vibrator applications . . . an unmatched fund of engineering skills in this field.

**VIBRATORS** for civilian and military use . . . produced by the organization which pioneered the development of commercial vibrators over 20 years ago and now supplies more vibrators for original equipment than all other makes combined.

**ENGINEERING AND PRODUCTION FACILITIES** that can design complete vibrator power supplies and manufacture them from start to finish . . . to your exact requirements.

Investigate Mallory's facilities now, whether your equipment is in production or still on the drawing board. Write or telephone today.

**Vibrators and Vibrapack® Power Supplies**

P.R. MALLORY & CO. Inc.

**MALLORY**

**SERVING INDUSTRY WITH THESE PRODUCTS:**

**Electromechanical**—Resistors • Switches • Television Tuners • Vibrators
**Electrochemical**—Capacitors • Rectifiers • Mercury Dry Batteries
**Metallurgical**—Contacts • Special Metals and Ceramics • Welding Materials

P. R. MALLORY & CO., INC., INDIANAPOLIS 6, INDIANA

# ELECTRONS AT WORK

Including INDUSTRIAL CONTROL

Edited by RONALD K. JURGEN


Experimental UHF Broadcast.....168
High-Voltage Power Supplies.....170
All-Triode Electronic Switch.....172
Speed-Sensing Relay .....174
Design of Slug-Tuned Superheterodyne Receivers .....176
Ultrasonic Therapy Unit.....202
Definitions for Color Television.....208
Latest Disc-Cathode Developments.....236
New Casting Resin for Potting Components .....252
Linear Current Regulator.....256
Improved Blanking Circuit.....260


**OTHER DEPARTMENTS featured in this issue:**


Page

Production Techniques...266
New Products .....310
Plants and People.....396
New Books .....414
Backtalk .....430


## Experimental UHF Broadcast


BY ROBERT P. WAKEMAN
*Head, Propagation Department*
*Allen B. Du Mont Laboratories, Inc.*
*Passaic, New Jersey*


A STEP IN the determination of the efficacy of television as an educational tool was made on April 30, 1952. On this day, a complete set of programs designed for classroom use were originated at the State Teachers College, Montclair, New Jersey, relayed to New York City and broadcast over uhf Channel 54. These programs were received in the classrooms of 13 Montclair and Bloomfield schools.

From the point of view of a practical problem in uhf television, the technical aspects are of interest and will be reviewed here.

Figure 1 is a block diagram showing the equipment and transmission paths utilized. The Teachers College gymnasium served as a combined studio and master control room. The video equipment was a standard Du Mont dual orthicon camera chain.

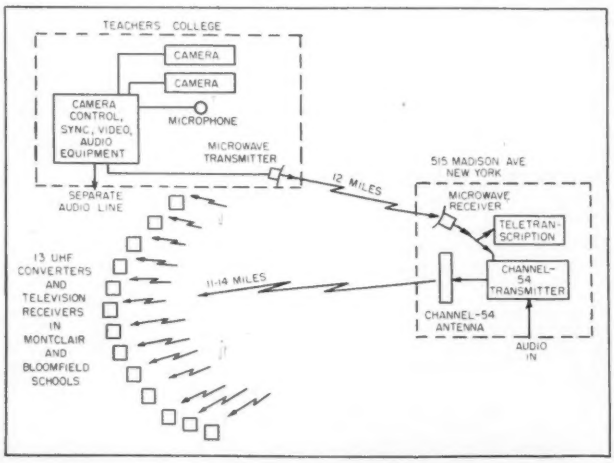


**FIG. 1—Block diagram showing equipment used and transmission paths**



**Continuously tuned uhf converter used in the experiment**

The composite video signal was fed over a 200-foot line to a 7,000-mc microwave transmitter, utilizing a 4-foot parabolic antenna located in a cupola atop the building. The 12-mile transmission path to 515 Madison Avenue in New York City is well above line of sight and a noise-free picture was received in New York. The demodulated signal was simultaneously fed to the tele-transcription unit and to the uhf transmitter.

The uhf transmitter has been described elsewhere.[1] The power output is of the order of 275 watts. The transmission line and sideband filter losses total approximately 0.2 db. The antenna consists of two slot waveguide antennas back to back, each having 20 half-wave slots along one flat side. This structure is mounted vertically and has a power gain in the vertical plane

# Measure Difference In Q with The Q METER Type 190-A

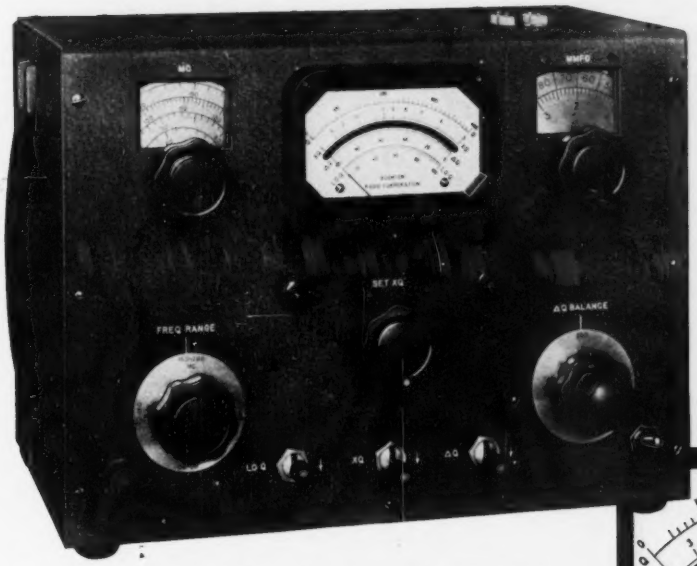





*In Designing Tuned Circuits* the effect on Q of adding capacitors, iron cores, or resistors must frequently be determined. The Q of the separate components is also often needed. These measurements made on Q Meters formerly available required the use of a small difference between two large Q values in various formulæ. This led to large errors. The Q Meter Type 190-A reads the difference between the Q of a reference circuit and the Q of this circuit when new components are added. The scale that indicates this *Differential Q* has a sensitivity 4 times as great as the scale which reads *Q*. The accuracy and ease with which *Differential Q* can be read is greatly improved by use of the *190-A Q Meter*.

The Q Meter Type 190-A has a "Lo Q" scale which reads Q down to a value of 5. The internal resonating capacitor is directly read and has a vernier arrangement for accurate reading of capacitance. The dial rotates approximately 10 times in covering the capacitance range. All readings are made on a single meter corrected for parallax.

**SPECIFICATIONS**

**FREQUENCY COVERAGE: 20 mc to 260 mc. Continuously Variable in Four Ranges.**
**FREQUENCY ACCURACY: Calibrated to ± 1%.**
**RANGE OF Q MEASUREMENTS: 5 to 1200.**
**RANGE OF DIFFERENTIAL Q MEASUREMENTS: 0 to 100.**
**ACCURACY OF Q MEASUREMENTS: Circuit Q of 400 read directly on meter can be determined to accuracy of ± 5% to 100 mc and to ± 12% to 260 mc.**
**INTERNAL RESONATING CAPACITANCE RANGE: 7.5 mmf to 100 mmf (direct reading) calibrated in 0.1 mmf increments.**
**ACCURACY OF RESONATING CAPACITOR: ± 0.2 mmf to 20 mmf**
**± 0.3 mmf to 50 mmf**
**± 0.5 mmf to 100 mmf**
**POWER SUPPLY: 90-130 volts—60 cps (internally regulated). Power Consumption—55 watts.**

*(Specifications subject to change without notice)*

PRICE: $625.00 F.O.B. Factory

**SINGLE, EASY-TO-READ METER WITH PARALLAX CORRECTION FOR ALL FUNCTIONS**

- **Q indicating voltmeter: 50 to 400.**
- **Multiply Q scale: 0.5 to 3.0.**
- **A differential Q scale for accurately indicating the difference in Q between two test circuits.**
- **Additional accurate expanded scale for measuring low values of Q.**
- **A counter type resonating capacitor dial for improved setting and reading accuracy.**
- **Regulated power supply for increased stability and accuracy.**
- **Careful design to minimize instrument loading of circuit under test.**

**BOONTON RADIO Corporation**
BOONTON · N·J · U·S·A·

of approximately 17 (12.3 db) over a dipole. The horizontal pattern is essentially omnidirectional with the exception of two small areas in the plane of the surface containing the slots where nulls appear.

The area covered in this experiment was well within the major lobe of the west element and effective radiated power in this direction was approximately 4.5 kw.

The uhf receivers used in this experiment were standard commercial vhf receivers with the addition of a continuously tuned uhf converter. Some trials were made using a uhf strip in place of one of the regular vhf strips. It was found that the noise figure of this arrangement was much too high in view of the relatively low transmitter power and the long receiving transmission lines. These lines varied from 50 to 200 feet and at 700 mc, with the cable available, represented a prohibitive loss. The noise figure of the uhf converter was much better and the converters could be placed in the antenna locations.

The ultimate receiver setup was as follows: A uhf 12-element broadside array antenna and reflector having a gain of 15 db was installed at a selected point on the school roof. A short length of RG-8/U (10 feet or less) connected the antenna and converter. The output of the converter (channel 6) was fed to the long RG-59/U tranmission line. This line terminated at the receiver in the classroom.

*Drift Considerations*

After an initial 15-minute warm up period, the drift of the converter was found to be negligible. Any slight residual drift during the day could readily be compensated by adjusting the fine tuning control on the vhf receiver.

Technically, this experiment confirms the feasibility of uhf television broadcasts over an area of near line-of-sight conditions. Three of the receiving antennas were actually below line of sight. Considerable effort was required to obtain satisfactory pictures but the pictures finally received were of excellent quality and entirely free of multipath effects.

Much of the difficulty encountered will be automatically eliminated when stations have an effective radiated power of 1,000 kw instead of the 4.5 kw used for this experiment. As the art advances, noise figures will almost certainly improve with the resulting effect being the same as a further increase in erp. There will always be fringe areas and it is anticipated that under these adverse conditions, home installations will present somewhat more of an engineering problem than is currently true of fringe area vhf installations.

REFERENCE

(1) Engineering Staff of Varian Associates, High-Power UHF-TV Klystron, ELECTRONICS, 24, p 117, Oct. 1951.

## High-Voltage Power Supplies

INTERESTING DESIGN factors are illustrated in the circuits of two high-voltage power supplies developed by North American Philips Company, Inc., Mount Vernon, N. Y.

Figure 1 shows the first supply under discussion. This circuit was originally designed for the 3NP4 picture tube and has an output of 25 kv. Basically, the supply is an interrupted r-f oscillator with a rectifier-tripler combination. The r-f oscillator is pulsed by a blocking oscillator at 1,000 cycles.

Damped wave trains set up by the triggering action have a frequency of approximately 25 kc. These wave trains result from the shock excitation of a circuit containing a low-loss step-up transformer with a peak r-f output of about 8.5 kv. This peak output is tripled and rectified by three EY51 tubes which derive filament power from separate transformer winds.

*Transformer Design*

Functioning of the transformer was made possible by designing it with a Ferroxcube core and a molded enclosure of the same material. Regulation of the output was accomplished by coupling an additional winding to the high-voltage transformer. The rectified and filtered output of this winding controls bias on the driver tube which has the primary of the high-voltage transformer as its plate load.

Power input for the circuit consists of a 6.3-v heater supply and a 350-v d-c source with a capacity of approximately 55 ma. The character of the circuit permits variation of the 350-v supply to an extent without interfering with operation. This makes it possible to control

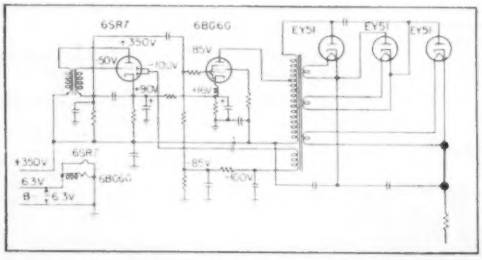


FIG. 1—Schematic diagram of the oil-immersed high-voltage supply

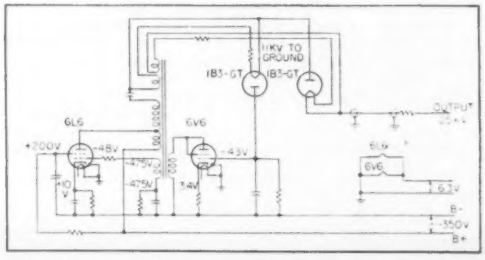


FIG. 2—Schematic of second supply free from an oil dielectric

Helipot

# *come to* Helipot *for the largest selection of* single turn *precision potentiometers*

The same engineering know-how and precision manufacturing facilities that have made HELIPOT the world's largest manufacturer of multi-turn potentiometers, have also established its leadership in the design and production of high precision *single*-turn potentiometers. These single-turn units are built with the same infinite care . . . on the same types of specially-designed equipment . . . by the same highly trained personnel that have made Helipot multi-turn potentiometers the world's standard. *Result*—a wide selection of single-turn potentiometers, available in volume, built to the highest-possible standards—*at mass-production economies!*

Most of the units shown at right are readily adaptable to special requirements—servo mountings, ball or sleeve bearings, ganged assemblies, single or double shaft extensions, taps spot-welded to a *single* turn of winding at virtually any desired point, and many other optional features to meet the needs of *your* applications.

*So, no matter what your requirement in precision potentiometers, bring it to Helipot!*

## ADVANCED ENGINEERING! VOLUME PRODUCTION!



**MODEL L SERIES (3" DIA.):**
A high-precision single-turn unit with continuous mechanical rotation and minimum electrical dead space. Model L has bushing mounting, sleeve bearings . . . LS, servo mounting, sleeve bearings . . . LSP servo mounting, ball bearings. All are gangable to 8 sections, sections phaseable after assembly to within ±1°. Many other features.*

**MODEL J (2" DIA.):**
The first production designed potentiometer with ball bearings as a standard feature—also versatile three-way servo mounting. Individual sections can be easily ganged and independently phased by the user after installation without external brackets or clamps. Many other unique features.*

**MODEL G (1 5/16" DIA.):**
A compact, single-turn precision potentiometer—low in price, extra rugged. Developed initially for remote positioning and indicating in aircraft applications—now also used for general instrumentation and servo mechanisms. Continuous 360° rotation. In certain resistance values is excellent for high temperature applications—at ambient temperatures as high as 165°C. under certain conditions.*

## miniature

**MODEL T "TRITORQUE" (7/8" DIA.):**
A miniature ultra-low-torque unit for guided missiles and aviation electronics. Features shielded ball bearings, highest possible precision and quality, long life, rugged dependability. Length only 25/32"—weight only 0.56 oz.—starting torque only 0.005 oz. in., when specified—negligible running torque. Sliders phaseable to within 3°. On vibration tests units have successfully withstood frequencies 0 to 2000 c.p.s. in 3 planes, accelerations up to 20 G's for periods to 1 hr.*

*See your nearest Helipot Representative for complete details. Or write direct!*

## Duodials *for every application*

Duodial turn-indicating knob-dials are ideal for Helipots and other multi-turn applications. Available in a wide range of sizes and turns ratios . . .



**MODEL RA:**
The beautiful new 10 turn *Precision Duodial* with a "feel" and appearance that add distinction to the finest instrument panels. Features excellent readability, positive locking lever, easy assembly. Available in 10:1 ratio only.

**MODEL R:**
Standard 2" Duodial in 10:1, 15:1, 25:1, 40:1 turns ratios for various Helipot ranges. Locking device, if desired.

**MODEL W:**
Large 4¾" Duodial for primary control applications. Easy to adjust and read. Finger hole for rapid rotation. Available in turns ratios of 10:1, 15:1, 25:1, 40:1.

**THE LABORATORY HELIPOT (MODEL T-10):**

A 10 turn Helipot, "R" Duodial and 3-way binding posts combined in a handsome walnut-cased unit ideal for laboratory and instruction purposes. Simplifies making and changing experimental circuits. More compact and 5 times faster to set than decade boxes. Linearity 0.1%, Power Rating 5 watts, Standard Resistance Ranges 100 to 100,000 ohms—others on order.

THE Helipot CORPORATION
SOUTH PASADENA 2, CALIFORNIA

Field Offices: Boston (CO. 7-1961), New York (Rockville Center 6-1014), Philadelphia (Collingswood 8-3515), Rochester (CU. 7640), Schenectady (DE. 2319), Cleveland (PR. 1502), Detroit (TO. 8-3130), Chicago (PA. 3-1170), St. Louis (SW. 5884), Los Angeles (RY. 1-8345), Seattle (PR. 7815), Dallas (ST. 3335), Ft. Myers, Fla. (FO. 1269-M). Canada: Cossor, Ltd. Toronto (PR. 1226) and Halifax (4-6488). Export Agents: Frohaut Co., New York City 18, (BR. 9-1396).

## THE FRONT COVER

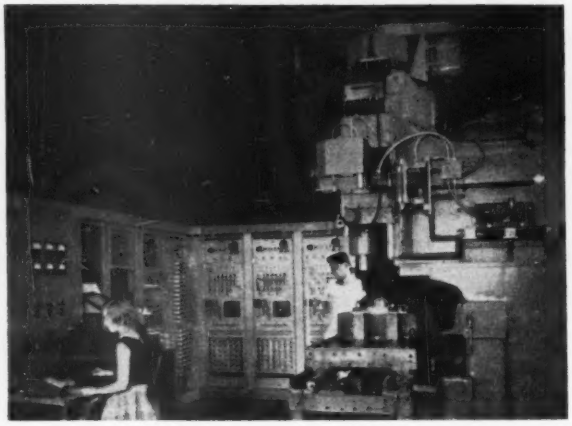

THE tube-controlled milling machine shown in the cover and accompanying photographs comprises a converted 28-inch Cincinnati Hydro-Tel and a director containing 250 electron tubes and 175 relays. The contouring equipment removed from the miller has been replaced by three servomechanisms that move the table, cross slide and spindle head.

The director consists of a data-input system that operates from the pattern of holes punched in a paper tape, a data-interpreting system and a set of three decoding servomechanisms. Directions punched into the tape are, therefore, converted into shaft rotations. Checking pulses are fed back from the rotating shafts.

The so-called numerical control technique used in this system is particularly attractive for machine-tool applications in that the numerical instructions may be of unlimited precision.

nominal output voltage for different applications. Normal output is approximately 25 kv with a capacity of 200 microamperes. Regulation is about 600 volts from no load to full load.

The output curve for the supply is such that voltage falls off rapidly after the maximum output current is reached. This was a deliberate part of the design to protect the tube and to afford some measure of safety to personnel. Output is obtained from a shielded high-voltage lead with a connector which incorporates a one-megohm resistor for additional protection.

All of the high-voltage circuits are housed in an oil-filled metal container. This includes the high-voltage transformer, the EY51 tubes and the filter capacitor. The metal container measures 3 by 3 by 3¾ in.

Although no field complaints were encountered due to presence of oil in the unit, it was considered objectionable by the Underwriters Laboratories, so a new design was developed.

### *New Supply*

The second high-voltage unit is completely free from oil dielectric but, of necessity is somewhat larger. Electrical characteristics are practically the same as for the oil immersed unit since the device was designed primarily to supply anode voltage to the same tube.

The r-f oscillator in the new circuit, Fig. 2, is continuous in its operation at approximately 28 kc. The ferroxcube-core transformer was used again both to supply coupling from oscillator plate to grid and to step up the r-f output to a peak value of approximately 12.5 kv. This is then rectified and doubled to furnish approximately the same output as that obtained from the previous unit.

With regulation circuits working, potential varies about 600 volts between no load and full load of 200 microamperes. This is accomplished by means of a loss circuit in which a triode-connected 6V6GT is coupled to the r-f transformer.

Adjustment of coupling and plate current reduces no-load voltage to a desired value. Rectified output current flows through a resistor in the grid circuit of the regulator tube. As output current increases, bias on the regulator is increased until the tube cuts off at a desired value of load current. Above this value, the power-supply unit operates on an unregulated curve. Where very close regulation is required for a specific purpose, it is not difficult to choose tubes which make the curve flat from no load to full load.

## All-Triode Electronic Switch

By CHARLES W. SPINDLER, JR.
*Engineering Department*
*Leeds and Northrup Co.*
*Philadelphia, Pa.*

IN THE COURSE of investigation of servo-systems, a need was felt for a simple low-gain electronic switch to allow the simultaneous observation of two signals. The following circuit has proved satisfactory for the purpose and may be refined by the addition of amplifier stages to extend its range of application.

The heart of the unit is a cathode-coupled gate circuit, Fig. 1, which uses a high-mu tube ($V_{2A}$ and $V_{2B}$) as an amplifier, cathode-coupled to a high-$g_M$ tube ($V_{3A}$ and $V_{3B}$). If the grids of $V_3$ are R-C coupled to opposite plates of a free-running multivibrator ($V_{1A}$ and $V_{1B}$) the two halves of $V_3$ will be alternately cut off and driven to a high level of current. As a result of this high level of current, the voltage on the common cathode resistors is more than enough to cut off the high-mu tubes.

When $V_{2A}$ and $V_{2B}$ are cut off by the multivibrator, the amplifiers operate as current-feedback circuits;

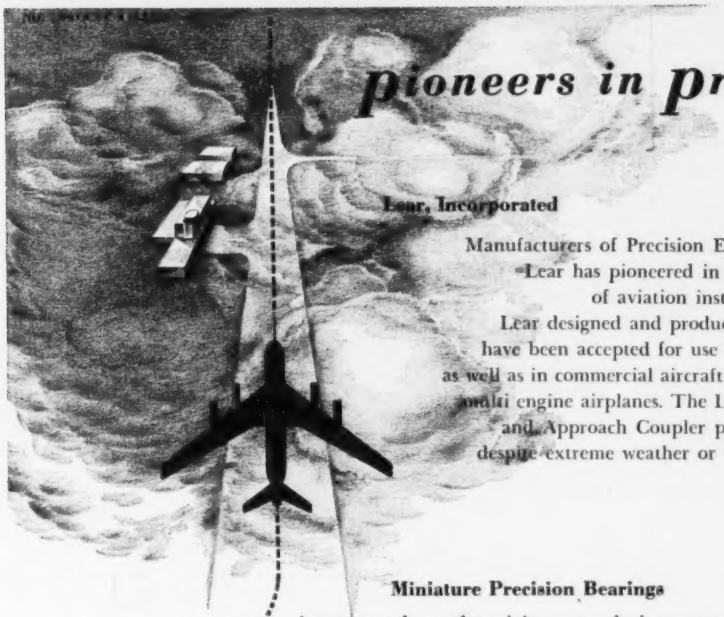

# pioneers in precision

**Lear, Incorporated**

Manufacturers of Precision Engineered Products, Lear has pioneered in the miniaturization of aviation instruments since 1930. Lear designed and produced automatic pilots have been accepted for use in jet fighter planes as well as in commercial aircraft for single engine or multi engine airplanes. The Lear Automatic Pilot and Approach Coupler permits safe landings despite extreme weather or visibility conditions.

**Miniature Precision Bearings**

incorporated, are the originators and pioneer manufacturers of radial ball bearings in miniature sizes. For and with Lear, **MPB** designed the first miniature flange bearings and has supplied many thousands of this and additional types.

A pioneer in other designs and dimensions now being internationally standardized, **MPB** has also originated many precision manufacturing techniques. High speed bore grinding was first explored and finally perfected in this plant. For nearly ten years, this recently publicized method has been standard practice at **MPB**. In fact, the original concept of practically every development in this field has been by **MPB**.

Regularly supplied in more than 120 types, sizes, and materials, from 1/10" to 7/16". Special designs are supplied where specifically indicated. They are fully ground, lapped, honed, and/or burnished to ABEC 5 tolerances or better.

**MPB** ball bearings have been installed in more than a million precision mechanisms. Design engineers are assured of full cooperation. Write, requesting Catalog 52B–shows complete range and selection data–engineering sheet E 11

*Quality improvement, continued thru an extensive expansion program has prompted a demand greater than ever. Enlarged facilities however, and newest exclusive processes will soon enable us to serve you better than ever.*

## Miniature *precision* Bearings

*Incorporated* Keene, New Hampshire

*"pioneer precisionists to the World's foremost instrument Manufacturers"*

*save*
*space*
*weight*
*friction*

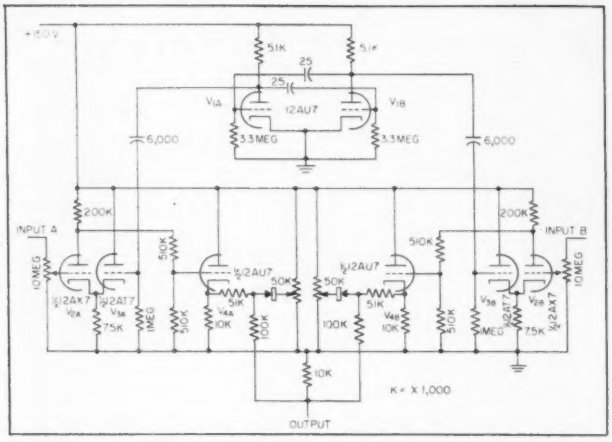


FIG. 1—Schematic diagram of the electronic switch

in this way, square waves are generated by the gate circuits. The level of the positive half cycle is determined by the plate supply voltage and is constant. The level of the negative half cycle is set by the grid-cathode voltage of the amplifier tube at that time.

Square waves generated by the two gating circuits are 180 deg out of phase and, if the amplitudes are made different, linear mixing will result in a square wave in which the level of the positive half cycle is fixed by the input to one gate and the negative by that on the other gate.

To achieve the decoupling necessary for mixing, outputs of the two gates are fed to cathode followers $V_{4A}$ and $V_{4B}$. Signals from the cathode followers go to biased clippers in which the clipping levels are adjusted by potentiometers. Since the clippers remove only the positive portion of the waves, only the peak amplitude is affected and the variations on the negative part are undisturbed.

Passing the outputs of the clippers through a mixing circuit results in a square wave which, when applied to an oscilloscope, shows a reproduction of the input signals to the electronic gate unit. Spacing of the traces may be adjusted by varying the relative peak amplitudes of the individual gating-circuit outputs by using the potentiometers in the clipping circuits.

The unit, exclusive of power supply, was built on a 5 by 4 by 3-in. box and the output terminated in banana plugs. The unit is arranged so that it plugs directly into and is supported by the input terminals of the oscilloscope.

## Speed-Sensing Relay

By John H. Porter
*Office of Naval Inspector of Ordnance*
*Rochester, New York*

For a certain laboratory application, it was desired to develop a relay which would trigger an external circuit at certain predetermined speeds of a motor. The motor speed is sampled photoelectrically by light bands on the shaft and the resulting alternating voltage fed to a thyratron through an adjustable frequency sensitive network.

Negative d-c voltage developed by a rectifier in the output of this network, Fig. 1, is used as hold-off bias on the thyratron grid, so that when the combination of grid and fixed cathode bias voltages becomes a minimum, the tube will fire. An a-c anode supply is used for the thyratron in order that the grid may retain control of the tube.

Because of the difficulty in obtaining the same attenuation from a parallel-T network at all null frequencies, the network, Fig. 1, was designed to present a constant input impedance to the phototube at




FIG. 2—Relative output vs frequency for different capacitor values. All C's are in $\mu\mu f$

all such frequencies considered. At balance

$$f = 1/2\pi R_1 C_1$$

and the usual design equations hold

$$R_1 = 2R_2$$
$$C_2 = 2C_1$$

If the network is terminated in a sufficiently high impedance, in this case 10 megohms shunted by a crystal rectifier, the input impedance can be approximated by

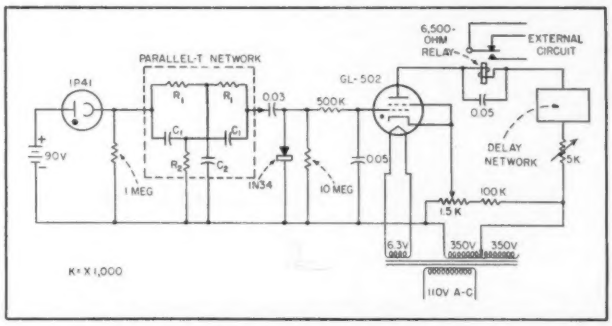


FIG. 1—Schematic diagram of the speed-sensing relay circuit

onsistently

ependable

## C-D CERAMIC CAPACITORS



***The ceramics with the "million dollar" body!*** Even the body is made by C-D, in the newest, most modern ceramic body plant in the world. You'll be as thoroughly "sold" on C-D ceramics as you are on C-D Dykanols*, micas and electrolytics. Write for Engineering Bulletins to: Dept. K-112, General Offices, Cornell-Dubilier Electric Corp., South Plainfield, New Jersey.

# CORNELL-DUBILIER

*world's largest manufacturers of capacitors*




SOUTH PLAINFIELD, N. J. • NEW BEDFORD, WORCESTER AND CAMBRIDGE, MASS. • PROVIDENCE, R. I. • INDIANAPOLIS, IND. • FUQUAY SPRINGS, N. C. • SUBSIDIARY, THE RADIART CORP., CLEVELAND, O.

# RG/ coaxial cables

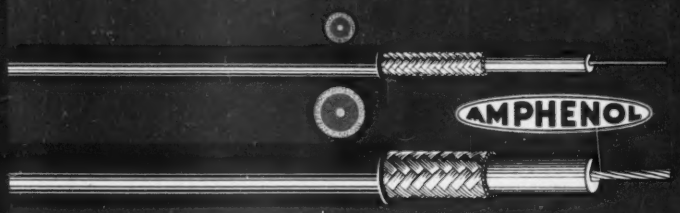


Whatever the size RG co[illegible] cable you need, you'll get a better cable when [illegible] from Amphenol. Every stage of cable manufacture, from the testing and selection of raw materials through to the final loading and shipping, is done by Amphenol's experienced workers in Amphenol's own modern cable plant under the watchful eye of Amphenol's technicians and engineers. There is no opportunity for outside errors to creep in.

Amphenol RG coaxial cables are available with either high quality polyethylene or Teflon dielectric. The polyethylene cables are jacketed with tough, weatherproof vinyl to military specifications. The Teflon dielectric type cables have an outer covering of silicone varnish impregnated glass fibre for high temperature applications up to 500°F. These Amphenol cables satisfy every environmental need for military and civilian use from the Arctic to the Tropics.

Amphenol solid dielectric coaxial cables are providing the best in RF transmission, *without maintenance expense*, in communication service everywhere!

A few of the popular sizes of Amphenol RG / Coaxial Cables

| AMPHENOL NUMBER | NOMINAL IMPEDANCE | NOMINAL O.D. | DIELECTRIC MATERIAL |
|---|---|---|---|
| 21-441 | 50 ohm | .160 | Polyethylene |
| 21-024 | 53.5 ohm | .195 | Polyethylene |
| 21-025 | 73 ohm | .242 | Polyethylene |
| 21-026 | 93 ohm | .242 | Polyethylene |
| 21-004 | 52 ohm | .405 | Polyethylene |
| 21-013 | 52 ohm | .870 | Polyethylene |
| 21-250 | 50 ohm | .425 | Teflon |
| 21-382 | 50 ohm | .195 | Teflon |

*This plastic cable and connector selector is designed to help the engineer or designer to choose the proper cable or combination of cable and connector. Listed on this selector are several hundreds of cables, connectors and combinations. This handy selector will be furnished at no charge to designers and engineers working with radio frequency cables and connectors. Address your request on your company letterhead to Department 13L.*



**AMERICAN PHENOLIC CORPORATION**
**1830 SOUTH 54TH AVENUE • CHICAGO 50, ILLINOIS**




**Table I—Component Values vs. Frequencies**

| Freq. (cps) | $R_1$ | $R_2$ | $C_1$ ($\mu\mu$f) | $C_2$ ($\mu\mu$f) |
|---|---|---|---|---|
| 260 | 669K | 333K | 900 | 1,800 |
| 400 | 669K | 333K | 600 | 1,200 |
| 600 | 669K | 333K | 400 | 800 |
| 900 | 669K | 333K | 265 | 530 |

$$Z_{in} = \frac{(R_2 + X_{C1})(R_1 + X_{C2})}{(R_2 + X_{C1}) + (R_1 + X_{C2})}$$

Making the proper substitutions from the balance equations

$$Z_{in} = \frac{3}{4} R_1$$

An input impedance of 500,000 ohms was chosen for this circuit, and Table I shows the values of $R$ and $C$ used for the various null frequencies to be encountered.

The network sensitivity with silver mica capacitors is such as to produce a d-c voltage of approximately 0.1 volt at a frequency 5 percent from any chosen null. Selectivity is shown on the curves of Fig. 2.

A slight amount of phase shift is obtained on the fixed cathode bias by the R-C grid network to increase the sensitivity of the grid to small changes in the negative d-c from the parallel-T. A delay network is shown in the anode circuit of the thyratron, Fig. 1, to keep the tube from firing at zero speed. This delay is initiated by the motor starting switch.

## Design of Slug-Tuned Superheterodyne Receivers

By PHILIP S. WESSELS
*Electronics Engineer*
*Guided Missile Division*
*Consolidated Vultee Aircraft Corp.*
*San Diego, Calif.*

MINIATURIZATION of receiver components has made the iron-core tuning unit a necessity in the continuously tuned superheterodyne front end. Some developments in experimental technique that proved of considerable value are presented in this article.

In the absence of external influences, such as tickler coils and

# ASSEMBLE AND INSPECT UNDER MAGNIFICATION *in one operation...*

## with the Kodak Contour Projector

This starter switch for a refrigerator motor presents a tough assembly and inspection problem. The springs must be accurately bent and adjusted by hand—tolerances are close.

With the Kodak Contour Projector the whole operation—bending and checking—may be done at the same time and under the magnification that's most convenient.

Since the Kodak Contour Projector has provisions for surface illumination from the same lens that picks up the image, every detail of the switch is shown on the screen. A 45° mirror permits the part to be mounted flat for easy accessibility. Both to adjust the part and check tolerances, the operator simply compares the magnified image with a chart-gage laid on the bright screen.

Whether your interest is in large parts or small parts, simple parts or complex parts with many dimensions, a Kodak Contour Projector will do the job quickly, completely, and accurately. The operator can work in a lighted room unhampered by hoods or curtains. And little training is required to get the work out in a hurry.

For rapid, routine inspection and adjustment work, the economical, stripped-down Kodak Contour Projector, Model 3, will meet your requirements. For toolroom measurement, the versatile Model 2A is what you need. In your area there is an experienced field engineer who will be glad to discuss your own particular problems. You can get in touch with him by writing Eastman Kodak Company, Industrial Optical Sales Division, Rochester 4, N. Y.

**the KODAK CONTOUR PROJECTOR**

A new sound movie shows how to simplify complex inspection problems. We'll tell you how to get it for a showing.

Kodak

# INDIANA PERMANENT MAGNETS

## All materials . . . all sizes . . . all shapes . . .

Look to INDIANA for quality permanent magnets — for skill in manufacture — for cost-cutting engineering aid. Strict supervision in every step of production is your assurance of exact magnetic and mechanical characteristics.

### Complete Engineering Service

Indiana offers a complete engineering service to help select the best permanent magnet for your application. Backed by years of research and experience gained in the development of thousands of magnetic designs, Indiana engineers have the "know-how" to select the best permanent magnet material and to properly design the magnet. This service involves no obligation on your part.

## 24 Hour Service

### ON CATALOG MAGNETS

**Write for this handy reference book full of detailed permanent magnet information. Ask for Catalog No.11.**

### MATERIALS

Indiana's wide variety of magnet alloys permits precise selection.

**HYFLUX Alnico V**
**Cast Alnico**
**Sintered Alnico**
**Cunife**
**Cunico**
**Chrome Steel**
**Cobalt Steel**
**Tungsten Steel**

### FOR ALL APPLICATIONS

Indiana Permanent Magnets provide uniform high energy for:

**RADAR MAGNETRONS**
All types and sizes, horns, "U's" and "E's". Indiana quality insures a strong, uniform magnetic field.

**LOUDSPEAKER MAGNETS**
Indiana Hyflux Alnico V speaker magnets offer a guaranteed energy product of 5¼ million BHmax as contrasted with an industry minimum of 4½ million.

**MAGNETS FOR METERS, INSTRUMENTS AND CONTROLS**
A complete variety for ammeters, indicating instruments, galvanometers, switches, etc.

**TV FOCUS COIL MAGNETS**
All types and sizes of segmented rings, thin wall rings, etc. for focus coils, ion traps and centering devices.

**MAGNETS FOR MOTORS, GENERATORS AND MAGNETOS**
Rotors and assemblies in all grades of Alnico.

**SEPARATOR MAGNETS**
Magnets for all types of industrial processing . . . from pulley separators to can-making machinery.

### Sales Offices Coast to Coast

**Boston 16, Mass., Park Square Building**
**Chicago 2, Ill., 6 North Michigan Avenue**
**Cleveland 14, Ohio, Hippodrome Building**
**New York 17, New York, 51 East 42nd St.**
**Philadelphia 7, Pa., Real Estate Trust Bldg.**
**Rochester 4, New York, Sibley Tower Bldg.**
**Los Angeles 15, Calif., 1151 S. Broadway**

INDIANA PERMANENT MAGNETS

**THE INDIANA STEEL PRODUCTS COMPANY**
**VALPARAISO, INDIANA • • • Sales Offices Coast to Coast**

SPECIALISTS IN "PACKAGED ENERGY" SINCE 1908

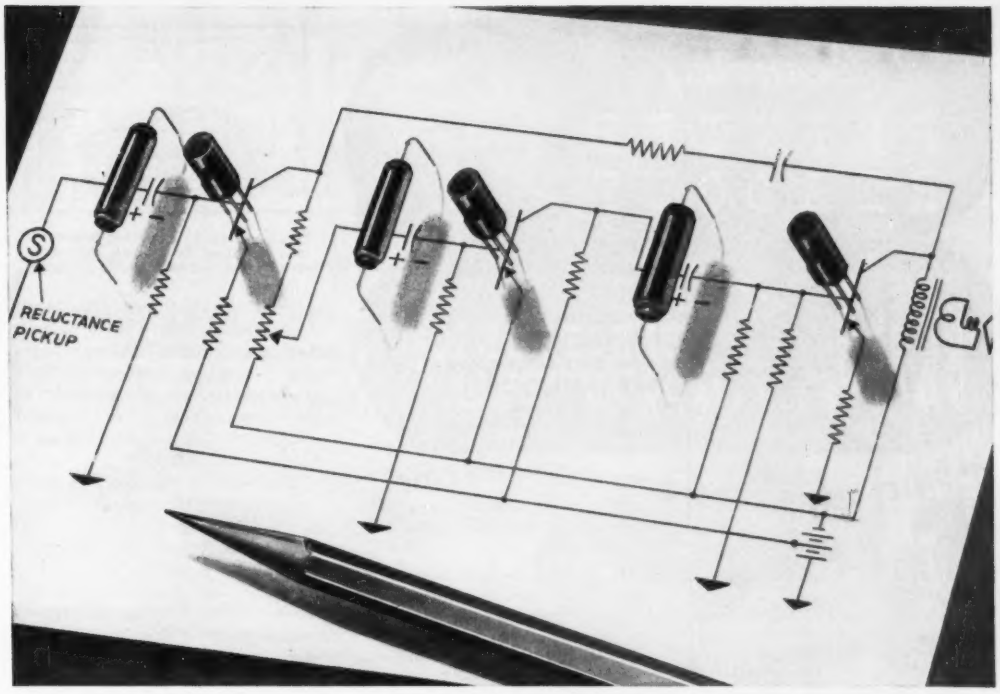


# TRANSISTORS . . . TANTALYTIC CAPACITORS

## teamed in 100-milliwatt tubeless amplifier

General Electric engineers at Electronics Park, Syracuse, have developed a new tubeless audio amplifier circuit that utilizes three junction transistors and three Tantalytic capacitors.

Although still experimental, this 3-stage amplifier promises significant advances in miniaturized equipments. It has a power output of 100 milliwatts—less than 10% distortion—and a power gain of 70 db.

Tantalytic capacitors were a "natural" for interstage coupling in the circuit because of their small size, large capacitance and low leakage current. They match the transistors in ruggedness and long operating life. And they will operate over a wide temperature range ($-55°C$ to $+85°C$ with at least 65% capacitance at $-55°C$). Other features include light weight, long shelf life, and hermetic sealing.

If you have a capacitor application where you need small size and superior performance, it will pay you to investigate Tantalytic capacitors. They're available in polar and non-polar construction and in ratings from 175 muf at 5 VDC to 12 muf at 150 VDC. For additional information use the convenient coupon below.

*General Electric Company, Schenectady 5, New York.*

**General Electric Co., Section A 407-313**
**Schenectady 5, New York**

Gentlemen: Please send me a copy of your free Bulletin(s)

☐ **GEC-808 and GER-451 "Tantalytic Capacitors"**

☐ **ECG-1 "Germanium Transistors"**

**Name** _____

**Company** _____

**Street** _____

**City** _____ **Zone** _____ **State** _____

**GENERAL ELECTRIC**

Berkeley

PRINTED READOUT

13273
25182
25173*

FOR ELECTRONIC COUNTERS!

• DIRECT READING • RAPID CYCLING • LOW COST

PRINTED READOUT for high speed electronic counters is now available at low cost as a standard BERKELEY product! This Digital Recorder provides a direct means of permanently recording sequential count information in arabic numeral form on a standard adding machine tape. It is designed to operate from electronic counters, Time Interval Meters, Events-per-Unit-Time Meters, nuclear scalers, and other electronic totalizing devices. Most standard BERKELEY instruments now in use can be readily adapted for operation with the BERKELEY Series 1550 Digital Recorder, thus eliminating the need for purchase of new counting equipment.

**DIGITAL RECORDER . . .** Series 1550 is composed of a Readout unit and a Printing Recorder. The first unit consists of a bank of readout decimal counting units essentially paralleling the totalizing function of the basic counting instrument from which they operate, and a selecting relay matrix to channel information from the counting circuit to the Printing Recorder. This second unit presents a sequence of total counts in direct reading digital form on a standard adding machine tape.

**A COMPLETE SYSTEM . . .** of Electronic Counter and Digital Recorder then consists of three elements: a suitable electronic counting device, Readout unit, and Printing Recorder. The latter two elements comprise the complete Digital Recorder. Under certain conditions a special modification of the system will permit original count information to be channeled directly into the Readout unit, thus eliminating the need for a separate electronic counter.

**SPECIFICATIONS . . .** Minimum counting period determined by the characteristics of the basic counting instrument. Maximum cycling rate: 1 printout every ¾ second. Indicating capacities 3, 4, 5 or 6 columns. Readout Unit—20¾" x 10½" x 15" cabinet, wt. 60 lbs., standard 19" relay rack panel. Printing Recorder—7½" x 8¼" x 14½" cabinet, wt. 20 lbs. Price, Digital Recorder, Model 1553 (3-column), $1050; Model 1554 (4-column), $1125; Model 1555 (5-column), $1200; Model 1556 (6-column), $1275, f.o.b. factory.

M-2

*Please request Bulletin 1011*

Berkeley Scientific

division of BECKMAN INSTRUMENTS INC.

2200 WRIGHT AVENUE • RICHMOND, CALIFORNIA

"DIRECT READING DIGITAL PRESENTATION OF INFORMATION"







**FIG. 1—Graph for predicting frequency ratios obtained by plotting right side of Eq. 1 in text versus coil diameter**

antenna coupling circuits, two slug-tuned coils with their associated capacitors can be made to tune with a constant frequency difference within reasonable limits by a simple adjustment of their diameters to give the proper frequency ratio to each unit.

If the tuning range of the low-frequency unit is to be $f_2$ to $f_1$ giving a ratio of $f_2/f_1$, then the high-frequency unit will tune over the range of $f_2 + f$ to $f_1 + f$ giving a ratio of $(f_2 + f)/(f_1 + f)$ where $f$ is the constant difference frequency, or i-f frequency, to be maintained.

It has been shown that the inductance ratio obtainable from a powdered-iron-core coil is given by

$$L_a/L_o = d^2/D^2\,(\mu' - 1) + 1 \qquad (1)$$

where $L_o$ is the inductance without iron, $\mu'$ is effective permeability of iron, $d$ is core diameter, $D = \frac{D_1 + D_2}{2}$, $D_1$ is outer diameter of winding and $D_2$ is inner diameter of winding.

When $\mu'$ is relatively large and $d^2/D^2$ does not differ greatly from unity, it is apparent that the in-




**FIG. 2—Frequency ratio versus $L_a/L_p$**

# Vibration Engineering that solves your problems

**PROBLEM:** To perform vibration tests to MIL-E-5272 specification.

**SOLUTION:** The MB Model C-25 Vibration Exciter rated at 2500 lbs. force.

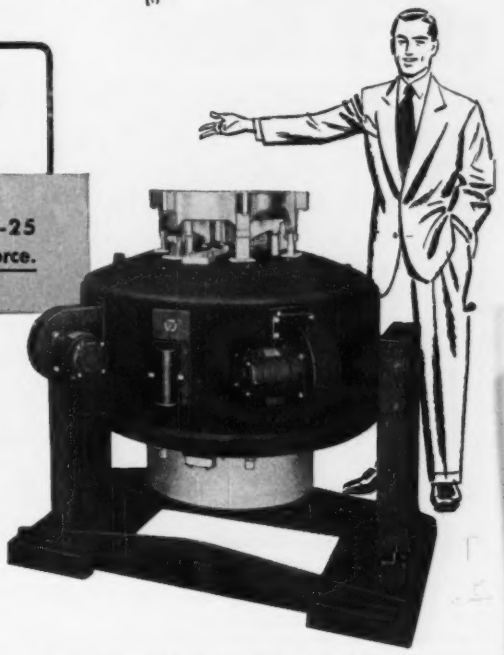

Shake testing gives a quick method of developing a product to withstand vibration. Such testing is vital for military equipment—and a good idea for any product. To meet this need, MB has applied its specialized vibration engineering to develop a range of shakers in various ratings for testing everything from electron tubes to airframes.

The big C-25 model illustrated develops large "brute forces" to satisfy specification MIL-E-5272. It has heavy duty capacity for a wide range of work, including fatigue testing. It features accurate, continuous control of force and frequency. Its control panel is available with an automatic cycling system for specific cycling tests called for in the MIL-E-5272 specification.

One of the largest and most dependable electromagnetic shakers available, the C-25 model is a good example of the quality of vibration engineering that has made MB "headquarters" for products to isolate, control, reproduce, detect, or measure vibration. More information on MB Vibration Exciters in Bulletin 1-VE-5. Write us.

## Want a standard mount for vibration isolation in the special class?

With the Isomode* Type 17 Isolator, you not only conform to MIL-I-5432 specification but also get an unusual degree of isolation efficiency. It has equal spring rates in every direction. This means better control of all modes of motion. For details on this mount, write to Dept. 5.

*Trade Mark Reg. U.S. Pat. Off.*

**THE MB MANUFACTURING COMPANY, INC.**
1060 STATE STREET, NEW HAVEN 11, CONN.

PRODUCTS AND EQUIPMENT TO CONTROL VIBRATION • TO MEASURE IT • TO REPRODUCE IT

# Marchant Calculating Machine Company

## *"They make no mistake in figuring resistor costs"*

**says L. F. Church, L. F. Church Company, San Francisco, representative for Ward Leonard Electric Company**

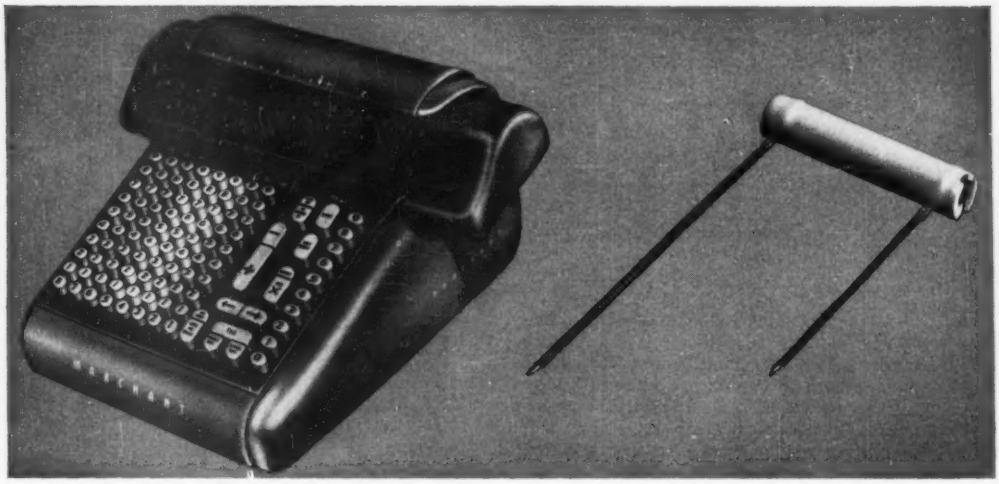

It's *cost in terms of performance* that counts with the makers of Marchant calculators.

A lot of arithmetic would be delayed if resistors failed to work in these push-button multiplication calculators. That's why Marchant insists upon quality resistors, rather than taking a chance with bargains.

How do you *tell* a quality resistor?

It's true that most resistors look alike. A resistor is a simple piece of equipment—really nothing more than a piece of ceramic tubing . . . a couple of terminals . . . a piece of resistance wire . . . and a protective coating.

But there the similarity ends, because in the *important* things that really count, resistors are miles apart! And the biggest difference is that all of the resistor is actually *made* by the company that sells it.

The only way to be sure that all components will react the same to changes in temperature is to balance their thermal characteristics.

Take the tube. Companies like Marchant are depending on that high-density, non-porous, high-dielectric strength, perfectly cylindrical Ward Leonard ceramic core, with smooth surface and straight ends.

They also know the terminals are made of the right alloy to permit proper expansion . . . and that they're securely, rigidly, clamped to the core.

They know the wire is drawn especially for their type of resistor . . . is capable of withstanding great overloads . . . has uniformly low coefficient of resistivity. They also know the coating provides a complete hermetic seal, highly resistant to thermal shock and to high humidity, acids, alkalies, electrolysis.

*You can be sure* of quality, by buying your resistors from the *one* manufacturer who manufactures, not just assembles, all the components that go into resistors. Play it safe and sound—insist upon VITROHM resistors.

WARD LEONARD

**WARD LEONARD ELECTRIC COMPANY**

MOUNT VERNON, NEW YORK

*Result-Engineered Controls Since 1892*



CERAMIC CORES are made by extruding refractory material from hydraulic presses such as this in Ward Leonard's plant.

RESISTANCE WIRE sample is being processed in the combustion furnace to insure accuracy of alloy formula.



VITREOUS ENAMEL for coating is fritted, then ground to exact fineness in these revolving "ball mills."

VITROHM vitreous enamel is measured by interferometer for coefficient of thermal expansion, melting and annealing points.

## Uniform Quality—Matched Thermal Characteristics—Long Service Life of VITROHM Resistors—Result From Unified Manufacture

All components of a VITROHM resistor are made by Ward Leonard, the only manufacturer who *makes*, not just assembles, all parts.

Vitreous enamel coating and ceramic cores are formulated and made by Ward Leonard—wire is drawn to their specifications.

This means that all parts are uniform in quality, balanced in respect to thermal coefficient of expansion.

There's no loosening, no failure, due to unbalance of thermal characteristics, heat affects all parts the same way, which in turn means longer life.

VITROHM resistors will stay on the job under the most adverse operating conditions where a less carefully made resistor would break down. Thermal shock, vibration, corrosive atmosphere, overloads, even prolonged exposure to humidity and electrolysis will not affect their performance.

## DISTRICT OFFICES AND REPRESENTATIVES

Atlanta 5, Ga.
C. B. Rogers and Associates, 1880 Peachtree St., N. E.

Baltimore 18, Maryland
Durling Electric Co., 2322 No. Charles St.

Charlotte 1, No. Carolina
James L. Highsmith & Co., P. O. Box 1011

Chicago 4, Illinois
Ward Leonard Electric Co., 53 West Jackson Blvd.

Cincinnati 2, Ohio
Sheldon Storer and Assoc., Trans. Bldg., 307 E. 4th St.

Cleveland 14, Ohio
The Ambos-Jones Co., 1085 The Arcade

Corpus Christi, Texas
Branco-Krochy Co., Inc., 126 North Staples St., P. O. Box 463

Denver 2, Colorado . . . Mark G. Mueller, 1644 Blake St.

Detroit 21, Michigan
Jesse W. Eukins Co., 16575 James Couzens Highway

Hartford 6, Conn.
Ward Leonard Electric Co., 37 Webster St.

Houston 1, Texas
Branco-Krochy Co., Inc., 4411 Navigation Blvd. P. O. Box 1724

Kansas City 2, Mo. . . .Maury E. Bottis Co., 406 W. 34th St.

Knoxville, Tenn.
John G. Pettyjohn, 1243 North Broadway, P. O. Box 395

Los Angeles 13, Calif.
Ward Leonard Electric Co., 420 So. San Pedro St.

Memphis 3, Tenn.
E. E. Torkoll, 198 So. Main St., P. O. Box 4029

Minneapolis 5, Minn.
Marvin H. Kirkeby, 437 Oliver Ave., S.

Newark 2, N. J.
Ward Leonard Electric Co., 1860 Broad St.

New Orleans 13, La.
Electron Engineering Co., 1850 Constance St.

Philadelphia 2, Pa.
Ward Leonard Electric Co., 112 South 16th St.

Pittsburgh 16, Pa. W. A. Bittner, 3845 W. Liberty Ave.

Roanoke, Va. . Lynn H. Morris, 2603 Dorchester Dr., Rt. 2, P. O. Box 5097

Rochester 7, N. Y.
Ward Leonard Electric Co., 66 South St.

St. Louis 10, Mo.
Ward Leonard Electric Co., 4030 Chouteau Ave.

Salt Lake City 1, Utah
Leonard M. Slusser, 318 Dooly Bldg.

San Antonio, Texas
Branco-Krochy Co., Inc., 434 Transit Tower Bldg.

San Francisco 3, Calif. L. F. Church Co., 750 Natoma St.

Seattle 4, Wash.
Northwestern Agencies, Inc., 4130 First Ave., So.

Tucson, Arizona
Control Station Equipment Co., 2323 Aviation Highway

Washington 5, D. C.
Federal Engineering Co., Inc., 1109 K. St., N. W

### CANADA

Edmonton, Alta . . . . . D. M. Fraser, Ltd., 10627-101 St.

Halifax, N. S. . . . . D. M. Fraser Ltd., 702 Robie St.

Montreal 25, P. Q.
D. M. Fraser, Ltd., 1570 St. Matthew St.

Toronto 1, Ont. . . . D. M. Fraser, Ltd., 54-56 Lombard St.

Vancouver, B. C. . . . D. M. Fraser, Ltd., 716 Cambie St.

Winnipeg, Man. . . . . D. M. Fraser, Ltd., 401 Ave. Bldg.

### EXPORT

New York 4, N. Y. . . . Ad. Auriema, Inc., 89 Broad St.

Ward Leonard's complete engineering textbook, "Handbook of Power Resistors," $3. per copy.

ENGINEERS...TECHNICIANS!..here is your

New! B&W Dip Meter

Model 600

PRICE $48 net

VERSATILITY, COMPACTNESS, QUALITY

Few instruments will prove so handy in so many ways as this versatile B&W Model 600 Dip Meter! Ideal for lab, production, service or ham shack use, it provides a quick, accurate means for measuring resonant circuit frequencies, spurious emissions and many other tuned circuit characteristics. Shaped for easy use in today's compact electronic assemblies, highly sensitive and accurately calibrated, it incorporates many features previously found only in higher-priced instruments. You'll find dozens of uses for it as ...

**A Grid Dip Oscillator** for determining resonant frequencies of tank circuits, antennas, feed line systems, and parasitic circuits; aligning filters and traps; peaking coils, neutralizing and tuning transmitters before power is applied.

**An Absorption Wave Meter** for accurately identifying the frequency of radiated power from various transmitter stages; locating spurious emissions causing troublesome TV and radio interference, and many similar uses.

**An Auxiliary Signal Generator** providing a signal for tracing purposes and for preliminary alignment of receivers, converters, and I-F stages.

**An R-F Signal Monitor** for audible observation of hum, audio quality, and other audible characteristics of radiated power.

**For Capacity, Inductance, and "Q"** measurements in conjunction with other components of known value.

TECHNICAL FEATURES

- √ Covers 1.75 to 260 mc. in 5 bands.
- √ Adjustable sensitivity control.
- √ Size 3" x 3" x 7". Weight 2 lbs.
- √ Handy wedge-shape for easy access in hard-to-get-at places.
- √ Monitoring jack and B+ OFF switch.
- √ Rust-proofed chassis, aluminum case.
- √ Built-in power supply for 110 volts A.C.

*Sold by leading distributors throughout U. S. A. and Canada*
*Data bulletin sent on request.*

BARKER & WILLIAMSON, INC.

237 Fairfield Avenue Upper Darby, Penna.




ductance ratio of Eq. 1 is approximately proportional to $d^2/D^2$, giving a frequency ratio of $d/D$, since $f$ is proportional to $1/\sqrt{L}$. If the low-frequency unit, generally the r-f circuits, has a core-to-coil diameter ratio of

$$d/D = f_2/f_1 \quad (2)$$

the high-frequency unit, or the local oscillator, will have a ratio of

$$d/D' = (f_2 + f)/(f_1 + f) \quad (3)$$

where it is assumed that other dimensions and physical constants are the same for both units and $D'$ is the diameter of the larger oscillator coil.

A graph such as shown in Fig. 1 is a convenient method of predicting frequency ratios and recording experimental data. The curves are theoretical and are obtained by plotting the square root of the right side of Eq. 1 versus the diameter of the coil.

*Padding Inductance*

Adjustment of tuning ratio may be accomplished also by the use of a series inductance that is not tuned by the main slug. If this external series inductance is variable, it will function in the same manner as the padder in the capacitor tuned case so that the antenna and oscillator coil can be identical. Its value is found as follows.

Assuming the main oscillator inductance has no magnetic coupling to the padding inductance, their combined inductance with the slug removed will be

$$L = L_o + L_p \quad (4)$$

When the slug is inserted, the inductance of $L_o$ will be increased by a factor $n = L_1/L_o$ as determined from Eq. 1. This gives a new total inductance of

$$L' = nL_o + L_p \quad (5)$$

The ratio of $L'$ to $L$ will be propor-




FIG. 3—Typical results obtained from Colpitts circuit

*As old as*

**RADIO**

*yet as young as*

**ELECTRONICS...**

# AEROVOX
## CAPACITORS

**1922** At the very dawn of radio—30 years ago, Aerovox came into being to meet capacitor needs. Pioneer radiophone transmitters and earliest radio receivers specified Aerovox capacitors. Such collaboration has continued down through the first three decades of radio-electronic progress.



**1952** Today, giant atom-smashing betatrons . . . radar gear spotting unseen targets . . . transoceanic radio-guided rocket bombs . . . world-wide radio communications . . . electronic computers reducing thousands of calculation man-hours to mere seconds . . . the modern miracle of television — for all facets of the Electronic Age, Aerovox capacitors are still engineered to customer specifications.

Indeed, from tiny precision "ceramics" and metallized-paper "space-savers," to giant power-handling "oils" and "micas," Aerovox remains the time-proven source for ALL capacitor needs.

Sub-miniature vitrified ceramic terminal end-seal Type P123ZN Aerolene-impregnated metallized-paper tubular capacitor.

AEROVOX capacitors

**AEROVOX CORPORATION**

NEW BEDFORD, MASS.

Hi-Q® DIVISION OLEAN, NEW YORK  WILKOR DIVISION CLEVELAND, OHIO

JOBBER ADDRESS: 740 Belleville Ave., New Bedford, Mass.

Export: 41 E. 42nd St., New York 17, N. Y. • Cable: AEROCAP, N. Y. • In Canada: AEROVOX CANADA LTD., Hamilton, Ont.

FOR

# FASTER

SERVICE
GREATER VARIETY
HIGHER QUALITY

# ALLMETAL "AN"

## STAINLESS STEEL FASTENERS

MACHINE SCREWS • NUTS • BOLTS • WASHERS • PINS • RIVETS

AVAILABLE IMMEDIATELY FROM STOCK, an endless stream of first quality "AN" stainless fasteners is Allmetal's answer to the exacting demands of defense production . . . in aircraft, electronics, ordnance, in industry everywhere. Always remember Allmetal, to get the fasteners you want—when you want them.

OFFICIAL DEPT. OF DEFENSE PHOTOGRAPHS

WRITE FOR CATALOG, ON YOUR LETTERHEAD, TODAY!

FOR EMERGENCY ORDERS:
WIRE Allmetal Screw Products Co.
WUX, New York
or PHONE WOrth 4-6444

STAINLESS STEEL FASTENERS

MANUFACTURERS SINCE 1929

ALLMETAL

SCREW PRODUCTS COMPANY, INC.

33 GREENE STREET NEW YORK 13, N. Y.

# Carbofilm®

## HERMETICALLY SEALED

TOUGH FOR ROUGH GOING!

**SPECIFICATIONS**

1. Hermetically sealed. Metal case. Vitrified ceramic end seals, pigtail leads. Thoroughly protected – mechanically, electrically, climatically.
2. Temperature Coefficient not exceeding .002 ohm per ohm per °C. over temperature range of –40°C. to +60°C. up to 15 megohms. Not exceeding .005 ohm per ohm per °C. up to 100 megohms.
3. Voltage Coefficient does not exceed .005% per volt.
4. Overloads up to 25% of rated voltage, without showing permanent change in resistance.
5. Accuracy: guaranteed tolerance of plus/minus 1% at 25°C. (77°F.).
6. Aging Changes negligible. Average change in resistance for self-aging, approximately 0.2% in a year.
7. Noiseless Silver-to-silver contacts insure very high stability and correspondingly low noise levels.
8. In Four Sizes: Two ½ watt, 1 watt and 2 watt [illegible]

Wilkor, the first licensee under Western Electric patents to produce carbon deposited precision resistors, takes another step forward. Wilkor now offers hermetically-sealed Carbofilm Resistors, the first fully-protected precision resistors available on a production basis.

Primarily intended for circuits calling for the accuracy and stability of wire-wound resistors, yet with the compactness of carbon or composition-element resistors. Excellent for measuring-instrument applications; in test and lab equipment; in oscillography and other critical electronic circuits; in electronic computers and allied techniques; and now, in the encased, hermetically-sealed construction, particularly in applications where resistance values must be critically maintained over long service life, regardless of climatic conditions.

TEMPERATURE COEFFICIENT OF RESISTANCE (TYPICAL)




*Literature on request. Let us collaborate in your precision-resistor requirements.*

*Trade Mark

WILKOR DIVISION

AEROVOX CORPORATION

CLEVELAND, OHIO

AEROVOX CORPORATION NEW BEDFORD MASS. HI-Q® DIVISION OLEAN, N. Y.

Export: 41 E. 42nd St., New York 17, N. Y. • Cable: AEROCAP, N. Y. • In Canada: AEROVOX CANADA LTD., Hamilton, Ont. JOBBER ADDRESS: 740 Belleville Ave., New Bedford, Mass.

★ *meeting* **JAN** *specifications* ★

official Army, Navy and Air Force photos, released by Dept. of Defense

*you can get*
**DRAKE**
*precision-made*
**SOCKET & JEWEL LIGHT ASSEMBLIES**
*for every use—usually at a saving!*




★
*still maintaining full service on non-defense orders with ON-TIME deliveries*
★

**HUNDREDS OF STYLES, SIZES and COMBINATIONS . . .**

. . are already available in the DRAKE line. It's usually easy to select from them the exact unit to fit your requirement best. But should your application need a special design, DRAKE can develop a unit especially for you . . just as we have done countless times for our customers during more than 20 years of specialization.

★ Why not write on your company letterhead for samples and full data—*now?* No obligation.

DRAKE

**DRAKE**
**MANUFACTURING COMPANY**
1711 WEST HUBBARD ST. • CHICAGO 22, ILL.
**SOCKET & JEWEL LIGHT ASSEMBLIES**






**FIG. 4—Typical results obtained from tickler-type circuit**

tional to the square root of the frequency ratio as determined by Eq. 3. If Eq. 5 is divided by Eq. 4 and the resulting equation is solved for $L_p$, there results

$$L_p = L_0 (n - R)/(R - 1) \qquad (6)$$

where $R$ is the ratio of $L'$ to $L$, and $L_p$ is the desired value of the padding inductance. Figure 2 is a plot of the square root of $R$, or frequency ratio, versus $L_o/L_p$ for $n=4$. This construction provides a convenient means of calculating the value of $L_p$ and will be used subsequently in choosing a value for the loop-antenna inductance.

From a more rigorous point of view, an adjustment of tuning ratio as described does not result in what is considered an optimum error curve.[1] While the systems described have the necessary three degrees of freedom for three-point tracking, it was not of practical importance to consider anything but the tuning ratio.

An examination of Fig. 3 and 4 reveals that three-point tracking was approached in both cases. The two figures suggest that any change could have given only a slight improvement in gain. The degrees of freedom are diameter or padding inductance adjustment, capacitance adjustment and adjustment of the relative slug positions.

*Available Band Coverage*

In the design of a specific unit, reference can be made to a manufacturer's table of recommended frequency ranges and approximate permeability of iron cores. After a particular mix is chosen as recommended for a desired frequency range, the approximate permeability may be referred to Fig. 5 and 6 to determine the effective permeability in terms of the length to

# The *NEW* Collins Mechanical Filter...

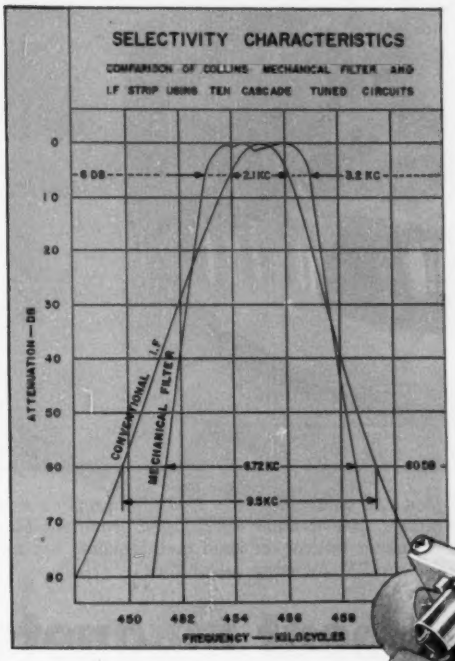


ANOTHER outstanding result of Collins Research and Development — the Mechanical Filter — has been engineered to fill a long-standing need in the field of electronics for a compact, permanently tuned band pass filter for intermediate frequency amplifier applications. Mechanical elements of the Collins Filter provide selectivity characteristics approximating the ideal rectangular shape needed for very close spacing of adjacent voice communication channels. Space requirements are reduced to a minimum with this hermetically sealed component that *requires no adjustment.*

Production of the Collins Mechanical Filter in quantity is going ahead at an increased rate in anticipation of the many applications in industry for which this NEW Filter will be found ideally suited. Characteristics of Filters in current production are shown in the specifications below. Filters having other characteristics are in development and will be announced in the future.

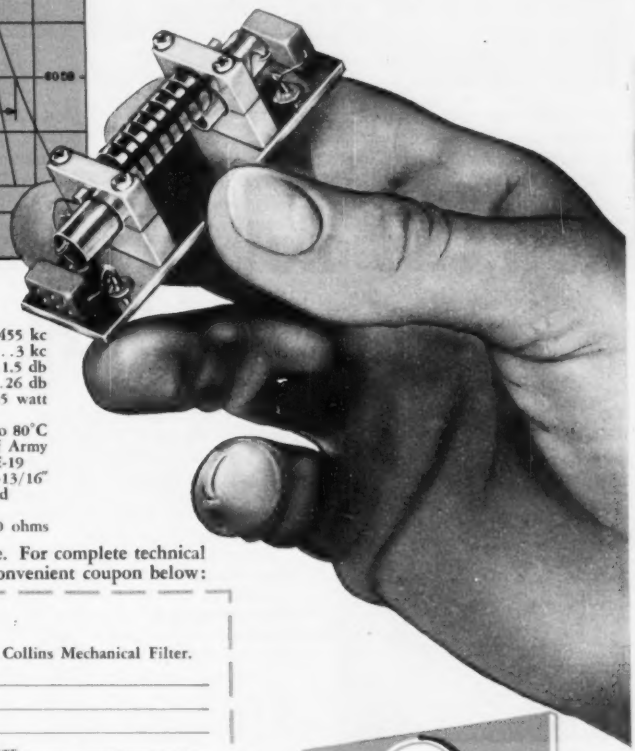

## SPECIFICATIONS

| | |
|---|---|
| Operating Frequency | 455 kc |
| Nominal Band Width | 3 kc |
| Peak to Valley Ratio | 1.5 db |
| Insertion Loss | 26 db |
| Overload Input Power Level | .035 watt |
| Operating Temperature Range (without temperature compensation) | 15°C to 80°C |
| Vibration | Satisfies Requirements of Army Navy Specification AN-E-19 |
| Case Size (Filter Shown with Hermetically Sealed Shield Removed) | 1" x 15/16" x 2-13/16" |
| Input and Output Impedance | 6,500 ohms |

Engineering samples are now available. For complete technical data and price information, use the convenient coupon below:

Collins Radio Company (Dept. 22 )
Cedar Rapids, Iowa

Please send complete Information on The Collins Mechanical Filter.

NAME_____

TITLE_____

ADDRESS OR FIRM_____

CITY_____ STATE_____

**For advanced electronic development, it's . . .**

COLLINS

**COLLINS RADIO COMPANY, Cedar Rapids, Iowa**

**11 W. 42nd Street, NEW YORK 36** **1930 Hi-Line Drive, DALLAS 2** **2700 W. Olive Avenue, BURBANK**

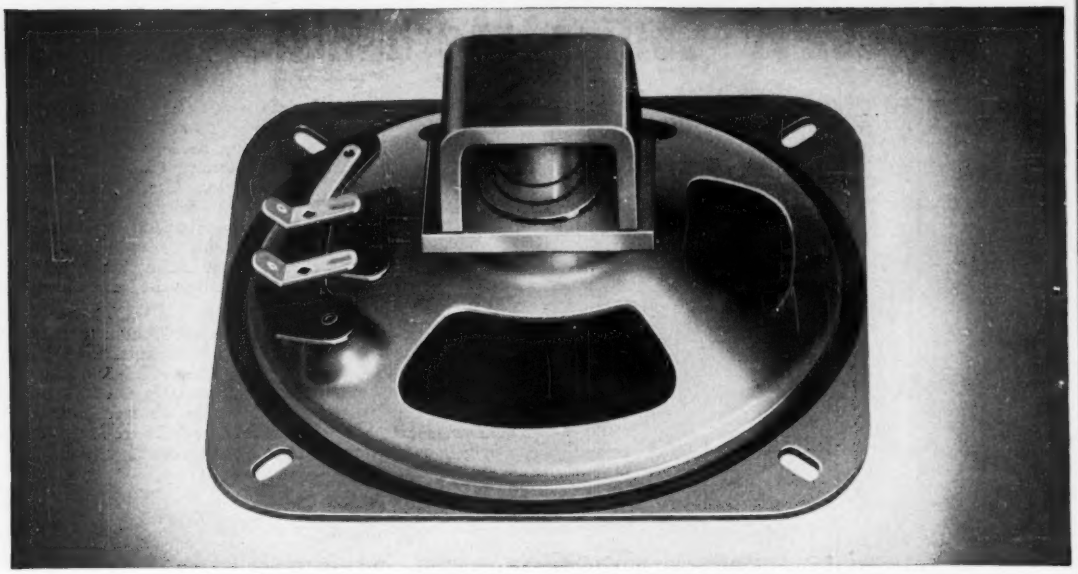

**SPEAKERS**—In radio and TV speakers, Carboloy Permanent Magnets replace larger electro magnets in the field structure. Current passing through *uniform* field of these high-energy magnets causes voice coil and cone to vibrate in proportion to voltage; *tone is truer!* Carboloy Permanent Magnets never fail; never need maintenance. Are also used in TV focusing assemblies.

# How Carboloy permanent magnets improve electrical products



**CONTROLS**—Switches in compact Minneapolis-Honeywell controls use permanent magnets to give safer snap action, help quench arcs. The magnets are exceptionally stable; provide uniform high energy for the life of the control.

**Want** to cut down product size, weight? Build a better-performing product for less money?

Then check the possibility of using Carboloy Alnico permanent magnets wherever you need *lasting* magnetic energy.

Carboloy permanent magnets are simple, self-containing sources of energy that *never* fail. They are powerful in small sizes. Need no outside power supply, no maintenance. They help reduce fabrication costs by eliminating wires, coils and operating parts. Above all, they let you simplify design . . . build a lighter, more compact, finer-performing product at a saving.

On these pages you'll see how others got the jump on competitors by using permanent magnets. Perhaps you'll get an application idea from reading about them.

**FREE SERVICES**

If so, check Carboloy magnet engineers for free, expert advice and an assist in design and application. Look to Carboloy production lines, too, for the uniform, high-energy Alnico magnets you'll need for best results — all sizes, all shapes; cast or sintered to your specifications.

Send coupon for free Magnet Design Manual PM-101 and Standard Stock Catalog PM-100.

**CARBOLOY**

**DEPARTMENT OF GENERAL ELECTRIC COMPANY**

**11139 East 8 Mile Road, Detroit 32, Michigan**

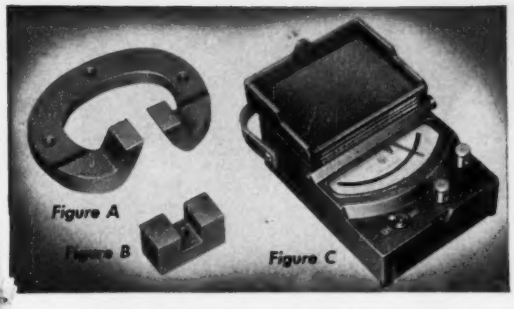


**INSTRUMENTS**—Fig. A is damping magnet once used in GE indicators. Fig. B is tiny Carboloy magnet now used. It permits smaller indicator design (Fig. C), cuts materials and assembling costs . . . speeds up calibrations.

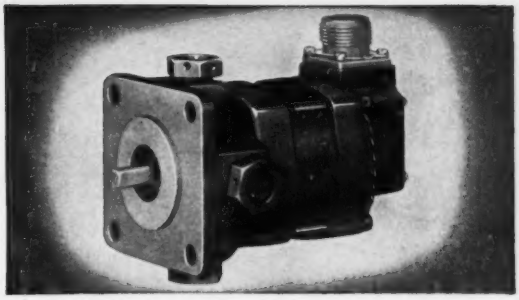

**GENERATORS**—When GE engineers had only 6" x 6" area for jet's tachometer generator, they whipped design problem with a tiny permanent magnet. It eliminated coils and wires, supplied the powerful energy required.

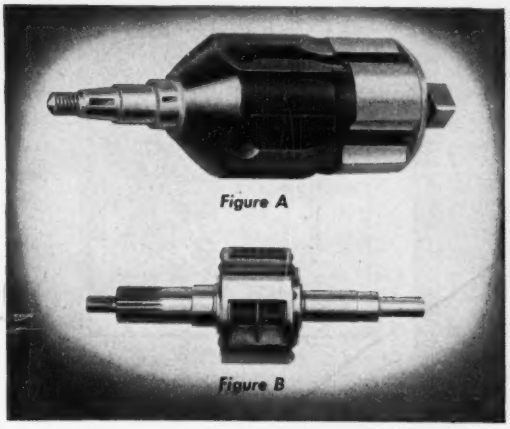


**MAGNETOS**—To Scintilla Magneto Division, Bendix Aviation Corp., weight savings are vital in their aircraft products. Fig. A shows chrome rotor weighing approximately 4 lbs. 9 ozs. Fig. B shows newer model rotor using Carboloy Alnico. It weighs only 2 lbs. 4 ozs.

## ADVANTAGES OF CARBOLOY PERMANENT MAGNETS

1. Simple — no operating parts
2. Uniformly powerful
3. Permanent source of energy
4. No coils to wire
5. Cool-running
6. No operating costs
7. No power failures
8. Combine electrical and mechanical features
9. Simplify mechanical assemblies
10. Uninterrupted operation
11. Moisture-resistant
12. Create savings

"Carboloy" is the trademark for the products of Carboloy Department of General Electric Company

**Plants at Detroit, Michigan; Edmore, Michigan; and Schenectady, New York**

**CARBOLOY ALNICO PERMANENT MAGNETS**

*Mail Coupon Today*

Carboloy Department of General Electric Company
11139 East 8 Mile Road, Detroit 32, Michigan

Gentlemen:

Please rush me, without cost or obligation, copies of Permanent Magnet Design Manual PM-101 and Standard Stock Catalog PM-100.

NAME_____

POSITION_____

COMPANY NAME_____

ADDRESS_____

CITY_____ ZONE____ STATE_____

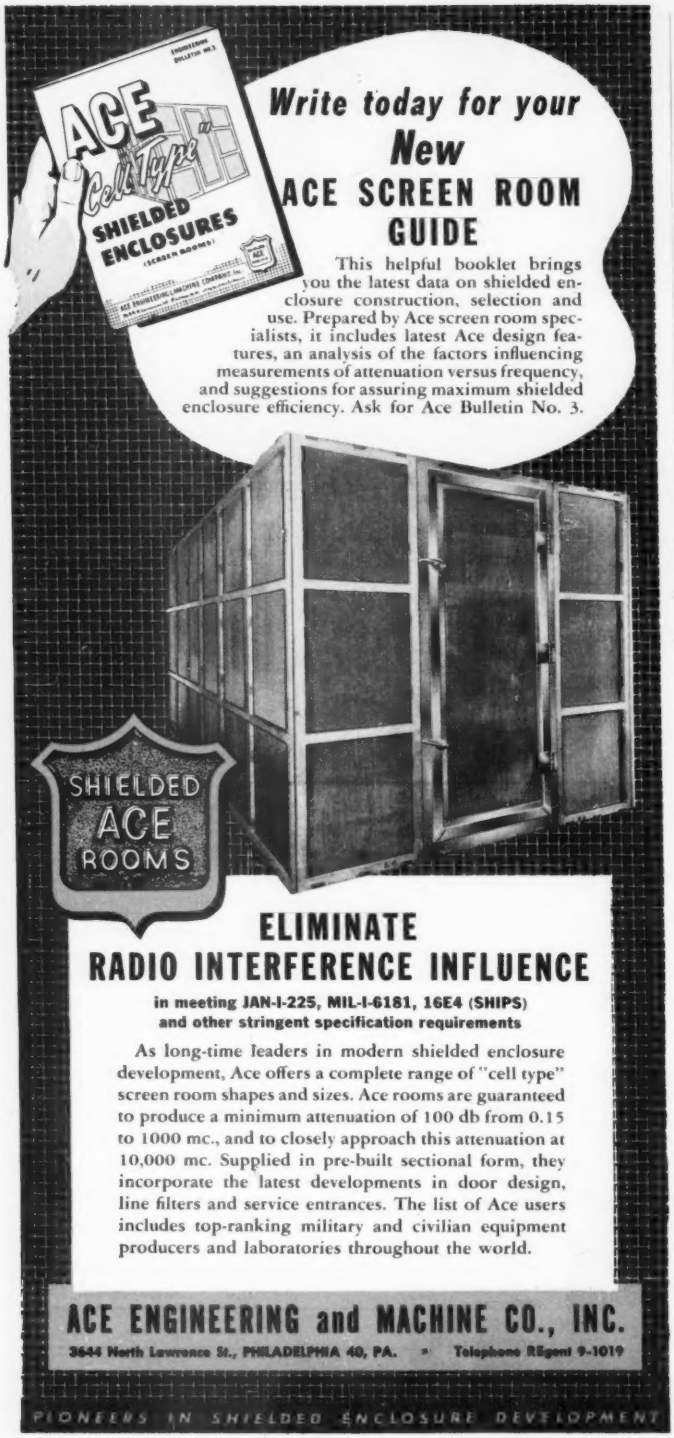
ACE
"Cell Type"
SHIELDED
ENCLOSURES
(SCREEN ROOMS)
Write today for your
New
ACE SCREEN ROOM
GUIDE
This helpful booklet brings you the latest data on shielded enclosure construction, selection and use. Prepared by Ace screen room specialists, it includes latest Ace design features, an analysis of the factors influencing measurements of attenuation versus frequency, and suggestions for assuring maximum shielded enclosure efficiency. Ask for Ace Bulletin No. 3.
SHIELDED
ACE
ROOMS
ELIMINATE
RADIO INTERFERENCE INFLUENCE
in meeting JAN-I-225, MIL-I-6181, 16E4 (SHIPS)
and other stringent specification requirements
As long-time leaders in modern shielded enclosure development, Ace offers a complete range of "cell type" screen room shapes and sizes. Ace rooms are guaranteed to produce a minimum attenuation of 100 db from 0.15 to 1000 mc., and to closely approach this attenuation at 10,000 mc. Supplied in pre-built sectional form, they incorporate the latest developments in door design, line filters and service entrances. The list of Ace users includes top-ranking military and civilian equipment producers and laboratories throughout the world.
ACE ENGINEERING and MACHINE CO., INC.
3644 North Lawrence St., PHILADELPHIA 40, PA. • Telephone REgent 9-1019
PIONEERS IN SHIELDED ENCLOSURE DEVELOPMENT




diameter ratios or form factors. The approximate inductance range may then be determined by substituting this value of $\mu'$ into Eq. 1. The frequency ratio will then be approximately the square root of this value.

Since the interpolar distance of an iron core is less than its length, the core should be approximately 1.18 times longer than the coil when the winding consists of a few layers close to the core and greatest inductance ratio is desired. If the core length is different from this optimum value, the value of $\mu'$ should be altered according to the following relation:

$$\mu'' = \mu'(L/l)^{1/3} \qquad (7)$$

Where $L$ is the length of the core, $l$ is the length of the coil and $\mu''$ is the corrected value of the effective permeability.




**FIG. 5—Approximate permeability as a function of effective permeability for a range of L/D ratios**

A procedure which facilitates checking these suggested solutions has been described in a previous article.[2]

*Oscillator Circuits*

The local oscillator in a permeability-tuned system can be of almost any type. Since the circuitry used required the use of a filament-type mixer tube, the Colpitts and tickler type of oscillators proved most suitable. When an interwound tickler is used, its grounded end should be at one end of the coil as opposed to locating the grounded end toward the coil center. When this precaution is not observed, serious deviations from what would be considered a normal insertion distance versus resonant-frequency curve are experienced. In general, it will still be necessary to correct for the distortion caused by the

Added Evidence that—

# Everyone Can Count on VEEDER-ROOT

Aerial navigators and bombardiers rely on the figures that keep turning up on this Veeder-Root Counter, specially designed for the Armed Forces. And if *you* need to know exactly where you are, with any product or mechanism that's vital to Defense, then you can count on Veeder-Root to help you, to the utmost limits of ability . . . and of available capacity. Write:

VEEDER-ROOT INCORPORATED
"The Name That Counts"
HARTFORD 2, CONN.

Chicago 6, Ill. • New York 19 • Greenville, S. C.
Montreal 2, Canada • Dundee, Scotland

*Offices and agents in principal cities*

*"Counts Everything on Earth"*

# MINIATURE AIRCRAFT TRANSFORMERS

This custom-built transformer is typical of Keystone's versatility.

Every job is built to order. No matter how intricate your unit may be, Keystone will build it to your *exact* specifications. Controlled manufacturing — constant, step-by-step inspection — deliveries when promised. Get a quote from Keystone on your next transformer requisition.

**KEYSTONE PRODUCTS COMPANY**

UNION CITY 2, N. J. UNion 6-5400

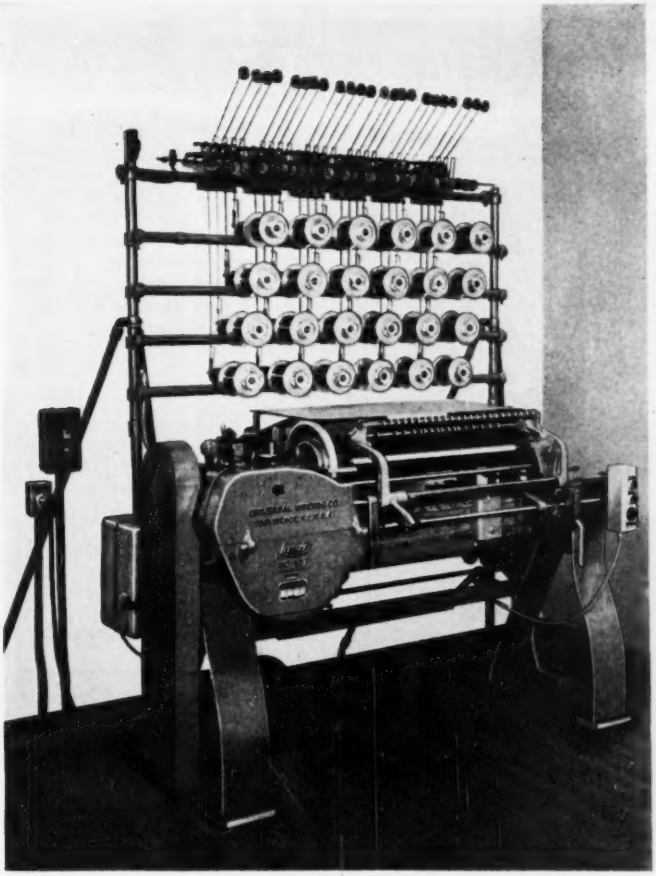

## Automatic features

# SPEED UP COIL WINDING

## Assure accuracy and low cost

## Leesona® No. 107 Coil Winder Offers Many Advantages

**1. Automatic Delivery Shelf** does it! New shelf feeds the paper inserts to the coils, exerting uniform tension on the paper as it is fed into the coil. This means tighter finished coil. Staggers overlaps to insure perfectly round or square coils. Delivery shelf automatically lengthens each insert as the coil diameter increases. This makes certain that the coils produced are within the maximum allowable outside diameter.

**2. Automatic Electronic Speed Control.** Slow, cushioned start . . . gradual speed build-up . . . constant high running speed for uniform wire tension and coil density.

**3. Automatic Stop Motion** — stops the machine whenever a spool runs out or a wire break occurs.

**4. Automatic Counter** stops the machine when the required number of turns have been reached.

*Send for Bulletin 107* — get the details on this fully automatic Leesona® No. 107. It will show you how to get the exact electrical characteristics you want in either paper or acetate insulated coils, at the highest production rate, and lowest cost.

**UNIVERSAL WINDING COMPANY**

**P. O. Box 1605, Providence 1, R. I.**

**Chicago office and Demonstration Room, 9 So. Clinton St., Chicago 6, Ill.**



LEESONA

**For winding coils in quantity accurately . . . automatically use Universal Winding Machines**

# 7 good reasons for specifying MEPCO *Precision Resistors*

1. Crossover wire insulated from each winding by 2000v. insulation *(patented)*.
2. Special metal molded connecting feature, which bonds end of winding and terminal in a non-corrosive and mechanically secure manner—no solder or flux used.
3. Reversed and balanced PI-windings for low inductance, with use of only the finest resistance alloys.
4. Impregnated with approved fungus, moisture and salt water-proofing compounds.
5. JAN approved non-hydroscopic steatite bobbin, specially treated prior to winding in order to provide additional protection for fine enameled wire.
6. Protective fungi resistant acetate label.
7. Rigid hot solder coated brass terminals for easier soldering.

MEPCO, INC.,
MORRISTOWN, NEW JERSEY




presence of the tickler winding on the oscillator coil especially if a high degree of selectivity is employed.

The graphs of Fig. 3 and Fig. 4, respectively, give typical results obtained from the Colpitts and tickler-type circuits. It was found that one of these graphs could be constructed in about ten minutes using the procedure described. The points along the solid line are read along the left-hand ordinate and represent the signal generator reading when its beat note with the local oscillator rests on the peak of the response curve of the r-f amplifier.




**FIG. 6—Curves similar to those in Fig. 5 but for different *L/D* ratios**

The horizontal straight line through the center of the graph is drawn at the i-f frequency as read along the left-hand ordinate. The distance between this line and the solid curved line represents tracking error as a function of insertion distance, which is plotted along the abcissa. The two lines diverging to the right represent the approximate passband of the antenna coil on the assumption that it has a Q of 25. Since the Q is not necessarily constant across the band, these lines would actually be curved but are for the sake of simplicity drawn here as straight lines. They represent minimum rather than true passband. The dash lines are read along the right-hand ordinate and represent the resonant frequency of the antenna coil as a function of insertion distance.

The author acknowledges the consideration of W. J. Polydoroff of the Stackpole Carbon Company.

REFERENCES

(1) K. R. Sturley, "Radio De-
(*Continued on page* 202)

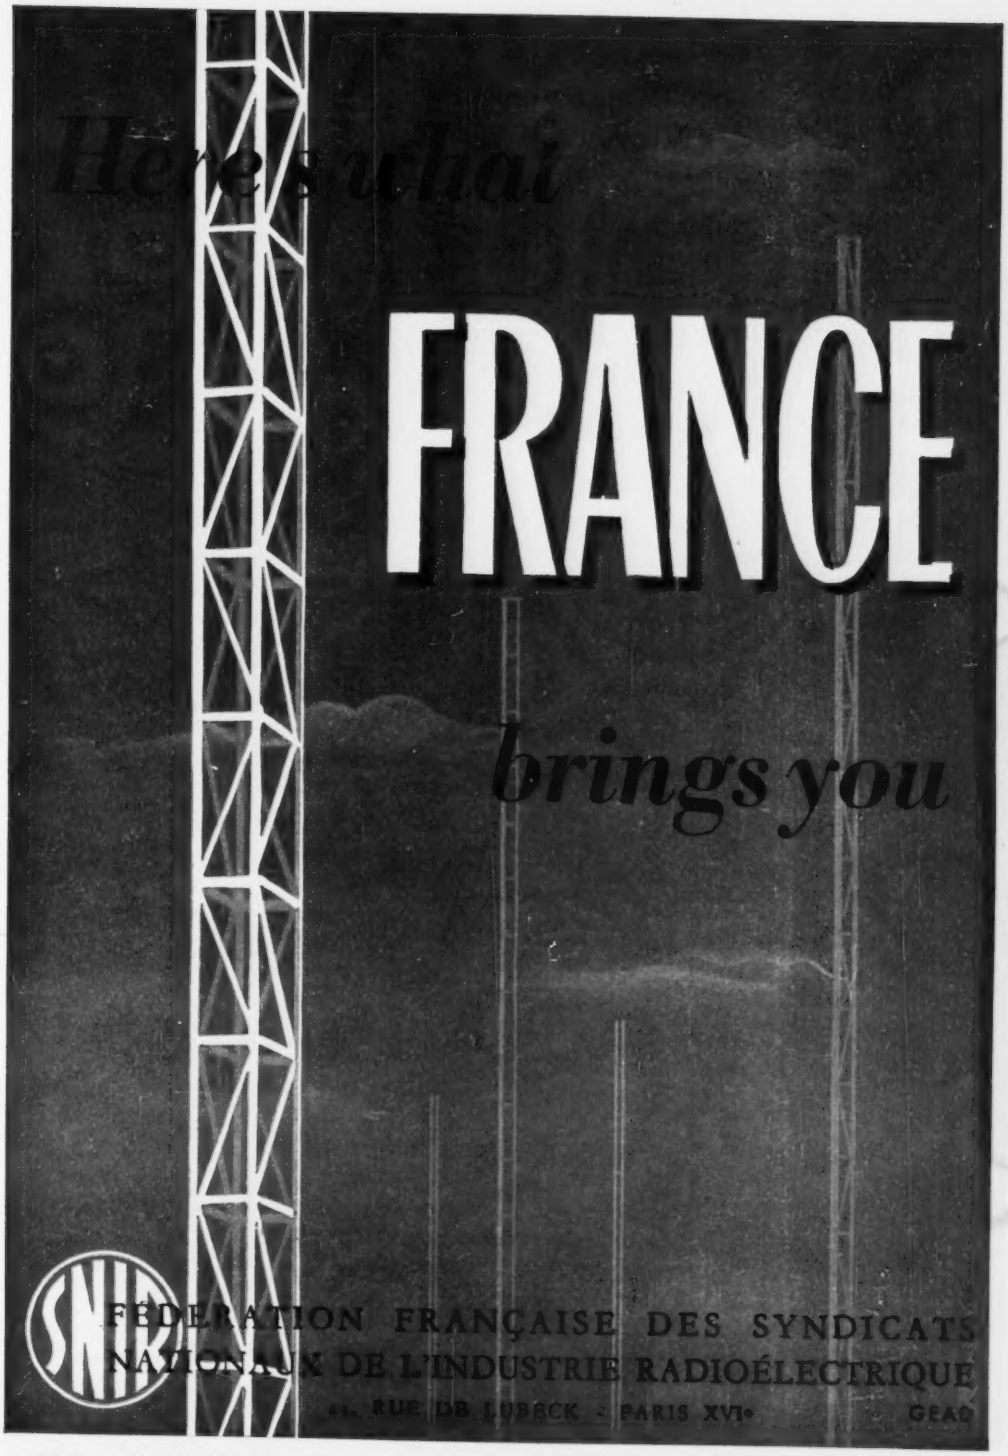
Here's what
FRANCE
brings you
SNIR
FÉDÉRATION FRANÇAISE DES SYNDICATS
NATIONAUX DE L'INDUSTRIE RADIOÉLECTRIQUE
RUE DE LUBECK - PARIS XVI
GEAC

*Front of technical progress...*

SOCIÉTÉ INDUSTRIELLE DES PROCÉDÉS LOTH
S. A. AU CAPITAL DE 150.006.000 FRANCS

TÉL. : MEN. 62.94



RADIO-BEACON 75 Mc/s

V.H.F. TRANSMITTER
for airport control tower

ALL
PROFESSIONAL
MATERIAL
OF
TELECOMMUNICATIONS

•

DETAILED
LEAFLETS
ON
REQUEST

1 KW Standard
TRANSMITTER
Simultaneous emissions



500—700 W.
1 KW
TRANSMITTER
with several frequencies

COMMUNICATIONS RECEIVER

Ag. PUBLÉDITEC-DOMENACH

# Our job:

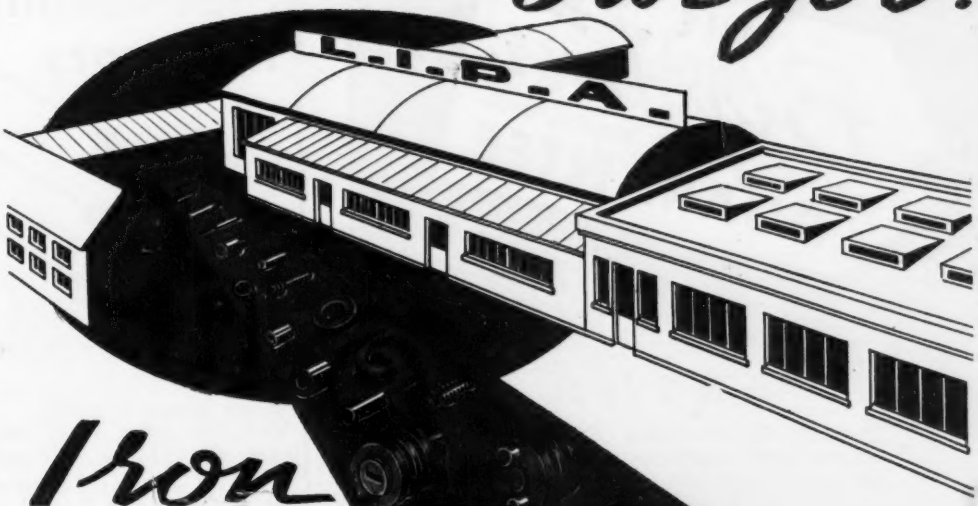


# Iron CORES

The manufacture of injection-molded powdered-iron cores, just as in any other high-grade industrial operation, requires carefully designed production machinery that turns out each item exactly the same as the last.

Our equipment, contrived to serve the diverse needs of the European market, is versatile enough to take on the problems of American designers, however complex or in whatever volume.

Our large Research Department stands ready to give immediate technical assistance. Why don't you submit your model specifications to us and let us quote you prices for volume production, based on our study and previous wide experience?

A glance through our descriptive brochure, sent to you without obligation, will show you the characteristics of the hundreds of standard parts we have already turned out for discriminating manufacturers.

**Laboratoire Industriel de Physique Appliquée**
**67, Rue M.A.-Colombier - BAGNOLET (Seine) FRANCE**

*ask for our free booklet*

*Please send me free booklet on dust iron cores*

NAME.....

COMPANY.....

ADDRESS.....

CITY..... ZONE.....

STATE.....

Pub. GEAD. Paris

MEMBER FEDERATION NATIONALE DES SYNDICATS DES INDUSTRIES RADIOELECTRIQUES ET ELECTRONIQUES

ARENA - AUDAX - SAFCO-TREVOUX VEDOVELLI

THE Big Four FRENCH RADIO MANUFACTURERS GUARANTEE

★ MASS PRODUCTION
★ ATTRACTIVE PRICES
★ HIGHEST STANDARDIZED QUALITY
★ RELIABLE ON TIME DELIVERY

**ARENA**

ALL TYPES OF VARIABLE CONDENSERS FOR RADIO BROADCASTING AND ALL ELECTRONICS APPLICATIONS BY THE GREATEST PRODUCTION IN EUROPE

**AUDAX**

ALL TYPES OF LOUDSPEAKERS BY THE MOST IMPORTANT PRODUCTION ON THE CONTINENT

**SAFCO-TREVOUX**

CAPACITORS OF ALL TYPES BY THE MOST IMPORTANT SPECIALIZED PLANTS ON THE CONTINENT

**VEDOVELLI**

TRANSFORMERS AND COILS FOR RADIO - T.V. AND ALL ELECTRONICS AND INDUSTRIAL APPLICATIONS

DEAL WITH THEIR

**SIEMAR**

EXCLUSIVE EXPORT DEPARTMENT

62, RUE DE ROME, PARIS-8e - TEL. LAB. 00-76

ARENA - AUDAX - SAFCO-TREVOUX - VEDOVELLI

MEMBER FEDERATION NATIONALE DES SYNDICATS DES INDUSTRIES RADIOELECTRIQUES ET ELECTRONIQUES

High stability **Resistors**

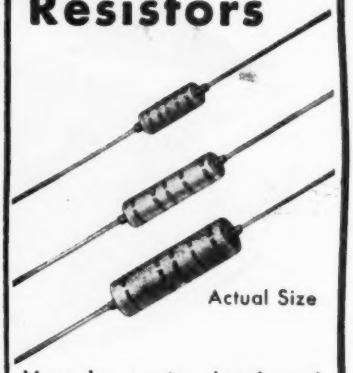

Actual Size

Very low noise level and temperature coefficient 1/4, 1/2, 1 watt and 2-3 watts models.
Available from ± 10 % to ± 0,5 % tolerance.

Noiseless **Potentiometers**

Available without switch and with multi-pole switch · Every variation curve obtainable.

Ask for free catalog

*Name* _____

*Address* _____

*City* _____

*State* _____

*Distributor for U.S.A.:*

**ARNHOLD CERAMICS INC.**
11-54, 44th. Drive
LONG ISLAND CITY-1
N. Y. U. S. A.

GEAD

**RADIAC S. A.**
205, Rue Lafayette, PARIS-X^e^
(FRANCE)
CABLES · SARADIAC-PARIS

MEMBER FEDERATION NATIONALE DES SYNDICATS DES INDUSTRIES RADIOELECTRIQUES ET ELECTRONIQUES

# There are hundreds of jobs open to engineers today!

## *but few opportunities like these*

Westinghouse is in nuclear power to stay. We believe in the development of atomic energy as man's next great source of power. If you want to get in on a new era in industry, we want to talk to you.

### Atomic power opportunities are waiting for electronic engineers with 4 to 10 years of this kind of experience...

**ELECTRONIC COMPUTERS,** employing pulse amplifying wide range linear amplifying and rate circuits.

**NULL BALANCE DEVICES,** employing both vacuum tube and magnetic amplifiers, SERVOMECHANISMS, PLANT CONTROL SYSTEMS.

**LIAISON** with customers, contractors, designers of component equipment.

**SUPERVISION** of drafting work.

**REMEMBER! We are primarily interested in good *experienced* application and development engineers—lack of previous reactor development experience *is no handicap in this type of work.***

***HOW TO APPLY!*** What Westinghouse wants to know is: Where and when you obtained your degree . . . how you did in school . . . where you have worked at your profession . . . what kind of work you have done.

In other words, right now we're more interested in your ability to fill current openings and to develop in the Westinghouse Atomic Power Division than we are in your vital statistics. Write your letter of application accordingly.

You will be in communication with men who are experienced in keeping secrets. All negotiations will be discreet, and your reply will be kept strictly confidential.

**Address your application letter to: Manager, Industrial Relations Department, Westinghouse Electric Corporation, P. O. Box 1468, Pittsburgh 30, Pennsylvania.**

### *What do you want?*

**MONEY?** Good jobs are open here now—waiting for good men who want to make a permanent connection.

**A PERMANENT JOB?** Many of the engineers who joined Westinghouse 20 and 25 years ago are still with Westinghouse—and in key positions—and engineers who join us now will have the opportunity to make this work their lifetime careers. When many other industries may be going through slack times, atomic energy will still be in a stage of expansion.

**SUBURBAN LIVING?** It's here—within easy driving distance of your work. Within a few minutes of shopping centers . . . schools . . . metropolitan centers.

**JOB EXTRAS?** Westinghouse offers: Low cost life, sickness and accident insurance with hospital and surgical benefits. A *modern* pension plan. Westinghouse stock at favorable prices. Westinghouse appliances for your home at discount.

**YOUR KIND OF ASSOCIATES?** Every fourth person in the Division is an engineer or scientist. More than half the top Westinghouse executives are engineers.

**FASCINATING WORK?** What other branch of science offers such exciting challenges? So many opportunities for discovery? So many chances to benefit mankind? So many opportunities for original work?

**GROWTH OPPORTUNITIES?** Never again in your lifetime will you be able to get into such a sure-to-expand industry so early in its development.

**YOU CAN BE SURE.. IF IT'S Westinghouse**

New CERAMIC



AR
up to
25 KVA
DIA :
20 to 42 m/m
Test voltage :
in air ..... 5 000 VRMS
in oil ..... 25.000 VRMS
By pass up to 6.800 mmF 30A



A
up to
25 KVA
DIA :
20 to 55 m/m
Test voltage :
in air ..... 7.500 VRMS
By pass up to 7.500 mmF 30A

POT
IHF up to
25 A
•
Test voltage :
10.000 VRMS

TUBE
up to
30 KVA
and
100 KVA
IHF up to..... 50 A
Test voltage.... 12.000 VRMS

HT
IHF up to
25 A
•
Test voltage :
up to..... 20.000 VRMS

LE C... PARIS... ...CE

LCC
AMERICAN REPRESENTATIVE

AMERICAN - RADIO - CO - 135 BROADWAY N. Y. (6)
A member of the Federation S. N. I. R.
Agence Publeditec



sign," John Wiley & Sons, Inc., New York, p. 273.
(2) Philip S. Wessels, Visual Tracking of Superheterodyne Front Ends, ELECTRONICS, p 153, July 1952.

## Ultrasonic Therapy Unit

BY THOMAS A. DICKINSON
*Los Angeles, Calif.*

A PRODUCTION-TYPE unit for ultrasonic therapy is now being manufactured by The Birtcher Corporation of Los Angeles.

In essence, this unit comprises an electronic oscillator and crystal transducer. The transducer is installed in a chrome-plated brass gun so that its output vibrations can be utilized manually, like the output of an electrical scalp-massage vibrator.

The potentialities of ultrasonic therapy have been known to the medical profession in general since 1927, and ultrasonic therapy units have been commercially manufactured and used in Europe for at least ten years.

The therapeutical effectiveness of ultrasonic energy in alleviating tuberculosis, arthritis, ulcers and many other organic diseases is in many respects due to the ability of the human nervous system to conduct high-frequency vibrations. This process causes damaged portions of the body to resume their normal functions.

Compared with the ultrasonic generators that have been produced for therapeutical usage in Europe,




**FIG. 1—Simplified schematic diagram of the therapy equipment**

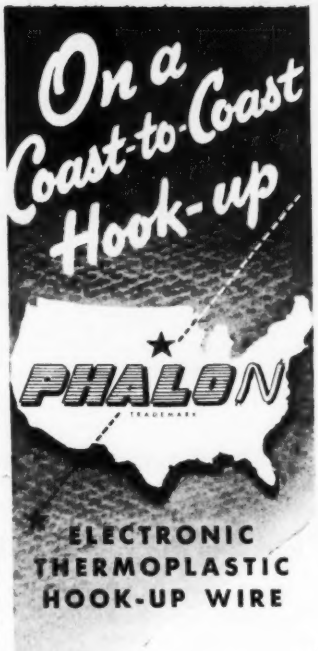


ELECTRONIC THERMOPLASTIC HOOK-UP WIRE

There is no mistaking quality performance . . . and PHALON hook-up wires are proving their quality in top performances coast-to-coast.

Hook-up, lead or fixture wires . . . whatever your requirement, there is a PHALON wire just made for the job! Get strong, tough, easy stripping with PHALON hook-up wires.

PHALO PLASTICS CORPORATION
CORNER OF COMMERCIAL STREET
WORCESTER, MASS.
*Manufacturers of Thermoplastic Insulated Wire, Cables, Cord Sets and Tubing*

PHALO
TRADEMARK

# You can bring crystals to frequency quickly, accurately . . . by high vacuum coating

Here's a way to bring piezo-electric crystals to an exact frequency without the usual time-consuming grinding, testing, grinding method.

It works like this: In a high vacuum coating chamber, silver is evaporated on a number of crystal blanks simultaneously through masks used to build the metal up solidly in the center. Then, in another vacuum unit, each crystal is individually brought down rapidly to required frequency by further coating. Frequency can be checked continuously during the second operation—there's no grind-and-try experimentation required.

DPi makes the high vacuum equipment you need to set up a complete crystal coating system. Units are easy to operate and capable of turning out highly accurate crystals on an economical mass-production basis. For complete information on this, or any application of high vacuum in the electronics industry, write to ***Distillation Products Industries,*** Vacuum Equipment Department, 727 Ridge Road West, Rochester 3, N. Y.



*Typical layout for a complete crystal coating system. Work flows through a base coating unit which handles a number of crystals at a time to final coating units which bring each crystal down to exact frequency.*

*DPi base coating unit Model LC1-14. Completely self-contained with mechanical pump and operating controls, it uses a highly efficient DPi oil diffusion pump. Vacuum is quickly achieved, coating is rapid.*

**high vacuum research and engineering**

DPi

**Also . . . vitamins A and E . . . distilled monoglycerides . . . more than 3500 Eastman Organic Chemicals for science and industry**

# BALLANTINE

## *STILL THE FINEST in ELECTRONIC VOLTMETERS*

**Ballantine pioneered circuitry and manufacturing integrity assure the maximum in**

***SENSITIVITY • ACCURACY • STABILITY***

- All models have a single easy-to-read logarithmic voltage scale and a uniform DB scale.
- The logarithmic scale assures the same accuracy at *all* points on the scale.
- Multipliers, decade amplifiers and shunts also available to extend range and usefulness of voltmeters.
- Each model may also be used as a wide-band amplifier.

MODEL 310A

| MODEL | FREQUENCY RANGE | VOLTAGE RANGE | INPUT IMPEDANCE | ACCURACY | PRICE |
|---|---|---|---|---|---|
| 300 | 10 to 150,000 cycles | 1 millivolt to 100 volts | 1/2 meg. shunted by 30 mmfds. | 2% up to 100 KC 3% above 100 KC | $200. |
| 302B Battery Operated | 2 to 150,000 cycles | 100 microvolts to 100 volts | 2 megs. shunted by 8 mmfds. on high ranges and 15 mmfds. on low ranges | 3% from 5 to 100,000 cycles; 5% elsewhere | $225. |
| 305 | Measures peak values of pulses as short as 3 microseconds with a repetition rate as low as 20 per sec. Also measures peak values for sine waves from 10 to 150,000 cps. | 1 millivolt to 1000 volts Peak to Peak | Same as Model 302B | 3% on sine waves 5% on pulses | $280. |
| 310A | 10 cycles to 2 megacycles | 100 microvolts to 100 volts | Same as Model 302B | 3% below 1 MC 5% above 1 MC | $235. |
| 314 | 15 cycles to 6 megacycles | With probe, 1 millivolt to 1000 volts. Without probe, 100 microvolts to 1 millivolt | With probe, 11 megs. shunted by 6 mmfds. Without probe, 1 meg. shunted by 25 mmfds. | 3% except 5% above 3 megacycles | $265 |

*For further information, write for catalog.*

**BALLANTINE LABORATORIES, INC.**

100 FANNY ROAD, BOONTON, NEW JERSEY




this unit is remarkably simple and inexpensive. It can be powered by means of a plug-in attachment on any alternating power circuit, and its ultrasonic output can be regulated accurately for values of 0.14 to 3½ watts per square centimeter at a constant frequency of one megacycle.

The basic electronic power circuit, Fig. 1, includes a high-voltage transformer, filament transformer, a pair of half-wave rectifier tubes and an oscillator. The output of the oscillator is conveyed to a quartz crystal in the aforementioned gun by means of a coaxial cable and may be limited to periods of 1 to 30 minutes by means of a mechanical timer.

Aside from the timer, only two manual knobs are used in operating

**Quartz crystal being inspected prior to installation in output gun**

the unit. Of these, a primary control knob actuates filament and plate switches as required while an output control knob determines the amount of ultrasonic power that will be produced.

A pair of signal lights on the instrument panel glow when the filament and plate circuits are properly energized, while a milliammeter indicates the actual output of oscillating current at all times.

The normal method of using the ultrasonic gun consists of smearing vaseline or a similar substance over the skin area to be treated, so that there will be no air space between the gun and the skin. The vibrating head of the gun is then rotated gently over the grease-coated skin;

# ALLIED'S NEW 50 G *Sub-Miniature Relays*

*

Approved by U.S.A.F.
Spec. MIL-R-5757A

Developed specifically to meet the rigid requirements of U.S.A.F. Spec. MIL-R-5757A, the new Allied line of sub-miniature double throw relays includes the MH-18 (6-Pole), the MH-12 (4-pole), and MH-6 (2-pole). • Contacts are rated at 2 amps resistive or 1 amp inductive at 28 volts D.C. • The high performance of these relays has been achieved in an extremely compact, unitized construction and parallels the most recent advances in airborne equipment design.

*For detailed specifications and drawings of these new relays, write for Bulletin 1002*

**ALLIED CONTROL COMPANY, INC. 2 EAST END AVE., NEW YORK 21, N. Y.**

AL 149

# EVENLY Wind

## SMALL TOROIDAL COILS AT HIGH SPEEDS WITH MINIMUM WIRE BREAKAGE

The MICAFIL Model RW-0 Toroidal Coil Winder automatically winds toroidal coils continuously around 360° and sector coils from 30° to 270°. To produce smooth, even layers of wire, the winder is adjusted easily to wind any wire size between 26 and 44 AWG and to obtain the proper pitch. Winding direction can be changed and feeds can be adjusted while machine is in operation.

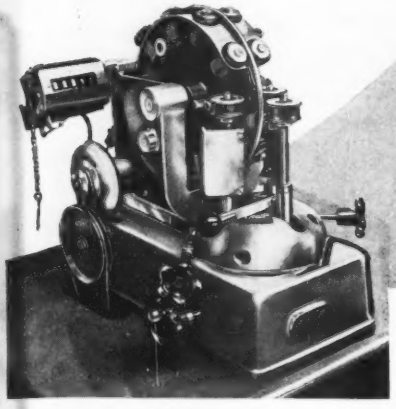

### CAPACITY

Coil Sizes
- Minimum finished I.D. . . . . ¼"
- Maximum finished O.D. . . . . 2"
- Minimum finished O.D. . . . . ½"

Wire Sizes . . . . . 26 to 44 AWG

Winding Speed—
according to wire size. . up to 1000 rpm

Shuttle Capacity—
according to wire size . . . 60 to 800 feet

MICAFIL Toroidal Coil Winders are made in three larger sizes for winding coils up to 8" O.D. and with 10 AWG Wire.

**SPIRALING DEVICE**—Device winds spirals for shuttle loads—in advance . . . Newly developed to permit continuous operation of Coil Winder . . . Winds to predetermined lengths.

**SHUTTLES**—Made in four different ring diameters to accommodate range of spiraled wire sizes . . . Larger wire capacities . . . *More than one coil can be wound with single loading* . . . Changed within 30 seconds . . . Loaded in less than a minute.

**ACCURATE TURNS COUNTER**—Preset for required number of turns . . . Automatically stops winder when turn count is reached.

Let Cosa Engineers study and recommend the winder for your needs. Or, write for Literature.

**COSA CORPORATION**
405 Lexington Ave., New York 17

Your source for all Precision Machine Tools—from Small Bench Lathes to Large Boring Mills

*IN DETROIT AREA* contact DETROIT-COSA CORPORATION, 16923 James Couzens Highway, Detroit 35, Mich.

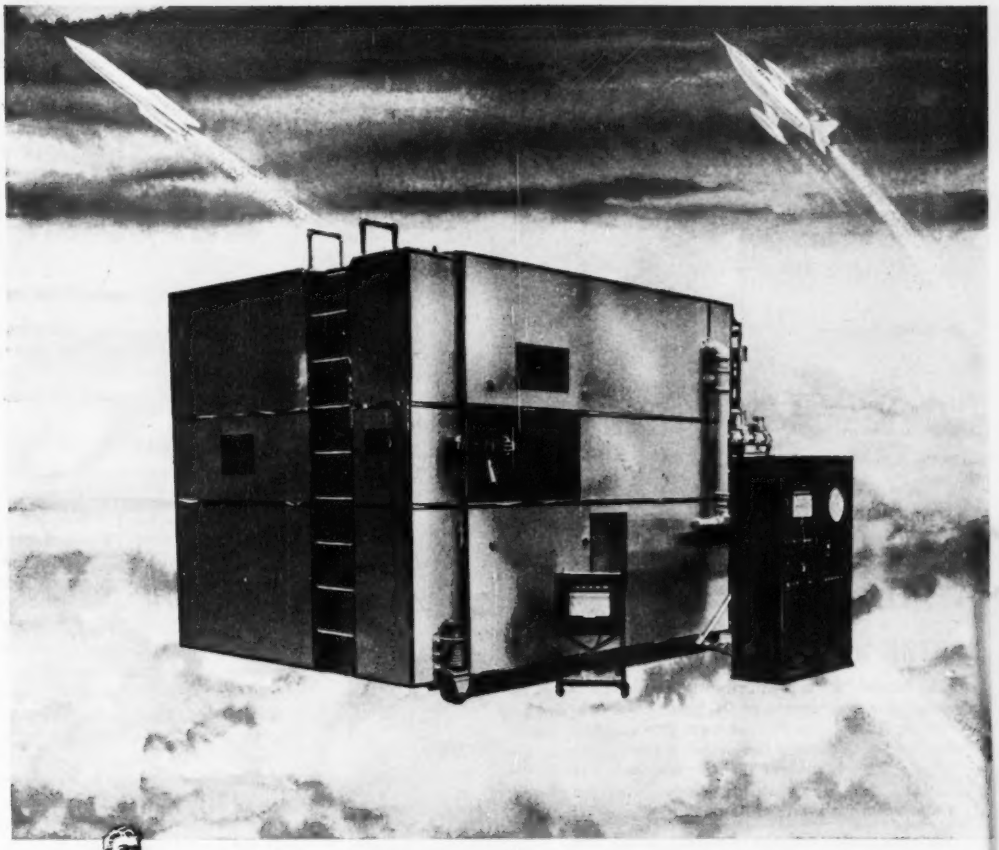

# cabin in the SKY?

Not quite . . . but this "cabin" duplicates the conditions of pressure, temperature and humidity found from sea level to 100,000 feet *plus* with a temperature range of —100 to +200°F. It is Consolidated Vultee's new high altitude test chamber . . . designed, developed and produced by Merritt & Zaleski. This complete environmental duplication facility enables test engineers at Convair's Fort Worth plant to predetermine the effects of environmental conditions on aircraft parts and assemblies in accordance with JAN and MIL specs. The importance of its contribution to avionic design, development and production is beyond calculation.

This is but one of the many Merritt & Zaleski test chambers serving industry today. Both stock and custom-built models are available with virtually limitless ranges . . . low and high temperature, humidity, pressure and complete environmental duplication. Discover, without obligation, how Merritt & Zaleski can solve your particular testing problem. *Write, in detail, for an analysis and specific proposal.*

**MERRITT & ZALESKI INC.** ATMOSPHERE UNLIMITED

33-66 12TH STREET, LONG ISLAND CITY 6, N. Y.

Stable as a *Wirewound* Resistor*

MODEL "R" VOLTMETER

SIE

DC VOLTS
DC MILLIVOLTS
AC VOLTS
AC MILLIVOLTS
OHMS
MEGOHMS
STANDARD CELL
DC AMPLIFIER

THE MODEL "R" VOLTMETER

The Model "R" is primarily intended for the precise measurement of DC potentials, providing DC voltage ranges from one volt full scale to 1,000 volts full scale; however, to allow the instrument its greatest possible utility, the following auxiliary functions have been included in its design:

*Distended DC Voltage Ranges:* Bucks out 99% of measured voltage and indicates 1% of measured voltage full scale.

*DC Millivolt Ranges:* One millivolt full scale to 1,000 millivolts full scale.

*AC Volt and Millivolt Ranges:* One Millivolt full scale to 1,000 volts full scale.

*Self-Contained Standard Cell:* For instant check of voltmeter calibration.

*Ohms Ranges:* Times one to times $10^6$.

*Distended Ohms Ranges:* Reads bottom half of ohms scale full scale.

*DC Amplifier:* Will drive a one ma recorder, has gain of 200, and frequency range of zero to 100 kc.

*This statement refers to the fact that precision wire-wound resistors are used for all attenuators and range resistances, and that the DC Amplifier is a highly degenerative system employing wirewound resistors for the beta network. It has been found that changes in gain with warm-up are in the order of .1 of 1% and are primarily due to the temperature coefficient of the resistors in the beta network.

SIE

SOUTHWESTERN INDUSTRIAL ELECTRONICS CO.




massaging action is necessary to prevent cavitational effects which might cause pain.

In some circumstances, vibrations are applied directly over damaged areas of the body. In most cases, best results have been attained by ultrasonically massaging the spinal column near the base of the neck.

## Definitions for Color Tv

THE FOLLOWING are approved working definitions for color television, submitted by Panel 19 to the N.T.S.C. at the meeting of June 23, 1952.

**BLACK-AND-WHITE**

Deprecated (see Monochrome)

**BRIGHTNESS**

The attribute of visual perception in accordance with which an area appears to emit more or less light.

Note: Luminance is recommended for the photometric quantity which has been called brightness. Luminance is a purely photometric quantity. Use of this name permits brightness to be used entirely with reference to the sensory response. The photometric quantity has been confused often with the sensation merely because of the use of one name for two distinct ideas. Brightness will continue to be used properly in nonquantitative statements, especially with reference to sensations and perceptions of light. Thus, it is correct to refer to a brightness match, even in the field of a photometer, because the sensations are matched, and only by inference are the photometric quantities (luminances) equal. Likewise, a photometer in which such matches are made will continue to be called an equality-of-brightness photometer.

A photoelectric instrument calibrated in foot-lamberts should not be called a brightness meter. If correctly calibrated, it is a luminance meter. A troublesome paradox is eliminated by the proposed distinction of nomenclature. The luminance of a surface may be doubled, yet it will be permissible to say that the brightness is not doubled, since the sensation which is called

# JOHNSON

## Broadcast/Communication Transmitting Accessories

JOHNSON manufactures a wide range of components and equipment for broadcast and commercial transmitter applications. These accessories in many cases offer the combined advantages of tailored design—to suit your particular requirements—plus the modest cost usually associated with standardized equipment.

Highest quality materials, skillfully fabricated, and the experience gained through many years of supplying broadcasters with outstanding equipment are assurance of complete satisfaction—utmost dependability!

### JOHNSON COAXIAL LINE

JOHNSON hard temper, 70 ohm and 51.5 ohm, flange type line is supplied in 20' lengths. Has precision mechanical assembly, low loss and low standing wave ratio. The 70 ohm line is intended primarily for AM service and has grade L-4 or better Steatite insulators. The 51.5 ohm line was designed primarily for high frequencies, has grade L-5 or better Steatite insulation. Meets RTMA standards for FM and TV.

In addition, JOHNSON manufactures a complete line of elbows, fittings, gas equipment and hardware for the above as well as semi-flexible, soft temper line in continuous lengths up to 1200 feet in 5/16", 3/8" and 7/8".

Whatever your coaxial line requirements may be, JOHNSON can meet them to your utmost satisfaction.



### 224-2-1 VARIABLE INDUCTOR

**For High Power Applications**

Rated to 50 amps. and variable to 16.5 mh. Spring loaded silver plated roller contact permits adjustment with full power applied. Cast aluminum end-frames slotted to minimize Eddy current losses. Available in eight standard models, maximum inductances 10 thru 110 mh.

The JOHNSON line includes many other variable and fixed inductors for low, medium and high power. Fixed inductors are available with single or multiple windings, fixed or variable coupling windings and with electrostatic shields.

### JOHNSON RF CONTACTORS

Rugged, compact with fast, snappy action. Designed for high voltage RF switching; suitable for many other applications.

Available in two sizes with ratings of 17 KV and 22 KV peak. Current rating, 25 amperes per contact. SPDT or DPDT contact arrangement. No holding current required. Features toggle actuated balanced rotary armature and wiping contacts designed to stay aligned and withstand heavy vibration.



### ANTENNA COUPLING UNITS

JOHNSON designs and builds antenna coupling units for any power rating in exact conformance to engineers' or consultants' specifications. This "custom-type" construction costs no more than less flexible standard types and is your assurance of optimum performance.

Illustrated, is a remote coupling unit featuring an interior door that remains closed during adjustments to provide complete weather-proofing at all times. Write for full information on these and other JOHNSON Broadcast Components.

### TOWER LIGHTING FILTERS

These filters prevent flow of RF energy via the lighting circuit to ground. Comply with FCC regulations by effecting less than 1% change in antenna radiation resistance. Variable tuning capacitor provides maximum RF reactance.

### JOHNSON ANTENNA INSULATORS

**Commercial Type**

Made of wet process porcelain with smooth white glazing. End bells of non-corrosive aluminum alloy. Available in three sizes; 8", 12" and 20" net length. Diameter 1½". Breaking strength 5000 lbs.

### FEED-THRU BOWL ASSEMBLIES

Heavy duty low-loss glass feed-thru bowl available with or without fittings. Bowl measures 6-15/16" O.D., 6-3/8" high. Available with studs for 4" to 12" walls. Fittings include spun aluminum corona shield, steel flange and cork gaskets. Illustrated is special model with static discharge gap.

For full information on the complete JOHNSON line of Broadcast Transmitter Accessories, write Dept. DN

# JOHNSON

E. F. JOHNSON CO. WASECA, MINNESOTA

CAPACITORS, INDUCTORS, SOCKETS, INSULATORS, PLUGS AND JACKS, KNOBS AND DIALS, AND PILOT LIGHTS

# Minimize Effects of varying supply voltage the simple way

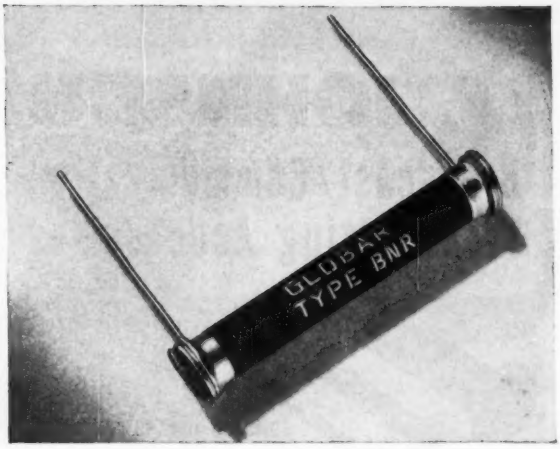


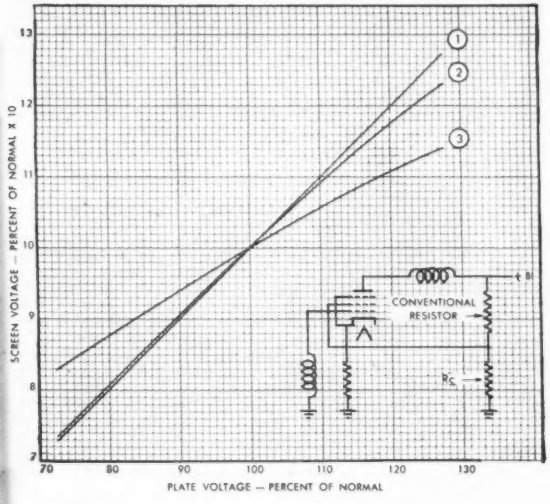


## Performance of Various Voltage Reducers for Pentode Screen Supply

1. Divider with conventional composition Resistor at $R_c$.
2. Plain series dropping Resistor ($R_c$ omitted).
3. Divider with GLOBAR type BNR Resistor at $R_c$.

● Variation in supply voltage which impairs pentode amplifier performance is especially serious in cathode ray tube applications where the effect on sweep amplifier output is visible. This is where the voltage sensitive characteristics of GLOBAR type BNR resistors prove extremely valuable. Employed in a voltage divider as shown here, they help to stabilize gain of amplifiers against supply voltage variations. Often, they reduce screen voltage variations by as much as *one half*.

● WRITE to Dept. E 87-121 for a copy of Bulletin GR-2 which contains useful engineering data on GLOBAR type BNR resistors.

**GLOBAR**
TRADE MARK
**TYPE BNR**
VOLTAGE SENSITIVE
**Ceramic Resistors**
by **CARBORUNDUM**

*"Carborundum" and "Globar" are registered trademarks which indicate manufacture by The Carborundum Company, Niagara Falls, New York.*

87-121

# Engineered today for your needs tomorrow!

# MYCALEX®

## PRECISION-MOLDED MYCALEX 410 TRANSISTOR SOCKETS

**—now in the pilot production stage**
**—engineered in advance of actual need**

In keeping with the MYCALEX policy of progressive design in advance of needs, these Transistor Sockets were engineered months ago and are now in small scale pilot production. They'll be available in quantity in advance of actual needs.

**PRECISION MOLDING!**

The body is precision-molded of MYCALEX 410, glass-bonded mica insulation for lasting dimensional stability, low dielectric loss, immunity to high temperature and humidity exposure combined with maximum mechanical strength. The loss factor is only 0.014 at 1 MC and dielectric strength is 400 volts/mil.

Contacts can be supplied in brass or beryllium copper. The sockets are readily solderable. The socket bodies will not warp or crack when subjected to high soldering temperatures. They function in ambient temperatures up to 200°F.




## Mycalex Low-loss Tube Sockets and Multiple Headers

A complete line of tube sockets including sub-miniature types is available in Mycalex 410 and Mycalex 410X glass-bonded mica insulation. Comparative in cost to ordinary phenolic sockets they are far superior in every respect. Dimensional accuracy is unexcelled. For complete information on standard and custom Tube Sockets or Multiple Headers, call, wire or write . . . there is no obligation, of course.

**MYCALEX TUBE SOCKET CORPORATION**
*Under Exclusive License of Mycalex Corporation of America*
30 ROCKEFELLER PLAZA, NEW YORK 20, N.Y.

SINCE 1919 MYCALEX THE INSULATOR

**MYCALEX CORPORATION OF AMERICA**
*Owners of 'MYCALEX' Patents and Trade-Marks*
Executive Offices: 30 ROCKEFELLER PLAZA, NEW YORK 20—Plant & General Offices: CLIFTON, N. J.

# Winchester Electronics

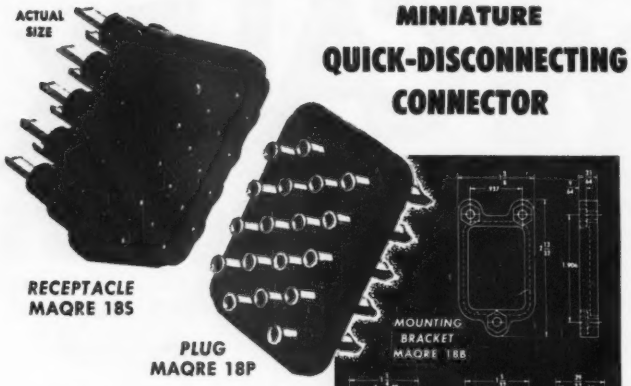


## MINIATURE QUICK-DISCONNECTING CONNECTOR

**Here is a MINIATURE connector—designed for limited space applications—which incorporates all of the features of our well known quick-disconnecting, self-aligning (type QRE) connectors. Rearrangement of contacts and omission of guides has resulted in a 35% space saving over the QRE connector with the same number of contacts.**

## QUALITY FEATURES of the MAQRE 18

**QUICK DISCONNECTING.** The separately spring loaded contacts used in this connector eliminate the annoying prying and pulling necessary when separating ordinary multi-contact connectors. Forcing, which frequently results in serious damage, is eliminated and special levers are not required.

**SELF-ALIGNING.** Individually floating contacts assure self-alignment and contact arrangement provides positive polarization.

**PRECISION MACHINED CONTACTS.** Pins are from brass bar (QQ-B611) and sockets from spring temper phosphor bronze bar (QQ-B746a). They are gold plated over silver for consistent low contact resistance, reduction of corrosion and ease of soldering.

**MONOBLOC* CONSTRUCTION** eliminates unnecessary creepage paths, moisture and dust pockets and provides stronger molded parts.

**MOLDED MELAMINE BODIES** (in accordance with MIL-P-14) Mineral-filled—are fungus-proof and provide mechanical strength as well as high arc and dielectric resistance.

**MOUNTING.** A die cast aluminum, black anodized bracket for rack and panel mounting permits necessary float for self-alignment.

## PHYSICAL AND ELECTRICAL DATA

| Receptacle Code No. | Plug Code No. | Number of Contacts | Solder Cup Hole Dia. In. | Weight Oz. | | D. C. Volts Breakdown Between Contacts (Connector Engaged) | |
|---|---|---|---|---|---|---|---|
| | | | | Receptacle | Plug | Sea Level Normal Humidity | 60,000 Feet Altitude |
| MAQRE 18S | MAQRE 18P | 18 | .073 | 1.8 | 1.1 | 5400 | 1350 |

Patent Number 2466370

Wire or write for catalog on other types or advise your special requirements.

**WINCHESTER ELECTRONICS INCORPORATED**

West Coast Branch: 1729 Wilshire Blvd., Santa Monica, California

★ Trademark

**GLENBROOK, CONN., U.S.A.**




brightness is generally judged to be not doubled.

**BRIGHTNESS CHANNEL**

Deprecated (see Monochrome Channel, Luminance Channel)

**BRIGHTNESS SIGNAL**

See Monochrome Signal

**BURST PEDESTAL**
**(Color-Burst Pedestal)**

The rectangular pulse-like component which may be part of the color burst. The amplitude of the color-burst pedestal is measured from the a-c axis of the sine-wave portion to the horizontal pedestal.

**BYPASS MIXED HIGHS**

The mixed-highs signal that is shunted around the color-subcarrier modulator or demodulator.

**BYPASS MONOCHROME SIGNAL**

A monochrome signal that is shunted around the color-subcarrier modulator or demodulator.

**CAMERA SPECTRAL CHARACTERISTIC**

The sensitivity of each of the camera color separation channels with respect to wavelength.

Note: It is necessary to state the camera terminals at which the characteristics apply.

Because of nonlinearity, the spectral characteristics of some kinds of cameras depend upon the magnitude of radiance used in their measurement.

Nonlinearizing and matrixing operations may be performed within the camera.

**CAMERA TAKING CHARACTERISTICS**

Deprecated (see Camera Spectral Characteristic)

**CARRIER COLOR SIGNAL**

The sidebands of the modulated color subcarrier (plus the color subcarrier, if not suppressed) which are added to the monochrome signal to convey color information.

**CHROMINANCE**

The colorimetric difference between any color and a reference color of equal luminance, the reference color having a specified chromaticity.

Note: In N.T.S.C. transmission, the specified chromaticity is the

## Sangamo's dry tubular electrolytic capacitor *that fits anywhere*

Type MT and MTD electrolytic capacitors, "Chieftains" of the Sangamo line, are built to provide longer life, greater dependability, and better electrical characteristics in television and other electronic applications. Their small physical size makes them a "natural" for application in tight spots beneath a chassis, and the bare tinned-copper wire leads make them easy to mount.

Sangamo "Chieftains" are contained in hermetically-sealed round aluminum cans and are tightly encased in heavy cardboard sleeves on which polarity is clearly indicated. Double, pure paper spacers assure adequate breakdown characteristics and all sections are tightly held in place within the container. Multiple staking connects the terminal tabs to the electrodes, providing permanent low resistance contact throughout the life of the capacitor. The low voltage units are supplied with etched cathodes to maintain uniform capacity when the capacitor is subjected to heat and high ripple currents.

"Chieftains" are manufactured under controlled conditions of almost surgical cleanliness, utilizing the very finest materials and production procedures available in the industry, for your assurance of quality in every respect.

*Tomahawk*


*Warrior*

*Mohican*

**Your own trial-use will convince you that new standards of dependability and longevity have been built into Sangamo Electrolytics. Order from the new Sangamo Capacitor Catalog No. 800A which is yours for the asking, and without obligation.**

*Those who know* — The SANGAMO Tribe — PAPER-MICA-SILVER-ELECTROLYTIC CAPACITORS — *...choose Sangamo*

**SANGAMO ELECTRIC COMPANY**

SC52-11

MARION, ILLINOIS

# Your dollar buys more "instrument" ...in our Model #630

Volt-Ohm-Mil-Ammeter

**by R. L. Triplett**
PRESIDENT

Because we build every major part of our instruments the quality is carefully controlled. For example, we know we have more torque driving our pointers because we designed and built the complete instrument. We know we have sustained dependence in the shafts and switch contacts of our test equipment for the same reason. Cycle tests for switches exceed several times the rigid requirements of the armed forces.

There is another important value to you. Because we make our own components we eliminate the profit another manufacturer would make in selling them to us. And this "profit" is passed on to you.

Consider these features of Model 630 V.O.M., for example—

**One Hand Operation**—One switch with large recessed knob has a single position setting for each reading. Leaves one hand free. Eliminates switching errors, trouble, saves time.

**Ranges—AC-DC Volts:** 3-12-60-300-1200-6000 (AC, 5000 Ohms/Volt; DC, 20,000 Ohms/Volt). 60 Micro-Amps. 1.2, 12, & 120 Mil Amps. DB scales at 1.73V on 500 Ohm line, 0-66 DB output.

**Highest Ohm Reading**—To 100 Meg. in steps of 1000-10,000-100,000 Ohms—100 Megohms.

Yes, with us it's a matter of personal pride to make "Triplett" stand for better construction and more service for your test equipment dollar.

*R. L. Triplett*

PRESIDENT
TRIPLETT ELECTRICAL INSTRUMENT CO.
Bluffton, Ohio

TRIPLETT **630 V.O.M.**
*only* $39.50

***For service, accuracy, highest dependability, buy***

TRIPLETT
**Triplett**

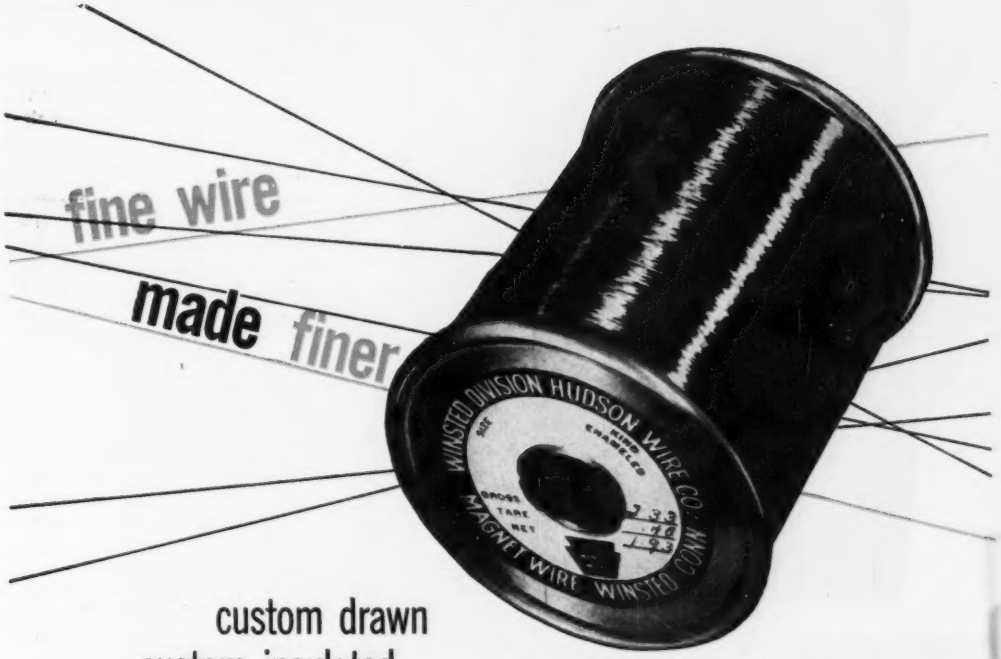


## custom drawn
## custom insulated
## custom spooled

to your most exacting requirements

For the past fifty years (1901 - 1951) we have specialized in "Fine Wire Made Finer." That is why Hudson-Winsted fine wires are the first choice of electrical, radio, television and electronic manufacturers whose products are noted for performance, reliability and long life.

So just specify the electrical properties, flexibility, tensile strength, laying speed, uniformity and other characteristics you must have. Our Hudson and Winsted Divisions will meet and maintain your specifications.

**● Tell us your wire problems and requirements. Our research, engineering and production facilities are at your disposal. Let us quote!**

### BARE WIRES

*(Hudson Wire Division)*

Copper
Brass
Zinc
Tinsel
Tin
Nickel-Silver
Cadmium
Oxygen-free Copper
Silver-plated Bronze
Phosphor-Bronze
Silver
Monel
Lead Wire
Fuse Wire
Specialty Wires

### TEXTILE-COVERED WIRES

*(Winsted Division)*

Nylon
Celanese
Silk
Cotton
Rayon
Fiberglas

All available on bare or enameled wire, single or double covered.

### INSULATED WIRES

*(Winsted Division)*

| MATERIALS | TYPES | COVERINGS |
|---|---|---|
| Copper | Instrument Tubing | Plain and Heavy Enamel |
| Aluminum | Litz | Formvar |
| Iron | Multiplied and Twisted | EZsol (Liquid Nylon) |
| Copper-clad Steel | | Cement-coated Enamel |

### FINE WIRES

*(Hudson and Winsted Divisions)*

Specializing in fine wires custom-drawn and insulated, to critical needle size, material, insulation. Your consideration is called particularly to the finest wire sizes, Nos. 44 to 50.

## HUDSON WIRE COMPANY

GENERAL OFFICES: OSSINING, N. Y. • WINSTED DIVISION: WINSTED, CONN.

# 604
# 604B
## And now—it's the
# ALTEC
# 604C

**Since** the introduction of the original 604 speaker in 1943 the Altec 604 "duplex" has been known to all as the finest loudspeaker that money can buy. Now, after years of continuing research, the new Altec 604C "duplex" is here to set even higher standards for audio reproduction . . . for the 604C will faithfully reproduce tones from 30 to 22,000 cycles and handle 50 watts of peak power! Listen to the amazing Altec 604C soon. Your ears will agree it's the finest loudspeaker in the world.



**604C SPECIFICATIONS:**

Power rating.....35 watts (50 watts peak)
Network impedance .....16 ohms
Maximum diameter.....15⅜ inches
Maximum depth.....11⅛ inches
Weight with network.....40 pounds

*Don't forget to listen to these new members of the "duplex" line, the 12" 601A and the 15" 602A. They are designed especially for the home.*

ALTEC LANSING CORPORATION

9356 Santa Monica Boulevard, Beverly Hills, California
161 Sixth Avenue, New York 13, New York

**ALL THREE SPEAKERS ARE GUARANTEED TO REPRODUCE ALL OF THE TONES FROM 30 TO 22,000 CYCLES!**




zero subcarrier chromaticity.

**CHROMINANCE CHANNEL**

In a color-television system, any path which is intended to carry the carrier color signal.

**COLOR BURST**

That portion of the composite color signal comprising the few sine-wave cycles of color subcarrier frequency (and the color burst pedestal, if present) which is added to the horizontal pedestal for synchronizing the color-carrier reference.

**COLOR CARRIER**

See Color Subcarrier

**COLOR-CARRIER REFERENCE**

A continuous signal having the same frequency as the color subcarrier and having fixed phase with respect to the color burst. This signal is used for the purposes of modulation at the transmitter and demodulation at the receiver.

**COLOR COORDINATE TRANSFORMATION**

Computation of the tristimulus values of colors in terms of one set of primaries from the tristimulus values of the same colors in another set of primaries.

Note: This computation may be performed electrically in a color television system.

**COLOR DIFFERENCE SIGNAL**

An electrical signal which when added to the monochrome signal produces a signal representative of one of the tristimulus values (with respect to a stated set of primaries) of the transmitted color.

**COLOR EDGING**

Spurious color at the boundaries of differently colored areas in the picture.

Note: Color edging includes color fringing, misregistration, etc.

**COLOR PHASE**
**(of a given subcarrier component)**

The phase, with respect to the color-carrier reference, of that component of the carrier color signal which transmits a particular color signal.

**COLOR PHASE ALTERNATION (CPA)**

The periodic changing of the color phase of one or more compo-

Series AJ Helipot models are only ¾" in diameter and 1⅛" long; weight 1.0 oz. Ten-turn 18" slide wire gives adjustment accuracy of 1/3000 in a 100-ohm unit—1/6500 in a 50,000-ohm unit.

# Helipot achieves "HIGHEST PRECISION" with DRIVER-HARRIS RESISTANCE WIRE

Cutaway view of Model A 10-turn Helipot precision helical potentiometer. Resistance element 45" long is contained in case 2" x 1-13/16" diameter. On element are wound 3003 to 9800 turns of resistance wire, depending on total resistance value required. Adjustment accuracy is 12 to 14 times that of conventional single-turn potentiometer of equal diameter.

To win consumer preference and assure customer satisfaction, Helipot Corporation is guided by a basic policy that has proved as effective as it is simple. It is: (1) to produce components of the highest precision, and (2) to realize the economies inherent in mass production.

By following these objectives, Helipot has become the world's largest maker of precision potentiometers, producing the widest selection of single-turn and multi-turn units available anywhere.

States Helipot: "Our policy of mass producing the highest precision potentiometers practicable, in order to deliver top quality at moderate cost, is reflected in the fact that standard linearity accuracy of all our stock models, selling competitively, is held to ±0.5%. Our reliance on Driver-Harris alloys such as Nichrome V, Advance, and Karma to provide resistance windings for many of our products constitutes a strong endorsement of Driver-Harris skills and reliability."

Driver-Harris takes particular pride in having played so important a role in the Helipot story, and is fully conscious of the responsibility the confidence of this famous manufacturer imposes.

Nichrome*, Advance*, and Karma* are at your service, too; as are more than 80 other alloys developed exclusively by Driver-Harris for application in the electrical and electronic fields. We feel confident that, like Helipot, you will realize outstanding advantages by putting one or more of them to work for you. Let us have your specifications. We'll be glad to make recommendations based on your specific requirements.

*T.M. Reg. U.S. Pat. Off.

Sole producers of Nichrome, Advance, and Karma

## *Driver-Harris Company*

HARRISON, NEW JERSEY

BRANCHES: Chicago, Detroit, Cleveland, Los Angeles, San Francisco

In Canada: The B. GREENING WIRE COMPANY, Ltd., Hamilton, Ontario.

MAKERS OF THE MOST COMPLETE LINE OF ELECTRIC HEATING, RESISTANCE, AND ELECTRONIC ALLOYS IN THE WORLD

# *Specialists* in the design and volume manufacture of SPECIAL ELECTRICAL ASSEMBLIES

Ucinite has years of specialized experience in the electronics field plus complete facilities for volume production of small metal stampings as well as assembly of metal to plastic and ceramic components. For special electrical parts and assemblies . . . designed, assembled, wired and marked to your specifications . . . call your nearest Ucinite field engineer.

ELECTRICAL ASSEMBLIES

Ucinite

RADIO AND AUTOMOTIVE

**SPECIAL METAL STAMPINGS**
**MOLDED PLASTIC AND CERAMIC PARTS**

**LAMP SOCKETS**
**SWITCHES · CONNECTORS**

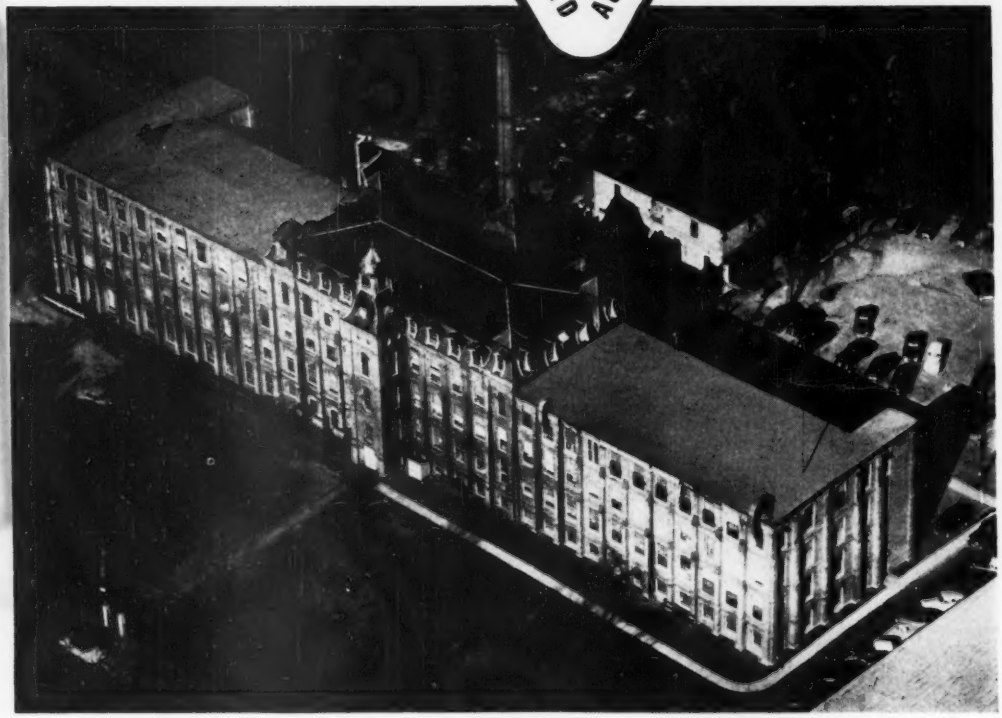

**The UCINITE COMPANY**
NEWTONVILLE 60, MASS.
*Division of the United-Carr Fastener Corp.*

Tailor-made fasteners DESIGNED AND PRODUCED IN VOLUME
by the WORLD'S LEADING SPECIALISTS
in SPECIAL FASTENERS AND ALLIED DEVICES
United-Carr's design and production engineers have years of experience in the specialized field of fastener engineering. United-Carr's plants are equipped for volume production of metal stampings and for the assembly of metal to plastic and ceramic components. All in United-Carr and you have at your command an integrated team capable of meeting practically any requirements for special fasteners and allied devices.
UNITED-CARR FASTENER CORP.
CAMBRIDGE 42, MASSACHUSETTS
MAKERS OF DOT FASTENERS

# TINY-TRIM and TERRIFIC

## THE TURNER 80

ACTUAL SIZE

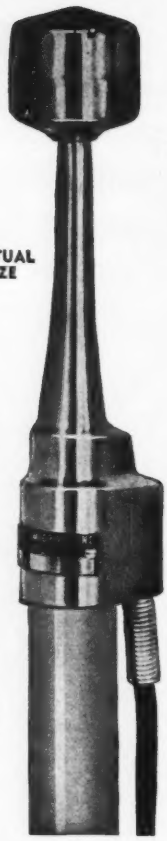

THIS is the new Turner 80 — a crystal microphone so tiny it hides in the palm of your hand, yet so strikingly designed it is the very picture of scintillating symmetry. Weighs less than 5 ounces, yet its high output and unusually fine response characteristics make it a natural for announcing and mobile public address systems, for home recording, dictating machines, amateur communications, portable recorders and dozens of other applications. Finished in beautiful satin chrome. Level: Approximately 58 db below 1 volt/dyne/sq. cm. Response: 80 — 7000 c.p.s. 7 foot attached single conductor shielded cable.

List Price----------$15.95

The Model 80 is pictured with the C-2 desk stand—a good combination for paging, dictaphone, home recording, etc.
C-2 stand. List Price $2.75

Model 81 — smaller than Model 80. Same technical specifications, but with a PC1M Amphenol connector attached.
List Price --------$13.95

Model 83 — Same technical specifications as Model 80. Ideal for use wherever a hand microphone is required.
List Price --------$15.95

Model 82-3H — Same technical specifications as Model 80. Furnished with famous Turner "Third Hand" and 20 foot attached single conductor shielded cable.
List Price --------$22.75

THE TURNER COMPANY 905 17th St., N. E. Cedar Rapids, Iowa

IN CANADA:
Canadian Marconi Co., Ltd. Toronto, Ont., and Branches

EXPORT:
Ad. Auriema, Inc. 89 Broad Street, New York 4

Crystals licensed under patents of the Brush Development Company




nents of the color subcarrier between two sets of assigned values

Note: In the N.T.S.C. system, the color phase is changed after every field.

It is recommended that the term "Color Phase Alternation" be used in place of the terms Oscillating Color Sequence and Flip-Flop, which have been used with this same meaning.

**COLOR PICTURE SIGNAL**

The electrical signal which represents color picture information, consisting of a monochrome component plus a subcarrier modulated with color information, excluding synchronizing signals.

**COLOR SUBCARRIER**

The carrier whose modulation sidebands are added to the monochrome signal to convey color information.

**COLOR SYNC SIGNAL**

See Color Burst

**COLOR TRANSMISSION**

In television, the transmission of a signal wave for controlling both the luminance values and the chromaticity values in a picture.

**COMPATIBILITY**

The nature of a color television system which permits substantially normal monochrome reception of the transmission by typical unaltered monochrome receivers designed for standard monochrome.

**COMPOSITE COLOR SIGNAL**

The color picture including blanking and all synchronizing signals.

**CONSTANT LUMINANCE TRANSMISSION**

A method of color transmission in which the carrier color signal controls the chromaticity of the produced image without affecting the luminance, the luminance being controlled by the monochrome signal.

**DELAY DISTORTION**

That form of distortion which occurs when the envelope delay of a circuit or system is not constant over the frequency range required for transmission.

**ENVELOPE DELAY**

The first derivative of the phase

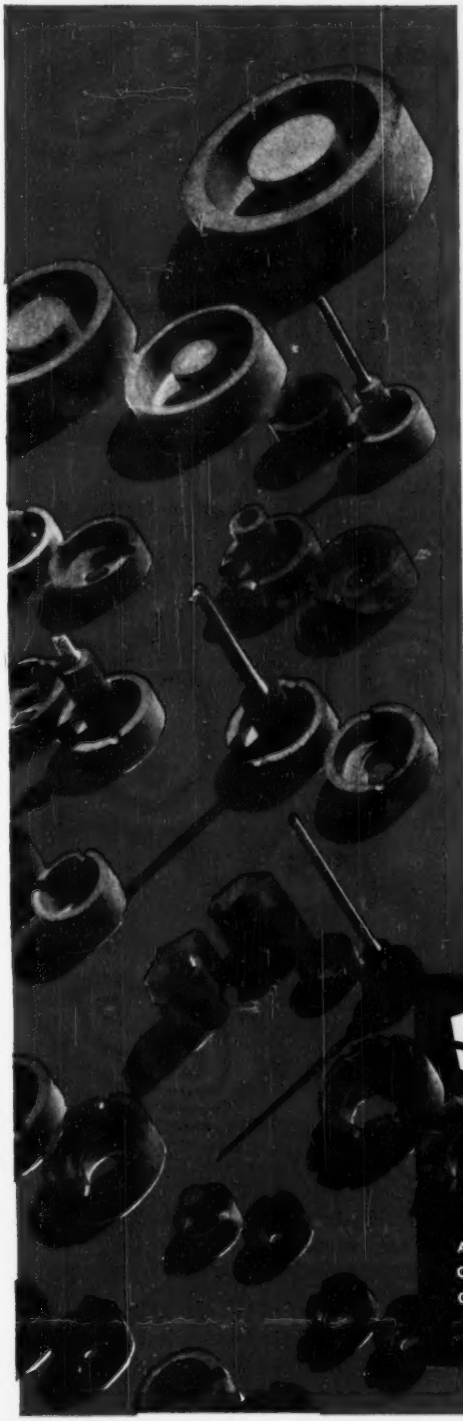

# When it comes to making a *Real Saving* in space...

Stackpole cup cores with their self-shielding characteristic can be mounted close to the chassis or any other metal part for maximum results in extremely close quarters. In some instances, the high Q circuits made possible through their use permit reduction in the number of tubes needed.

Standard types include numerous shapes and sizes, each available in a wide range of permeability possibilities. Highly specialized types to meet the most critical specifications can be engineered and produced from a broad background of experience in this exacting field.

*Electronic Components Division*

**STACKPOLE CARBON COMPANY**

*St. Marys, Pa.*

## STACKPOLE *Cup Cores*

*Other Stackpole core types include:*

ALL STANDARD MOLDED IRON CORE TYPES, SIDE-MOLDED, CHOKE COIL CORES, SLEEVE TYPES, THREADED TYPES and COIL FORMS . . . also Stackpole CERAMAG® CORES (FERRITES).

*Write for Electronic Components Catalog RC-8*

# THERE IS PLENTY OF TIN IN MALAYA

Only a deliberate distortion of facts could give rise to the false impression that tin is in short supply.

You should know the truth.

We have prepared a 20-page booklet that graphically and concisely presents the complete story. A copy is yours for the asking.

**THE MALAYAN TIN BUREAU**

Department 38

1028 Connecticut Avenue Washington 6, D. C.

***There Is Plenty of Tin in Malaya***

# *Let* JOY *handle Your* FAN ENGINEERING *on* ELECTRONIC COOLING PROBLEMS

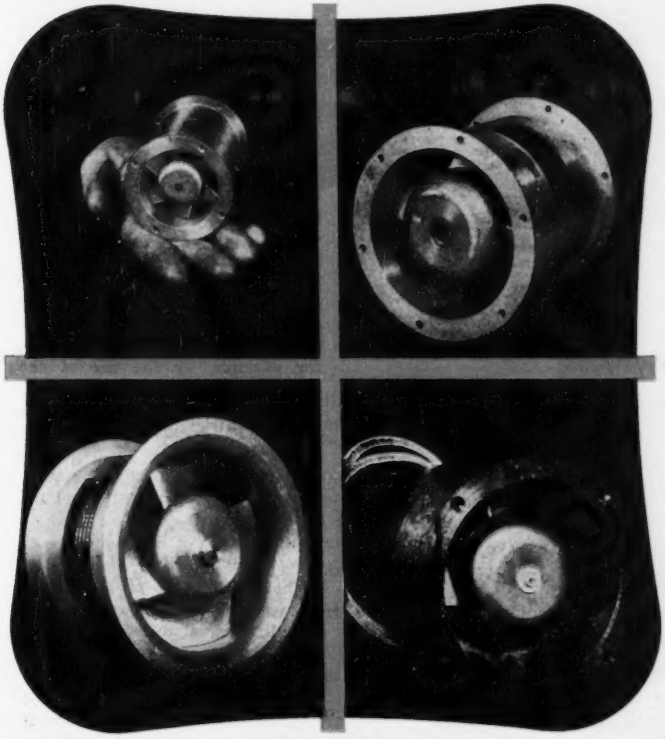

JOY AXIVANE* Fans offer you advantages in electronic equipment cooling which have been thoroughly proved in service. The higher pressure-output of these vaneaxial blowers generally permits more compact arrangement of the equipment. Additional advantages are: light weight, high strength, high shock and vibration resistance, and high efficiency in low or high pressure service.

For minimum weight, JOY electronic cooling fans are made of aluminum, magnesium, or combinations of these metals. They are designed to meet all present Air Force and Naval electronic specifications, and are available in fan sizes from 2" I.D. up. Totally-enclosed or explosion-proof motors can be furnished where required.

● If you have a problem in heat dissipation from electronic units, no matter what the service conditions may be, let us place at your disposal JOY'S experience as the world's largest manufacturers of vaneaxial-type fans.

*Consult a Joy Engineer*

Over 100 Years of Engineering Leadership

*Reg. U. S. Pat. Office

WAD 1-4010

## JOY MANUFACTURING COMPANY

GENERAL OFFICES: HENRY W. OLIVER BUILDING · PITTSBURGH 22, PA.

IN CANADA: JOY MANUFACTURING COMPANY (CANADA) LIMITED, GALT, ONTARIO

# BRUSH and the future of high fidelity...

*With use of Brush crystal elements, phonograph pick-ups can be made feather-light, meeting the requirements of micro-groove records.*

BRUSH piezo-electric crystals make possible many refinements in design of high fidelity sound recording and reproducing equipments.

As the heart of pick-ups, Brush crystal elements permit the designer to make smaller, lighter weight pickup arms, and to eliminate the problem of hum. He can achieve the ultimate in faithful tonal reproduction.

In other audio applications, Brush crystals open the way to smaller, more uniformly responsive microphones, and lighter, more sensitive headphones.

Brush is the world's largest producer of man-made crystals. There is a complete line to help you develop new and improved audio products. To acquaint yourself further with the scope of Brush's activities in this and other fields, write for the brochure "This Is Brush".

THE Brush DEVELOPMENT COMPANY
*3405 Perkins Avenue • Cleveland 14, Ohio*

BRUSH

Piezo-electric Crystals and Ceramics
Magnetic Recording Equipment
Acoustic Devices
Ultrasonics
Industrial & Research Instruments




shift with reference to the frequency.

Note: If the phase is measured in radians and the frequency in radians per second, the envelope delay will be in seconds.

**FIELD**

One of the two (or more) equal parts into which a frame is divided in interlaced scanning.

**FLIP-FLOP**

Deprecated (see Color Phase Alternation)

**FREQUENCY OVERLAP**

In a color television system that part of the frequency band which is common to the monochrome channel and the chrominance channel.

Note: Frequency overlap is a form of band-sharing.

**GAMMA**

In color or monochrome channel, or part thereof, the coefficient expressing the selected evaluation of the slope of the used part of the log vs log plot relating input (abscissa) and output (ordinate) signal magnitudes as measured from the point corresponding to some reference black level.

Note: As the log vs log plot is usually not entirely straight in the used region it is necessary to formalize that evaluation of the slope, for example, by the use of the value at a particular point, maximum, mean, or other value. The method of evaluation must be stated.

At some points the signal may be in terms of light intensity or light transmission.

**GAMMA CORRECTION**

The modification of a transfer characteristic for the purpose of changing the value of gamma.

**LUMINANCE**

Luminous flux emitted, reflected or transmitted per unit solid angle per unit projected area of the source.

Note: Usual units are the lumen per steradian per square meter, the candle per square foot, the lambert, the millilambert and the footlambert.

This quantity is also called photo-

# Sensational Advancements In Science & Industry

## Created the Need for THE NEW *Stabelex* "D" CAPACITORS

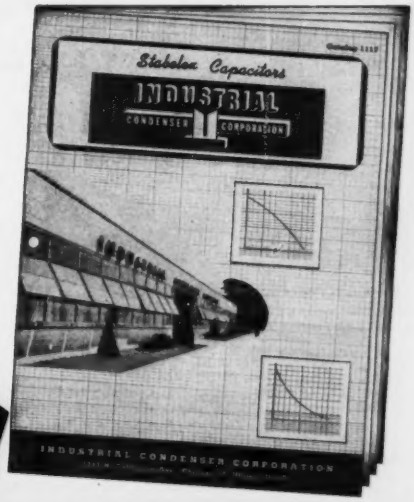


**YOUR FREE**
INDUSTRIAL CONDENSER CORPORATION Stabelex "D" Capacitor Catalog may prove to be the most important new single piece of literature for you this year!

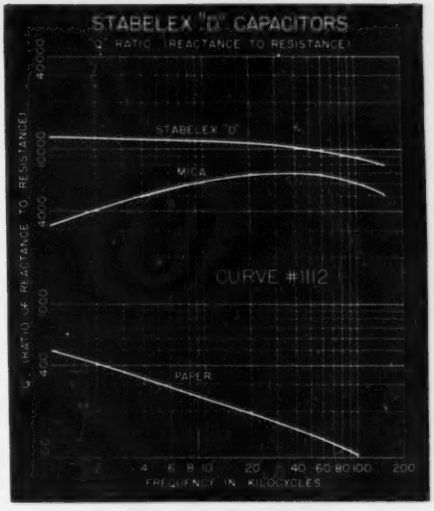


The low losses of Stabelex "D" capacitors are shown in Curve # 1112, which indicates the effect of frequency on the "Q" and also compares it with mica and paper capacitors.

Performance curves illustrating various characteristics of the Stabelex "D" Capacitor will appear in this magazine each month.

### OUTSTANDING FEATURES

**INSULATION RESISTANCE AT 20° C. AFTER THREE MINUTES CHARGE**—900,000 megohm microfarads

**INSULATION RESISTANCE AT 75° C.**—78,000 megohm microfarads

**INSULATION RESISTANCE AT —75° C.**—In excess of 5 million megohm microfarads

**CHANGE IN CAPACITANCE FROM 25° C. TO —80° C; +0.76%**

**SELF TIME CONSTANT OF 10 MFD CAPACITOR—4800 hours**

**Q AT 50 KILOCYCLES—10,000**
**POWER FACTOR AT 1 KC—0.00025**

### *SEND FOR CATALOG 1117 TODAY*

After a long period of research, Industrial Condenser Corporation now offers to industry for the first time the first of their family of Stabelex capacitors, Stabelex "D", which has been produced for special applications for some time.

Complete information performance curves, characteristics, and suggested applications of the various types now available will be found in this catalog.

**INDUSTRIAL CONDENSER CORPORATION**

**3244 N. California Avenue**
**Chicago 18, Illinois, U.S.A.**

Please send me my FREE copy of your new Catalog 1117 on Stabelex "D" Capacitors.

Name .....
Company ..... Position .....
Street .....
City ..... Zone ..... State .....

**Mfrs. of OIL, WAX, ELECTROLYTIC, PLASTIC CAPACITORS and RADIO INTERFERENCE FILTERS**

# ENGRAVING and MARKING

*The Green Engraver*

ENGRAVES,
ROUTS,
PROFILES and MODELS

**A real money saver for industry. Proven by the experience of tool and die, electronic machine, radio, electrical and instrument manufacturers.**

The Green Engraver zips out precision work on metal, plastics, wood, glass, hard rubber etc. . . . engraves panels, name plates, scales, dials, molds, lenses, instruments, instruction plates, directional signs . . . by simple tracing. *Routing, profiling and three dimensional modeling indicate its versatility.* Electric etching attachment available.

**Specify the Green Engraver for the best in low cost performance. Special attachments and engineering service available for production work.**

***FREE — Fact-packed folder yours upon request.***

*Green Instrument Company*
INCORPORATED

**363 PUTNAM AVENUE • CAMBRIDGE, MASS.**

# *Century* MODEL 408

## RECORDING OSCILLOGRAPH

**FOR VIBRATION, TEMPERATURE, STRESS, STRAIN ANALYSIS**



After conducting a nation-wide survey among the users of oscillograph equipment and carefully considering the problems which have confronted them for a number of years, Century is proud to offer the Model 408 Oscillograph. This Oscillograph has been designed and built expressly for mobile and airborne operation. As with all Century products, this oscillograph incorporates the utmost in modern design and workmanship, yet it remains simple in its operation and maintenance.

*Write for Bulletin CGC-302*

**REGISTER and VOTE—it's YOUR country**

*Century* GEOPHYSICAL CORPORATION
TULSA, OKLAHOMA

4447 No. Bodine, Philadelphia 40, Pa. — 3406 W. Washington Blvd., Los Angeles 18, Calif. — 238 Lafayette St., Dayton 2, Ohio — 309 Browder St., Dallas, Texas — EXPORT OFFICE: 149 Broadway, N. Y. City

- **ELECTRONIC DESIGN ENGINEERS**
- **TECHNICAL WRITERS**
- **DESIGN DRAFTSMEN**
- **PHYSICISTS**

# Westinghouse

## offers you SECURITY AND OPPORTUNITY

EE's and ME's with over 3 years experience . . . a number of excellent positions are now available in our Electronic & X-ray and Air-Arm Divisions for work on:

- Broadcast Transmitters
- Power Line Carrier Communication Equipment
- Railroad Radio
- Radio Frequency Heating
- Medical and Industrial X-ray
- Commercial Radar
- Balancing Equipment
- Military Radar (ship, ground, airborne)
- Military Transmitters
- Specialized Electronic Equipment
- Fire Control Systems
- Automatic Pilots
- Guided Missiles

**Check These Outstanding Benefits:** Top pay, ideal working conditions, advancement on merit, graduate study opportunities, employee scholarships, paid relocation expenses, Baltimore location.

**Send resume of experience and education to:** Manager of Industrial Relations, Westinghouse Electric Corp., 2519 Wilkens Ave., Baltimore 3, Md.

**If you are using your greatest skill in a defense industry, do not apply.**

**YOU CAN BE SURE...IF IT'S**
**Westinghouse**

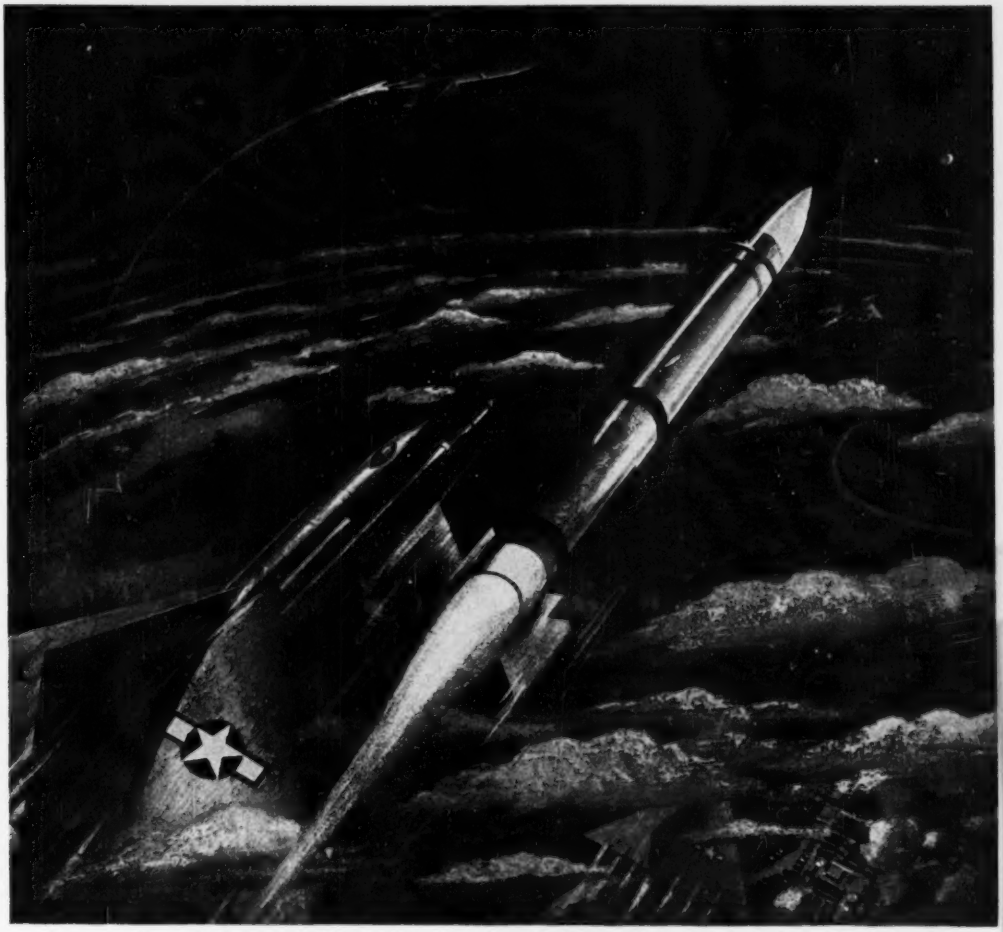

# Missile with a "one track mind" ...Bomber Defense

Defensive guided missiles launched from supersonic aircraft will depend upon electronic marvels that come as close to simulating human intelligence as any mechanism ever devised. Important functions of these "weapons of the future" are typical of those entrusted to systems made by Arma Corporation.

Complex electronic and electro-mechanical controls from Arma are an integral part of many of America's most advanced weapons. In basic research, design, development and manufacture, Arma Corporation has worked in close cooperation with the Armed Forces since 1918—and more recently, the Atomic Energy Commission. *Arma Corporation, Brooklyn, N. Y.; Mineola, N. Y. Subsidiary of American Bosch Corporation.*

**ARMA** ADVANCED ELECTRONICS FOR CONTROL

meets

# MIL-T SPECS

**CHICAGO** Hermetically Sealed Transformers meet all requirements of Grade I MIL-T-27 specifications for Class A operation.

**RADIO SHACK'S** stock of Chicago transformers meets your entire need — for any type — and for production quantities.

**FREE!** RADIO SHACK AND CHICAGO CATALOGS

Please send me the new 1953 Radio Shack Catalog and the new 1953 Chicago Transformer Catalog.

NAME .....

COMPANY .....

STREET .....

CITY ..... STATE .....

**RADIO SHACK**
CORPORATION
167 Washington St., Boston 8, Mass.




metric brightness.

### LUMINANCE CHANNEL

In a color-television system, any path which is intended to carry the luminance signal.

Note: The luminance channel may also carry other signals; for example, the carrier color signal, which may or may not be used.

### LUMINANCE SIGNAL

A signal wave which is intended to have exclusive control of the luminance of the picture.

### LUMINOSITY

Ratio of photometric quantity to corresponding radiometric quantity in standard units (lumens per watt).

### LUMINOUS FLUX

The time rate of flow of light. When radiant flux is evaluated with respect to its capacity to evoke the brightness attribute of visual sensation, it is called luminous flux, and this capacity is expressed in lumens.

### MATRIX

(Noun) In color television, an array of coefficients symbolic of an operation to be performed, which operation results in a color coordinate transformation. (This definition is consistent with mathematical usage).

(Verb) In color television, to perform a color coordinate transformation by computation or by electrical, optical or other means.

### MATRIXER (Matrix Unit, Matrix Circuit, etc.)

A device which performs a color coordinate transformation by electrical, optical or other means.

### MIXED HIGHS

Those high frequency components of the picture signal which are intended to be reproduced achromatically in a color picture.

### MODULATED COLOR SUBCARRIER

See Carrier Color Signal

### MOIRE

In television, the spurious pattern in the reproduced picture resulting from interference beats between two sets of periodic struc-

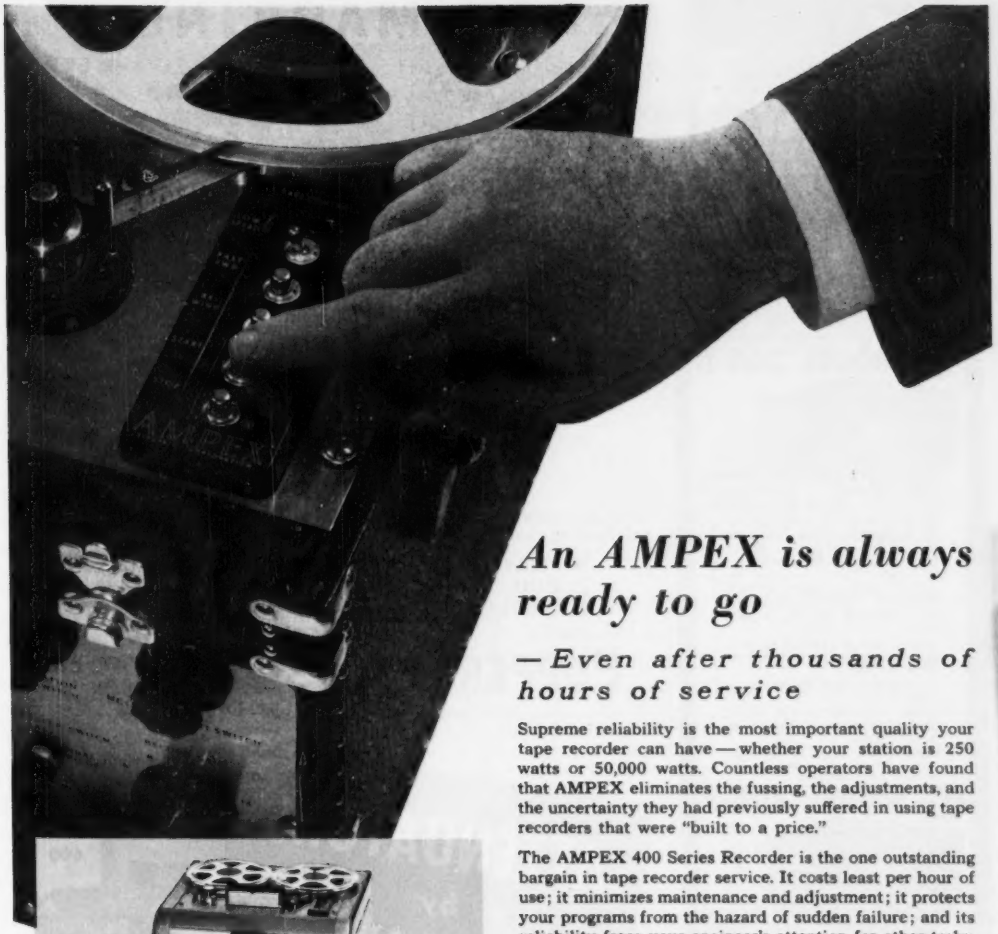

# *An AMPEX is always ready to go*

## *— Even after thousands of hours of service*

Supreme reliability is the most important quality your tape recorder can have — whether your station is 250 watts or 50,000 watts. Countless operators have found that AMPEX eliminates the fussing, the adjustments, and the uncertainty they had previously suffered in using tape recorders that were "built to a price."

The AMPEX 400 Series Recorder is the one outstanding bargain in tape recorder service. It costs least per hour of use; it minimizes maintenance and adjustment; it protects your programs from the hazard of sudden failure; and its reliability frees your engineer's attention for other tasks.

Even after thousands of hours of service, your AMPEX Recorder will be reliable in these important ways:

- *When you press the button, it operates*
- *Program timing stays accurate*
- *Starting, stopping, and rewind will operate smoothly*
- *Fidelity will still be high*
- *Maintenance costs will still be low*

***For new broadcast application bulletin, write Dept. E-10 i.***

***If you plan for tomorrow, buy an AMPEX today.***

# AMPEX

**MAGNETIC RECORDERS**

**AMPEX ELECTRIC CORPORATION**
934 CHARTER STREET • REDWOOD CITY, CALIF.

NEW

2 new D.C. REGULATED

# POWER SUPPLIES

By mercury

Featuring — Continuously Variable output voltage (without switching)

## #1 MODEL 304-B

Regulated Power Supply
0-600 VDC @ 300 MA

OUTPUT VOLTAGES: #1 0-600 VDC @ 300 MA Regulated. #2 0-150 VDC @ 5 MA Regulated. #3 6.3 VAC @ 10 Amps Unregulated.

REGULATION: Within .5% from 20-600 VDC. From no load to full load. At 10 volts. Regulation 1%.

HUM VOLTAGE: Less than 8 millivolts.

METERS: High Voltage and Bias Voltage readable on voltmeter. Milliammeter included.

OUTPUT TERMINATIONS: Positive or Negative ground.

OUTPUT IMPEDANCE: Less than 2 ohms at 20 cycles or more for all output voltages.

DIMENSIONS: Length 19" x Height 10½" x Depth 13". Panel size 19" x 10½". WE Notching.

## #2 MODEL 308-A



Regulated Power Supply
0-600 VDC @ 200 MA

OUTPUT VOLTAGES: #1 0-600 VDC @ 200 MA Regulated. #2 0-150 VDC @ 5 MA Regulated. #3 6.3 VAC @ 10. Amps Unregulated.

REGULATION: Within .5% from 20-600 VDC from no load to full load. At 10 volts Regulation 1%.

HUM VOLTAGE: Less than 5 millivolts.

METERS: High Voltage and Bias Voltage readable on voltmeter. Milliammeter included.

OUTPUT TERMINATIONS: Positive or Negative ground.

OUTPUT IMPEDANCE: Less than 2 ohms at 20 cycles or more for all output voltages.

DIMENSIONS: Length 19" x Height 8¾" x Depth 13". Panel size 19" x 8¾". WE Notching.

**WRITE FOR COMPLETE DETAILS ON THESE TWO NEW UNITS AND A COPY OF OUR LATEST CATALOG**

*Designers, Developers, Producers of Fine Electronic Equipment*

mercury electronic company

RED BANK NEW JERSEY

# FOR MARKING...

**PLASTIC • METAL**
**GLASS • PAPER**
**RUBBER • CERAMIC**
**CARDBOARD**
*in such products as*
**Resistors, capacitors, valves, tubes, labels, sleeves, spark plugs, cartons, etc., etc.**

**THESE PRODUCTS AND MANY OTHERS OF ALMOST ANY MATERIAL AND SHAPE CAN BE IMPRINTED**

ON THE

# REJAFIX
## MARKING MACHINE

***Why not send us samples*** **of your products? They will be test-printed and returned to you for your examination!**

- **REJAFIX HAND-OPERATED MODELS FOR SMALL RUNS. FULLY AUTOMATIC MODELS FOR MASS PRODUCTION.**

EST. 1922

**POPPER & SONS INC.** 300 FOURTH AVENUE NEW YORK 10, N. Y.

# ATTENUATORS by TECH LABS

MIDGET TYPE 600

"Midget" model is especially designed for crowded apparatus or portable equipment.

STANDARD TYPE 700

- **Solid silver contacts and stainless silver alloy wiper arms.**
- **Rotor hub pinned to shaft prevents unauthorized tampering and keeps wiper arms in perfect adjustment.**
- **Can be furnished in any practical impedance and db. loss per step upon request.**
- **TECH LABS can furnish a unit for every purpose.**
- **Write for bulletin No. 431.**

**Exclusive Canadian Dist.: RCA Victor, Ltd**

TECH LABORATORIES, INC.

*Manufacturers of Precision Electrical Resistance Instruments*

PALISADES PARK • NEW JERSEY

NOW RMC

**Temperature Compensating as well as By-Pass**

# DISCAPS®

***are Rated at 1000 Working Volts!***

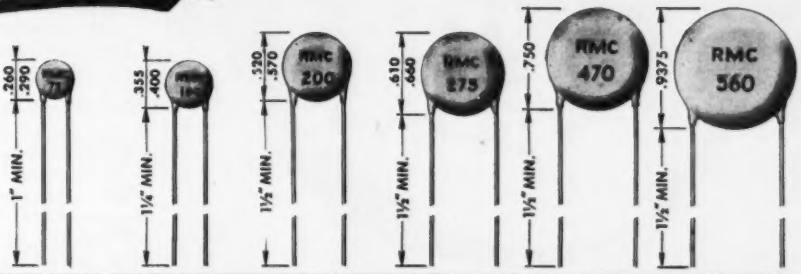


| TC | 1/4 Dia. | 5/16 Dia. | 1/2 Dia. | 5/8 Dia. | 3/4 Dia. | 7/8 Dia. |
|---|---|---|---|---|---|---|
| P-100 | — | 2– 9 MMF | 10– 30 MMF | — | — | — |
| NPO | 2– 12 MMF | 13– 27 | 28– 60 | 61– 75 MMF | 76–110 MMF | 111–150 MMF |
| N– 33 | 2– 15 | 16– 27 | 28– 60 | 61– 75 | 76–110 | 111–150 |
| N– 80 | 2– 15 | 16– 27 | 28– 60 | 61– 75 | 76–110 | 111–150 |
| N– 150 | 2– 15 | 16– 30 | 31– 60 | 61– 75 | 76–110 | 111–150 |
| N– 220 | 2– 15 | 16– 30 | 31– 75 | 76–100 | 101–140 | 141–190 |
| N– 330 | 2– 15 | 16– 30 | 31– 75 | 76–100 | 101–140 | 141–190 |
| N– 470 | 2– 20 | 21– 40 | 41– 80 | 80–120 | 121–170 | 171–240 |
| N– 750 | 5– 25 | 26– 50 | 51–150 | 151–200 | 201–290 | 291–350 |
| N–1400 | 15– 50 | 51–100 | 101–200 | 200–250 | 251–470 | 480–560 |
| N–2200 | 47– 75 | 76–100 | 101–200 | 201–275 | 276–470 | 471–560 |

**If the samples you need are not here—send for them.**

## SPECIFICATIONS

POWER FACTOR: LESS THAN .1% AT 1 MEGACYCLE

WORKING VOLTAGE: 1000 VDC TEST VOLTAGE: 2000 VDC

DIELECTRIC CONSTANT: P-100 14K N-750 88K N-2200 265K NPO 35K N1400 165K

CODING: CAPACITY, TOLERANCE AND TC STAMPED ON DISC

INSULATION: DUREZ PHENOLIC—VACUUM WAXED

LEAKAGE RESISTANCE: INITIAL 7500 MEG OHMS AFTER HUMIDITY 1000 MEG OHMS

LEADS: #22 TINNED COPPER (.026 DIA.)

LEAD LENGTH: ¼" BODY 1", ⅜" BODY 1⅛", ½" AND LARGER BODY 1½"

TOLERANCES: ±5%, ±10%, ±20%

***RMC DISCAPS are Designed to Replace Tubular Ceramic and Mica Condensers at LOWER COST***

*SEND FOR SAMPLES AND TECHNICAL DATA*

**DISCAP CERAMIC CONDENSERS**

RMC

**RADIO MATERIALS CORPORATION**

**GENERAL OFFICE: 3325 N. California Ave., Chicago 18, Ill.**

**FACTORIES AT CHICAGO, ILL. AND ATTICA, IND.**

***Two RMC Plants Devoted Exclusively to Ceramic Condensers***

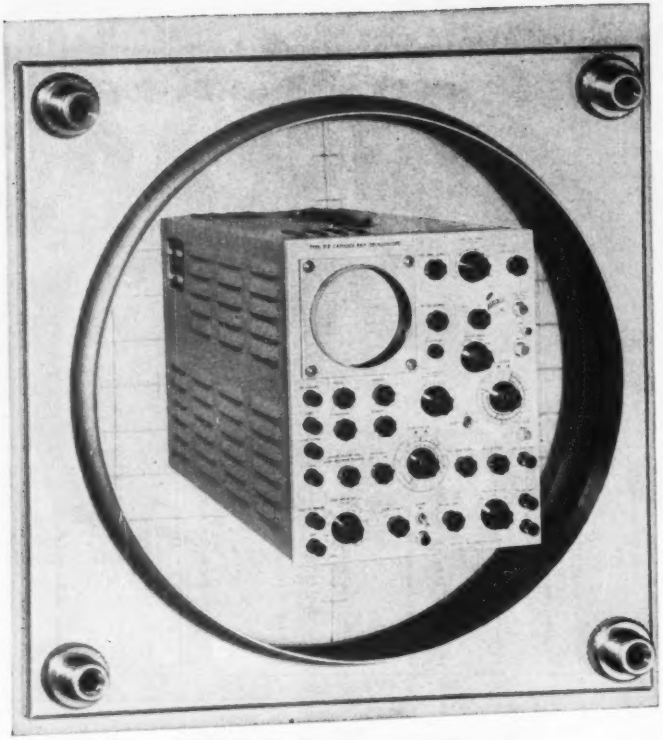

# TYPE 512
## CATHODE-RAY OSCILLOSCOPE

This precision laboratory oscilloscope is preferred by development engineers for all work within its time base and frequency response capabilities. In addition, the Type 512 has characteristics that make it highly desirable for work in special fields.

Balanced differential input to the direct coupled vertical amplifier is useful to attenuate in-phase components or to mix two signals without interaction or frequency discrimination. High sensitivity permits observation of low level phenomena. Slow sweeps, coupled with a P7 crt screen, provide maximum utility in low frequency pulse work. An adjustable delayed trigger, a positive gate, and the sweep waveform are available at the front panel for external use. The calibration voltage, a square wave of about 1 kc, is also useful for rc attenuator adjustment and external test purposes.

**SPECIFICATIONS**

***Vertical Amplifier***
Sensitivity, dc to 1 mc, 5 mv/cm
Risetime 0.4 μsec
Sensitivity, dc to 2 mc, 0.15 v/cm
Risetime 0.2 μsec

***Time Base***
Single, triggered, or recurrent, 0.3 sec/cm to 3 μsec/cm in ten ranges, continuously variable, accurate within 5% (1 sec/cm or 3 sec/cm available on special order)

***Calibration Voltage***
Square wave, approximately 1 kc, continuously variable in 9 ranges, 5 mv to 50 v full scale, accurate within 3%

***All dc voltages electronically regulated.***

***Two 10x rc probes, 1 blue and 1 amber filter furnished as standard equipment.***

*TYPE 512 — $950, f.o.b. PORTLAND, OREGON*

**TEKTRONIX, Inc.**
**P. O. Box 831A, Portland 7, Oregon • Cable: TEKTRONIX**



tures in the image.

Note: Moires may be produced, for example, by interference between regular patterns in the original subject and the target grid in an image orthicon, between patterns in the subject and the line pattern and the pattern of phosphor dots of a three-color kinescope, and between any of these patterns and the pattern produced by the carrier color signal.

**MONOCHROME BANDWIDTH**
**(of the signal)**

The video bandwidth of the monochrome signal.

**MONOCHROME BANDWIDTH**
**(of the monochrome channel)**

The video bandwidth of the monochrome channel.

**MONOCHROME CHANNEL**

In a color television transmission, any path which is intended to carry the monochrome signal.

Note: The monochrome channel may also carry other signals; for example, the carrier color signal which may or may not be used.

**MONOCHROME SIGNAL**

In monochrome television transmission, a signal wave for controlling the luminance values in the picture but not the chromaticity values.

In color television transmission, that part of the signal wave which has the major control of the luminance of the color picture and which controls the luminance of the picture produced by a conventional monochrome receiver.

**MONOCHROME TRANSMISSION**

In television, the transmission of a signal wave for controlling the luminance values in the picture, but not the chromaticity values.

**OSCILLATING COLOR SEQUENCE**

Deprecated (see Color Phase Alternation)

**PICKUP SPECTRAL CHARACTERISTIC**

The set of spectral responses of the device, including the optical parts, which converts radiation to electric signals prior to any nonlinearizing and matrixing operations.

**RECEIVER PRIMARIES**

The colors of constant chromati-

# Lapp
## PLUG-AND-RECEPTACLE
## for Sectionalizing Circuits

SIMULTANEOUS contact of any number of leads can be made or broken by use of Lapp Plug-and-Receptacle units, for panel-rack assembly or other sectionalized circuits. Insulation is Steatite, the low-loss ceramic which is non-carbonizing, even when humidity, moisture or contamination sets up a leakage path. The unit shown above provides twelve contacts, rated for operation at 2.5Kv peak terminal-to-terminal, 1.5Kv peak terminal-to-ground, 25 amps at 60 cps. All contacts are silver-plated; terminals are tinned for soldering. Polarizing guide pins assure positive alignment. Write for specifications of this and other available units, or engineering recommendations for special units for your product.

**Lapp Insulator Company, Inc., LeRoy, New York**

# Lapp

versatile
Multi-channel
telegraph A1 or
telephone A3
STABLE
High stability (.003%) under
normal operating
conditions.
RUGGED
Components
conservatively
rated. Completely
tropicalized.
Model 646 transmitter operates on 4 crystal-controlled frequencies (plus 2 closely spaced frequencies) in the band 2.5-13.5 Mcs (1 6-2.5 Mcs available) Operates on one frequency at a time, channeling time 2 seconds Carrier power 350 watts. A1 or A3 AM Stability 003% using CR 7 (or HC-6U) crystals Operates in ambient 0° to + 45° C using mercury rectifiers, -35° to + 45° C using gas filled rectifiers Power supply, 200 250 volts, 50/60 cycles, single phase. Conservatively rated, sturdily constructed. Complete technical data on request.
Here's the ideal general-purpose high-frequency transmitter! Model 646 . . . 4-channel, 4-frequency, medium power, high stability. Suitable for point-to-point or ground-to-air communication. Can be remotely located from operating position. Co-axial fitting to accept frequency shift signals.
Consultants, designers and manufacturers of standard or special electronic, meteorological and communications equipment.
AER -O- COM
AERONAUTICAL COMMUNICATIONS EQUIPMENT, INC.
3090 Douglas Road Miami 33 Florida

**UPON ACCURACY OF THE DIE**
**Depends Quality and Finish**
**In This Instance Silver Clad Copper Wire**

ANOTHER behind the scenes service that is part of the every day routine at "Improved" is shown here. This is the die checking room where dies for all our wire and tubing products are scientifically checked to assure the accuracy fundamentally necessary for the high quality and finish traditional with this fifty-three-year-old, owner-managed company. We will be pleased to answer inquiries on how our many services may be of useful assistance to you.



*The Home of IMPROVED Service*
**Rhode Island's largest manufacturer of Laminated Metals.**

**The IMPROVED SEAMLESS WIRE COMPANY**
INCORPORATED 1898
**775 Eddy Street, Providence 5, Rhode Island**

# VEE-D-X
# Sectional Tower

***MOST ECONOMICAL FOR MICROWAVE · FM · TV COMMUNICATIONS · RADAR***



Actual photograph of VEE-D-X Sectional Tower installation showing 152 MC ground-plane antenna suited for ground-to-plane, ship-to-shore, and mobile communications.

**THE LaPOINTE-PLASCOMOLD CORP.**
**ROCKVILLE, CONNECTICUT**



# HOW MANY *db*– AT 5,000 MEGACYCLES? AT 25,000 MEGACYCLES?

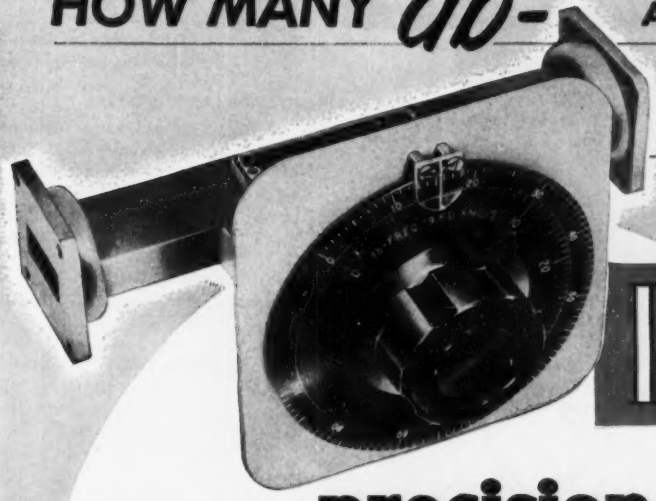

PRD

# precision variable attenuators

- METALLIZED GLASS ATTENUATING ELEMENTS
- PRECISE, PERMANENT CALIBRATION
- BROADBAND CHARACTERISTICS
- NEGLIGIBLE INSERTION LOSS
- BACKLASH-FREE
- LOW REFLECTION
- WELL SHIELDED CASING

The use of metallic-film-on-glass techniques to provide attenuation at microwave frequencies is no longer new. This type of PRD attenuator is now well recognized for its constancy of attenuation with time as well as for its insensitivity to variations of humidity and temperature.

PRD has now augmented this line of attenuators with units employing metallized mica elements to provide broader-band characteristics for the millimeter region of the microwave spectrum. As a consequence, it is now possible to offer complete coverage of the range from 2,600 to 40,000 megacycles per second in designs varying from a simple level set attenuator to a precisely calibrated secondary standard. Write today for our complete new catalog of microwave test equipment — address Dept. E-10.

*Polytechnic* RESEARCH & DEVELOPMENT COMPANY, Inc.

55 JOHNSON STREET, BROOKLYN 1, NEW YORK

WESTERN SALES OFFICE

737 NO. SEWARD STREET, HOLLYWOOD 38, CALIF.



"We minimized scrap loss...
...cut fabricating costs 23.9%
by letting
Fansteel
fabricate our
TUNGSTEN and
MOLYBDENUM
COMPONENTS

*A short molybdenum rod (1) was hot forged to form basic cone (2), and the part (3) was finished by machining and drilling.*

More and more tungsten and molybdenum users are finding Fansteel fabrication the answer to complicated and costly production problems. Fansteel's long-experienced engineers and technicians not only recommend the material to be used but also the shape best adapted to solve a specific problem. Why not use Fansteel fabrication to your advantage, too? Fansteel will help you effect important cost savings by eliminating the scrap and reject problem, minimizing inspection costs, and releasing equipment and personnel for other work.

FANSTEEL
WORLD'S LARGEST
PRODUCER OF
REFRACTORY
METALS

Write for the informative booklet: "FANSTEEL TUNGSTEN AND MOLYBDENUM"

TUNGSTEN & MOLYBDENUM

22503C

Fansteel Metallurgical Corporation NORTH CHICAGO, ILLINOIS, U.S.A.




city and variable luminance produced by the receiver which, when mixed in proper proportions, are used to produce other colors.

Note: Usually three primaries are used: red, green, and blue.

**STATIONARY CPA AXIS**

A fixed reference phase with respect to which a carrier color signal of constant chrominance makes equal and opposite angles for successive fields, this reference phase being the same for all chrominances.

**TAKING CHARACTERISTIC**

See Camera Spectral Characteristic

**ZERO SUBCARRIER CHROMATICITY**

The chromaticity which is intended to be displayed when the subcarrier amplitude is zero.

## Latest Disc-Cathode Developments

RECENT electronics research and development at Superior Tube Company, Norristown, Pa. have made significant advances in disc cathodes.* Manufacturing techniques have been perfected for maintaining a critical $E$ dimension tolerance, Fig. 1, $\pm 0.0005$ in. during long production runs. New and more efficient alloys for electron-emitting cathode caps have been developed. Sublimation effect leakage of electrons across the ceramic disc of the cathode and heater-to-cathode electron leakage has been reduced. Heater shrinkage due to improper insertion during assembly has been eliminated.

As a result of these five basic innovations, the disc cathode now seems to be ready for the more stringent electronic tasks to which it may be applied in the near future.

The disc cathode may be described as a cathode sleeve material which is crimped or fastened to a ceramic disc. The disc part of the name comes from the ceramic disc used as an insulator between the cathode and the grid No. 1 electrode.

The disc cathode is used in the

* Manufactured under U. S. Patents No. 2551871 and 2608743.

BROWN INSTRUMENTS ACCELERATE RESEARCH

THE BROWN ELECTROMETER

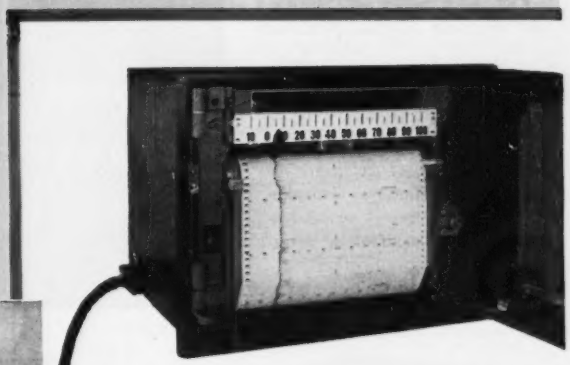

*Brown Electrometer showing recorder with door ajar and preamplifier at left.*

# for measuring and recording currents as low as $10^{-15}$ amperes

## *Electrical Characteristics*

- Full Scale Current Ranges Available: $10^{-13}$ amperes with $10^{11}$ ohm resistor, and selector switch adjustment for full scale of $10^{-12}$ or $10^{-11}$ amperes. Using other resistors, full scale current ranges up to $10^{-7}$ amperes can be supplied with selector switch adjustment up to $10^{-4}$ amperes.
- Input Resistor: $10^{11}$ ohms for most sensitive current measurement. (Also supplied in values down to $10^{8}$ ohms.)
- System Accuracy: Approximately 1 per cent of scale.
- Zero Drift: Should not exceed 0.3 millivolt per day.
- System Noise: Approximately 5 microvolts.
- Instrument Speed of Response: Available for either 24, 12, or 4½ seconds full scale.
- Maximum Speed of Response Using 4½ Second Instrument Speed: 5 seconds for 90 per cent of change, with preamplifier located at source.
- Power Supply: 115 volts, 60 cycles. Also dry cell supplied in instrument.
- Power Requirements: 65 watts.

ACCURATE measurement of extremely small currents is accomplished in this instrument through the use of a null balance servo system and a-c amplifiers that prevent drift and consequent instability. It is the only such system that incorporates a recorder as an integral part of the circuit. Designed to measure and record minute currents in ionization chambers, the Brown Electrometer may be used in any application where currents as low as a billionth of a microampere are encountered.

Features of the instrument include a special power supply to prevent false measurements from stray signals which might originate in an a-c power source . . . vibration frequency carefully selected to prevent phase shift . . . and automatic standardization of voltage across the slide-wire.

MINNEAPOLIS-HONEYWELL REGULATOR CO., *Industrial Division*, 4428 Wayne Ave., Philadelphia 44, Pa.

MINNEAPOLIS **Honeywell**

BROWN INSTRUMENTS

*First in Controls*

● *Important Reference Data*

**Write for Data Sheet No. 10.0-4 . . . and for Bulletin No. 15-14. For valuable information on analytical and research instrumentation.**

# 2 MUSTS

***For Low-Cost Servicing of Mobile Radio Systems***

Lampkin equipment gives you the lowest cost per channel, whether you supervise a large multiple-frequency system, or whether you service numerous smaller installations! Lampkin equipment measures center frequency and modulation deviation, to FCC specifications!

**The Type 205 FM Modulation Meter For Multiple Mobile Frequencies.**



The Type 205 FM Modulation Meter measures peak frequency swing due to voice modulation of FM transmitters, as required by the FCC. Indicates 0-25 KC. deviation. Instantly tunable to any frequency from 25 MC. to 200 MC. Simple to use. Direct reading. No charts. No tables. $240.00.

**For Any Number of Frequencies, AM or FM. The Type 105-B Micrometer Frequency Meter**



The Type 105-B Micrometer Frequency Meter measures center frequency deviation on any number of transmitters, AM or FM, from 0.1 MC. to 175 MC. The accuracy, determined by over 500 field tests, is conservatively guaranteed better than 0.0025%, surpassing FCC requirements. Readily checked against WWV. $220.00

*Return coupon TODAY for complete literature.*

**LAMPKIN LABORATORIES, INC.**
Instruments Div., Bradenton, Florida

Please send me complete technical literature and delivery information on the following Lampkin-designed instruments:

☐ Type 205 FM Modulation Meter
☐ Type 105-B Micrometer Frequency Meter

Name .....

Address .....

City ..... Zone .... State .....

---

**drawn cases**

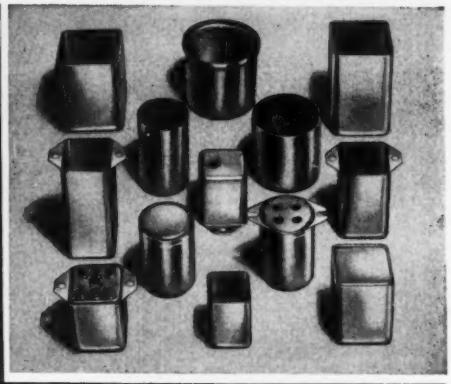

hot tin dipped . . . fabricated terminal and vent holes . . . smooth, one-piece construction using cold rolled steel . . . draw depths up to 2½" . . . **inside fit covers for easy hermetic sealing in all sizes** . . . available as stock sizes and as special fabrications.

**OLYMPIC METAL PRODUCTS COMPANY, INC.**
**P. O. BOX 71A** **PHILLIPSBURG, N. J.**

---

# Boost Your Quality Standards with DX ELECTRONIC COMPONENTS

TOROID COILS

SPECIAL ASSEMBLIES

DEFLECTION YOKES

CRYSTALS



**TOROID FILTERS . . . I. F. TRANSFORMERS . . . R. F. COILS . . . DISCRIMINATORS TRANSFORMERS . . . TV TUNERS . . . ION TRAPS . . . SPEAKERS**

If you require exacting quality and dependable performance, let DX engineers figure with you on your next production run. Users of DX components enjoy exceptional freedom from field failures. This advantage can be yours at no extra cost. Write today.

DX COMPONENTS "the heart of a good television receiver"

**DX RADIO PRODUCTS CO.**
*GENERAL OFFICES: 2300 W. ARMITAGE AVE., CHICAGO 47, ILL.*

TINNERMAN

Speed Nut
SAVINGS STORIES

## Jackson TELEVISION

# Channels 63% Savings

## WITH TINNERMAN SPEED NUTS®

● Engineers at Jackson Industries, Inc., Chicago, Ill. are "on the beam" when it comes to maintaining TV quality at production line speeds. They found the SPEED NUT way of attaching their new Tri-Lok television chassis to the cabinet picked up a neat 63% production savings! This attachment was one of their toughest fastening problems... to solve it Jackson found a standard Tinnerman part tailor-made and engineered for the job!

Four angle brackets are used to fasten the chassis to the cabinet. In the old way, an angle bracket was threaded to receive a machine screw, and it was necessary to align the screws perfectly with the threaded holes since the attachment is in a "blind" position.

SPEED NUTS eliminate the tapping operation required in threading the angle brackets, making hole alignment easier, faster! Now Jackson has adapted this part into their standards along with a 63% savings in time and materials-handling!

You can turn your fastening problems into production savings... do as thousands of manufacturers are doing ...turn to Tinnerman for a FREE FASTENING ANALYSIS of your products. The Tinnerman representative in your area will be happy to give you the full details on this great service. Call on him today or write direct to: TINNERMAN PRODUCTS, INC., Dept. 12, Box 6688, Cleveland 1, Ohio.

*In Canada*, Dominion Fasteners Ltd., Hamilton, Ontario. *In Great Britain:* Simmonds Aerocessories, Ltd., Treforest, Wales. *In France:* Aerocessoires Simmonds, S.A.—7 rue Henry Barbusse, Levallois (Seine.)

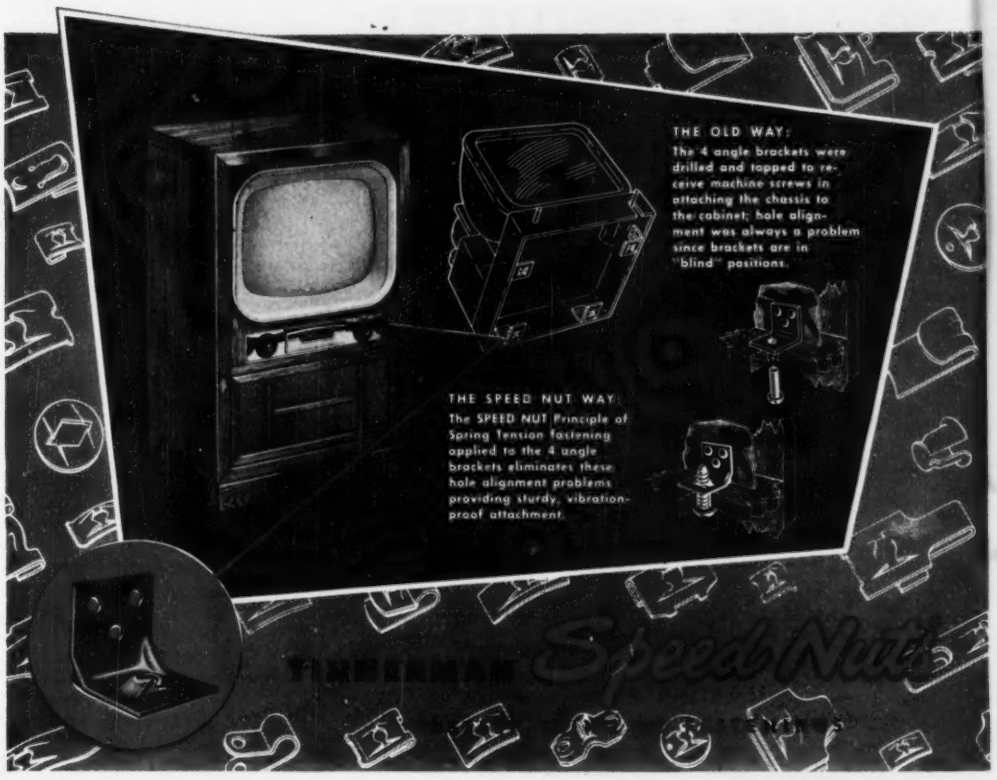
THE OLD WAY:
The 4 angle brackets were drilled and tapped to receive machine screws in attaching the chassis to the cabinet; hole alignment was always a problem since brackets are in "blind" positions.
THE SPEED NUT WAY:
The SPEED NUT Principle of Spring Tension fastening applied to the 4 angle brackets eliminates these hole alignment problems providing sturdy, vibration-proof attachment.
TINNERMAN
Speed Nuts

# FOR BETTER NO LOAD TO FULL LOAD REGULATION

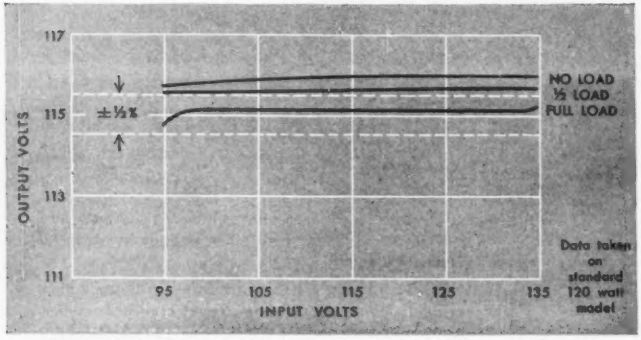


When tested under both hot and cold conditions, from no load to full load, standard Raytheon Voltage Stabilizers held output voltages between 114.6 and 115.6 volts or only 1.0 volt change. Ordinary voltage regulators varied as much as 5.2 volts under the same conditions.

*Specify* RAYTHEON

# VOLTAGE STABILIZERS

Watt for watt, Raytheon Magnetic Voltage Stabilizers are smaller, lighter, more compact than other makes. Comparative tests show that they are also more efficient. Check them any way you like and you, too, will find Raytheon Voltage Stabilizers ten ways better. Specify Raytheon Voltage Stabilizers when you want to insure reliable operation of any electrical equipment.

Standard catalog models in ratings from 15 to 2000 watts are carried in stock by 125 parts distributors from coast to coast . . . can be built into your equipment or used as an accessory. Custom engineered units from 5 to 10,000 watts can be designed and built for any military or commercial application.

*Write for complete information and performance data*

**TESTS PROVE 10 POINTS OF RAYTHEON SUPERIORITY**

1. Deliver accurate AC voltage within ±½%
2. Stabilize output with more precision
3. Regulate better at full load
4. Hold up better under overload
5. Better no-load to full-load regulation
6. Accept wider input voltage range
7. Less voltage change as units heat up
8. Less change in output as frequencies fluctuate
9. Smaller, lighter, more compact, no moving parts
10. Cost less to operate

RAYTHEON®

*Excellence in Electronics*

**RAYTHEON**

MANUFACTURING COMPANY

**EQUIPMENT SALES DIVISION**

**DEPT. 6270-A, WALTHAM 54, MASSACHUSETTS**

**DISTRICT OFFICES: BOSTON, NEW YORK, CLEVELAND, CHICAGO, NEW ORLEANS, LOS ANGELES (WILMINGTON), SAN FRANCISCO, SEATTLE**

**INTERNATIONAL DIVISION: 19 RECTOR ST., NEW YORK CITY**

*RAYTHEON PRODUCTS INCLUDE:* WELDPOWER* welders; Voltage stabilizers (regulators); Transformers; Sonic oscillators for laboratory research; Standard control knobs; Electronic calculators and computers; Radio, television, subminiature and special purpose tubes and other electronic equipment. *Reg. U. S. Pat. Off.







**FIG. 1—Construction of a disc cathode. Electrons emitted to gun structure (A), barium sublimes to give grid emission (B), grid-cathode spacing (C), spacer (D), *E* dimension (E), shaded groove (F), ceramic insulator (G), heater-cathode leakage current (H), heater (I), alloy sleeve (J), grid cup (K), nickel sublimes to give low-resistance path across ceramic (L) and alloy cap (M)**

cathode-ray picture tube as a source of electrons. Electrons are emitted from the cap or top surface of the disc cathode.

The cathode sleeve is hollow, so that it can be beaded easily to the ceramic disc and a heater may be conveniently inserted. The heater maintains a temperature of approximately 775 C, the usual operating temperature at which electrons are emitted from the surface. The electron-emitting end of the cathode sleeve or cylinder is closed by continuous metal or by a special cap. The metal cap or closed end of the cathode sleeve is coated with a barium-strontium oxide coating which emits electrons in the same manner and practice that is used in the receiving-tube industry.

The disc cathode is spaced within the grid cup during assembly where care must be taken to maintain a fixed grid-to-cathode spacing. This spacing, in turn, is controlled by a critical *E* dimension of the disc cathode.

### *E-Dimension Tolerances*

As applied to the final assembly of a disc cathode, the *E* dimension is the critical distance between the ceramic surface and the surface of the emitting cap. In operation of the cathode-ray tube, the *E* dimension controls the cut-off voltage since it determines the grid-to-cathode spacing. It is necessary to control the *E* dimension to within narrow limits to add uniformity to the characteristics of cathode-ray tubes in production and circuit

AVAILABLE NOW
in a wide range
of sizes!
GOVERNMENT APPROVED
MIL-W-5086
AIRCRAFT WIRE
AWG SIZES
24-22-20-18-16-14
12-10-8-6
ALSO
MIL-C-7078 (MIL-W-5086)
WITH SHIELD
COMPLETELY EXTRUDED
INSULATIONS
Primary Insulation: Polyvinylchloride
Overall Insulation: Nylon Jacket
Write for samples
and complete test data.
Resto-Wire
RHODE ISLAND INSULATED WIRE CO., Inc.
50 BURNHAM AVENUE
CRANSTON, RHODE ISLAND
National Sales Offices: 624 S. Michigan Blvd., Chicago, Ill.

HYCOR

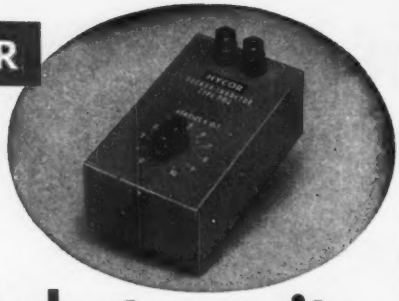

the NEW 700 series

# Decade-Inductor units

- **HYCOR DECADE — INDUCTOR** units are indispensable for design and experimentation work on audio filters.
- The units are available in four ranges up to 10 henries. Units may be used individually or all four may be connected in series to obtain 11.11 henries in 1 millihenry steps.
- Toroid coils are used to obtain high "Q", stability and low pickup from external fields. Inductance accuracy is 2%.

**Send for bulletin D-2**

**HYCOR COMPANY, INC.**
**11423 VANOWEN STREET, NORTH HOLLYWOOD, CALIFORNIA • SUnset 3-3860**
Manufacturers of Toroid Inductors, Decade Inductor Instruments, Wave Filters, Resistive Networks, and Precision Resistors

MAKE IT
**ARROW!**
*Single Source*
INDUSTRIAL ELECTRONICS SUPPLIER

SAME DAY SHIPMENTS of over 75,000 different items!

COMPLETE STOCKS of over 300 National Brands

ONE ORDER brings you Everything in the INDUSTRY

ONLY 1 INVOICE • SAVE TIME, BILLING, SHIPPING COSTS

COMPETENT TECHNICAL STAFF — AT YOUR SERVICE

FROM ARROW ELECTRONICS INC. NEW YORK

ELECTRONICS BUYERS INDUSTRY EVERYWHERE U.S.A.

RUSH SHIPMENT

FREE! 1100-PAGE GENERAL CATALOG!

*Everything* in **ELECTRONICS** including JAN EQUIPMENT

*Suppliers for*
RESEARCH • PRODUCTION
DEVELOPMENT • PROCESSING
CONTROL and MAINTENANCE

Purchasing Agents! Chief Engineers! Write today on your company letterhead for your copy of our gigantic buying guide. Address Dept. E-11

For FAST SERVICE • Teletype: NY1-472
Western Union: WUX-N.Y. • Cable: "AROLECTRO-N.Y."

**ARROW ELECTRONICS INC.**
82 CORTLANDT ST., NEW YORK 7, N. Y. • DIGBY 9-4714

*speed up production . . . bring your costs down!*

**ALPHA**
SOFT SOLDER
**PREFORMS**

Alpha's preformed solders, in any shape or size, cut many hours from your production time. You can select washers, rings, coils, cut shapes, drops, pellets, solder foil, to fit your specific needs. They save you considerable money and materials in repetitive soldering processes.

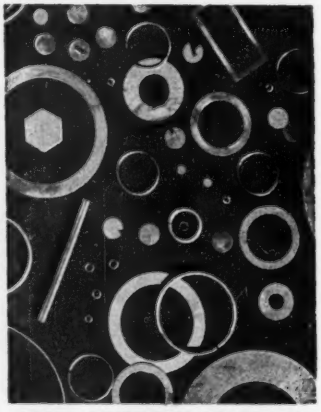

**SPEED AUTOMATIC SOLDERING**
for flame, oven or induction heating

Increase Production • Melts Faster • Guarantee Product Precision • With Or Without Self-Flux Save Labor Costs • Designed For Your Application All Sizes, Shapes, Alloys • Stronger, Smoother Joints

AVAILABLE IN

★ CEN-TRI-CORE *ENERGIZED* ROSIN-FILLED
★ TRI-CORE *LEAK-PRUF* ACID-FILLED
★ SINGLE-CORE
★ SOLID WIRE
★ SHEET SOLDER

Please consult us on your soldering problems. Trained Field Engineers always available to assist you. Small or large quantities.

*write to* **ALPHA** *for further information*

**ALPHA METALS, INC.**
58 Water St., Jersey City 4, N. J.

# Rugged GPL Camera withstands a Rugged Trip

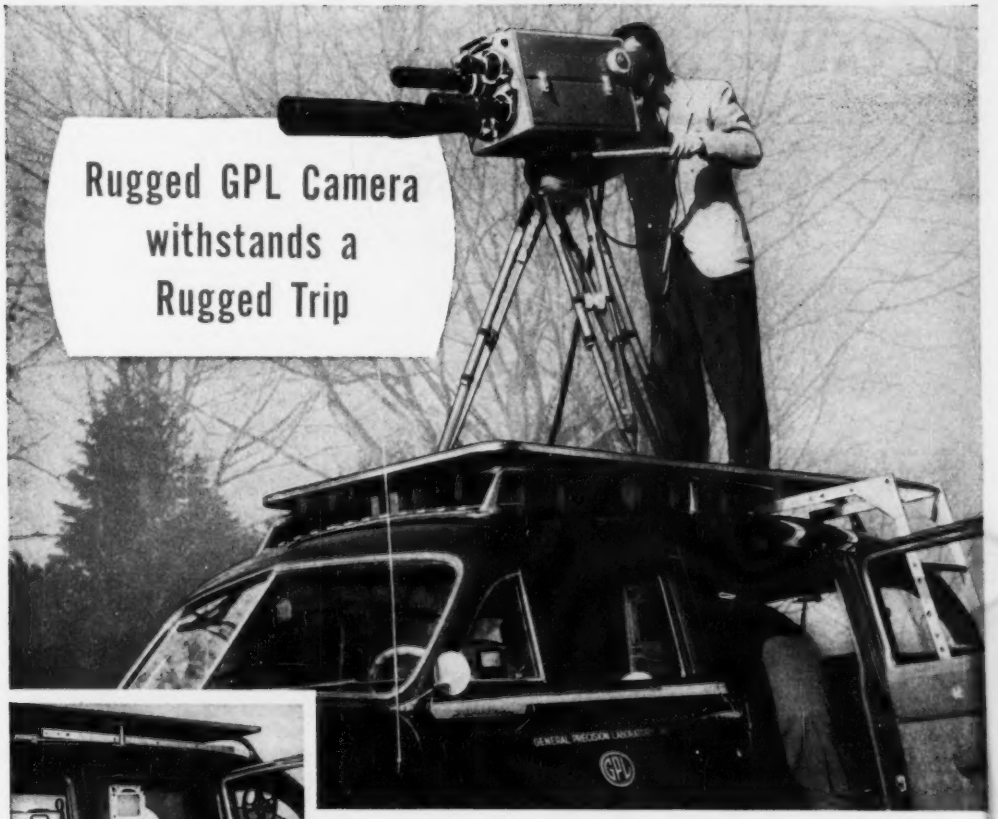

EQUALLY RUGGED and service-free on trip was GPL Utility Projector with "3-2" intermittent which permits use with I. O. camera for film telecasting from remotes.



GPL STUDIO CAMERA CHAIN was packed in station wagon . . . demonstrating mobility of entire chain for fast coverage of news events, sports, other programs in the field.

## 20,000 Miles Cross-Country Without Camera Service

This GPL image orthicon camera has just completed a demonstration tour to studios in 67 cities from Maine to Mexico . . . Michigan to Miami.

Without a single service operation, it took the bumps of 20,000 miles of hard driving. It was loaded and unloaded more than 150 times. Every working element received far more than normal wear and tear, as usual on demonstrations. Yet nothing failed, nothing needed replacing.

This is the kind of ruggedness you may have for both studio and field operations, PLUS all the precision of GPL camera design. This unit is engineered for smooth, fast control, from pushbutton turret change to remote adjustment or iris and focus.

For the stations just starting, it has many special advantages: in compactness of chains, ease of operations.

Write, wire or phone, for full details of the camera equipment that is the "industry's leading line—in quality, in design."

**General Precision Laboratory**
INCORPORATED
PLEASANTVILLE NEW YORK

**GPL**

Export Department: 13 E. 40th St., New York, N. Y. Cable address: Arlab

TV Camera Chains • TV Film Chains • TV Field and Studio Equipment • Theatre TV Equipment

# YOU CAN DO THIS *automatically*

1



As the process speeds by, very clever fellow counts parts, inches, revolutions or machine operations up to 60,000 per minute without a mistake . . .

with a Potter Instrument Company, Inc.

2

At a precise preselected count short of the total, alert foreman signals for reduced speed or other preliminary control action . . .

**Two Sequence**

**Predetermined Electronic Counter**

3



When final predetermined count is reached, gates close, shears cut or other machine control takes place—on the fly, without stopping . . .

4



With operation completed, tireless manager instantaneously calls for complete recycle without missing a count.

***faster without human error***

Potter instruments are working for manufacturers in every industry—controlling everything from the number of zips in a zipper to the number of pills in a bottle.

Potter counters can solve your problem if high speed and precise control are needed. No more flexible method of preselecting one, two or more counts in sequence exists. There are no moving parts, therefore wear, slippage and inertial effects are eliminated.

Have you a counting problem? We'd like to help.

**WRITE FOR DESCRIPTIVE CATALOG 11-C**

**POTTER INSTRUMENT COMPANY**

INCORPORATED

115 CUTTER MILL ROAD, GREAT NECK, NEW YORK




work. During assembly, it is desirable to control to ±0.0005 in. tolerance limits the spacing between the surface plane of the ceramic disc and the parallel plane of the emission cap.

With the shank and cap separated until final assembly, manufacturing operations may all be accomplished prior to establishment of the *E* dimensional tolerance. In the final step of disc-cathode assembly, the subassembly containing the seamless shank crimped to the ceramic disc and the cap are positioned by special equipment. Four electric spot welds are applied at 90-deg intervals around the cap, fastening it to the shank at a position well within the required tolerance of the *E* dimension.

By establishing the precision of the *E* dimension spacing in the disc cathode itself, the necessity for matching spacers with disc-cathode assemblies of the proper *E* dimension to produce the desired grid-to-cathode spacing corresponding to a given cut-off voltage is eliminated. The interchangeability of disc cathodes and uniform spacers now employed in cathode-ray-tube assembly virtually eliminates waste and has reduced labor costs by more than 20 percent for this operation.

### *Choice of Cap Alloys*

The choice of various alloys in the cap material allows a greater specialization in application of the disc cathode. Active, normal or passive alloys can be used to meet the various needs of rapid cavitation, high emission level, reliable long life or undesirable rigid emission.

### *Sublimation Effect*

The tendency of all nickel alloys to sublime slightly during processing and activation of the disc cathode, when the metal is held at high temperatures, causes a movement of metal molecules from a cathode shank to the surface of the ceramic disc to occur. This sublimation effect, occuring over long periods of time, may result in a significant buildup of deposited metal across the surface of the ceramic insulator disc. As this metal film deposits, electrical leakage occurs between the cathode shank and the

# MOLONEY *HiperCore* ELECTRONIC CORES

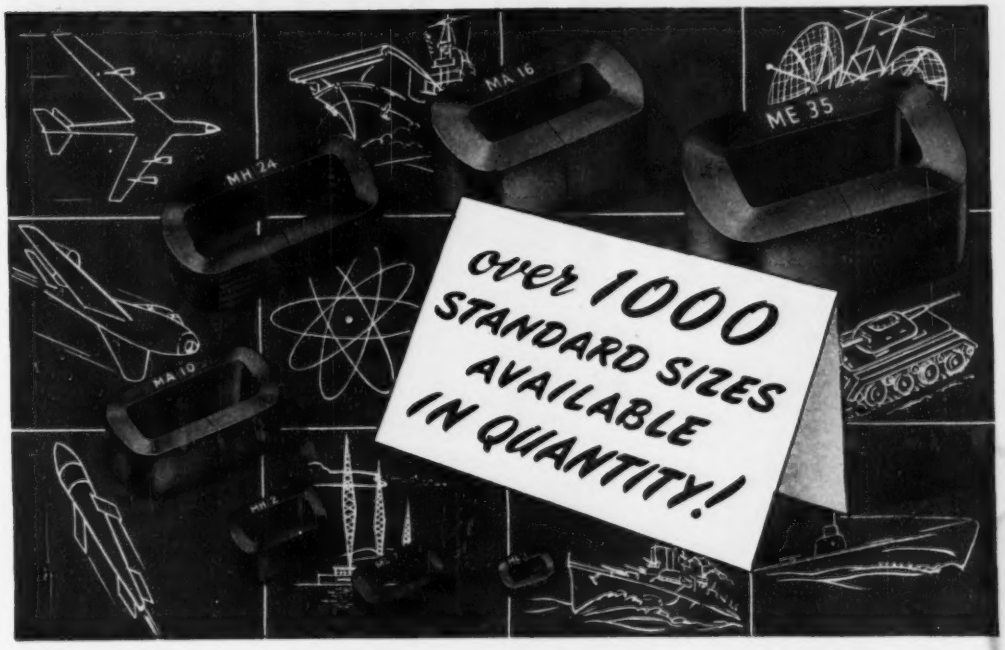


Over 200 manufacturers of electronic products for ultimate use by the U. S. Government are now using Moloney HiperCore Cores for Electronic Transformers.

More than 1000 standard sizes are available in quantity to such manufacturers in thicknesses from 1 mil to 12 mil and in widths from ¼". HiperCore Electronic Cores are of wound core construction using oriented-grain, cold-rolled silicon steel which results in greater flux carrying capacity and lower losses than other type cores of comparable sizes. These smaller, lighter cores perform better and permit increased production by savings in assembly time.

Rigid control of core production permits these cores to test well within industry tolerances. Table at right shows typical test requirements. Special tests for specific operating conditions are made when desired.

Write today for further information.

ME-52-27

## STANDARD TESTS

All 12 mil cores are tested for core loss (true watts) and exciting volt-amperes (apparent watts) at 60 cycles. 4 mil cores are tested at 400 cycles. Following table gives maximum test values. Average values are approximately 20% less than maximum.

| | 12 Mil—60 Cycle @ 15000 gauss | 4 Mil—400 Cycle @ 10000 gauss |
|---|---|---|
| Core Loss (TW) | 0.95 x lbs. | 4.4 x lbs. |
| Exciting Volt-Amps (AW) | 1.75 x lbs. + 8.25A* | 5.0 x lbs. + 16.8A* |
| * A = Gross Area of core face in Sq. In. | | |

All 2 mil cores are tested for pulse permeability by using a 2 microsecond pulse width at 400 P. P. S. and maximum flux density of 10000 gauss. The minimum permeability will be 500.

All 1 mil cores are tested for pulse permeability by using a 0.25 microsecond pulse width at 4000 P. P. S. and maximum flux density of 3000 gauss. The minimum permeability will be 175.

## MOLONEY ELECTRIC COMPANY

*Manufacturers of Power Transformers • Distribution Transformers • Load Ratio Control Transformers Step Voltage Regulators • Unit Substations*

MOLONEY ELECTRIC = BETTER PERFORMANCE, GREATER RELIABILITY, LESS MAINTENANCE

SALES OFFICES IN ALL PRINCIPAL CITIES • FACTORIES AT ST. LOUIS, MO. AND TORONTO, ONT., CANADA

# Silicone

## DIFFUSION PUMP FLUIDS

***Dow Corning 702 and 703***

Stable to Air and Moisture at 150° to 225°C

After almost 4 years' service in an electron microscope, Dow Corning 702 has yellowed slightly but is still as clear and liquid as ever.

SECOND only to mercury in chemical and thermal stability, Dow Corning Silicone Diffusion Pump Fluids withstand operating conditions which completely decompose organic oils. So resistant to oxidation and moisture that they remain clear even after distillation at atmospheric pressure, these fluids are unaffected by the accidental admission of air to a hot system. Chemically unable to break down and form carbonaceous deposits on jets, boilers or fore pumps, they remain in usable condition almost indefinitely.

Pump speeds and limiting back pressure for these silicone fluids equal those for the best organic oils, as do the ultimate vacua attainable with Dow Corning 703. For applications which do not require the lowest pressures, the economical Dow Corning 702 has a lower boiling point and operates against higher forepressure.

The rapid recovery of these fluids, plus their resistance to decomposition, means increased production and reduced maintenance costs in lens coating equipment, metallizing units, electron microscopes and vacuum tube manufacture.

*Write Department BD-23 for data sheet.*

DOW CORNING SILICONES

DOW CORNING CORPORATION
Midland, Michigan

# GOAT Electronic Components

An example of GOAT engineering —THE TUBE SHIELD WITH BUILT-IN SPRING ACTION GRIP

Particularly suited for high vibration situations involving uhf tubes, the four spring-like lances of this shield expand with the tube without sacrificing full shielding efficiency.

This is only ONE of a wide variety of stock miniature and standard size GOAT shields.

A complete design service is available for those long-run, tough-spec custom jobs.

For a full description of tube shields, clips and other GOAT electronic components, send for GOAT catalog E52.

GOAT lanced tube shield G1702-2 and clip G1770

## The Fred Goat Co., Inc.

308 DEAN ST. BROOKLYN 17, N. Y.

Pioneers in metal stamping
Serving the electronics industry since 1926

Established 1893

Build YOUR OWN Heathkit TEST EQUIPMENT

Heathkits are completely engineered instruments supplied unassembled. Every kit goes together smoothly and easily. All drilling, punching, and painting has already been done for you.

It's easy and fun to build a Heathkit. All parts are furnished and are of highest quality for years of trouble-free, dependable operation.

Save money by constructing your own. All expensive wiring and assembly costs are completely eliminated.

Detailed construction manual shows clearly where each wire and part goes and tells exactly how to build the kit. Write for free catalog.

HEATH COMPANY
BENTON HARBOR 14, MICHIGAN

EXPORT AGENT: ROCKE INTERNATIONAL CORP. 13 E. 40th St. NEW YORK CITY 16

Resistors
Rheostats
TRU-OHM PRODUCTS
Division of Model Engineering & Mfg., Inc.
General Sales Office:
2800 N. Milwaukee Avenue, Chicago 18, Ill.
Factory: Huntington, Indiana
MANUFACTURERS: Power Rheostat, Fixed Resistors,
Adjustable Resistors, "Econohm" Resistors
Write for FREE Engineering Catalog NOW!

POWER RELAYS
SMALL RELAYS
SENSITIVE RELAYS
LATCH RELAYS
INSTRUMENT-CONTROLLED RELAYS and SETS
SEQUENCE RELAYS
TIMING UNITS
SPECIAL-PURPOSE RELAYS

5,348
RELAY TYPES

...mean that you get exactly the right relay for the job!

STRUTHERS-DUNN

Struthers-Dunn, Inc., 150 N. 13th St., Philadelphia 7, Pa.

BALTIMORE • BOSTON • BUFFALO • CHARLOTTE • CHICAGO • CINCINNATI
CLEVELAND • DALLAS • DETROIT • KANSAS CITY • LOS ANGELES
MINNEAPOLIS • MONTREAL • NEW ORLEANS • NEW YORK • PITTSBURGH
ST. LOUIS • SAN FRANCISCO • SEATTLE • SYRACUSE • TORONTO




No. 1 grid electrode, with eventual change in grid bias and short circuiting.

In order to reduce this undesirable tendency, a shadow groove is molded around the ceramic disc face at a prepositioned radius between the shank and tube. The side of the groove falls within the shadow of the subliming shank material so that very few molecules can be deposited on the unexposed groove side. A clean ceramic surface having the original high resistance of the ceramic is left in the shadow groove to give a large resistance between grid and cathode electrodes.

The sublimation or deposition of metal film during processing operation of the cathode ray tube can be further reduced by the choice of alloy in the seamless shank material. It is desirable to use cathode alloys of normal or passive materials whose sublimation rate is very much less than some active alloys. Thus, thinner films and smaller grid cathode resistances are obtained in the normal activation and use.

With the successful overcoming of cathode-ray-tube failures due to sublimation short circuiting, the life expectancy and service potential of these tubes has been greatly increased.

*Heater-Cathode Leakage*

The newest and most promising solution to the heater-to-cathode leakage problem involves the relatively simple expedient of assuring absolute cleanliness of the cathode-shank inside-diameter surface. During repeated experiments, both in the laboratory and in end-product use, good results have been obtained with disc cathodes whose shank inside-diameter surface has been carefully polished and chemically cleaned to remove all surface contamination. The use of seamless nickel tubing in the shank does provide a clean metal surface to aid in the reduction of heater-cathode leakage.

*Flared Shank*

To reduce direct shorts between the heater and the cathode shank, the uncapped open end of the cathode shank should be flared.

**RUGGED as a RHINO . . .**

**Quick as a Fox!**

**Two Special Purpose Connectors by** BREEZE MARK



## Battery Connectors

8-pin type for both A and B batteries used in all types of field communication equipment. "RUGGEDIZED" for extra security and long service life: polarizing stud is ALL METAL and all metal parts are cadmium plated and sealed with an iridite sealer. Cable may be brought out at any desired side position and locked. Handy bail makes removal from inaccessible places easy.

## Quick Disconnect

Simply push male and female members together and lock. To disconnect with minimum resistance, pull back sleeve on plug shell and disconnect. Exceptionally low disengaging force required (less than 6 lbs., excepting pin friction). Vibration proof, moisture-proofed with synthetic rubber insert. Meets AN pin pattern and voltage requirements, in accordance with MIL C-5015. Plug shell and coupling sleeve are aluminum alloy, cadmium plated and iridite-sealed. (Federal Spec. QQP – 416, Type 2.)

**Receptacle Types:** Round flange single hole panel-mounted, square flange for 4 bolts, or specially flanged to specification. All contacts silver plated.

*We invite your inquiries* on any problems concerning connectors. Our wealth of engineering experience in this specialty is at your service.

**BREEZE**

**CORPORATIONS, INC.**

41 South Sixth Street, Newark, N. J.

## SERVOTHERM PRODUCTS

### BOLOMETER AND PREAMPLIFIER

Thermistor bolometers are FAST, sensitive INFRARED and HEAT detectors. Especially RUGGED for industrial, scientific, and military applications. PREAMPLIFIER provides NOISE-FREE initial amplification and mount.





### THERMISTOR POWER SUPPLY

Provides voltages required by BOLOMETER bridge and PREAMPLIFIER. Regulated and filtered permitting THEORETICAL NOISE LIMITS of amplification, while operating from 60 CYCLE line.

SERVO CORPORATION OF AMERICA

DEPT. E-11 NEW HYDE PARK, N.Y.

## CONTROLLED QUALITY...

CUSTOM BUILT FOR GOVERNMENT AND INDUSTRY

## TRANSFORMERS

REACTORS

RESONANT FILTERS

•

Top Engineering and Workmanship

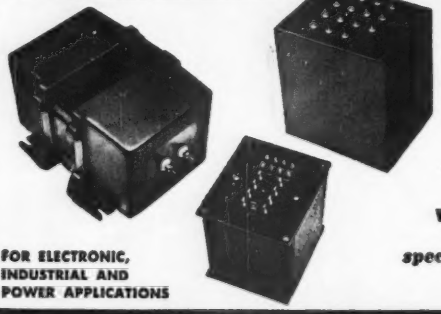

***We have been solving the transformer engineering problems of government and industry since 1938!***

***Write or phone us regarding your special requirements.***

FOR ELECTRONIC, INDUSTRIAL AND POWER APPLICATIONS

ELECTRONIC TRANSFORMER COMPANY, INC.

209 West 25th Street · WAtkins 4-0880 · New York 1, N. Y.

## Aerophysicists, Designers, Engineers

## YOUR IDEAS WILL COUNT AT NORTH AMERICAN

North American encourages advanced thinking, because they know looking ahead is the only way to maintain leadership in the aviation industry. That's why North American needs men of vision. If you like hard thinking and would like to work for a company that will make the most of your ideas, you'll find real career opportunities at North American. North American offers you many extra benefits, too.

***North American Extras—***

Salaries commensurate with ability and experience • Paid vacations • A growing organization • Complete employee service program • Cost of living bonuses • Six paid holidays a year • Finest facilities and equipment • Excellent opportunities for advancement • Group insurance including family plan • Paid sick leave • Transportation and moving allowances • Educational refund program • Low-cost group health (including family) and accident and life insurance • A company 24 years young.

***Write Today***

Please write us for complete information on career opportunities at North American. Include a summary of your education, background and experience.

***IS YOUR FIELD LISTED HERE ?***

Airborne Electronic Equipment
Equipment Flight Tests
Precision Instruments
Automatic Controls
Propulsion Systems
Servo-Mechanisms
Airframe Studies
Radar Devices
Instrumentation
Micro Wave Techniques
Metallurgical
Electroplating
Engineering Planning

## NORTH AMERICAN AVIATION, INC.

*Aerophysics, Electro-Mechanical Research Division*

Dept. 3, Personnel Section,
12214 Lakewood Blvd., Downey, California

*North American Has Built More Airplanes Than Any Other Company In The World*

# FREE to every engineer with an industrial fastening problem! The most complete catalog on retaining rings ever published!

**This encyclopedia of retaining rings** combines—*in one 52 page volume*—engineering specifications and data for 17 different ring types—more than 600 different sizes. Gives assembly data, typical applications, everything you need to know about selection and use of Waldes Truarc Retaining Rings.



**28 pages of charts giving complete engineering data and specifications.** Dimensions of Rings, Grooves, Shafts, and Housings; Clearances; Allowable Thrust Loads; Safety RPM Limits. Data on end-play take-up. Countless other engineering data, arranged in easy-to-read, easy-to-use table form.



**6 pages showing typical cost-cutting applications and case histories,** covering self-locking rings; basic type rings; rings for taking up end-play; rings for radial assembly; and special rings.

**5 pages showing drawings of assembly and accessory tools,** designed to handle Truarc retaining rings on a speedy, production line basis. There are data on tools for recessing grooves, pliers and applicators for assembly, and the new Truarc "E" ring dispenser. **You will find the new Waldes Truarc Retaining Ring Catalog** *invaluable* in selecting and specifying Truarc retaining rings, the better way to hold parts together.

**WALDES**
# TRUARC
REG. U. S. PAT. OFF.
## RETAINING RINGS

**WALDES KOHINOOR, INC., LONG ISLAND CITY 1, NEW YORK**

WALDES TRUARC RETAINING RINGS AND PLIERS ARE PROTECTED BY ONE OR MORE OF THE FOLLOWING U. S. PATENTS: 2,382,947; 2,382,948; 2,416,052; 2,420,921; 2,428,341; 2,439,705; 2,441,046; 2,459,165; 2,483,380; 2,483,383; 2,487,602; 2,487,903; 2,491,306; 2,509,081 AND OTHER PATENTS PENDING.

MAIL THIS COUPON TODAY FOR YOUR COPY!

Waldes Kohinoor, Inc., 47-16 Austel Place, L. I. C. 1, N. Y. E-114

Please send the new complete Waldes Truarc Retaining Ring Catalog. (PLEASE PRINT)

Name_____

Title_____

Company_____

Business Address_____

City_____ Zone_____ State_____

• plots speeds up to 20 cps . . .

• permits instant manual pen positioning . . .

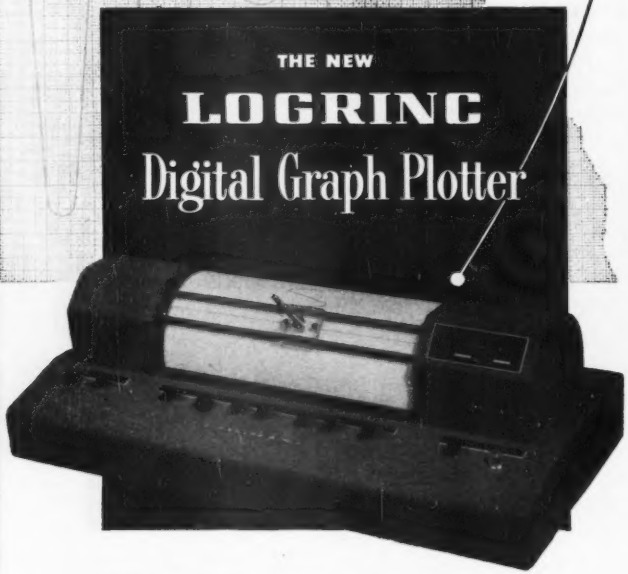


THE LOGRINC DIGITAL GRAPH PLOTTER automatically plots one variable against another algebraically in incremental steps, in response to electrical impulses. It is ideally adapted for use as a read-out device for electronic digital computers, especially digital differential analyzers, and for use in connection with such problems as aircraft tracking and automatic data reduction.

- plots at speeds up to 20 steps per second, in incremental steps of 1/64 of an inch.
- simultaneous movement on both axes in either direction.
- can be controlled electronically or by external or remote switches or relays.
- will make several carbon copies or duplicating stencil.
- instant manual positioning of pen and drum.
- takes 12" x 18" paper or continuous 12" strip.

Mechanical simplicity..high reliability..digital accuracy ..quick pen cartridge change..self-contained power supply.

Additional information supplied on request.

LOGISTICS RESEARCH COMPANY

*141 South Pacific Avenue*
*Redondo Beach, California*



Even a slight flare permits insertion of the insulated heater coil without damage to the insulating coating by scraping or cutting. This simple innovation has reduced cathode-ray-tube failures in service and rejections in production.

## New Casting Resin for Potting Components

LOW COST is one of the advantages of a new National Bureau of Standards' casting resin for embedding or potting electronic components and assemblies. The resin, known as AN-5, has good storage properties even without refrigeration and its physical properties and electrical characteristics at both high and low frequencies are in general as good as those of expensive and hard-to-store casting resins.

The new resin meets the need for a material that may be manufactured economically from available ingredients. It is essentially a styrene to which are added distilled acrylonitrile and divinylbenzene (from which nearly all the inhibitor has been removed by passing it through a column of activated alumina), hydrogenated terphenyl, polystyrene and cobalt drier.

Refrigeration is not necessary unless an unusually long storage life is required. Storage at about 60 F in a dark place gives a shelf-life of about eight to 18 months. Small amounts of benzoyl peroxide and a polymerization promoter are added just before use to catalyze the curing process.

Although satisfactory cures can

Shown from left to right: a two-stage printed-circuit amplifier being potted with casting resin; a complete two-stage plug-in amplifier before potting and the two-stage plug-in amplifier after potting





## *At your service*

# National's complete fabricating facilities

First objective in our fabricating service is to save you time, money and production headaches. Second objective is to make the service useful, but economical. Adequate facilities, modern laboratory plant and equipment, technical skills and the knowledge gained through 79 years of experience all play a part in helping us meet these objectives. Hundreds of successful customer case histories form our record. Next time you need fabricated parts—one or one million—whether of National Vulcanized Fibre or Phenolite laminated plastic, get in touch with National. We're at your service.

**NATIONAL VULCANIZED FIBRE CO.**

Wilmington Delaware

Offices in principal cities

since 1873



# THE *Reliable* ELECTRONIC MEMORY



## ERA MAGNETIC DRUM STORAGE SYSTEMS

**for**

- **DIGITAL COMPUTERS**
- **AUTOMATIC PROCESS CONTROL SYSTEMS**
- **DATA-HANDLING SYSTEMS**

In the past, the rapid development of modern automatic information-processing systems has been handicapped by the high cost and marginal reliability of the associated high-speed information-storage equipment.

Today, fully-engineered, operationally-proved ERA Magnetic Drum Storage Systems are available which provide the reliability, the large storage capacity, the economy in dollars and in space, and the high speed required for many applications.

Investigate the possibility of replacing storage relays, stepping switches, punched tape, or other bulky forms of storage with an ERA Magnetic Drum Storage System. ERA's experienced engineers will be pleased to assist you in the application of ERA Magnetic Drum Storage Equipment to your particular system requirements.

**Write today for descriptive brochure.**

*Engineering Research Associates, INC.*

*A Subsidiary of* **Remington Rand**

**Department E-5, 1902 West Minnehaha Avenue St. Paul 4, Minnesota**

Digital Computers..Data-Handling Systems..Magnetic Storage Systems..Instruments..Analog Magnetic Recording Systems..Communications Equipment



# MICO ENGRAVERS

An accurate, inexpensive and portable machine for engraving name plates and panels, forming small molds and dies, and profiling small parts. Geometrically correct for true three dimensional work. Accurately duplicates master copy in metals, plastics or wood. Rugged, sturdy construction.

COMPARE THESE SUPERIOR FEATURES

- Engraves in 2 or in 3 dimensions.
- Pantograph permits 4 reduction ratios.
- Micrometer depth control graduated in thousands of an inch.
- High speed, ball bearing spindle.
- Chuck ¼" to take variety of small tools, burrs, mounted points as well as standard cutters.

*Send for Illustrated Catalog*

**MICO INSTRUMENT COMPANY**

**76E Trowbridge St. Cambridge, Mass.**



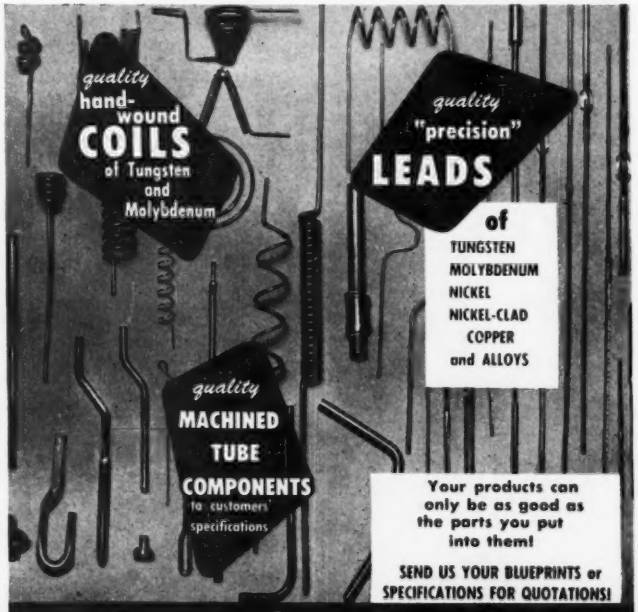


**ELECTRONIC PARTS MANUFACTURING CO.**

**508 25th St., Union City, N. J.**

# International RECTIFIER CORPORATION

EL SEGUNDO CALIFORNIA

# Selenium Diodes

**TYPE U SERIES**

**TYPE 1T1**

**Output 20V - 200 *ua***

**Specifications at 45° C**

Max. Reverse Current....6.0 *ua* at 26V
Rated Forward Current.....200 *ua*
Shunt Capacitance at 200 KC. 0.000057 *uf*

**Maximum Ratings**

Peak Inverse Voltage.....60 volts
Max. Average Rectified Current..200 *ua*
Peak Rectified Current.....2.6 ma
Max. Surge Current (1 sec).....10 ma
Ambient Temp. Range..−50 to 100° C
Max. RMS Applied Voltage....26 volts
Max. RMS Input Current.....500 *ua*
Max. DC Output Voltage.....20 volts
Voltage Drop at Full Load.....1 volt
Reverse Current at 10 V RMS...0.6 *ua*
Frequency, Max. .....200 Kc

*Also available in 2T1*

**TYPE 1U1**

**Output 20V - 1.5 ma**

**Specifications at 45° C**

Max. Reverse Current.....27 *ua* at 26V
Rated Forward Current.....1.5 ma.
Shunt Capacitance at 100Kc..0.00014 *uf*

**Maximum Ratings**

Peak Inverse Voltage . 60 volts
Max. Average Rectified Current..1.5 ma
Peak Rectified Current.....20 ma
Max. Surge Current (1 sec).....80 ma
Ambient Temp. Range..−50 to 100° C
Max. RMS Applied Voltage....26 volts
Max. RMS Input Current.....3.75 ma
Max. DC Output Voltage.....20 volts
Voltage Drop at Full Load.....1 volt
Reverse Current at 10 V RMS...2.4 *ua*
Frequency, Max. .....100 Kc

*Also available in 2U1, 3U1, 4U1*

**TYPE T SERIES**

**WRITE FOR BULLETIN SD-1**

**INTERNATIONAL RECTIFIER**

**CORPORATION**

General Offices: 1521 E. Grand Ave., El Segundo, Calif. • Phone: El Segundo 1890
Chicago Branch Office: 205 West Wacker Drive • Phone: Franklin 2-3889
New York Branch Office: 12 West 32nd Street, N. Y. 1 • Phone: Chickering 4-0017

Western Auto

Philco

Regal

Steelman

Continental


Admiral

The value leaders in Clock-Radios continue to be the brands equipped with

SESSIONS TIMERS

Esquire

Because Sessions Timers are lower-priced than other dependable makes, more and more clock-radio manufacturers are offering buyers a better value for their money.

Make any comparison. Take this initial price advantage and add Sessions-quieter operation, unbeatable accuracy, and attractive styling, and you have a total number of important features unmatched by any other clock-radio timer. For details write the Sessions Clock Company, Timer Division, Dept. 48, Forestville, Connecticut.

Sparton

Philco

Sears Roebuck


Jewel

Sylvania




be obtained at room temperature within several days, the curing rate is hastened by the application of a moderate amount of heat. At 50 C, the resin gels in about two hours and is almost completely cured in about 20 hours. Choice of curing technique depends on the type of component being embedded and on the amount of resin required.

## Linear Current Regulator

LINEARITY of current control provided by the circuit shown in Fig. 1 depends only upon a single helical potentiometer available, inexpensively, to linearity tolerances of 0.1 percent or better.

The circuit is similar to conventional current regulators but uses an a-c supplied thyratron followed by a diode and an integrating circuit in place of the usual d-c amplifier. Because the thyratron plate current is either zero or some constant value, the operating point of the thyratron does not change over the controlling range and may be regarded as accounting for the linearity of the circuit.

When there are no thyratron pulses, the load current $I$ increases gradually toward its zero bias value as the grid potential of the 6L6 decays through the integrating network. A point is reached eventually beyond which the thyratron is allowed to fire on each peak of its alternating plate voltage. The negative pulses which appear on the plate of the diode recharges the 6L6 grid-leak capacitance until the thyratron grid returns to the cut-off region and $I$ drifts toward saturation again. If $R_1$ is rotated slowly, the controlled current follows in a linear manner.

The original regulator model was used to provide a linear time variation of magnetic field in a nuclear




FIG. 1—Current regulator circuit

# insuline

## . . . . world's largest producer of TEST LEADS and PROBES!

INSULINE manufactures over 2000 items for the radio, automotive, electronic, aircraft, television and marine industries. For over 30 years, INSULINE has been the leading producer of test leads and probes (standard and special types) . . . outselling the combined production of the next three leaders.

Whether it be test leads, probes, tools, metal goods or antennas, insist on INSULINE . . . a respected name since 1921.



*Write Dept. E-11 for latest catalog, illustrating and describing one of the largest selections of electronic equipment made by one manufacturer.*

You will find a plug, jack or connector for your specific need in our latest catalog. INSULINE products are sold through radio and electronic jobbers throughout the United States and Canada.

**insuline**

**CORPORATION OF AMERICA**

INSULINE BUILDING • 36-02 35th AVENUE • LONG ISLAND CITY, N. Y.

*West Coast Branch and Warehouse:*
1335 South Flower Street, Los Angeles, Calif.

*Exclusive Canadian Sales Agents:* CANADIAN MARCONI COMPANY, Toronto

wanted:
something
better!



Although several filament making and tabbing machines were already available, a recent Kahle client wanted something better. The client ordered a machine that would be more positive in operation, faster - and that would cover a greater range of filament sizes. Kahle's solution was to build the fully automatic machine shown above, Model 2036. This machine, producing 1200 to 3000 units per hour, handles coated filament wire from .0006" diameter up and cuts lengths from 14 mm. to 40 mm.

This is but one of hundreds of problems solved by Kahle. Working closely with your organization, Kahle's experienced staff of electronic and equipment engineers will, at your request, recommend a solution to your own specialized production problems. Learn how Kahle's more than 40 years of practical experience can benefit you . . . Write Kahle now.

Kahle
ENGINEERING
COMPANY
1310 SEVENTH STREET
NORTH BERGEN N. J.

AMRECON ALL-PURPOSE RELAYS
. . . for the most diverse applications



A wide selection of high-quality relays—of many types, capacities, and contact combinations—makes Amrecon your ideal relay source. Standard units are available, rated from 1 to 25 amp at 115 VAC, or 32 VDC, noninductive. In addition, special units can be quickly assembled of Amrecon precision components to meet your most exacting requirements. Write to us about your particular design problems—we are well equipped to help you.

TYPE CRU: Normally rated at 2.75 watts DC, 5.6 watts AC. Coil voltages up to 230 VDC or 440 VAC at 60 cycles. Std. contact comb: 4 pole, double throw. Contact rating: 5 amp at 115 VAC or 32 VDC, non-inductive load. Size: 2-7/16" long, 1-3/32" wide. Height varies with contact combinations.

SEND FOR CATALOG NO. R-10
American Relay & Controls, Inc.
4911 W. Flournoy St., Chicago 44, Ill.

new
development in—

SOLDER PREFORMS

lower cost
more exacting precision standards

● The new Art Wire Solder Preforms reduce your costs, eliminate variability in soldering, insure sounder, stronger joints, and minimize hand labor. Precision made to every specification including Military and Federal for soft solder . . . in shapes that meet the requirements of your induction soldering operation.

*Complete information on request. Send blueprints or samples for estimates.*

ART WIRE & STAMPING CO.
1 Boyden Place Newark 2, N. J.

100% INSPECTION

.....assures top performance of

# JEFFERS

## high voltage capacitors

**Other Jeffers Products**

ceramic capacitors • disc capacitors
high voltage condensers • capristors

**Other Speer Products for the Electronics Industry**

anodes • contacts • resistors • iron cores • discs • brushes • molded notched* coil forms • battery carbon graphite plates and rods

*Patented

*Other Speer Divisions:* Speer Resistor, International Graphite & Electrode

Jeffers Electronics Division
Speer Carbon Company
Du Bois, Pennsylvania

JEFFERS ELECTRONICS

You can be sure of maximum results from Jeffers high voltage television capacitors for two reasons:

**FIRST**—every unit is 100% inspected for capacity, power factor, leakage, and voltage. The testing device is adjustable, permitting each capacitor to be held at high test voltage for any specified length of time. Thus there is no chance for a defective part to get by.

**SECOND**—these high voltage capacitors are extremely well made. They are completely encased in a special thermosetting molding material of exceptional strength. All terminals are securely soldered to the high dielectric constant ceramic body. The entire unit is impregnated under vacuum with a microcrystalline wax to give extra protection against moisture.

Jeffers high voltage capacitors are ideal in circuits for filtering or by-passing, where the AC component is small. Why not put them to work for you? *Write today for our specification sheets.*

SUB-MINIATURE
PILOT LIGHTS
Approved for AIRCRAFT
AND IMPROVED IN IMPORTANT DETAILS

DIALCO

SUB-MINIATURE INDICATOR ASSEMBLIES

A great aid to your miniaturization program

MOUNT IN 15/32" HOLE
ALL LENS COLORS

Easy lamp replacement with any midget flanged base lamp types

Complete blackout or semi-blackout dimmer types

ACTUAL SIZE

NON-DIMMING
No. 8-1930-621

MECHANICAL DIMMER
No. 11-1930-621

ACTUAL SIZE

THESE ASSEMBLIES LOGICALLY REPLACE LAMPS NO. 319, 320, and 321

REPLACE WITH THIS

NOT THIS

OR THIS

PLASTIC PLATE (EDGE) LIGHT ASSEMBLIES

AIR FORCE and BUREAU of AERONAUTICS
MIL-L-7806 DRAWING MS-25010

DIALCO *No. TT-51* (Red filter-black top)
. . . or, *No. TT-51A*, complete with No. 327 Lamp

ALSO MADE
with other filter colors and with *light-emitting top* (for indication)

ALL OF THE ASSEMBLIES ILLUSTRATED ACCOMMODATE LAMPS NOS. 327, 328, 330, and 331.

ACTUAL SIZE

ANY ASSEMBLY AVAILABLE COMPLETE WITH LAMP

SAMPLES ON REQUEST — NO CHARGE

*Foremost Manufacturer of Pilot Lights*

The DIAL LIGHT COMPANY of AMERICA

60 STEWART AVENUE, BROOKLYN 37, N. Y. HYACINTH 7-7600

© 1952



magnetic resonance spectrometer. Circuit values shown in Fig. 1 were used. Component $R_2$ is a magnet winding of several thousand henrys inductance. A one-rpm synchronous motor operating through a gear train drove $R_1$.

This material was abstracted from an article entitled "A Linear Current Regulator" by John S. Waugh, James N. Shoolery and Don M. Yost which appeared in the August, 1952, issue of *The Review of Scientific Instruments*, page 441.

## Improved Blanking Circuit

By Seymour Cuker
*Chief Engineer*
*Gem Radio and Television Corp.*
*Jersey City, N. J.*

With the advent of higher voltage requirements for large picture tubes, it has become necessary to relax the retrace time requirements of the horizontal sweep circuits. To maintain a short retrace, the number of components in the sweep and high-voltage circuits must be increased. The only economical procedure at present is to allow longer retrace time.

Allowing longer retrace time creates the problem of horizontal foldover, introducing an objectionable flaw in the picture presentation. To counter this defect, television engineers have utilized horizontal retrace blanking. This device introduces a so-called curtain effect on the left half of the picture because of horizontal transformer leakage reactance. The effect is most prominent and annoying at low and medium brightness levels. At high brightness levels it becomes




**FIG. 1—Relative brightness on left side with flat subject and superimposed retrace blanking**

**These Transformers Have Identical Performance Specifications—**

***BOTH*** **are Grade 1**

**MIL-T-27**

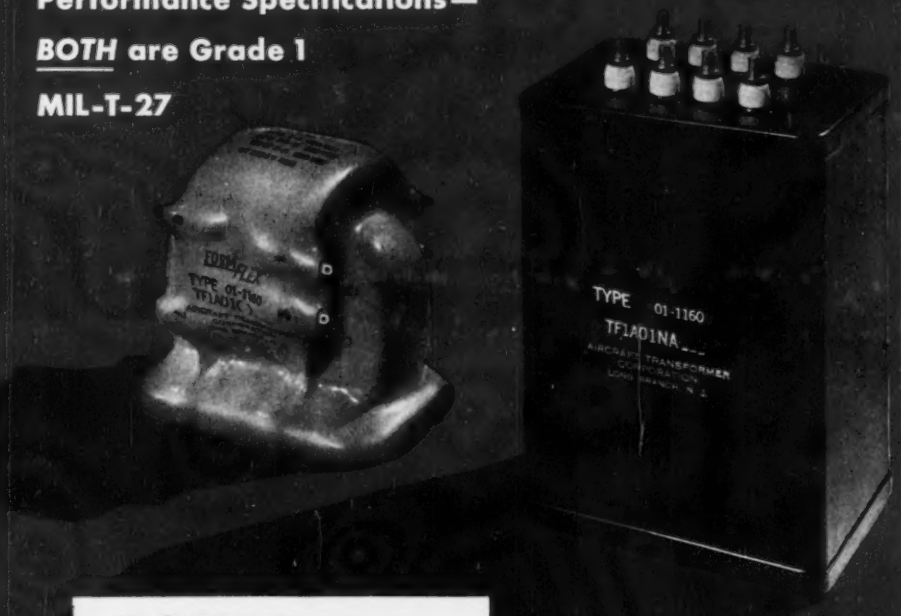


FORM*FLEX*®
Patent Pending
TRANSFORMERS

*save:*

*over 30% in space*

*over 40% in weight*

Where space is at a premium and weight is critical, specify FORM*FLEX* Transformers. Our engineers will discuss your problems with you at your request. Considerable performance data is available.

FORM*FLEX* Transformers are manufactured exclusively by Aircraft Transformer Corporation and its licensees.

Write for details

AIRCRAFT TRANSFORMER CORPORATION

MANUFACTURERS OF INDUCTIVE EQUIPMENT • LONG BRANCH, NEW JERSEY, LONG BRANCH 6-6250

## Communication Products Company • Inc

*Announces*

# We're on the march with

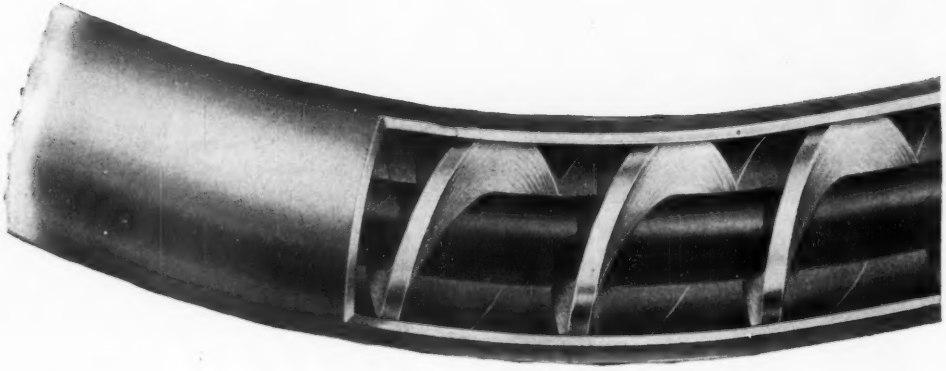

**Popular size Styroflex**
**Coaxial Cables, now available, include—**

| OUTSIDE DIAMETER | INNER CONDUCTOR TYPE | APPROXIMATE WEIGHT PER 1000 FEET NET | GROSS |
|---|---|---|---|
| | 50 OHM IMPEDANCE | | |
| ½" | SOLID | 161 | 497 |
| ¾" | SOLID | 370 | 706 |
| ⅞" | SOLID | 484 | 862 |
| 1-⅛" | TUBE | 500 | 1185 |
| 1-⅝" | TUBE | 914 | 1719 |
| 3-⅛" | TUBE | 2728 | 8682 |
| | 70 OHM IMPEDANCE | | |
| ½" | SOLID | 121 | 457 |
| ¾" | SOLID | 276 | 612 |
| ⅞" | SOLID | 349 | 727 |
| 1-⅛" | SOLID | 520 | 1205 |
| 1-⅝" | TUBE | 786 | 1591 |
| 3-⅛" | TUBE | 2540 | 8440 |
| | 77.5 OHM IMPEDANCE | | |
| ½" | SOLID | 114 | 450 |
| ¾" | SOLID | 249 | 585 |
| ⅞" | SOLID | 316 | 694 |
| 1-⅛" | SOLID | 470 | 1155 |
| 1-⅝" | SOLID | 950 | 1755 |
| 3-⅛" | TUBE | 2460 | 8360 |

# Styroflex Coaxial Cable

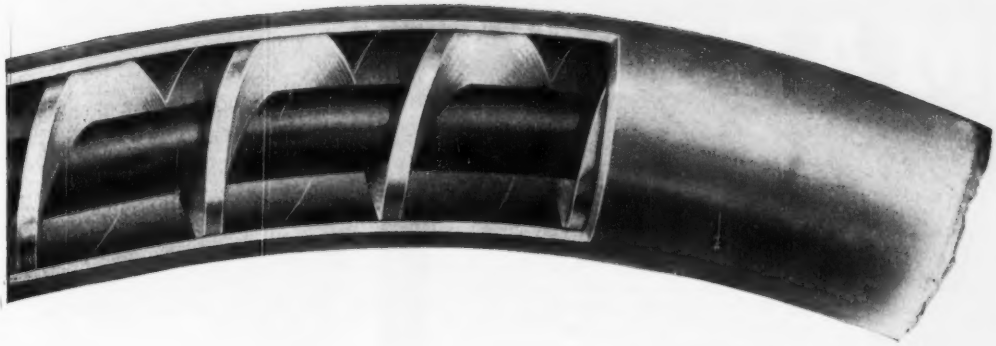

Now come to us for small or large quantities of Styroflex coaxial cable. We are ready to fill your needs with this new aluminum sheath cable as distributors for the producers — Phelps Dodge Copper Products Corporation.

We stock Styroflex cable for immediate shipment from our plant cut to length, supplied in coils or on reels, formed, fitted or otherwise fabricated to your requirements. We have developed a line of fittings for Styroflex cable soon to be available.

For a full description of Styroflex cable or its fittings send for technical literature which will be mailed at once. It includes data on losses throughout the VHF, UHF and Microwave ranges to 8000 megacycles. A price list is included.

**COMMUNICATION PRODUCTS COMPANY • Inc** MARLBORO, NEW JERSEY Telephone: FReehold 8-1880

minute
or

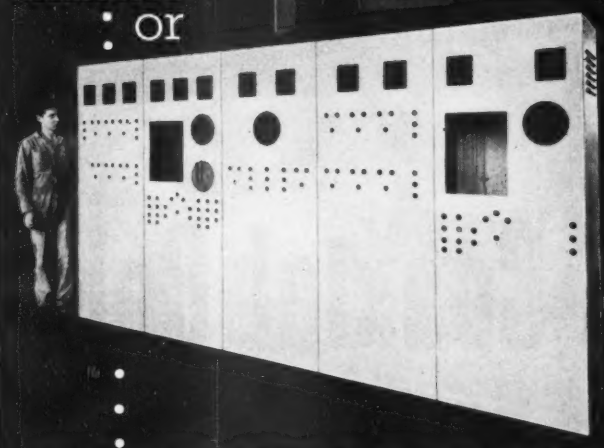

MASSIVE

KIRK AND BLUM

**Electrical Enclosures**

Any size . . . any shape . . . any number . . . for whatever requirement . . . KIRK & BLUM fabricating experience and facilities are at your service. Built to exacting specifications . . . we custom fabricate sheet steel, light plate, stainless, aluminum, monel and other alloys to ½" in thickness.

Write for your copy of the latest KIRK & BLUM Electrical Enclosures Booklet . . . for prompt quotation on any job send prints to The KIRK & BLUM MFG. CO., 3211 Forrer Street, Cincinnati 9, Ohio

Control Desks • Instrument Panels
Electrical Enclosures • Cubicles
Control Panels • Transformer Tanks
Outdoor Electrical Enclosures
Switch Gear Housings • Test Stands

KIRK AND BLUM
METAL FABRICATION






**FIG. 3—Schematic diagram of the circuit with improved blanking**




**FIG. 2—Relative response to two brightness levels**

almost invisible to the naked eye.

The idea described herein proposes that the retrace blanking should be reduced proportionally with the brightness level. Figure 1 shows the curtain effect in terms of a flat picture and the superimposed retrace blanking component. If the average brightness level were reduced to near zero, the half cycles above the average brightness would be light and those below the average brightness would be dark.

The eye responds to brightness logarithmically. Response is proportional to the logarithm of brightness. The relative response to two brightness levels is shown in Fig. 2. To reproduce a flat picture faithfully, the ratio $B/A$, Fig. 2, must be close to unity. With varying picture brightness, the perturbation must be reduced proportionally to maintain the near unity ratio of $B/A$.

A circuit which accomplishes the desired effect is shown in Fig. 3. This circuit also includes vertical blanking. The main advantage of vertical blanking is the complete removal of the vertical retrace lines.

Vertical blanking also introduces vertical shading at low brightness levels. Here again, the thinking applied previously to horizontal perturbation is valid. The circuit shown in Fig. 3 is one which gives, in a single stroke, positive blanking minus the usual defects attributed to blanking circuits.

ARE YOU, TOO, USING
CLEVELITE*
. . . the dependable Laminated Phenolic Tubing?
Products containing CLEVELITE are in use the world over
Possibly right now we can be of service to you through our Research and Engineering Laboratory on some new product, or in helping you to improve performance and lower costs.
Yes, Clevelite will be made to your exact specifications, meeting the required tolerances.
Clevelite assures you of uniformity and continued, dependable performance at lower production costs.
Hundreds of thousands of Clevelite coil forms, collars, bushings, spacers, tubes and other items are giving continuous satisfaction. Play safe! Be sure you use CLEVELITE!
Our laboratory is at your service.
*Reg. U. S. Pat. Off.
The CLEVELAND CONTAINER Co.
6201 BARBERTON AVE. CLEVELAND 2, OHIO
PLANTS AND SALES OFFICES at Plymouth, Wisc., Chicago, Detroit, Ogdensburg, N.Y., Jamesburg, N.J.
ABRASIVE DIVISION at Cleveland, Ohio
CANADIAN PLANT: The Cleveland Container, Canada, Ltd., Prescott, Ontario
REPRESENTATIVES
NEW YORK AREA R.T. MURRAY, 604 CENTRAL AVE., EAST ORANGE, N. J.
NEW ENGLAND R. S. PETTIGREW & CO., 62 LA SALLE RD., WEST HARTFORD, CONN.
CHICAGO AREA PLASTIC TUBING SALES, 5215 N. RAVENSWOOD AVE., CHICAGO

# Production Techniques

Edited by JOHN MARKUS


Automatic Transformer-Testing Turntable ..... 266
Printed TV Antenna Applied with Air-gun Stapler ..... 268
Photoelectric System Controls Loudspeaker Magnetizer ..... 268
Twisting Coil Leads ..... 270
Assembly Fixtures ..... 270
Socket Terminal Spreader ..... 272
Coil-Handling Trays ..... 274
Window-Washing Rack ..... 278
Metering Pump for Potting Compound 280
Wire Tension Meter Reduces Coil Rejects ..... 282
Chassis-Holding Fixtures ..... 286
Tube Burn-in Setups ..... 288
Strand Twister ..... 292
Slide-in Subassemblies Simplify Wiring and Soldering ..... 292
Socket-Holding Fixtures ..... 298
Vise on Powrarm ..... 300
Mesh-Crimping Machine ..... 302
Rack for Line Cords ..... 302
Assembling Dial Drive Cords ..... 304
Ventilating Screen Stapler ..... 308



**OTHER DEPARTMENTS featured in this issue:**

| | Page |
|---|---|
| Electrons At Work | 168 |
| New Products | 310 |
| Plants and People | 396 |
| New Books | 414 |
| Backtalk | 430 |


## Automatic Transformer-Testing Turntable

POWER transformers for television and radio receivers are automatically run through six different types of tests by a new six-foot-high machine having a 15-foot diameter motor-driven turntable. On this turntable are 32 small platforms, each having a set of terminal clip-boards into which the leads of a transformer are quickly inserted. The contact clips are made of spring brass or phosphor bronze, and are so arranged that a downward pressure with a lead gives a good electrical contact. After testing, a simple upward sweep of the hand under the leads disconnects them all.

Behind each terminal clip-board are contact arms. As a particular transformer-bearing platform passes a test position, these arms make contact with conducting bars that connect the transformer into the test circuit.

As designed by test equipment engineers of the RCA Victor Division plant in Camden, N. J., the machine has 8 test positions in all, for the following six different types of tests: turns ratio, exciting current, impedance, core loss, induced voltage breakdown and polarity, and three separate high-potential breakdown tests. Exciting current and core loss are measured only on the primary.

Each of the 32 platforms has its own roll of marking tape for indicating and identifying the nature of a reject. At each of the six test positions is a marking solenoid that is actuated when a transformer fails to meet specifications for that test. The solenoid brings an inked brush in contact with the paper tape when actuated by the electronic test circuit. A different color of ink is used at each test position, to identify the nature of the reject. The inking brushes are set at six different levels so that marks do not overlap, eliminating the need

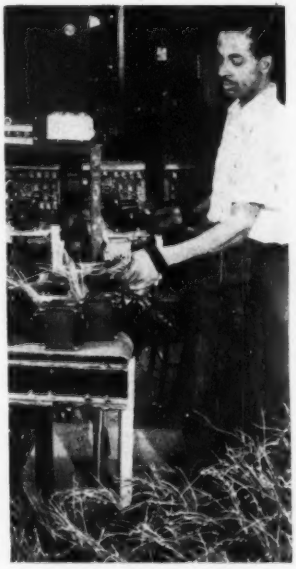

Tested transformers are placed on a conveyor belt which carries them to the packaging department. At the same time, the operator reloads the machine with untested transformers from the lift in the foreground. Other operators connect the transformer leads to the terminal clip board

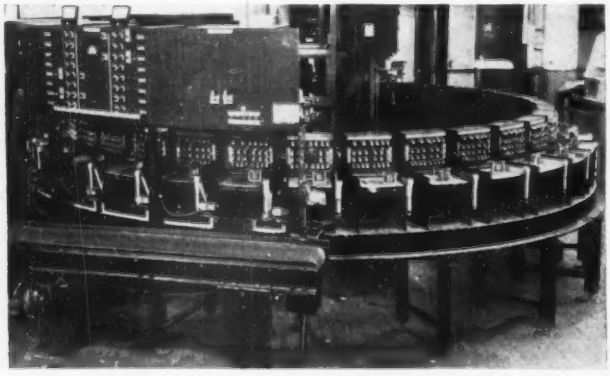

Over-all view of transformer tester. The six different test positions are located above the turntable at the left

# UNIFORM

## KESTER FLUX-CORE SOLDER

***UNIFORM*** **In Alloy**

***UNIFORM*** **In Flux Content**

Right down the line, spool after spool, Kester "44" Resin, "Resin-Five" and Plastic Rosin-Core Solders offer these features of uniformity so necessary to the best in soldering.

Alloy . . . just the right amount of Tin and Lead, complying with your specifications *every time*, and only the best metals used!

Flux content . . . not a single inch of the solder is without uniform flux distribution . . . and remember, *only* Kester can give you that flexibility in core size or flux content, more or less as needed, the exact *predetermined amount*. Kester is truly an engineered Solder.

Over 100,000 types Kester Flux-Core Solder Available

**Kester meets all applicable Government Specifications.**

**Free Technical Manual—write for your copy of "SOLDER and Soldering Technique."**

**KESTER SOLDER COMPANY**
4204 Wrightwood Ave., Chicago 39
Newark 5, New Jersey • Brantford, Canada

KESTER SOLDER

for automatic paper feed. For each reject, the operator tears out the marked paper and places it with the defective transformer, then pulls down more paper to the marking position.

The number of transformer-carrying platforms has little bearing on the number of test positions. Some of the factors considered in arriving at this 32-platform design were rotary speed, desirable turntable size, sufficient time and working space for loading and unloading transformers, and provisions for installing additional test positions later if needed. The present design is entirely flexible, and can be quickly readjusted for testing various other types of transformers. The machine has increased testing efficiency more than 200 percent over previous manual testing methods.



Marking solenoid at one of the test positions. One reject mark has already been made on the paper tape at the right by the inked brush of an actuated solenoid. Ordinary relay was converted to give solenoid action by bolting extension arm on armature



Transformer-carrying platform, showing how leads are inserted in terminal clips

## Printed TV Antenna Applied with Air-Gun Stapler

A BUILT-IN television receiver antenna made by silk-screening aluminum paint onto heavy waterproof paper is fastened inside the cabinet of a television receiver in less than a minute with an air-operated stapler. Each time the trigger is pulled, a staple is automatically fed to driving position and driven into the wood walls of the cabinet.

A heavier power stapler and larger staples are used in assembling the cabinet itself. The cabinet framework consists of angle irons welded together. Previously punched holes in the angle-iron members are appropriately positioned so that staples can be driven through them into the plywood side walls and top of the cabinet. This eliminates costly, time-consuming gluing operations and at the same time gives a sturdy steel-reinforced cabinet construction. The chassis shelf is all steel, welded to the angle-iron uprights.

Use of combination wood and steel construction was started in the Crosley Division of Avco Mfg. Corp. because of a wood shortage some time ago. The new technique proved so successful that it is being continued.

Wood screws are used to supplement the staples for fastening the front of the cabinet. Glued reinforcing blocks are still used behind the joining of front and top panels, this being the most exposed joint in the cabinet. For additional cabinet rigidity, the bottom steel framework is screwed to a wood base. This has the added advantage of eliminating the need for a wood pallet when shipping these consoles in corrugated cardboard cartons.

Fastening printed antenna to inside of steel-reinforced console television receiver cabinet with air-gun stapler

## Photoelectric System Controls Loudspeaker Magnetizer

COMPLETED loudspeakers in a variety of sizes are placed face down on a heavy canvas conveyor belt for transport between the poles of the huge electromagnet used in Crosley's Cincinnati television receiver plant to magnetize the Alnico permanent-magnet fields. As a speaker moves under the electromagnet, it breaks the light beam of a GE photoelectric control system, thereby actuating the contactors that



Loudspeaker magnetizing position on conveyor line. Light source is in foreground, and phototube housing is on far side of conveyor

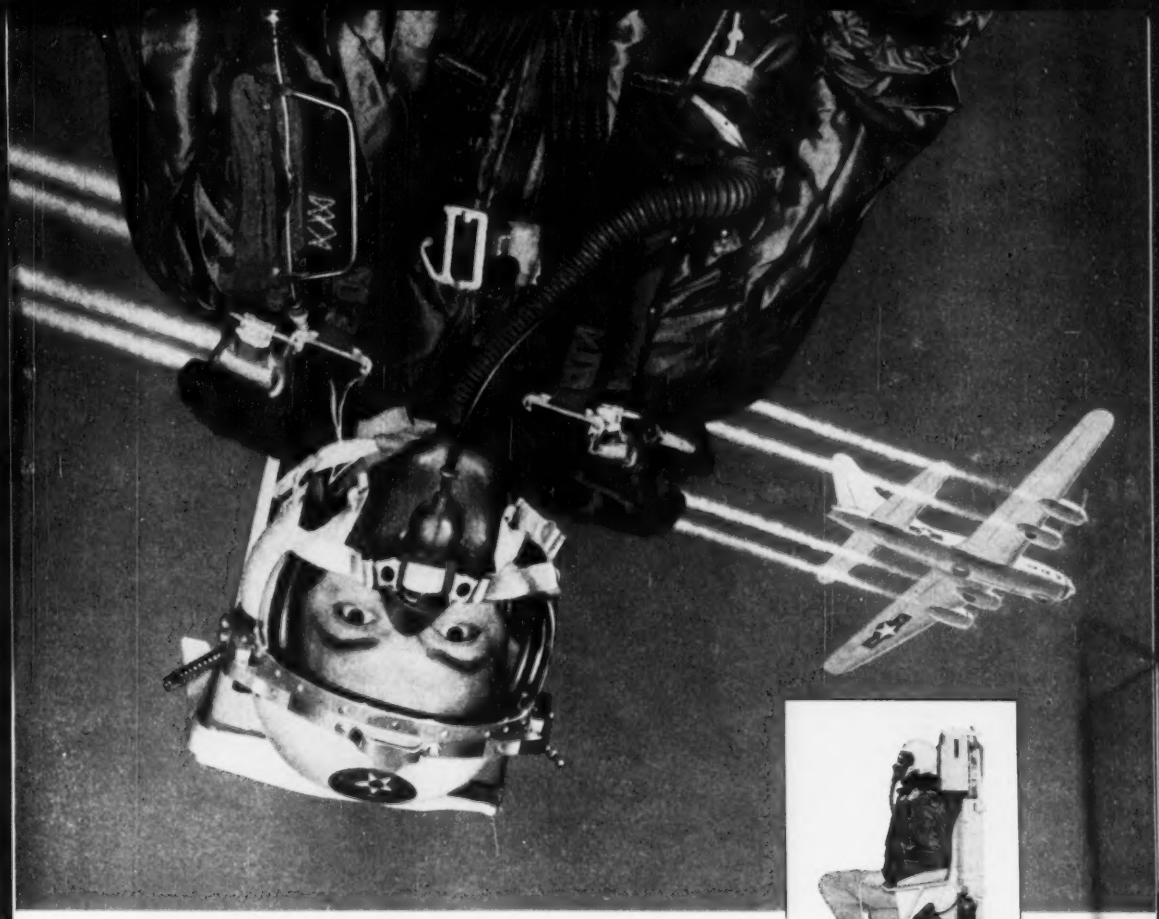

# FINGER ON THE PULSE...

## *at more than 40,000 feet!*

Can a man jump from eight miles up – and live?

In its exhaustive study of high altitude bail-outs the Aero Medical Laboratory of the Air Research and Development Command's Wright Air Development Center has conducted numerous tests. Few of these were more spectacular than the world's record jump of Major Vincent Mazza, USAF.

Major Mazza fell free in his special ejection seat for 27,576 feet before his chute automatically opened, bringing him down the additional 14,600 feet in safety. And at every instant of this drop the Air Force had its finger on his pulse... and temperature... and respiration. His equipment weighed only 70 pounds yet it included a complete Bendix-Pacific Telemetering System which radioed his physical condition to the ground station.

Bendix-Pacific developments, like its subminiature Telemetering Systems, are meeting today's control problems with advanced *and practical* electronic developments.

This division specializes in radar, radio control, electronic servo components and telemetering systems which can serve you *better*, too.

* * *

***Write for a free copy of a booklet describing this division's contribution to electronics.***

Bendix

Pacific Division

NORTH HOLLYWOOD, CALIF.

# high gain
## LOW COST

ANDREW

## Andrew Omnidirectional Antenna for VHF Communications

No, this new High Gain Communications Antenna isn't cheap, but it does offer the most economical solution to your coverage problem. Whether you want maximum coverage for a specific transmitter power, minimum power or shortest tower for a specific coverage, or freedom from dead spots, the ANDREW Type 3000 Antenna is the least expensive solution. Why? Because talk-back is the limiting factor in mobile communications. Gain in the central station antenna costs less than increased power in every mobile unit.

ANDREW Type 3000 High Gain Communications Antenna offers better than 6 db gain in the 148-174 MCS band. This means that the power delivered to the receiver on both talk-out and talk-back is increased four times. The horizontal radiation pattern is circular.

Write for the ANDREW High Gain Antenna bulletin today!



Andrew CORPORATION
363 EAST 75TH STREET, CHICAGO 19
ANTENNA SPECIALISTS
TRANSMISSION LINES FOR AM-FM-TV-MICROWAVE • ANTENNAS • DIRECTIONAL ANTENNA EQUIPMENT • ANTENNA TUNING UNITS • TOWER LIGHTING EQUIPMENT




send magnetizing current through the electromagnet.

Flat copper guide sheets mounted over the belt in the magnetizing region serve to move off-center speakers into position. The copper sheets also hold down speakers that might otherwise be pulled up to the magnet pole.

### Twisting Coil Leads

A MOTOR-DRIVEN chuck with a hook in its jaws is used in Crosley's Cincinnati plant to twist a tap coil lead for about two inches of its length, during production of 45-mc oscillator coils for uhf television tuners. During winding, the operator puts in only two or three turns when pulling out a loop of wire for

**Motor-driven setup for twisting tap coil lead prior to tin-dipping**

this tap. Twisting the wires by machine reduces operator fatigue and increases production about 370 percent over manual operation.

In the twisting operation, the operator loops the wire over the hook in the chuck and presses a foot switch to start the winding motor. After twisting, the wire is cut off the hook.

### Assembly Fixtures

DURING final assembly of the components and subassemblies for a military radio transmitter having a cast aluminum housing with deep, narrow compartments, several different types of fixtures are used to hold the units outside of the chassis while wiring and soldering the master cable harness.

Tubular wire-wound resistors

# A NEW OPPORTUNITY TO REDUCE ASSEMBLY COSTS!

# KEPS®

...THE PRE-ASSEMBLED NUT AND SHAKEPROOF® LOCK WASHER

**SAVE TIME**
Only one unit to handle ... free spinning action assures fast, easy driving!

**SAVE PARTS**
The lock washer can't drop off ... every nut is locked tight!

**SAVE PAPER WORK**
One order does the work of two ... nut and lock washer inventories always balance!

## Send for this Free Sample Kit!

**TEST KEPS YOURSELF!**
... see how easy they are to handle and drive. See how much you can save!

for Better Fastenings and Lower Assembly Costs Come to...

# SHAKEPROOF®

*"Fastening Headquarters"*

DIVISION OF ILLINOIS TOOL WORKS
St. Charles Road, Elgin, Illinois
Offices in principle cities
In Canada: Canada Illinois Tools Limited, Toronto, Ontario

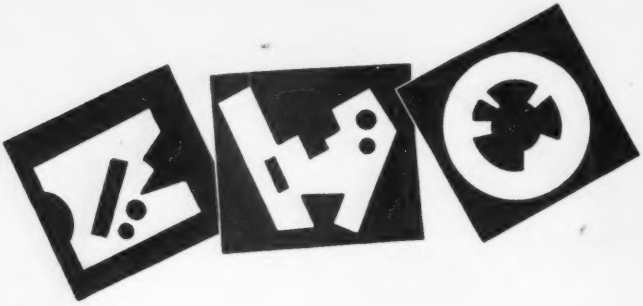

**Puzzled about Industrial Laminates?**

**NEVAMAR®**

**has the answer for you!**

Specify NEVAMAR industrial grade laminates and take all the guesswork out of making the right choice for any particular application. Produced in many different grades to meet a wide variety of requirements, NEVAMAR is backed by the engineering and manufacturing "know how" of one of America's foremost makers of high-pressure decorative laminates. This is your assurance of obtaining a superior laminate with the properties essential to numerous electrical and mechanical assemblies. NEVAMAR meets or exceeds the standards of the National Electrical Manufacturers Association. Would you like to see samples?

NEMA

The NATIONAL Plastic Products Company

Manufacturers of Nevamar Decorative and Industrial Laminates • SARAN FILAMENTS • Wynene Molded Products

ODENTON, MARYLAND • NEW YORK: EMPIRE STATE BUILDING • LOS ANGELES: 5025 HAMPTON STREET






**Use of fixtures to permit soldering of wiring harness outside of combination housing and chassis. All wood is treated to prevent warpage. With wood fixtures, reworking is usually possible when specifications are changed**

are slipped over metal pegs on the fixture board. Controls are supported by inserting their shafts in drilled holes. Two small, closely-spaced wood blocks grip the soldering-lug termination of a lead. Swinging metal tabs hold other parts in position for this operation in the Clifton, N. J. plant of Federal Telephone and Radio Corporation.

### Socket Terminal Spreader

AFTER completion of socket terminal wiring for an IBM electronic calculator panel having over 200 closely spaced tubes, the terminals are spread outward at a uniform angle with a special conical-face tool de-



**Using conical tool to spread out tube socket terminals after wiring is completed**

# *NEW* 27EP4 PROVIDES GIANT-SCREEN TV AT A PRICE YOU CAN AFFORD!

### TUBE PLUSSES ARE:

- **Extremely short length, for compact cabinet construction.**
- **Aluminized to give you a bright, sharp picture at 16,000 v!**

DESIGNERS and manufacturers now can plan production of that deluxe TV with super-size picture! Distributors will order your new set in volume, for 27EP4 cost—only *one-third* that of a 30-inch type—permits, for the first time, real giant-screen TV at a sensible retail level.

Over 400 square inches of picture, or ¾ the viewing area of a 30-inch round tube! Compact, because of the 90-degree deflection angle—so short that tube length is the same as picture width, 24 inches! Means a trimmed-down, practical cabinet.

Filter-glass face, *aluminized* for maximum brightness and contrast at moderate voltage—16,000 v, no more than a 21-inch standard tube requires for top-quality viewing!

Get all the facts without delay. Phone, wire, or air-mail *Tube Department, General Electric Company, Schenectady 5, N.Y.*

**27EP4**

| | |
|---|---|
| Picture width | 24 inches |
| Picture height | 18¼ inches |
| Deflection angle | 90 degrees |
| Tube length | 24 inches |
| Recommended operating voltage | 16,000 v |
| Focus | magnetic |
| Screen | Filter glass, aluminized |

**GENERAL ELECTRIC**

162-1AG

# Here's why those in the know —demand CANNON PLUGS®

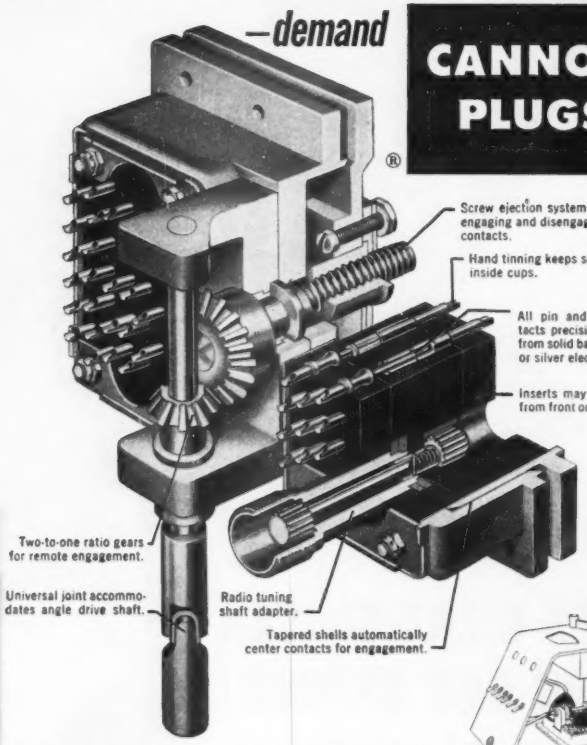
Screw ejection system for engaging and disengaging contacts.
Hand tinning keeps solder inside cups.
All pin and socket contacts precision machined from solid bar stock, gold or silver electroplated.
Inserts may be removed from front or rear of shell.
Two-to-one ratio gears for remote engagement.
Universal joint accommodates angle drive shaft.
Radio tuning shaft adapter.
Tapered shells automatically center contacts for engagement.

This highly specialized DPD2 Cannon Plug, a member of the DP Series, has its principal use in aircraft instrument panels and remote radio control equipment. But, like many other Cannon Plugs, it has found its way into other fields where the highest quality is needed and where the value of long, trouble-free performance is recognized.

Originally this 2-gang connector was designed to assist in the standardization of radio and instrument assemblies so that such equipment might be interchanged between similar aircraft. It allows for compact design in close quarters with access from the front only. This type of application and variations of the fittings are shown at right. Any Cannon DPD insert may be placed within the shell, with or without tuning shaft, coax, twinax, large or small contacts, provided the separation forces of both halves are similar.

This plug typifies the close attention to important detail that distinguishes every Cannon Plug—the world's most extensive line. If you are looking for real value, regardless of the field you work in, your best bet is Cannon.



Connector is separated by turning slotted shaft here. Complete unit may then be removed from pedestal, shown below.





(Left) Same Cannon Plug without tuning shaft. Straight drive instead of 90° gear. (Right) Similar DPD2 with Dzus wing nut extraction method and junction shells. There are several other variations. Write for details.

**CANNON ELECTRIC**

*Since 1915*

CANNON ELECTRIC COMPANY
LOS ANGELES 31, CALIFORNIA

Factories in Los Angeles, Toronto, New Haven. Representatives in principal cities. Address inquiries to Cannon Electric Company, Dept. K-120, P.O. Box 75, Lincoln Heights Station, Los Angeles 31, California.




vised for this purpose.

This tool is pushed against the bottom of each socket in turn and twisted slightly. It serves to spread out terminals that may have been bent inward during wiring, insuring exactly uniform clearance between all terminals. With this tool, the operation takes only a few minutes for an entire panel in the Poughkeepsie plant of International Business Machines Corp.

## Coil-Handling Trays

FOUR different types of Crosley-designed trays are used to protect television receiver coils from damage while they are being transported from one assembly station to another in this firm's Cincinnati plant. The trays also serve for transporting the coils in large



**Wire-screen trays for holding, moving and storing coils and other parts having axial leads**



**Coil-holding trays made from perforated metal and stove bolts. Round shape permits use on stem of spinner in wax-impregnating tank**

# HERE'S THE WIRE THAT CUTS YOUR PRODUCTION COSTS

FOR 50 YEARS *Wiremaker for Industry*

**To You,**

**Belden's Golden Anniversary Means**

—product performance that can come only from a "know-how" that has grown through actual service since the early days of the electrical industry.

—an ability to cooperate in pioneering new wires to meet or anticipate industry's growing needs.

In the years that follow This Belden Program Is—

**TO BE CONTINUED**

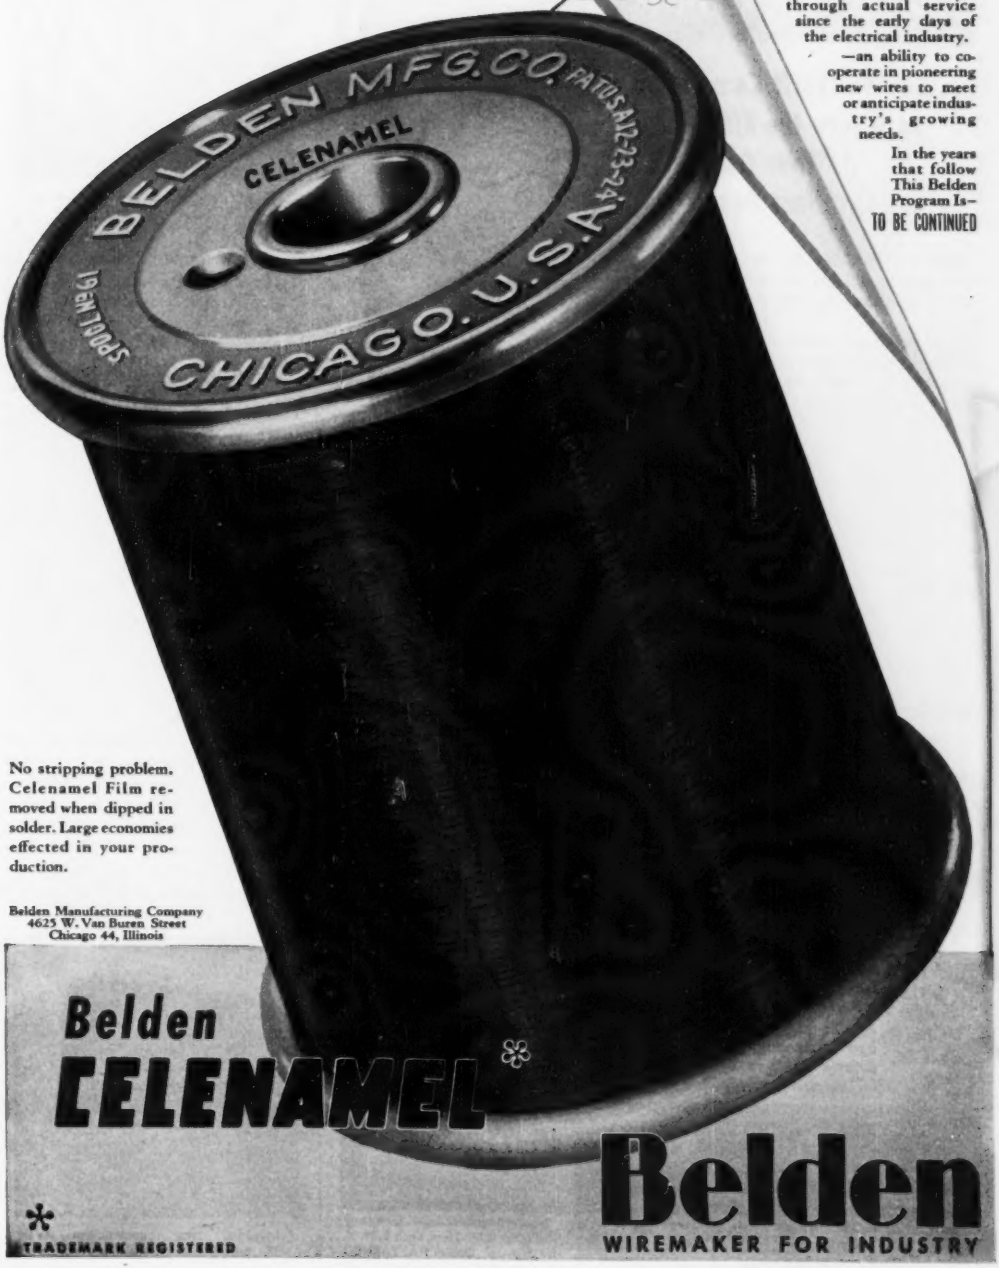


No stripping problem. Celenamel Film removed when dipped in solder. Large economies effected in your production.

Belden Manufacturing Company
4625 W. Van Buren Street
Chicago 44, Illinois

**Belden CELENAMEL***

* TRADEMARK REGISTERED

**Belden**
WIREMAKER FOR INDUSTRY

# New 8020 TAYLOR HIGH VOLTAGE RECTIFIER

## . . . Custom Built Companion to Insure the Efficiency of Your Own Excellent Design

Taylor's reputation in the rectifier field has long been associated with operating efficiency and dependable service.

The new type 8020 high voltage rectifier is well up to Taylor's established quality standards. Its construction features a specially treated tantalum anode for stability and long life. The 5 Volt—6 Ampere filament is of the thoriated tungsten type. Envelope is of nonex glass and the standard four-prong base is securely fastened with an oil resisting silicone basing compound. Life expectancy of the 8020 is over 5000 hours when operated within ratings.

The Taylor 8020 warrants your consideration.

ACTUAL SIZE

### Taylor 8020 Ratings

The 8020 is rated at 40 KVP inverse or forward in air, 60 KVP in oil. Average current: 100 MA, with instantaneous peak current capacity of 2 Amp.

★ TRANSMITTING ★ INDUSTRIAL
★ RECTIFIER ★ ELECTRONIC

*As always, Taylor is producing tubes of superior quality and outstanding performance. The Taylor Representative nearest you is ready and willing to discuss your particular requirements. Call on him for information any time.*

Taylor HEAVY CUSTOM BUILT DUTY Tubes

TAYLOR TUBES INC., 2312-18 WABANSIA AVE., CHICAGO 47, ILL.

Canada: Atlas Radio Corp., Ltd.
560 King St., W., Toronto 2-B
Cable: ATRADCO

Export: Royal National Company
75 West St., New York 6, N. Y.
Cable: NATVARNCO






Welded tray using lead-holding wire loops as coil supports

batches through a wax-impregnating operation.

For coils with pigtail leads, such as those wound around a resistor, a paper capacitor or a plain coil form, the tray consists of two layers of $\frac{1}{16}$-inch-mesh wire screen. The layers are spaced about an inch apart on a metal framework. The leads of the coils are pushed through the holes in the screen. Metal studs with bent tops are welded to each corner of a tray to permit stacking without risk of crushing coils.

Another type of tray, used for small coils having center holes, requires no welding. The tray is a single disk of perforated sheet metal. Bolts inserted in the punched holes serve as individual supports for the coils. Each bolt is locked in position with a single nut. Four longer and heavier bolts spaced equidistant around the circumference serve as standoffs to permit stacking of the trays. Each tray has a large center hole that goes on the stem of the spinner in the impregnating tank, so that excess



All-welded tray construction using metal rods as coil supports

# for electronic advancement

28 Volt D.C. Motor Actuated Coaxial Switch Model CA-71

Lobing Switch Model CA-31

Manual Coaxial Switch Model CA-36

Motor Actuated Coaxial Switch Model CA-26

1P-2T Coaxial Switch Model CA-20

High Voltage Power Supply Unit Model BP-01



RF & Power Switch Model CA-60



Antenna Switch Model CA-37

Polar Recorder Model BU-02

Transfer Switch Model CA-19



Logarithmic Amplifier Model BA-01



Dummy Load Model BL-07

**The research facilities** of Thompson Products are helping in the development of the electronic industry. In fact, many electronic developments owe part of their creation to Thompson research or Thompson-made equipment.

We are proud of our contributions—and, we think, justfully so. On the other hand—we *should* do a top job! We are equipped to solve tough problems. Thompson has two plants—one in Cleveland, another in Columbus, Ohio—devoted exclusively to research engineering and manufacturing of electronic equipment. And our facilities stand ready, willing and able to help you solve your every problem—whether today's production or tomorrow's design—in coaxial switches, antennae, specialized test equipment or wave guide and coaxial components and accessories.

For complete information, we invite you to write, wire or telephone!

## YOU CAN COUNT ON THOMPSON

## Thompson Products, Inc.

**ELECTRONICS DIVISION**

**2196 Clarkwood Road • Cleveland 3, Ohio**

# These American Electric Miniatures do BIG jobs!

## Cooling and Ventilating



**CENTRIFUGAL BLOWERS**

**400 cycle, 60 cycle, or variable frequency types (320 to 1000 cps.)**

Substantially flat output over full frequency range on variable frequency models with minimum watts loss.

Blower scrolls of latest design are molded of fibre-glass reinforced plaskon: practically unbreakable, highly resistant to impact, deformation, heat and cold. Blower unit unusually small in size and weight for compact installations. Generally used when working against pressure heads ranging up to 1.2" water. Single or double end blowers, Clockwise or Counterclockwise rotation. *Output range: 24 to 200 cfm. Made in sizes: Numbers 1½, 2, 2½, 3.*

**AXIAL FLOW FANS**

**400 cycle operation**

In its smallest size this compact, light weight unit is equipped with a 2" fan protected with 18" mesh 2¼" O.D. screen shroud. Other larger sizes special. Air stream is conical. Recommended for use at 0 static pressure where semi-directed air flow is required. Motor diameter 1.45". Rotation: Clockwise or Counterclockwise. *Output: 30 cfm.*

**PROPELLER FANS—400 cycle operation**

Built for limited space applications requiring maximum air movement widely dispersed.

Operates at 0 static pressure in ambient temperatures from −65° to +65° C. Made in 2, 3, 4 and 5½" fan diameters. *Output range: 33 to 680 cfm.*

## Motivating Cams, Timing Devices, Antennas, Clutches, Optical Equipment, etc.

**MINIATURE INDUCTION MOTORS**

400 cycle, 60 cycle, single and poly phase, 2 to 8 pole. Frame diameters: 1.45", 1.75", 2", 2½" & 3-5/16". *Output torque range: ½ in. oz. to 50 in. oz.*

**SYNCHRONOUS MOTORS**

400 cycle, 60 cycle, hysteresis and reluctance types. Single and poly phase: 2, 4 and 6 pole. Frame diameters: 1.45", 1.75", 2", 2½", 3-5/16". *Output torque range: .01 in. oz. to 10 in. oz.*

*Both induction and synchronous motors can be supplied for intermittent or continuous duty, with standard or high temperature insulation. Drive and synchronous motors: any standard shape.*

**Manufacturers also of INSTRUMENTS, SERVO-MOTORS AND SYNCHROS, HIGH FREQUENCY POWER SUPPLIES** *(Inductor—Alternator type—500 watt to 75 KVA output).*

AMERICAN ELECTRIC MOTORS
TRADE MARK

4811 Telegraph Road, Los Angeles 22, California




wax can be driven out from all coils on a stack of trays in one operation.

All-welded construction is used on a rectangular tray also intended for coils having center holes through the forms. Coil-supporting metal rods are welded to strap iron strips and these in turn are welded inside a rectangular strap iron frame. Larger rods welded to the four corners serve as standoffs; these have sign-like metal pieces welded to their tops to get greater bearing surface.

A modified rectangular tray uses wire loops instead of rods as supports for larger coils. The loops have double peaks to provide a valley in which the delicate leads of the coils can be placed, to prevent these leads from getting tangled and broken.

## Window-Washing Rack

CLEANING of safety glass windows for television receivers is speeded by use of a grooved wood frame which holds the glass rigidly in a vertical position. The operator can then clean and dry both sides of the glass simultaneously, using both hands. A better cleaning job is obtained because any remaining spots and smears can be cleaned from both sides without trying to figure

**Window-cleaning rack. Safety dispenser for cleaning fluid can be seen on other side of glass**

*New!*

# UNITED High Voltage Power Diodes

## Much Smaller—Same Ratings

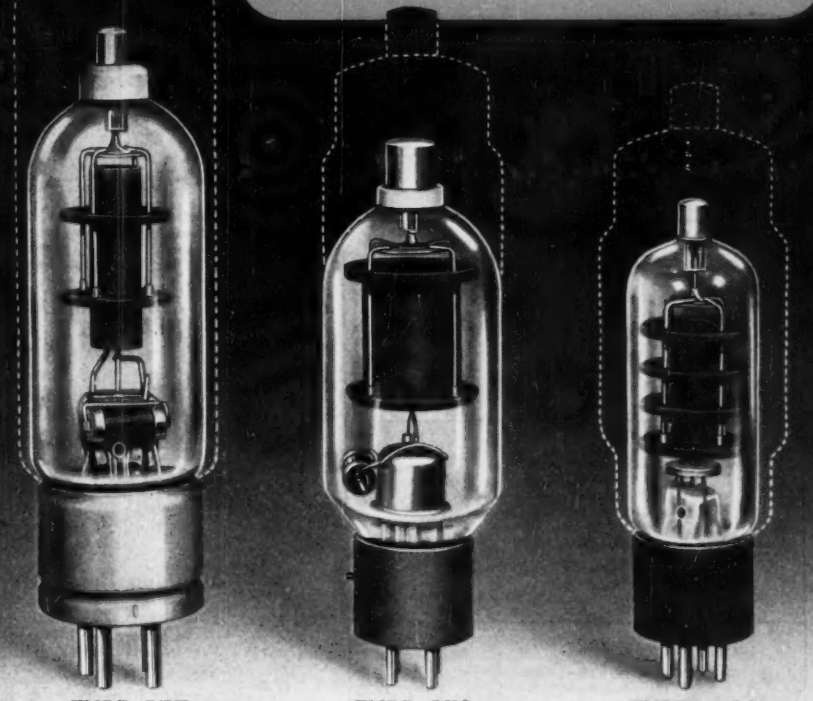

**TYPE 577**
New small version of 371-B

**TYPE 578**
New small version of 8020

**TYPE X-22**
New small version of 1616

Illustrations show relative sizes

AIRBORNE radar and other electronic equipment can be made much smaller and lighter by use of these modern, smaller tubes. UNITED has designed types 577, 578 and X-22 as exact electrical replacements for JAN preferred list types 371-B, 8020 and 1616, in applications where space and weight conservation is important.

*Write for full specifications.*

**UNITED ELECTRONICS, 42 Spring Street, Newark 2, N. J.**

*(TRANSMITTING TUBES EXCLUSIVELY Since 1934)*

HOW TO
SQUEEZE PENNIES
OUT OF
UPSET SPECIALS COSTS

Specially designed upset products are solving thousands of problems. Dozens of design pointers on them are yours for the asking. Send us your sketches, prints, finished products for suggestions.

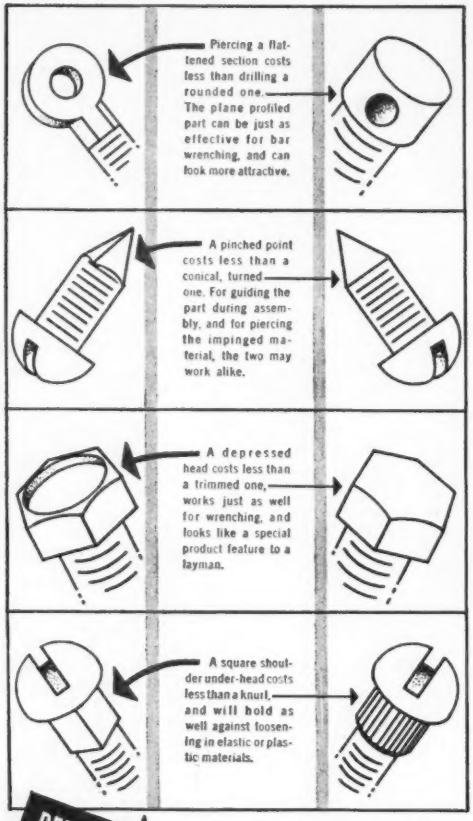
Piercing a flattened section costs less than drilling a rounded one. The plane profiled part can be just as effective for bar wrenching, and can look more attractive.
A pinched point costs less than a conical, turned one. For guiding the part during assembly, and for piercing the impinged material, the two may work alike.
A depressed head costs less than a trimmed one, works just as well for wrenching, and looks like a special product feature to a layman.
A square shoulder under-head costs less than a knurl, and will hold as well against loosening in elastic or plastic materials.

REPRINTS of this chart are available on request for use in drafting and purchasing departments.

QUALITY PROMCO BRAND

MACHINE SCREWS AND SPECIAL FASTENERS ARE OUR BUSINESS



WRITE FOR OUR CATALOG

THE PROGRESSIVE MANUFACTURING COMPANY
50 NORWOOD ST., TORRINGTON, CONN.



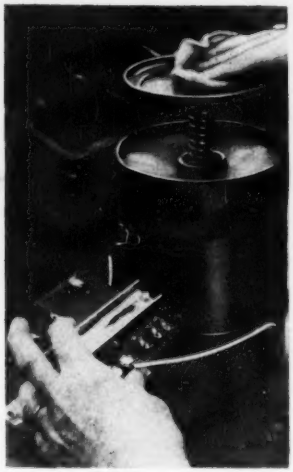

**Safety dispenser for cleaning fluid, being used here with a solvent for removing smeared rubber-stamp markings from a subassembly panel**

out on which side of the glass they are.

The cleaning fluid used for this operation is So-Clear, made by SOHIO Labs. in Cleveland. The fluid is kept in a special dispensing can made by Protectoseal Co., Chicago. The operator merely presses the cloth down on a sprinkler-type head to actuate a pump inside that forces the fluid up into the cloth.

## Metering Pump for Potting Compound

FILLING of television divider network molds with Plastisol potting compound is speeded up in the plant of LaPointe-Plascomold Corp., Windsor Locks, Conn. through use of a metering pump made by E. E. Robinson Inc., Nutley, N. J. Accuracy of metering resulted in a saving of material along with increased production and reduced unit costs.

The pump employs a thermostatically-controlled heated tank that can liquify most solid waxes in less than an hour from a cold start. The pump has a positive gear drive which forcibly ejects fluid compounds with a volume accuracy of three percent and a rate of up to 88 ejections per minute.

In this example, the potting com-

# MICROTRAN®

## hermetically sealed transformer

*available as stock items*

These ruggedized military type units were developed to meet demands of a growing miniaturization program.

All units are available from stock in hermetically sealed cans, although open frame units may be ordered. Open frame units are Epoxy Resin impregnated to provide thorough protection from adverse climatic conditions and are supplied with flexible 3" color coated leads.

Also available on special order for MIL applications are standard MIL type cases.

### MINIATURE TRANSFORMERS

| PART NO. | MIL TYPE | APPLICATION | PRIMARY IMPED. | SECONDARY IMPED. Ω | RESPONSE ±2 db. (C.P.S.) MAX. LEVEL 10 db. | LIST PRICE |
|---|---|---|---|---|---|---|
| M1 | TF1A10YY | Mike pickup or line to 1 grid | 50, 200, 500 | 50,000 | 20-20,000 | $15.40 |
| M2 | TF1A10YY | Mike pickup or line to 2 grids | 50, 200, 500 | 50,000 | 20-10,000 | 15.40 |
| M3 | TF1A10YY | Dynamic mike to 1 grid | 7.5, 30 | 50,000 | 20-20,000 | 14.30 |
| M4 | TF1A15YY | Single plate to 1 grid | 15,000 | 60,000 | 20-15,000 | 12.10 |
| M5 | TF1A15YY | Single Plate to 1 grid | 15,000 4MA.D.C. | 60,000 | 200-20,000 | 12.10 |
| M6 | TF1A15YY | Single plate to 2 grids | 15,000 | 95,000 | 20-15,000 | 14.30 |
| M7 | TF1A15YY | Single plate to 2 grids | 15,000 4MA.D.C. | 95,000 | 200-20,000 | 14.30 |
| M8 | TF1A13YY | Single plate to line | 15,000 | 50, 200, 500 | 20-20,000 | 15.40 |
| M9 | TF1A13YY | Single plate to line | 15,000 4MA.D.C. | 50, 200, 500 | 150-20,000 | 15.40 |
| M10 | TF1A13YY | Push pull plates to line | 30,000 ohms P.-P. | 50, 200, 500 | 30-50,000 | 15.40 |
| M11 | TF1A10YY | Crystal mike to line | 50,000 | 50, 200, 500 | 20-20,000 | 15.40 |
| M12 | TF1A16YY | Mixing and matching | 50, 200 | 50, 200, 500 | 30-40,000 | 14.30 |
| M13 | TF1A20YY | Reactor 300 HYS. - No D.C.: 50 HYS - 3MA. D.C. | | 6,000 ohms D.C. res | | 11.00 |
| M14 | TF1A10YY | 50: 1 mike or line to 1 grid | 200 | 1/2 Megohm | 80- 3,000 | 15.40 |
| M15 | TF1A15YY | 10: 1 single plate to 1 grid | 15,000 | 1 Megohm | 100-2,500 | 15.40 |

### SUB MINIATURE TRANSFORMERS

| PART NO. | MIL TYPE | APPLICATION | PRIMARY IMPED. Ω | SECONDARY IMPED. Ω | RESPONSE ±2 db. (C.P.S.) MAX. LEVEL 0 db. | LIST PRICE |
|---|---|---|---|---|---|---|
| SM1 | TF1A10YY | Input | 200, 50 | 250,000, 62,500 | 80-10,000 | $12.90 |
| SM2 | TF1A15YY | Interstage 3:1 | 10,000 | 90,000 | 100-10,000 | 12.90 |
| SM3 | TF1A13YY | Plate to line | 10,000(3MA.)-25,000(1.5MA.) | 200, 500 | 150-10,000 | 12.90 |
| SM4 | TF1A13YY | Output | 30,000 1MA.D.C. | 50 | 70-10,000 | 12.90 |
| SM5 | TF1A20YY | Reactor 50 HY at 1 mil D.C. | 4,000 ohms.D.C. res. | | | 10.90 |
| SM6 | TF1A13YY | Output | 100,000 .5MA.D.C. | 60 | 100-10,000 | 12.90 |

### MICRO MINIATURE TRANSFORMERS

| PART NO. | MIL TYPE | APPLICATION | PRIMARY IMPED. Ω | SECONDARY IMPED. Ω | RESPONSE ±2 db (C.P.S.) MAX. LEVEL 0 db. | LIST PRICE |
|---|---|---|---|---|---|---|
| MM1 | TF1A10YY | Input | 200, 50 | 250,000, 62,500 | 200-10,000 | $12.90 |
| MM2 | TF1A15YY | Interstage 3:1 | 10,000 | 90,000 | 150-10,000 | 12.90 |
| MM3 | TF1A13YY | Plate to line | 10,000(3MA.)-25,000(1.5MA.) | 200, 500 | 150-10,000 | 12.90 |
| MM4 | TF1A13YY | Output | 30,000 1MA.D.C. | 50 | 150-10,000 | 12.90 |
| MM5 | TF1A20YY | Reactor 50 HY at 1 mil D.C | 3,500 ohms.D.C. res. | | | 10.90 |
| MM6 | TF1A13YY | Output | 100,000 .5MA.D.C. | 60 | 200-10,000 | 12.90 |

Open Frame Construction

### TRANSISTOR TRANSFORMERS

| PART NO. | MIL TYPE | APPLICATION | PRIMARY IMPED. | SECONDARY IMPED. | LIST PRICE M | LIST PRICE SM & MM |
|---|---|---|---|---|---|---|
| *T1 | TF1A10YY | Input-Line to emitter | 500 | 500 | $14.50 | $14.15 |
| *T2 | TF1A10YY | Input-Hi impedence mike to emitter | 50,000 | 500 | 15.70 | 14.15 |
| *T3 | TF1A15YY | Interstage-collector to emitter | 50,000 | 500 | 15.70 | 14.15 |
| *T4 | TF1A13YY | Output-collector to line | 50,000 | 500 | 15.70 | 14.15 |
| *T5 | TF1A13YY | Output-collector to speaker | 50,000 | 8 | 14.50 | 14.15 |

* Add M Prefix to indicate miniature size, SM for sub-miniature size, MM for micro-miniature size. Size to be used depends on D.C. current, frequency response and power output requirements. Write for full details.

**Immediate delivery of stock items!**

**Our circuit design department can assist you in your miniaturization problems. Our recent developments of HI "Q" audio transformers for single frequency applications have permitted substantial reduction in equipment complexity.**

*Write for Catalogue M and name of nearest representative.*

CREST LABORATORIES, INC.

Whitehall Building, Far Rockaway 91, N. Y.

*Standard* **push button ATTENUATOR**

for true **V.H.F** measurements

This outstanding "*Standard*" V.H.F. Attenuator now in its second year of production remains the first and only accurate instrument of its kind and continues to meet a heavy demand from leading organisations and authorities the world over.

**Four models now available**

| Characteristic Impedance | 75 ohms | 50 ohms |
|---|---|---|
| 0-9 db in 1 db steps | Type 74600-A | Type 74600-E |
| 0-90 db in 10 db steps | Type 74600-B | Type 74600-F |

*All types will handle inputs up to 0.25 watts.*

**Accuracy of D.C. adjustment**

**0-9 db Models:** The insertion loss error will not exceed ± 0.05 db for any setting.

**0-90 db Models** The insertion loss error for the 90 db setting will not exceed ± 0.3 db. For other settings this limit falls linearly to a value of ± 0.06 db at the 10 db setting.

**High frequency performance**

**0-9 db Models:** At 50 Mc/s the insertion loss error for the 9 db setting will not exceed ± 0.15 db. For other settings this limit falls linearly to a value of ± 0.05 db for the 1 db setting.

**0-90 db Models:** At 50 Mc/s the insertion loss error will not exceed ± 0.1 db per step. N.B. All insertion loss errors are relative to zero db setting.

**Ready for Building into your own equipment. Calibration charts for frequencies up to 100 Mc/s for the 0-9 db models or 65 Mc/s for the 0-90 db models can be supplied on request.**

*Standard Telephones and Cables Limited*

(An I.T. & T. Associate)

TRANSMISSION DIVISION, NORTH WOOLWICH, LONDON, E16

**Method of using metering pump for filling large number of Vee-D-X television divider network molds one after another. Molds are held rigidly in metal frame having locking nut at one end**

pound is a vinyl copolymer dispersion made by New England Tape Co., Hudson, Mass. When subjected to fusing heat of about 375 F and allowed to cool, it jells to a solid mass that is thermoplastic. Cooling may be hastened by immersing in cold water.

## Wire Tension Meter Reduces Coil Rejects


By Erwin J. Saxl

*President, Saxl Instrument Co. Harvard, Mass.*


In winding coils, wire-wound resistors and tube grids, the tension of the wire is a critical factor affect-



**Saxl tension meter in use on coil winder in plant of New England Transformer Co.**

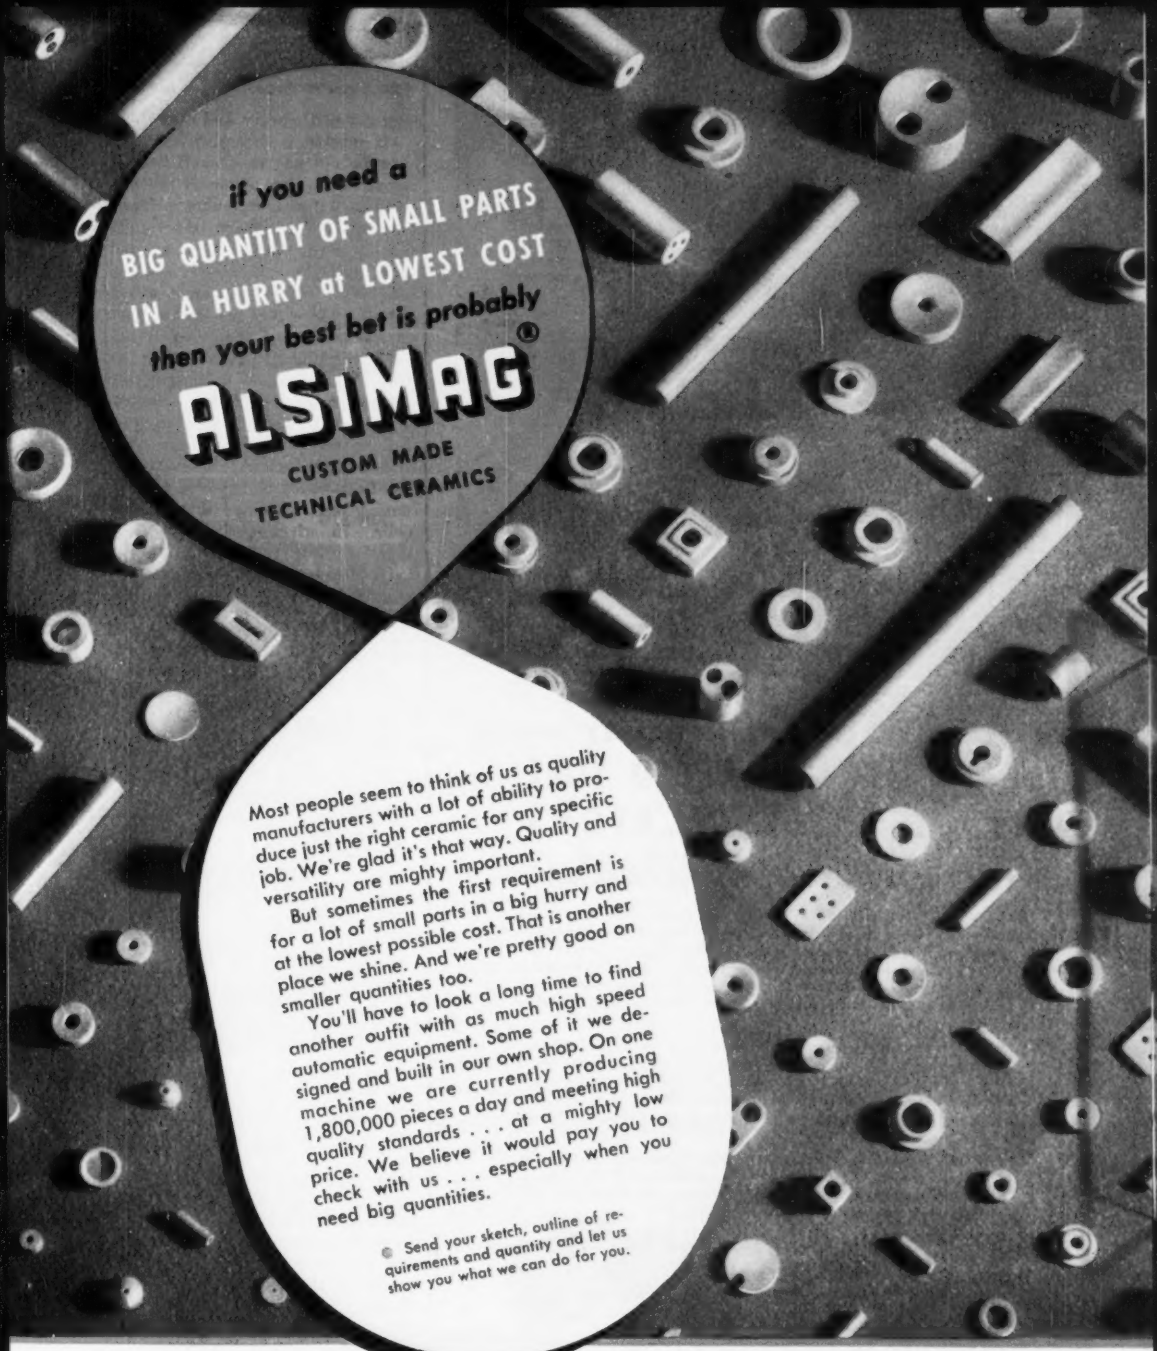


Most people seem to think of us as quality manufacturers with a lot of ability to produce just the right ceramic for any specific job. We're glad it's that way. Quality and versatility are mighty important.

But sometimes the first requirement is for a lot of small parts in a big hurry and at the lowest possible cost. That is another place we shine. And we're pretty good on smaller quantities too.

You'll have to look a long time to find another outfit with as much high speed automatic equipment. Some of it we designed and built in our own shop. On one machine we are currently producing 1,800,000 pieces a day and meeting high quality standards . . . at a mighty low price. We believe it would pay you to check with us . . . especially when you need big quantities.

Send your sketch, outline of requirements and quantity and let us show you what we can do for you.

**51**ST YEAR OF CERAMIC LEADERSHIP

## AMERICAN LAVA CORPORATION

**CHATTANOOGA 5, TENNESSEE**

OFFICES: METROPOLITAN AREA: 671 Broad St., Newark, N. J., Mitchell 2-8159 • PHILADELPHIA, 1649 North Broad St., Stevenson 4-2823
SOUTHWEST: John A. Green Co., 6815 Oriole Drive, Dallas 9, Dixon 9918 • NEW ENGLAND, 1374 Massachusetts Ave., Cambridge, Mass., Kirkland 7-4498
LOS ANGELES, 5603 North Huntington Drive, Capitol 1-9114 • CHICAGO, 228 North LaSalle St., Central 6-1721 • ST. LOUIS, 1123 Washington Ave., Garfield 4959



# 400 CYCLE HERMETICALLY SEALED ELAPSED TIME INDICATORS

## FOR *Airborne Applications*

The **HAYDON*** 7008 Elapsed Time Indicator indicates operating time of components with specific life or servicing requirements. This unit offers the unusual advantages of small size, hermetic sealing and 400 cycle operation for such applications as electronic devices, where tubes or other components should be replaced at specified intervals. Running time indicators can prevent unnecessary servicing, insure timely maintenance that protects against failure in operation.

**HAYDON** specializes in the manufacture of timing components for standard applications and in the design and production of custom-engineered timers for volume applications. The basic element of all **HAYDON** timers is our own rugged industrial-type motor which assures long, quiet operation. Their compact design and ability to operate in any position afford designers unusual latitude.

**HAYDON** also manufactures a variety of timers specifically designed for 60 cycle, 400 cycle or D.C. operation in military applications. The 5103 Series "trigger-trip", hermetically sealed Time Delay Relays are available in a wide range of delays from seconds to hours.

**COMPLETE INFORMATION**

Write for information you need: catalogs on motors or devices; bulletins on D.C. motors, 400 cycle motors, time delay relays, and elapsed time indicators.



*TRADEMARK, REG. U.S. PAT. OFF.

**HAYDON Manufacturing Co., Inc.**

Subsidiary of GENERAL TIME CORPORATION

2435 ELM STREET

TORRINGTON, CONNECTICUT




ing product quality and output.

If tension is excessive, the wire breaks and has to be butt-welded, resulting in down-time of the machine and a pieced-up wire of lower quality. If the tension is not sufficiently high, the machines are not running at their greatest speed and efficiency; here the cost of direct labor and overhead per foot of wire is increased, and the loose or uneven windings impair quality as well. There is a comparatively limited range of correct tension tolerances within which wire-processing methods should be engineered.

The finer the wire, the greater is the importance of uniform tension during the winding of precision coils. In wire-covering machines also, whether for enamel, tin or yarn insulation, maintenance of standard tensions means freedom

**Closeup view of tension meter, showing the three rollers around which the wire runs. Trigger is in released position; when pulled, outer two rollers come down below sensing roller**

from insufficiently covered wires and better yield from wire and insulation materials.

The best wire tension for a particular component is generally known to at least one experienced operator. The problem then involves measuring that tension in order to maintain it during the entire run and to achieve it on other similar machines or on reruns at some future date, independently of availability of the experienced operator. For this purpose, a tension-measuring instrument called the tension

# THREE WAYS BETTER!

## A New Calibrated Mega-Sweep

1. Much Higher Output
2. Wider Sweep Width
3. Zero Level Baseline

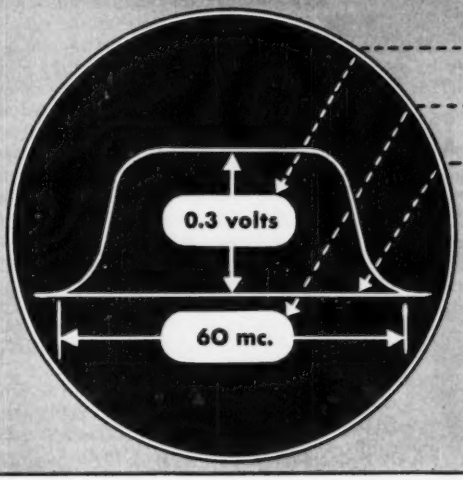

### 111A CALIBRATED MEGA-SWEEP

### FOR MILITARY PROJECTS

### VHF-UHF TELEVISION and COUNTLESS LABORATORY APPLICATIONS

This new model of the Calibrated Mega-Sweep has, for work in the UHF range, many advantages over the standard model. The output impedance is 70 ohms unbalanced (over the whole frequency range) or 300 ohms balanced (for the range 450-900 mcs). The output of 0.3 volts into a 300 ohm balanced termination in the UHF range is adequate for frequency response testing of TV converters or tuners. The zero level baseline provides convenience in measuring gain of the circuits being tested. The great sweep width allows viewing the response of several channels at one time.

### SPECIFICATIONS

| Frequency Range | Output Impedance | Output Voltage |
|---|---|---|
| 10 mc-950 mc | 70 ohms unbalanced | 0.15 volts |
| 450 mc-900 mc | 300 ohms balanced | 0.3 volts |

SWEEP WIDTH: Continuously variable to approximately 60 mc maximum.

BLANKING: Provides zero level reference baseline.

GENERAL SPECIFICATIONS: Similar to those of standard model Calibrated Mega-Sweep.

PRICE: $575.00 f.o.b. factory.

*NOW IN DEMAND MORE THAN EVER!*

### Standard Calibrated Mega-Sweep

- ★ **FREQUENCY RANGE: 50 kc. to 950 mc.**
- ★ **SWEEP WIDTH: Variable to 30 mc.**
- ★ **OUTPUT: 0.05 volt into 53.5 ohms**
- ★ **CALIBRATED TUNING DIAL: Easy operation.**
- ★ **AMPLITUDE MODULATION: Less than 0.1 db per mc.**
- ★ **RUGGED CONSTRUCTION: Reliable performance.**

*Price: $425.00 f.o.b. Factory*

KAY

## KAY ELECTRIC COMPANY

25 Maple Avenue — Phone CAldwell 6-4000 — Pine Brook, New Jersey

## Technology Instrument Corp. Presents a Compactly-Built Wide-Band Decade Amplifier

Featured by its wide band response, high input impedance, low output impedance, and compact dimensions, TIC's Type 500-A wide band decade amplifier is excellent as a general purpose laboratory instrument. Here is an instrument for special applications requiring a zero phase shift and high stability of gain. TIC increases the general utility of this amplifier by including a self-contained power supply and cabinet or rack mounting.

**SPECIFICATIONS:**

**Amplification :** 10, 100 and 1000 times, selected by 3-position rotary switch.

**Frequency Response:** Flat to ± .5 db from 5 cycles to 2 mc on gain of 10; Flat to ± .5 db from 5 cycles to 1.5 mc on gain of 100; Flat to ± .8 db from 5 cycles to 1 mc on gain of 1000.




**Amplification Accuracy:** ± 2% of nominal — dependent on precision resistors only; Unaffected by normal tube characteristics or line variations.

**Phase Shift on All Ranges:** 0 to ± 2° from 20 cycles through 100 kc

**Gain Stability on All Ranges:** Constant with line voltages of 105 to 124 volts.

**Noise and Hum:** 60 db below maximum output voltage with input shorted.

**Input Impedance:** Approximately 160 megohms shunted by 7 $\mu\mu f$.

**Output Impedance:** Approximately 200 ohms.

**Output Voltage on All Ranges:** 20 volts maximum output across a load of 20 k$\Omega$ or greater.

**Power Supply:** 105-125 volts, 50-60 cycles self-contained power supply requiring approx. 30 watts. (230 volt, 50-60 cycles models available).

**Mounting Dimensions:** Single, in cabinet: 13¼" wide x 5" high x 9⅜" deep. (11¼" x 3½" panel) Single, for rack: 19" wide x 3½" high x 8½" deep.

The low distortion is a feature much desired in amplifiers of this type.

Further information and details gladly sent upon request.

*Engineering Representatives*

Chicago, Ill. — UPtown 8-1141
Cleveland, Ohio — PRospect 1-6171
Waltham, Mass. — WAltham 5-6900
Boonton, N. J. — Boonton 8-3097
Dayton, Ohio — Michigan-8721
Arnprior, Ont., Can. — Arnprior 400
New York, N. Y. — Murray Hill 8-5858
Hollywood, Cal. — HOllywood 9-6305
Dallas, Texas — DIxon 9918

**TECHNOLOGY INSTRUMENT CORP.**

**533 Main Street, Acton, Massachusetts, Telephone: Acton 600**




meter is being used in many coil-winding departments. This instrument is a simple hand-operated dial indicator that can be quickly inserted in the path of the running wire by simple trigger action.

Pulling the trigger of the meter lowers the outer two guide rollers, so that the wire to be checked can be easily inserted between these and the sensing roller. Releasing the trigger brings the moving wire automatically into measuring position. The rollers maintain the correct angle at which the wire passes the center sensing roller, regardless of how the meter is held.

Motion of the sensing roller is kept at a minimum to insure lasting accuracy of the restraining spring in the meter. This small motion is amplified through a zero-backlash gear train to actuate the dial pointer. The scale range is 0-250 grams tension; another meter model has a 0-1,000 gram range for larger wires.

Other factors indicating the necessity of tension measurement and adjustment are the build-up of multilayer coils and the continually reducing diameter of the wire supply spool.

With the aid of a tension meter, the operator can make such adjustments as will keep tensions within practical limits throughout the entire winding operation. This results in better quality, faster production, better utilization of a given quantity of materials and fewer rejects.

### Chassis-Holding Fixtures

A SIMPLE strap iron fixture holds a television receiver chassis at a pitched angle on a moving conveyor line in Crosley's Cincinnati plant. After bending the iron strap at



Crosley-designed chassis-holding fixture

# Information Wanted...

## about your uses for C-D-F METAL CLADS

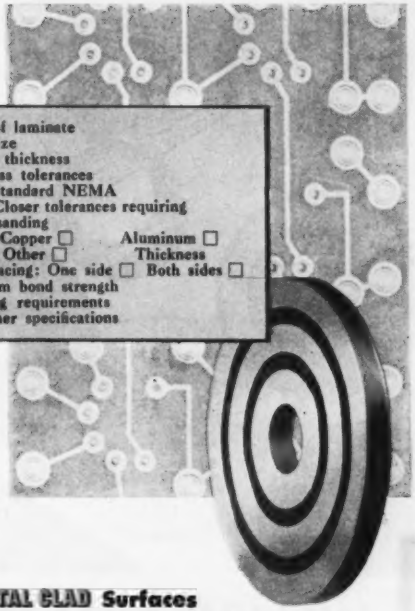


Did you know that C-D-F supplies a full range of metal clad laminates in both Dilecto and Teflon grades? With mounting interest in printed circuits it pays to consider the respective advantages of these new C-D-F materials . . . it also pays to line up all the Information Wanted facts and discuss your specific application with your C-D-F sales engineer (Offices in principal cities). He's a good man to know!

### Dilecto METAL CLADS

Printed circuits depend upon stable, uniform core material and Dilecto has years of proven insulation service (Dilecto is a laminated thermosetting plastic made only by C-D-F from paper, cotton, glass or asbestos fabric base, or a mat base). Normally phenolic or melamine impregnating resins are used for METAL CLAD sheet stock. There are many grades of Dilecto, but only the better electrical grades are supplied with metal foil surfaces. Outstanding is C-D-F grade XXXP-26, a hot punching grade with high insulation resistance, low and stable dielectric losses and excellent moisture resistance. Green color. New C-D-F Catalog GF-53 gives complete data on Dilecto grades. Write for your copy today.

### Teflon* METAL CLADS

Glass fiber cloth is first coated with Teflon resin and laminated into C-D-F GB-112T sheet stock. This base withstands high heat (200°C. maximum operating temperature) with the dissipation factor and dielectric constant extremely low over a wide frequency range. No adhesive film is needed to bond metal to the Teflon laminate, thus the inherently good electrical properties of the core material are maintained. GB-112T has practically zero water absorption, so a METAL CLAD with this core offers consistent high insulation resistance with excellent stability of dielectric loss properties.

### METAL CLAD Surfaces

Copper foil (usually .00135" or .0027" thick) is bonded on one or both faces of the sheet grade of Dilecto selected. The foil used is a special grade of electrolytic deposition copper particularly adaptable for cementing onto laminated materials. An adhesive film is placed between the metal and the Dilecto, and cemented during the pressing and curing cycle. When closer tolerances are required C-D-F sands the Dilecto to the required thickness before bonding. Aluminum, silver, or other alloys of various metals may be supplied.

### Better Bond Strengths

One of the most important physical properties of a metal clad product is its peel strength, the pounds pull required to separate the foil surface from the core material. Working with years of laminating know-how, C-D-F has been successful in obtaining the following average test values for its METAL CLAD sheet stocks:

| | Lbs. pull per 1" width |
|---|---|
| XXXP-26 plus .00135" copper ..... | 5 to 8 |
| XXXP-26 plus .0027" copper .... | 7 to 10 |
| XXXP-26 plus .0015" aluminum .. | 9 to 12 |
| GB-112 Teflon plus .00135" copper .. | 6 to 9 |

Sheet sizes: Dilecto grades — 38 x 38", 38 x 42"
Teflon grades — 16 x 36"

THE NAME TO REMEMBER . . . FOR PRINTED CIRCUIT METAL CLAD STOCK

**Continental-Diamond Fibre Company**
**NEWARK 16, DELAWARE**

*DU PONT TRADE MARK

**Write for new C-D-F General Catalog GF-53, new C-D-F Teflon folder T-52, and talk METAL CLADS with your C-D-F sales engineer.**

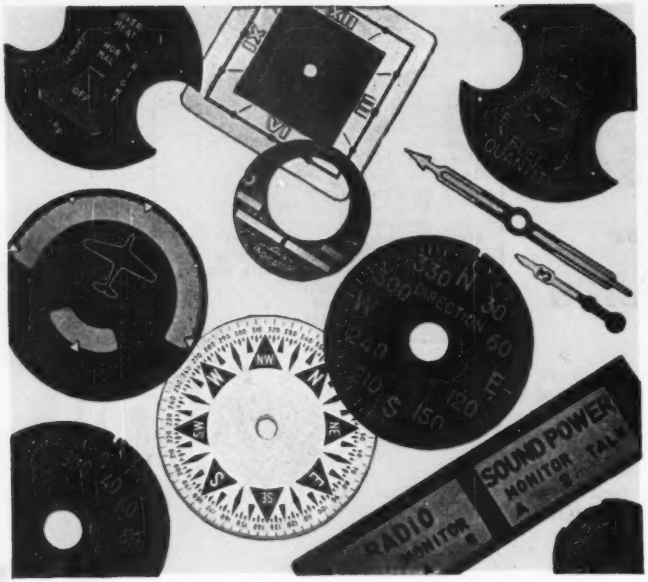


# MILLION-DOLLAR DIALS

## ...for pennies!

Self-luminous, fluorescent, phosphorescent, or *non*luminescent—etched, lithographed, or screened—*whatever* type of dial you need, U. S. Radium Corporation can produce it . . . with "million-dollar" accuracy and finish, at mass-production cost.

Yes, even though they cost less than you'd think, U. S. Radium dials look like a million dollars. That's because, in producing millions of dials for instruments and timepieces, we've learned how to apply precise markings with big-volume methods that are a boon to the budget. We also make high-accuracy dials, in as small quantity as desired, for scientific requirements.

To *find out* how our dial experience can benefit your instruments – with better dial design, or lower cost, or *both* — **write** Dept. **E11**, U. S. Radium Corp., 535 Pearl Street, New York 7, N. Y.

***Other Products of U. S. Radium***

**RADIOACTIVE FOILS**
(alpha-ray ionization sources)

**IONOTRON STATIC ELIMINATORS**

**RADIUM LOCATORS:**
pendants, lenses, buttons, screws, markers

**LUMINOUS RETICLES**
and other specialties

**POWDERS:**
cathode-ray tube and television tube

**SILHOUETTE ILLUMINATION**
of clocks, watches and instruments

**UNITED STATES RADIUM CORPORATION**






DuMont-designed chassis-holding fixture

right angles, a chassis-gripping lip is welded to the bend and a metal stop is welded in position halfway down the slope. Once in position, the chassis cannot slide out unless it is first lifted up. Though simple and inexpensive, this fixture supports the chassis at the optimum angle for final wiring work.

A modified version of this chassis-holding technique is used on circular wood pallets employed on both pass-along and moving-conveyor lines in DuMont's East Paterson, N. J. television receiver plant. Here two different arrangements of the holding clips are used, to accommodate two different types of chassis. One set of clips serves as the back stop for the other set.

## Tube Burn-in Setups

By CURTISS R. SCHAFER
*The Liquidometer Corp.*
*Long Island City, N. Y.*

RUGGEDIZED and Arinc tube types are not always available, even for military equipment. In the event that regular JAN types must be used, it is desirable to operate them for at least 50 hours under somewhat more severe conditions elec-




Circuit for aging 100 type 12AX7 tubes simultaneously

# Plastic Film Dielectric CAPACITORS*

*—because the solid film is chemically stable, dielectrically strong, and non-porous—*

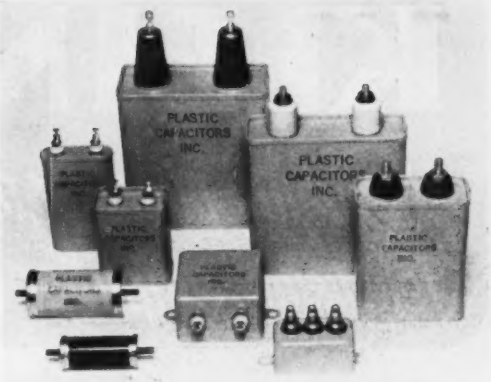


## GIVE YOU *these* IMPORTANT CHARACTERISTICS

- Smaller size and lighter weight for a given value.
- Operation up to 150° C and more without voltage derating.
- Series resistance exceeding $10^{12}$ megohms/mfd and as high as $10^{14}$ for small capacitance values.
- Dielectric absorption as low as 0.02%.
- Power factor at 60 cycles as low as 0.01%.
- Q factors exceeding 500 at 100 KC.
- Capacitance stability to within 0.5% for a period of one year.
- Voltage range 100 volts to 60 KV.
- High current (continuous or intermittent) service for r. f. or pulse circuits.

**Get this FREE Catalog**

*Contents:* Temperature range; Capacitance tolerances; Capacitance stability; Temperature coefficient; Power and Q factors; Dielectric absorption; Permissible ripple; Life; Containers; Impregnant; Insulators and terminals; Mounting brackets; Vibration and shock; Salt spray and immersion; *plus* HIGH-VOLTAGE LOW-CURRENT POWER SUPPLIES and PULSE FORMING NETWORKS.

***Choice of solid dielectric film and impregnant accentuates the electrical characteristics and increases the effectiveness of the circuit.***

## *Plastic Capacitors, Inc.*

PLASTIC FILM CAPACITORS • HIGH VOLTAGE POWER SUPPLIES
• PULSE FORMING NETWORKS

2511 WEST MOFFAT STREET • CHICAGO 47, ILLINOIS

# KLEINS

## Quality pliers for radio-television-amplifier work

**No. 301 KLEIN LONG NOSE PLIERS**
Extra long reach of jaws permits getting into difficult places. Hardened and tempered to assure positive grip at point. Available in 5, 6 and 7 inch lengths.

**No. 202 KLEIN NARROW NOSE OBLIQUE CUTTING PLIERS**
One of the most useful tools in your kit. Narrow head permits use in confined places. Individually honed knives meet accurately at all points and stay sharp. Available in 5 or 6 inch sizes.

• There is a Klein Plier made for every job in wiring radios, television or sound system amplifiers. Long nose pliers that assure a tight grip even in confined spaces. Keen edged cutters that stay sharp even after continued service. Flat nose pliers, duck bill pliers, curved nose pliers—many types and sizes to meet every wiring need. By having a full selection of these quality tools, you will save valuable time in any wiring work.

*This Klein Pocket Tool Guide gives full information on all types and sizes of Klein Pliers. A copy will be sent without obligation.*

**ASK YOUR SUPPLIER**
**Foreign Distributor**
**International Standard Electric Corp.**
**New York**

"Since 1857"

Mathias KLEIN & Sons
Established 1857
Chicago, Ill., U.S.A.
3200 BELMONT AVENUE CHICAGO 18 ILLINOIS

Burn-in setup for 100 type 12AX7 tubes



Burn-in setup for 15 type 6005 tubes

trically than they are subject to in normal use. The equipment shown is used to burn-in 12AT7 and 12AX7 tubes, 100 at a time and for a period of 100 hours. About 18 percent of all 12AT7 tubes received from the manufacturer showed one defect or another after the burn-in. These tubes checked OK on a standard tube checker when they were received, but they would undoubtedly have resulted in many equipment failures if they had been used.

The burn-in equipment consists of a power supply and four tube racks. Separate plate and cathode resistors are necessary to prevent oscillation.

A similar piece of equipment is




Circuit for aging 15 type 6005 tubes simultaneously

# SYLVANIA PICTURE TUBES

## Out-perform, out-last all others tested!

Fifty minutes *on* . . . ten minutes *off* . . . hour after hour for 500 consecutive hours, Sylvania Picture Tubes were tested side by side with the tubes of other leading manufacturers.

These intensive tests, made under punishing, accelerated voltages were conducted under supervision of an outside, independent laboratory. Checks were also taken over a 3-month period for emission, leakage, color, light out-put, grid control, and other characteristics.

**Read the remarkable record.**

The chart at right tells the story. Note that *only* Sylvania Picture Tubes showed no failures. And, in over-all point quality, *Sylvania won over all other brands by a wide margin.*

These important conclusions definitely place Sylvania Picture Tubes in the highest rank. They also mean the highest in trouble-free operation . . . better business . . . more satisfied customers for every set manufacturer who uses Sylvania Picture Tubes. For full details about these important tests write today to: Sylvania Electric Products Inc., Dept. R-1411, 1740 Broadway, New York 19, N. Y.

**United States Testing Co.**
1415 Park Ave., Hoboken, N. J.

Test No. E-5095
August 8, 1952

| Manufacturer | Number of Tubes Tested | Number of Failures | Overall Point Quality |
|---|---|---|---|
| A | 8 | 1 | 81 |
| B | 8 | 1 | 78 |
| C | 8 | 6 | 62 |
| D | 8 | 1 | 83 |
| E | 8 | 4 | 67 |
| F | 8 | 5 | 42 |
| G | 8 | 4 | 52 |
| H | 8 | 5 | 30 |
| SYLVANIA | 8 | NONE | 92 |

SYLVANIA

RADIO TUBES; TELEVISION PICTURE TUBES; ELECTRONIC PRODUCTS; ELECTRONIC TEST EQUIPMENT; FLUORESCENT TUBES, FIXTURES, SIGN TUBING, WIRING DEVICES; LIGHT BULBS; PHOTOLAMPS; TELEVISION SETS

Precision
ATTENUATION
to 3000 mc!

- VSWR less than 1.2 at all frequencies to **3000 mc.**
- **TURRET ATTENUATOR** featuring **"Pull - Turn - Push"** action with 0, 10, 20, 30, 40, 50 DB steps.
- Accuracy ±.5 DB, no correction charts necessary.
- 50 ohm coaxial circuit. Type N Connectors.

COAXIAL LINE TERMINATION
50 ohms

SINGLE ATTENUATOR PAD
50 ohms

VSWR ± 1.2 to 3000 mc.
One watt c.w. power dissipation

Inquiries are invited concerning single pads and turrets having other characteristics

STODDART AIRCRAFT RADIO CO.
6644-A SANTA MONICA BLVD., HOLLYWOOD 38, CALIFORNIA
Hillside 9294



used for burning in 6AQ5 tubes. In this case the power requirements are so great that only 15 tubes are handled by each unit. Both aging setups are being used for tubes required in capacitance-type aircraft fuel gages made by The Liquidometer Corp.

### Strand Twister

A MOTOR-DRIVEN wire twister rolls loose strands together on stripped wire at high speed in Crosley's Cincinnati plant. A cone-shaped hole in the end of the twister guides

**Twisting loose strands together on shielded cable after stripping. Next operation is tin-dipping. Operator picks up handful of conductors, twists them individually, then lines up ends and dips entire handful into solder pot**

the strands between a rotating pair of flat jaws as the conductors are inserted one by one. The twister is made by The Wire Stripper Co., Cleveland, Ohio.

### Slide-in Subassemblies Simplify Wiring and Soldering

BY WILLIAM F. WEBER
*Project Supervisor*
*Ford Instrument Company*
*Division of the Sperry Corporation*

A NEW packaging system for electronic components of a Navy aircraft computer features standardized miniature units, readily producible, extremely flexible, compact and light in weight. Equally important is the ease of assembly and disassembly, making for fast, uncluttered maintenance in the field by personnel with limited training. This equipment was evolved under

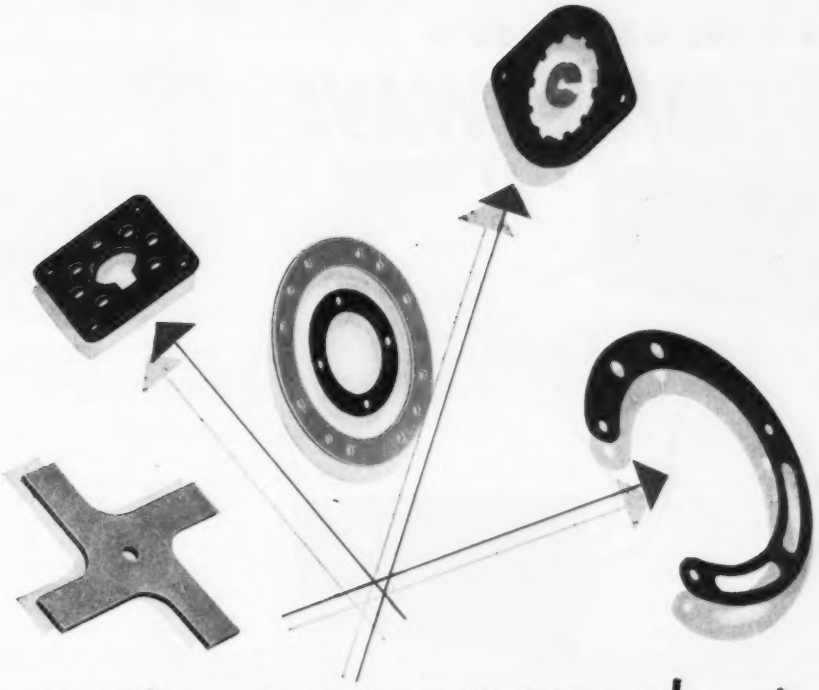

# the properties you want are "built-into" Lamicoid®

- High Dielectric Strength
- Low Power Factor
- Heat Resistance
- Low Moisture Absorption
- High Impact Resistance
- Dimensional Stability
- Light Weight
- Tensile Strength
- Abrasion Resistance
- Good Machinability
- Punchability

Many specific properties and combinations of properties—to suit the exact requirements of *your* product—are built into LAMICOID. This thermosetting laminated plastic (made with such fillers as glass, nylon, fabric, paper, etc., with a variety of synthetic resins) has solved the problem of material shortages in many fields.

LAMICOID may be the answer to the mechanical, structural and insulating needs of *your* application. Here are just a few of its many uses: dials, antenna parts, coil forms, tube socket supports, panels, motor and transformer parts, switch gear and relay parts.

Take advantage of the versatility of LAMICOID; put it to work for you. LAMICOID is supplied in standard sheets, rods and tubes, or fabricated into parts to your specifications. Whatever your electrical insulation problem may be, let us put our 58 years of experience at your disposal. For a prompt quotation, send blueprints or specifications.

MICA Insulator COMPANY

Schenectady 1, New York

*Offices in Principal Cities*

LAMICOID (Laminated Plastic) • MICANITE® (Built-up Mica) • EMPIRE® (Varnished Fabrics and Paper) • FABRICATED MICA

# HERE'S THE BASIS FOR A MICROWAVE TEST SETUP

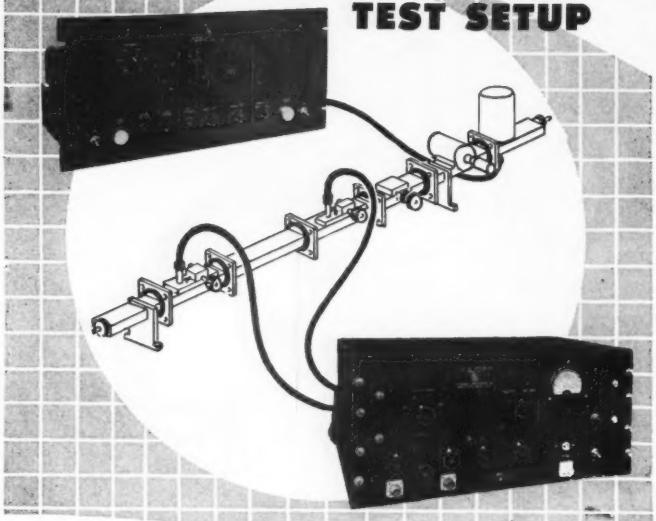

**A VERSATILE, dependable laboratory set-up for microwave testing can easily be built around these two Browning instruments.**

The basis of a signal generator in the super-high-frequency range is provided in the Model TVN-7 square-wave modulator and power supply. This unit is used as a square-wave modulator at 600 to 2500 cycles for low-power velocity-modulated tubes, such as the 417A, 2K28, and 2K25. Provision is also made for external modulations: for grid pulse modulation at amplitudes up to 60 volts, and for reflector pulse modulation at up to 100 volts maximum. The power supply delivers regulated cathode voltage continuously variable from 280 to 480 volts, with provision for a 180-300 volt range.

Measurement of standing-wave ratios, with slotted lines, is easily accomplished with the Model TAA-16A amplifier — a high-gain a-c voltmeter, covering 500 to 5000 cycles per second. Front-panel controls can be set for broad-band or selective operation; sensitivities are: 15μv in broad-band and 10μv in selective position. The 4 inch output meter with illuminated scales is graduated in standing-wave voltage ratio and with a 0-10 linear scale. A panel switch is provided for convenience in applying bolometer voltage. The master gain control switch provides attenuation factors of 1, 10, and 100. Unit and regulated power supply are contained in black wrinkle steel cabinet 9 x 20 x 12 inches.

Both of these instruments are designed for 115-volt 50/60 cycle operation.

**Write today for data sheets giving detailed specifications of the TVN-7 and TAA-16A equipments.**

ENGINEERED FOR ENGINEERS

**BROWNING**
Laboratories, Inc.
Winchester, Mass.






**Type of T-shaped frame used to support subassemblies. This frame slides into a container which may be sealed for pressurizing**

a development contract with the Navy Bureau of Aeronautics as part of a continuing program to equip Navy aircraft with reliable scientific instrumentation without further complicating the already highly complex chore of maintaining airborne equipment.

The development involves an electronic computing network, the basic packaging form of which may contain a dozen or more subassemblies. The mounting frame supporting the subassembly chassis is T-shaped. It mounts into a container that can be sealed, permitting pressurizing or the use of dry inert gas.

The subassemblies are built around standard chassis, terminal boards and plug-in connectors. Design of the chassis is such that resistors, capacitors, sockets and other components can be completely wired on a layout board before assembly onto the chassis. This expedient simplifies wiring and soldering operations, making for



**Example of amplifier subassembly. Its chassis slides on rails and is locked in position on the main frame with the jack-screw at the left, which also serves to mate plug-in members**

# HERE'S GOOD NEWS!

# NEW TVOR

- increases plane let-down safety for any airfield
- changes "fair-weather" to all weather airline service
- permits marginal weather landings by private and executive aircraft.

**AT LESS THAN**

## *one fourth the cost of* VOR!

This new terminal VHF omnidirectional radio range adds safe instrument approach facilities to any airport. CAA approved. Installs directly on the airfield. Includes field detector, antenna and installation test equipment. *And is available on 90 day delivery.*

Made by a company specializing in VOR systems for the CAA and foreign governments, TVOR radiates 50 watts of power, ample for most installations. Time tested circuits, using the same quality components and given the same rugged tests as CAA equipment, are easy to maintain and service. Installation operates almost entirely without attention. Any plane with standard VOR instrumentation can make precision approaches to a TVOR equipped field.

TVOR can build your field's air traffic by extending service through marginal weather . . . increase airline passenger service by eliminating flights lost due to rain and fog . . . brings corporation aircraft to their home field in spite of low ceilings.

Flight test TVOR with your own plane at the College Park Airfield. Visit our factory at the edge of the field. Inspect the equipment. Convince yourself that your group can not afford to be without low cost, high quality TVOR.

**TVOR single unit installation needs only an inexpensive shelter on the field.**

**TVOR changes fair-weather to all weather airline service.**

**TVOR guides corporation aircraft to their home fields, in spite of low ceilings.**

**TVOR works with standard instrumentation. Private planes "home" on their own airfield.**

**TVOR commercial transmitters are the same as those designed and built for the CAA.**

**MARYLAND ELECTRONIC MANUFACTURING CORPORATION**

**COLLEGE PARK 14, MARYLAND**

# GTC Transformers
## demanded for
# Unusual Applications

The illustrated new automatic pin-spotter is a product of the American Machine & Foundry Company. An exceptionally high degree of precision is necessary for proper performance.

"GTC" Transformers are used in the AUTOMATIC PIN-SPOTTER because of their accepted ability to meet the most rigid specifications. If your application is most unusual or standard, we suggest you consider "GTC" — proven transformers where maximum performance is essential.

*We welcome your inquiries.*

GTC

**GENERAL TRANSFORMER COMPANY**

*serving industry since 1928*

**18240 Harwood Avenue, Homewood, Illinois**

**(Suburb of Chicago)**

**New packaging technique permits wiring resistors, capacitors and other parts on a convenient layout board before assembly onto the chassis**

clean, well-soldered connections and uniform cable layout. This feature enhances miniature design, allowing for more compact construction through the elimination of inaccessible areas.

Assembly after wiring merely involves securing the terminal board, sockets and plug-in connector to the chassis and tightening several screws.

Interlocking rails and guards are used for mounting subassemblies on the T-shaped frame. A subassembly is installed by aligning the rails and guards, sliding the unit in place and tightening a jack screw. Electrical connections are made by plug-in connectors whose male and female members mate when the subassembly is secured. The T-shaped frame provides rigidity with a minimum of material and allows for even distribution of weight.

The flexibility of this type of construction makes it possible to build a complete computer to any degree of complexity by combining readily assembled, integral units. Modifications can be performed by simply exchanging one or more units and/or subassemblies.

The assembly of units in convenient rack-type structures with small intervening air spaces presents



**After wiring is completed, the layout board, sockets and plug-in connector are fastened to the chassis with bolts. Further speed-up in production could be achieved by use of dip-soldering if quantities warranted use of such high-speed fixtures**

# Where Application Requires Really Flexible Class H Electrical Insulation . . .

# BH "1151"

## SILICONE RUBBER COATED FIBERGLAS TUBING

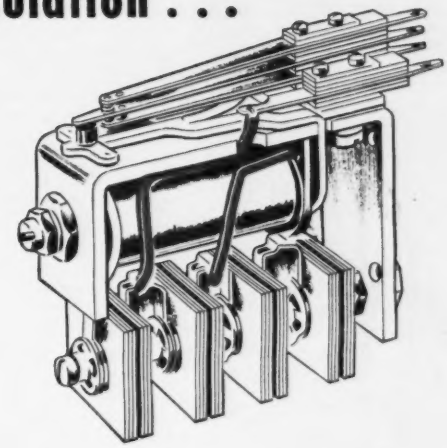

BH "1151" Silicone Rubber coated Fiberglas tubing is flexible when manufactured and *stays* flexible through all applicable NEMA Class H tests. This long-lasting union of two great inorganic materials assures maximum product protection.

BH "1151" withstands bending, required in normal assembly, without loss of dielectric strength—will not craze or crack. It remains unchanged through continuous product operation in a temperature range of –90° F. to 400° F. . . takes 600° F. for 15 minutes without physical or dielectric failure.

Are you looking for a product with high dielectric, chemical and fungus resistance? . . . Use BH "1151".

Available in colors; in economical coils, 36 inch lengths, or cut without wastage to your specifications. Send for samples and data sheets today.

Address Dept. E-11
Bentley, Harris Manufacturing Co.
Conshohocken, Pa.

# BH *Fiberglas** SLEEVINGS

*BH Non-Fraying Fiberglas Sleevings are made by an exclusive Bentley, Harris process (U. S. Pat. No. 2393530). "Fiberglas" is Reg. TM of Owens-Corning Fiberglas Corp.

relatively large heat-dissipating areas, adapting the instrument to convectional cooling systems.

Grouping of accessible units simplifies maintenance. In the event of failure, units or subassemblies rather than isolated components can be checked and the fault remedied by the insertion of a new unit or subassembly. The testing of units rather than components allows for simplification of maintenance test equipment, making feasible the adaptation of built-in fault-locating systems.

Unit maintenance minimizes field servicing time and does not require the ability of highly trained personnel.

Structural parts are designed for simplicity and ruggedness. All parts can be readily produced by punching and die-forming operations, resulting in maximum production rates with a minimum of man effort.

Structural assemblies are of riveted construction. Rivets appearing at the surface of a unit are solder-sealed to prevent gas or pressure leakage.

The above-described packaging system has made possible great saving in weight and space, while still providing a frame rigid enough to withstand all stress in military aircraft and enough room for heat dissipation and clearance between electronic parts.

### Socket-Holding Fixtures

ASSEMBLY of four corona shield and socket assemblies simultaneously is made possible by use of a simple

Socket subassemblies plug into up-ended tube bases on these holding fixtures

**...for every application**

Whatever your requirements may be, Carol Cable will engineer wire, cable or wiring assemblies to your particular specifications.

Carol manufacturing facilities are complete—from drawing of copper, copperweld and aluminum wire to formulation of our own insulating materials from natural rubber, synthetic rubber or plastics. Carol is a complete wire mill with all the necessary adjuncts to be completely independent and without intermediate profits.

Constant laboratory control over raw materials, work in process and finished product assures dependable performance.

Your wire and cable problems will receive our prompt attention. Write to us today!

*(trifluorochloroethylene)* loses none of its properties in temperatures as high as 390°F. Matter of fact, it runs the temperature gamut all the way up from –320°F. . . . a range of 710 fahrenheit degrees!

You'll find reason upon reason for liking this high polymer thermoplastic. For one thing, it has an excellent memory. Press it out of shape and it returns, once pressure is released, to its original form.

KEL-F has unusually high chemical and electrical resistance. Conducts little heat. Resists "wetting". Humidity, moisture and fungus bother it not at all.

**Largest Single Sheet**

Besides rods, tubes, compression and injection molded forms, we are now making this versatile insulating material in the *biggest single sheets* ever known—up to **5 ft. discs.**

**Lowest Cost Ever**

Expanded production now enables us to offer KEL-F in all its forms at the *lowest prices* in history. We'll be glad to quote on your own requirements. Write today for KEL-F Brochure #202.

ELECTRONIC MECHANICS INC.
101 CLIFTON BOULEVARD,
CLIFTON, NEW JERSEY

# ON THE "FRONT LINE" IN COMMUNICATIONS

The rich experience and vast facilities of Delco Radio are again at the service of the nation!

Delco Radio has a major part in the current rearmament program . . . is currently producing advance-type radio equipment for many branches of the military. Delco Radio products serve equally well in civilian communications . . . in millions of passenger cars and trucks . . . in untold numbers of homes. Yes, in peace as in war, Delco Radio is on the front line in communications with on-time production of *superior* products. See for yourself!

## DELCO RADIO

DIVISION OF GENERAL MOTORS, KOKOMO, INDIANA

LEADER...

**IN PRODUCTION**

Delco Radio is the world's largest builder of automobile radios . . . the leader in production and assembly of component parts.

LEADER...

**IN ENGINEERING**

Delco Radio developed many of the most important advances in automotive radio . . . has unsurpassed experience in this field.

LEADER...

**IN QUALITY**

Every step in the manufacture of Delco Radio products is closely supervised to maintain high, uniform product quality.

LEADER...

**IN MANUFACTURING**

Completely integrated for efficient production, from raw material to finished product, Delco Radio meets any customer need.

# Put dependable MOSINEE
## Forest Fibres to work for you!

Remember . . . MOSINEE means more than "paper" in the field of electronics and electrical products. MOSINEE stands for FIBRES that have scientifically controlled electrical, chemical and physical properties, to perform specific functions . . . fibres of dependable technical uniformity vital to your quality standards and production requirements.

MOSINEE fibres can be made to your specifications, with

- good dielectric strength, high tensile or tear strength . . .
- specified pH for maximum-minimum acidity or alkalinity . . .
- accurate caliper or density . . .
- proper impregnation characteristics for resin, wax or other substances . . .
- proper characteristics for plastics operations and parts . . .
- uniform softness, stiffness, flexibility, toughness . . . or other vital technical characteristics.

MOSINEE has its sources of quality forest fibres, practical experience, laboratory facilities, and scientific production controls to create and produce the type of fibres your operations require. Contact MOSINEE.

MOSINEE PAPER MILLS COMPANY
MOSINEE, WISCONSIN

MOSINEE
makes fibres work for industry




wood fixture in Crosley's Cincinnati television receiver plant. Each socket is held upside down on the fixture by a tube base that has been bolted to the base of the fixture. Metal-covered wood rails alongside the tube bases serve as supports for the socket flanges, to protect socket terminal clips while pressure is applied during soldering of the heavy-wire corona shields.

On most fixtures of this type, all but two of the tube base pins have been clipped off to make insertion and removal of the socket easier. Octal tube bases are used. The aligning key is also removed since sockets can be oriented visually by glancing at the irregular-shaped socket mounting plate.

The metal plates on top of the rails serve to chill any solder running through the tubular rivets in which the corona shields are set and soldered. These same rivets also serve to fasten the socket to its plate.

### Vise On Powrarm

A SIMPLE arrangement welded onto the stud of a Powrarm Junior work-positioning tool gives a universal holding fixture for assembly work on almost any type and size of small chassis or subassembly. As used at the Poughkeepsie, N. Y. plant of International Business Machine Corp., the vise jaws are tightened by an ordinary machine nut to

**Vise-type holding fixture grips wide variety of subassemblies**

# ENGINEERING
## PLUS
# CRAFTSMANSHIP
## SOLVED
## THIS UNUSUAL
## REQUIREMENT

**THE PROBLEM:**

The problem was to develop a crystal unit for AM broadcast (550-1600 kc) which would maintain frequency tolerance per FCC requirement (±20 cycles) *without temperature control.*

**THE SOLUTION:**

When designing the crystal oscillator, the transmitter manufacturer gave primary consideration to voltage stability and low r.f. current. The resultant design provided an ideal environment for realization of the inherent stability of the crystal unit employed.

Bliley designed a plated crystal utilizing precision orientation to achieve the low drift characteristic needed. Contrary to ordinary practice in this frequency range, the crystal was soldered between rigid supports to prevent frequency deviation due to physical displacement. The assembly was then hermetically sealed in a dry nitrogen atmosphere to prevent contamination and minimize aging.

The resultant production units,type BH8, are calibrated at 30°C with maximum deviation not exceeding ±10 cycles thru the temperature range from +10°C to+ 50°C.

**TYPICAL STABILITY DATA**

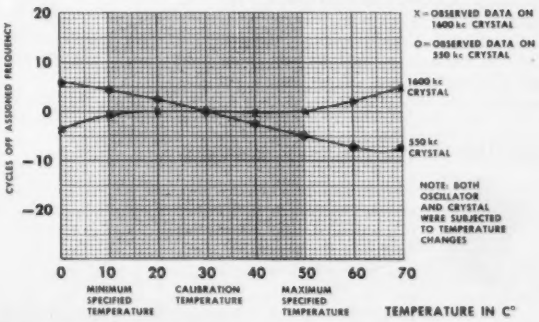


**Bliley** CRYSTALS

**BLILEY ELECTRIC COMPANY · UNION STATION BUILDING · ERIE, PA.**

# Plenty of advantages in using... S.S.WHITE FLEXIBLE SHAFTS For remote control

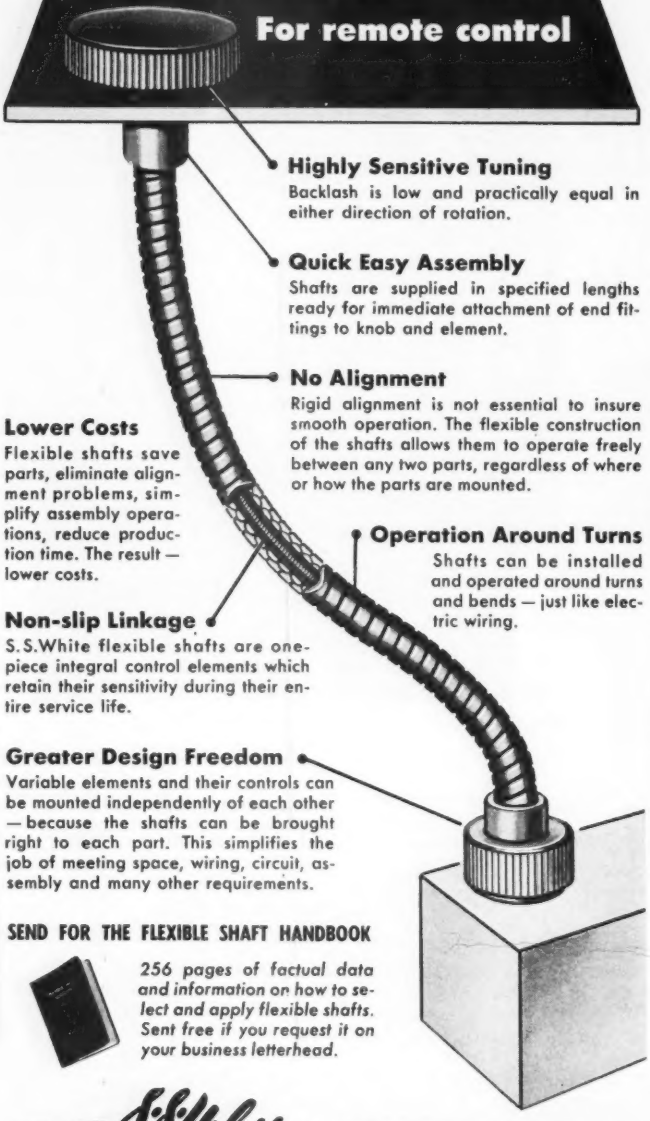

**Highly Sensitive Tuning**
Backlash is low and practically equal in either direction of rotation.

**Quick Easy Assembly**
Shafts are supplied in specified lengths ready for immediate attachment of end fittings to knob and element.

**No Alignment**
Rigid alignment is not essential to insure smooth operation. The flexible construction of the shafts allows them to operate freely between any two parts, regardless of where or how the parts are mounted.

**Lower Costs**
Flexible shafts save parts, eliminate alignment problems, simplify assembly operations, reduce production time. The result — lower costs.

**Operation Around Turns**
Shafts can be installed and operated around turns and bends — just like electric wiring.

**Non-slip Linkage**
S.S.White flexible shafts are one-piece integral control elements which retain their sensitivity during their entire service life.

**Greater Design Freedom**
Variable elements and their controls can be mounted independently of each other — because the shafts can be brought right to each part. This simplifies the job of meeting space, wiring, circuit, assembly and many other requirements.

**SEND FOR THE FLEXIBLE SHAFT HANDBOOK**



*256 pages of factual data and information on how to select and apply flexible shafts. Sent free if you request it on your business letterhead.*

THE S.S.White DENTAL MFG. CO. INDUSTRIAL DIVISION
Dept. E, 10 East 40th St.
NEW YORK 16, N. Y.

Western District Office • Times Building, Long Beach, California




which has been welded a rod that serves as a handle, eliminating need for a wrench. A spring between the jaws keeps them separated for ease in loading a new part.

## Mesh-Crimping Machine

A VARIATION of the old hand-cranked clothes wringer is used to crimp nickel mesh ribbon in the Newark, N. J. plant of Chatham Electronics Corp. Both rollers have longitudinal ridges machined out of the solid metal. Spacing between rollers is such that the ridges mesh



**Gloved hands and paper under crimping machine insure cleanliness of crimped mesh ribbon**

like gear teeth, with only enough clearance to equal the thickness of the nickel ribbon. A crank arm is attached to one roller. Knurled lock nuts permit raising or lowering the upper roller to adjust for different thicknesses of materials.

The crimped ribbon serves as the hydride coil for the type 1907 hydrogen thyratron tube made by this firm for pulsing high-power radar magnetrons.

## Rack for Line Cords

TOTE rods mounted on casters facilitate transporting of line cord assemblies to the next operating position on the television receiver assembly line in Crosley's Cincinnati plant. The tote rods are nailed at one end to a wood framework, and are spaced just far enough apart so that line cords go between them easily. The metal mounting

# Now available the revolutionary ELECTRO TEC process* for your LARGE SLIP RING ASSEMBLIES

featuring

• LOWER COST • CLOSER TOLERANCES • ONE-PIECE CONSTRUCTION • JEWEL-LIKE FINISH • UNIFORM RING HARDNESS • REDUCED WEIGHT

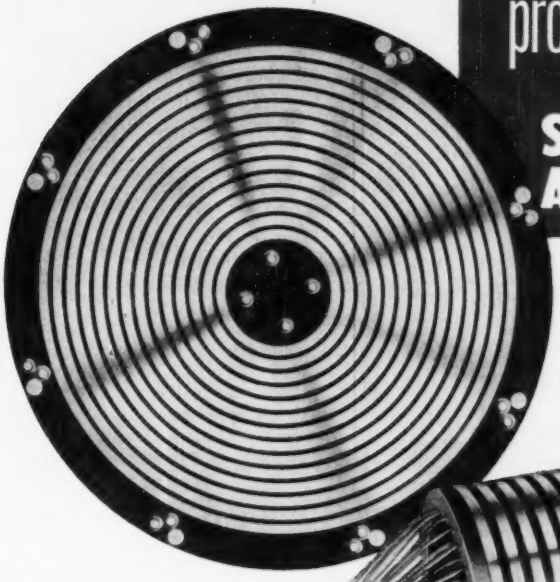

*Now a Complete Service in all sizes of Slip Ring Assemblies*

⬆ *An assembly with 14 concentric, hard silver rings electro deposited into machined plastic blank. Dovetail locks rings in place. Machined blank insures accuracy. Diameter approx. 11", thickness approx. 5/16".*

➡ *Cylindrical assembly with 25 rings. Three wide rings accommodate large contact area brushes for high current capacity. Length 14", O.D. approx. 5⅛".*

➡ *An assembly with 30 rings of various widths to accommodate various current requirements. Unit is approx. 4-5/16" long, designed for flange mounting.*



➡ *Cylinder type assembly approx. 3¾" long with 24 hard silver rings. 1⅜" O.D. with wall thickness less than ⅛".*



*PATENTS PENDING

ELECTRO TEC is now tooled up, with new expanded facilities for production of large Slip Ring Assemblies to exact customer specification. Sizes range up to 24" in diameter, either cylindrical or disc type.

The exclusive ELECTRO TEC PROCESS*—the electro-deposition of hard silver rings into an accurately machined plastic blank—consistently yields a high degree of dimensional accuracy, excellent concentricity, and a jewel-like ring finish. This process also eliminates expensive tooling and mold charges, frequently lowers costs to 30% of other methods of manufacture. The silver rings are uniformly hard for long life—75-90 Brinell.

ELECTRO TEC one-piece construction precludes dimensional variation due to accumulated errors. The plastic base is fully cured before rings are plated into it, thus preventing separation of base material from the rings.

ELECTRO TEC LARGE SLIP RING Assemblies are widely used in Radar Equipment, Fire Control Systems, Test Tables and many other critical applications. Light weight combined with rugged durability recommends their use in airborne applications.

Every user knows the ELECTRO TEC reputation for quality and superiority in miniature and sub-miniature slip ring assemblies.

Our Engineering Department is available for consultation on any of your slip ring problems without obligation.

**ELECTRO TEC CORPORATION**

SOUTH HACKENSACK • NEW JERSEY

A NEW twist FOR YOUR PRODUCT

Lewis

can help YOU improve YOUR product . . . simplify production!

It's amazing what things as commonplace as springs, coils and wireforms can do to help product performance and sales appeal! But, as Lewis Engineers can show you, there's more to a spring than just a coil of wire. The design and selection of material can "make or break" an otherwise good product. That's why it pays to choose a supplier who has the experience, reputation and facilities to furnish you with springs, coils and wireforms that are expertly designed and engineered to fit your product's exact needs.

**Call on Lewis!** Show us your product . . . tell us your problems . . . see how Lewis Engineers come up with the perfect answer to increased product performance and lower production costs! Drop us a line today!

LEWIS SPRING & MANUFACTURING COMPANY
2656 W. NORTH AVENUE, CHICAGO 47, ILLINOIS

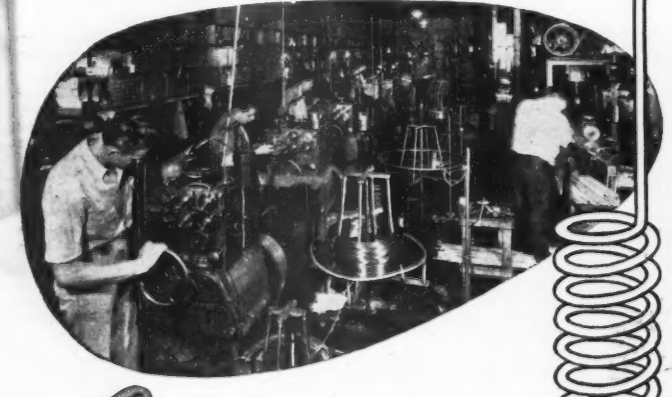

Lewis PRECISION SPRINGS
THE FINEST LIGHT SPRINGS AND WIREFORMS OF EVERY TYPE AND MATERIAL

Rolling rack for television receiver line cords. Operator places cords on it after stapling the metal back-cover plate to the female end of the cord

plate assemblies stay on top of the rods, and the coil cords hang down below. The construction reduces tangling of cords.

With 17 slots and a capacity of 10 cords per slot, the total capacity of the rack is 170 cords. The rack is called a xylophone by plant workers because of its resemblance when empty to this instrument.

## Assembling Dial Drive Cords

A RIVETING-MACHINE setup in Crosley's Cincinnati plant automatically produces finished dial drive cords cut to correct length and having securely riveted end loops. The operator needs only to unload and rethread the machine. Two loops are formed at each operation, one for the end of a finished cord and one for the start of a new cord.

As the first step, the operator hooks the loop (formed on the end of the cord coming from the spool during the previous operation) over



Riveting machine setup used for forming loops in drive cords for radio and television dial tuning

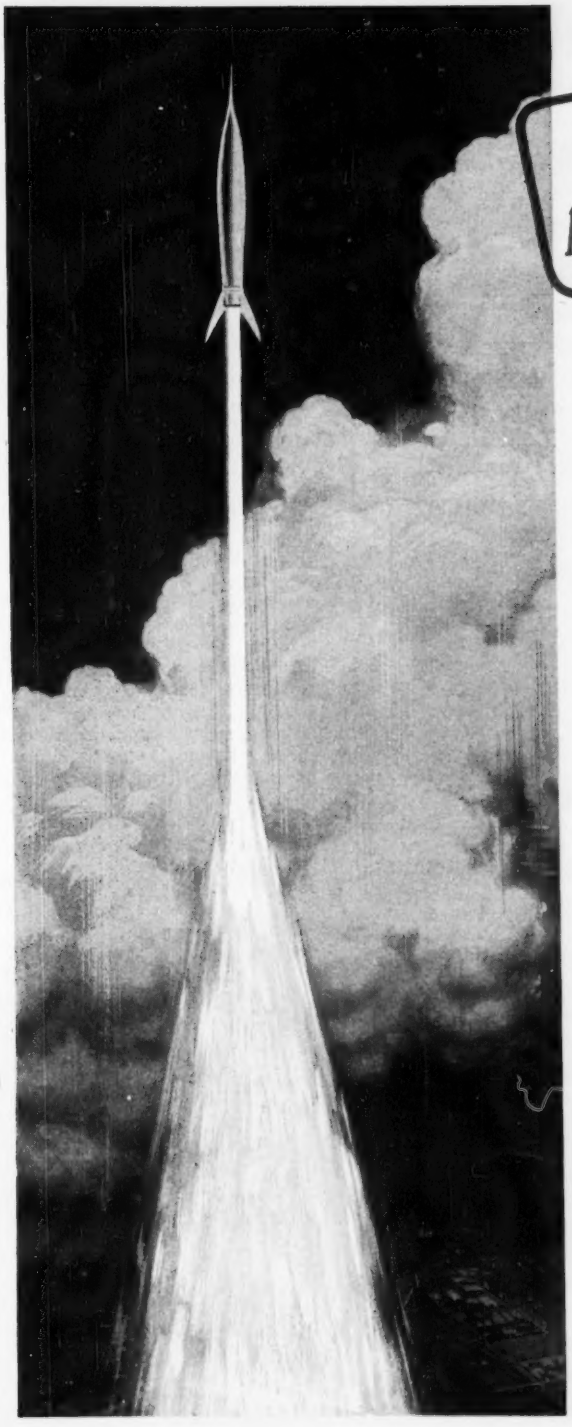

# IMPORTANT ANNOUNCEMENT

## ...to Engineers and Scientists

***You can now fill vital positions in our guided missile projects***

Chance Vought Aircraft, a supplier of high performance Navy aircraft for 35 years, is presently engaged in highly classified work on guided missiles under Navy contract. These missiles are in restricted production for intensive experimental use. They are flying and their performance has been excellent.

Engineering and scientific personnel with backgrounds in Aerodynamics or Electronics will find exceptional opportunities for employment on these interesting projects. Openings are available to personnel with Ph.D. and M.S. degrees, or B.S. degrees with related missile experience.

For further information write Engineering Personnel Section, Chance Vought Aircraft, P. O. Box 5907, Dallas, Texas.

★

CHANCE VOUGHT

**CHANCE VOUGHT AIRCRAFT**

Division of United Aircraft Corporation

DALLAS, TEXAS

# Here's how the BECKMAN EASE COMPUTER helped simplify F-86 Sabre jet design

*at North American Aviation*

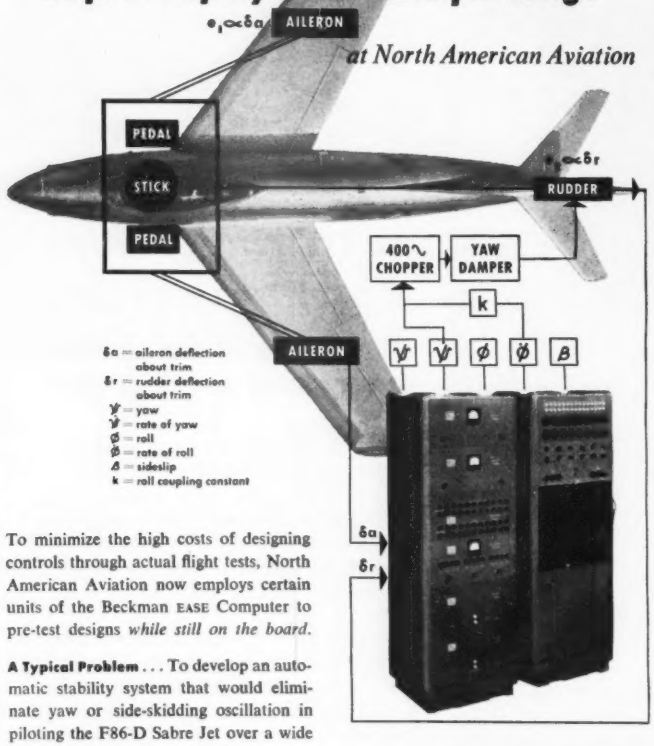


To minimize the high costs of designing controls through actual flight tests, North American Aviation now employs certain units of the Beckman EASE Computer to pre-test designs *while still on the board.*

**A Typical Problem . . .** To develop an automatic stability system that would eliminate yaw or side-skidding oscillation in piloting the F86-D Sabre Jet over a wide range of speeds and at altitudes from sea level to the stratosphere.

**How North American Solved It . . .** The diagram above shows how North American used certain units of the Beckman EASE Computer to quickly solve the problem by flight simulation. A control-system mockup was designed by engineers at North American which generated voltages proportional to aileron and rudder deflections made by movement of mockup stick and pedals. These voltages were fed into the computer so that its electrical response was analogous to the response of the F86-D in flight. Flight conditions—speed and altitude—were varied on the computer by merely turning knobs.

*Airborne performance confirmed the results as developed by flight simulation!*

**WHAT ABOUT YOUR DESIGN PROBLEMS?**

*The Beckman EASE Computer is currently being used to solve design problems on such products as guided missiles, submarines, railroad cars, automobiles, military vehicles—and has many other time and money-saving applications in industry and research. It is not only, by far, the lowest priced quality instrument in the field . . . but its unitized design, employing compact rack-mounted components, permits the user to select a custom computer which meets his exact requirements—whether as equation solver, simulator, or tester. Let us study your design problems and make helpful suggestions on applying the EASE to your operations!*

**Get complete details on this new Beckman advancement by writing for Data File 18-59**

BECKMAN INSTRUMENTS control modern industries

*Special Products Division*

**BECKMAN INSTRUMENTS, INC.**

SOUTH PASADENA, CALIFORNIA

Factory Service Branches: New York—Chicago—Los Angeles

Beckman Instruments include: pH Meters and Electrodes — Spectrophotometers — Radioactivity Meters — Special Instruments






**Closeup of riveting machine after cord has been strung. Retractable metal peg is just under finger. Cutter bar is just in front of finger, and moves away from finger when hand lever is operated**

a spring that is clamped to the machine. She then brings the cord around a pulley mounted on an outrigger at the left end of the machine; the position of this pulley is adjustable for changing the total length of a cord.

From the pulley, the cord is brought back around a metal peg in front of the operator, brought around one loop-forming hook, run across a gap through which the cutting tool later passes, then brought around the other loop-forming hook and back toward the operator. She holds her finger on this end of the cord to maintain tension, then operates the foot pedal of the press. This applies the rivet

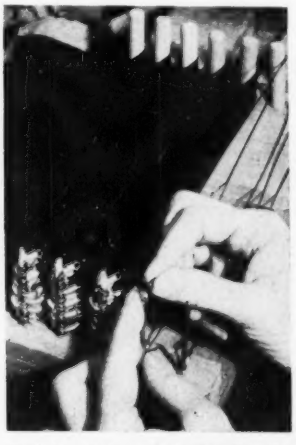

**Rack for storing and transporting finished drive cords**

# "DOUBLE-TEAMED"

## for quality GENERAL TRANSFORMERS



manufactured with

## Heldor CANS & TERMINALS



**Built to Meet MIL-T-27 SPECIFICATIONS**

General Transformer Company uses Heldor transformer cans and compression-type, hermetic seal bushings as a practical solution to many assembly problems. From design through every step of production, they know that their finished transformers will meet MIL-T-27 specifications.

Take advantage of HELDOR's new "PACKAGE"—transformer cans with hermetic seal bushings ASSEMBLED in can covers, all ready for final assembly operations—to save time, money and inventory problems. Don't buy merely cans and terminals—buy this new Heldor "PACKAGE". Mail specifications of your present can and terminal assemblies for a money-saving quotation.

WRITE FOR DATA

☐ Enclosed are specifications.
Quote on ..... Heldor "PACKAGES"
(Quantity)
☐ Send new Heldor Bushing Catalog.
Name .....
Title .....
Company .....
Street .....
City ..... Zone .....
State .....

**HELDOR MANUFACTURING COMPANY**
*Division of HELDOR BUSHING & TERMINAL CO., INC.*
225 Belleville Avenue, Bloomfield, New Jersey

# for best marking results use

# MARKEM®

## METHODS

MARKEM MACHINES • MARKEM TYPE • MARKEM INKS

FOR MARKING PRODUCTS, PARTS, PACKAGES, TAPES, TAGS, LABELS

Markem Methods are engineered to solve *specific* marking problems. The proper combination of a Markem marking *machine*, Markem *type* and Markem *ink* is matched to the individual requirements. Not only are the properties of the surface itself considered, but also local conditions of temperature and humidity together with your own handling techniques during production, storage and packaging. That is why it is so important that the Markem Method be followed completely.

When you have a marking problem, ask Markem about it. Send a sample of the item to be marked and details of your needs. Markem engineers have worked out practical solutions for many manufacturers. MarkeM Machine Company, Keene 5, N. H.

MARKEM BETTER MARKING SINCE 1911

2KW VACUUM TUBE BOMBARDER OR INDUCTION HEATING UNIT

only $650



**Simple . . Easy to Operate . . . Economical Standardization of Unit Makes This New Low Price Possible**

Never before a value like this new 2-KW bench model "Bombarder" or high frequency induction heater . . . for saving time and money in surface hardening, brazing, soldering, annealing and many other heat treating operations.

This compact induction heater saves space, performs with high efficiency. Operates from 220-volt line. Complete with foot switch and one heating coil made to customer's requirements. Send samples of work wanted. Specify time cycle required for your particular job. We will quote on proper size unit for your requirements. Immediate delivery.

Scientific Electric Electronic Heaters are made in the following ranges of power: 1–2–3½–5–7½–10–12½–15–18–25 40–60–80–100–250KW.

Scientific Electric

DIVISION OF "S" CORRUGATED QUENCHED GAP CO.

107-119 MONROE STREET GARFIELD, NEW JERSEY




over the final loop to complete the cord.

With her left hand, the operator then moves the hand lever on the machine enough to bring the starting loop for the new cord under the riveting head, and operates the foot pedal again to apply the second rivet. Moving the hand lever still farther now pulls the cutting blade back through the cord, shearing it. A final movement of the lever retracts the metal peg on the front of the machine, releasing the tension so that the finished loops can be unhooked easily.

At another work position, a spring is hooked on to each end of the finished cord. The cords are then stored on an adjustable tote board. This has headless nails at one end over which the spring eyes are placed. Each cord is hooked over one of the wooden pegs on a sliding board at the other end. The peg board is positioned correctly for a particular length of cord, then locked in position with a thumb screw.

### Ventilating-Screen Stapler

PROTECTIVE wire screens are stapled over ventilating openings in the composition backs of television receivers at a production rate of less than one minute per set, in Crosley's Cincinnati plant. This is made possible through use of a heavy-duty Bostitch power stapler controlled by a foot pedal. The machine uses spools of wire rather than staples, thereby reducing material costs for the operation.



**Stapling protective screen to back cover for television receiver**

# KEL-F

ONLY COMMERCIAL FLUORO-CHLORO-CARBON THERMOPLASTIC

# Application Report #4

. . . how the unique thermoplastic — TRIFLUORO-CHLORO-ETHYLENE — has been used to solve tough design problems

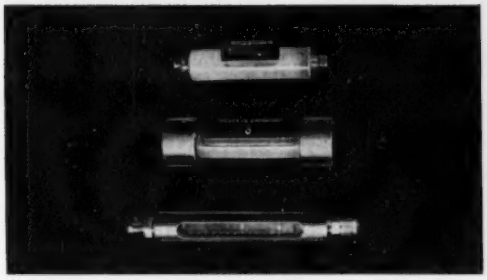

**1. Glass won't do in these gauges** which measure the rate of flow of hydrofluoric acid. Chemical inertness . . . transparency to permit reading liquid levels . . . shatter-resistance . . . and easy machinability of both rod and tube are the reasons for specification of Kel-F.

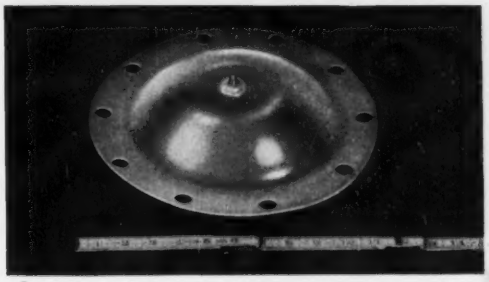

**2. Superior flexibility** over a wide temperature range, combined with chemical inertness, make Kel-F the natural specification for this large valve diaphragm to be used for corrosive service. Measuring *twelve* inches in diameter, the diaphragms are compression molded around metal inserts.

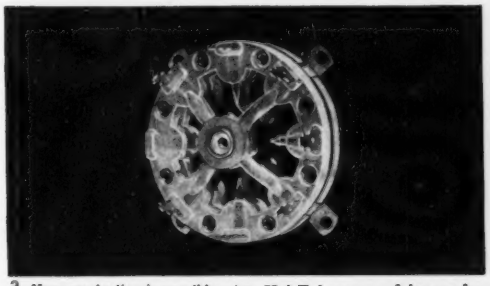

**3. Mass production is possible** with Kel-F because of its ready moldability. Electronic parts, like this tube base, may be injection molded in short cycles. No finishing, aside from sprue-removal, is required to assure close tolerance fits with metal parts.

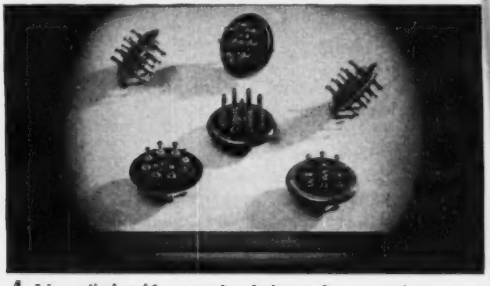

**4. A hermetical seal** between insulation and contacts is required in these multi-lead terminals. Other major "specs" include superior electrical and heat resistance. Today, Kel-F is specified for such applications—because the seal is easily achieved through compression molding about metal contacts.

## A Capsule Report on the Properties of KEL-F

- ★Chemical Inertness
- ★Wide temperature range —minus 320 F to 390 F
- ★High electrical resistance
- ★Low Cold Flow
- ★Zero Moisture Absorption
- ★Variable transparency and flexibility properties
- ★Readily molded, extruded and machined

## Basic Kel-F Products Available

**MOLDING POWDERS**

***Unplasticized***

**#300** . . for high temperature service
**#270** . . for less severe temperatures

***Plasticized*** *(in either #300 or #270)*

**P 20** . . with 20% plasticizer
**P 25** . . " 25% "
**P 30** . . " 30% "

**DISPERSIONS**

**NW-25** . . flows readily at fusion temperatures
**N-1** . . High molecular weight

**OILS, WAXES and GREASES**

**#1** . . Light Oil
**#3** . . Medium Oil
**#10** . . Heavy Oil
**#40** . . Waxy Oil (pour point 80-90 F)
**#150** . . Hard Wax at 70 F
(Greases compounded to order)

**Standard Fabricated Kel-F Materials and Parts Available from Commercial Sources**

Molded Sheets ★Extruded and Molded Rod ★Extruded Tubing
Thin Film (extruded as lay-flat tubing) ★Strip
Gaskets ★Washers ★Valve Discs ★"U" Packing
"O" Rings ★Kel-F coated Resilient-core "O" Rings
Valve Diaphragms
Transformer Terminals ★Rotary Electric Switches ★Hook-up Wire
Electronic Terminals, Tube Bases and Coil Forms

*For full information on various molders, extruders and fabricators of Kel-F products; also technical data on detailed properties, molding and application techniques — write*

**Chemical Manufacturing Division**

***THE* M. W. KELLOGG *COMPANY***

**P. O. Box 469, Jersey City 3, N. J.**

KELLOGG

PULLMAN INCORPORATED — SUBSIDIARY OF

# NEW PRODUCTS

Edited by WILLIAM P. O'BRIEN

**Recently Developed Test Instruments, New Materials and Components and Several of the Latest Tubes Are Included . . . Twenty-four Trade Bulletins Reviewed Under *Literature* (p 381)**


**OTHER DEPARTMENTS featured in this issue:**

| | Page |
|---|---|
| Electrons At Work | 168 |
| Production Techniques | 266 |
| Plants and People | 396 |
| New Books | 414 |
| Backtalk | 430 |

### Half-Wave Vacuum Rectifier

RADIO CORP. OF AMERICA, Harrison, N. J., has announced the 6AX4-GT, a half-wave vacuum rectifier tube of the heater-cathode type. It is intended chiefly for use as a damper tube in horizontal deflection circuits of tv receivers. Designed to withstand negative peak pulses between heater and cathode of as much as 4,000 volts with a d-c component up to 900 volts, the tube provides flexibility in choice of deflection circuits.



### General-Purpose Oscilloscope

TELETRONIC LABORATORIES, INC., 1835 W. Rosecrans Ave., Gardena, Calif. Model 101 general-purpose rack-mounted oscilloscope features a 7-in. viewing screen. The vertical amplifier provides 5 stages of push-pull amplification, giving sensitivity of 10 mv peak-to-peak per in. The sinusoidal frequency response of the amplifier from 0 to 200,000 cps is within 10 percent down; from 0 to 500,000 cps, within 6 db down from maximum response. The horizontal amplifier provides 3 stages of push-pull amplification, giving sensitivity to 100 mv rms per in. Sinusoidal frequency response of the amplifier from 0 to 100,000 cps is within 10 percent down; and from 0 to 300,000 cps, within 6 db down from maximum response. Test signals are provided for in the form of a 0.5-v rms sine wave at the line frequency and 3.5 v peak-to-peak sawtooth wave at the horizontal sweep frequency.



### Equalizer Preamplifier

THE RADIO CRAFTSMEN, INC., 4401 N. Ravenswood Ave., Chicago 40, Ill. Model C300 equalizer preamplifier features five-position low-and-high record equalization, five-position low-and-high sharp-frequency-cut-off filters for reduction of rumble and record scratch respectively, choice of loudness or straight volume-control action, continuously variable bass and treble controls and five different audio inputs. Other features include a self-contained shielded power supply, tube filaments powered by d-c to reduce hum to a minimum, tubes mounted on a shock-mounted subchassis, and an all-triode circuit with cathode-follower output.

### Miniature Relay

TERADO CO., 1068 Raymond Ave., St. Paul 8, Minn., has announced a miniature relay that is hermetically sealed and has an extreme sensitivity because of its high-efficiency coil. It will operate on 75 mw or less. The switch is spdt. Contacts are of solid coined silver. Other features include: maximum coil resistance, 10,000 ohms; insulation, 500 volts any terminal to ground; and base, the standard 7-pin miniature.



### Synchronous Inverter

THE BRISTOL CO., P. O. Box 1790, Waterbury 20, Conn., has developed a synchronous inverter having a

# Here's what makes RAYTHEON RELIABLE SUBMINIATURE TUBES

**RAYTHEON RELIABLE SUBMINIATURE TUBES**

**CK5702WA**
RF Amplifier Pentode

**CK5703WA**
High Frequency Triode

**CK5744WA**
High Mu Triode

**CK5783WA**
Voltage Reference

**CK5784WA**
RF Mixer Pentode

**CK5787WA**
Voltage Regulator

**CK5829WA**
Dual Diode

**CK6021**
Medium Mu Dual Triode

**CK6111**
Low Mu Dual Triode

**CK6112**
High Mu Dual Triode

**CK6152**
Low Mu Triode

✓ **EXPERIENCE** Raytheon has been in constant, large scale production of subminiatures for fourteen years — has made millions of them.

✓ **ENGINEERING** Many Raytheon engineers have worked exclusively on the development and improvement of Subminiature tubes. Raytheon designs have proved themselves in the field.

✓ **EQUIPMENT** Raytheon's production, testing and inspection facilities are custom built. Improved welding, sealing and exhaust procedures are among the many exclusive Raytheon advances.

✓ **EXCLUSIVE SUBMINIATURE TECHNIQUES** Include closer production tolerances for all parts; separate production and inspection personnel free of production-incentive pressure; grid inspection with high optical magnification; microscopic inspection of each assembly; longer, more complete electrical aging; rigid tests for shock, vibration, acceleration and all other factors affecting performance and life.

RAYTHEON

**RAYTHEON MANUFACTURING COMPANY**

RAYTHEON MAKES ALL THESE

sensitivity of 0.05 μv and a dissymmetry of less than 0.5 percent. It is capable of converting low-power d-c signals to alternating voltages that can be amplified and applied to electronic, electrical and servo systems. The Syncroverter Switch will operate at any frequency from 0 to 3,500 cycles. It is designed for precision use in electronic computers, instruments, gun directors, null detectors and many other similar uses. Instantaneous operation and length of life are not affected by vibration or shock. Errors due to thermal emf are eliminated by the use of two spdt contacts.

## Voltmeter

THE DAVEN CO., 191 Central Ave., Newark 4, N. J., announces its improved electronic voltmeter, type 170-A, for general laboratory and production use. Amplifier and power supply sections are separate subassemblies. The amplifier is completely shockmounted, reducing microphonic effects to a minimum. Both amplifier and power supply are electrostatically and magnetically shielded from each other and from external fields. This eliminates pickup and reduces hum in the amplifier and also prevents disturbance of nearby equipment due to radiation. Another new feature of the unit is the fact that selected tubes are not necessary for replacement. Any standard vacuum tube may be substituted without affecting the characteristics of the voltmeter. The improved instrument measures accurately a-c sinusoidal voltages over a frequency range from 10 to 250,000 cycles, and a voltage range from 0.001 to 100 v. Accuracy is ± 2 percent over the entire frequency range.

## Electrometer Pentode

RAYTHEON MFG. CO., 55 Chapel St., Newton 58, Mass. Type CK5889 is a subminiature pentode electrometer tube with a control-grid current rating of $3 \times 10^{-15}$ ampere maximum. A minimum of filament power is required by the 1.25-v, 0.0075 ampere filament. The conducting ring around the bulb may be grounded through a connecting clip to provide complete isolation of the grid lead, which is at the top of the tube. Full technical information is given in a data sheet now available.



## Four-Channel Oscilloscope

ELECTRONIC TUBE CORP., 1200 E. Mermaid Lane, Philadelphia 18, Pa., has available a new high-gain, four-channel oscilloscope for measuring the minute potentials from brain waves, heart waves and other neuromuscular reactions studied in encephalography, biophysics and allied fields of medical research. Model E4GAM has a high input impedance and a maximum gain of 1.8 million. Signals from all four channels are displayed on the face of a single 7-in. crt that may be readily photographed with an oscillo-record camera. The sweep generator is common to all channels and has a continuously variable range from 1 sweep per minute to 50,000 sweeps per second plus provisions for blanking, external synchronization and either common or individual positioning.



## Pulse Generator

RUTHERFORD ELECTRONICS CO., 3707 South Robertson Blvd., Culver City, Calif. Model B-2 pulse generator is an instrument for the generation of pulses of variable width, amplitude, delay and repetition rate, with very accurate control of all factors by means of helical potentiometers. It features duty factors as high as 25 percent, and repetition rates as high as 100 kc. It has an internal oscillator giving rates from 10 cps to 100 kc in four decade ranges. It may be externally triggered or used in single pulse operation. The main pulse may be delayed from 0 to 10,000 μsec from the synchronizing pulse in five decade ranges. The main pulse is variable in width from 0.2 μsec to 1,000 μsec in four decade ranges, has a rise time of 0.02 μsec, a fall time of 0.05 to 0.1 μsec (depending on width), and maximum amplitude of 100 v into an open circuit. The internal impedance of the main pulse output is 100 ohms. Amplitude of the outputs is adjusted by a constant-impedance 100-ohm step attenuator,

# NEW 7" REELS OF audiotape* give you EXTRA VALUE

## *at no extra cost!*

**GUARANTEED SPLICE-FREE**

**SPLIT-SECOND TIMING**
***with New 2¾" Hub***

Timing errors are virtually eliminated by this improved reel design which minimizes tension and speed changes throughout the winding cycle. Ratio of O.D. to hub diameter is the same as on the standard NAB aluminum reel.

**PERFECTED ANTI-FRICTION PROCESS.** Reduces head wear—eliminates annoying tape "squeal"—prevents "tackiness" even under extreme temperature and humidity conditions.

**MAXIMUM UNIFORMITY OF OUTPUT.** All 7" and 10" reels of plastic-base Audiotape are guaranteed to have an output uniformity *within* ± ¼db—and reel-to-reel-variation of less than ± ½db. What's more, there's an actual *output curve* in every 5-reel package to prove it.

With Audiotape, all of these extra-value features are *standard*. There's no extra cost—no problem of separate inventories or variations in tape quality.

For there's *only one* Audiotape—the finest obtainable anywhere. Test it—compare it—let Audiotape speak for itself.

The new 7-inch plastic reel with large diameter hub for greater timing accuracy is now being supplied on all orders unless otherwise specified. Because of increased hub diameter, maximum reel capacity is slightly over 1200 feet. Older style Audiotape reels with 1¾" hub and 1250 feet of tape will continue to be furnished on request at the same price.

**Trade Mark*

**AUDIO DEVICES, Inc.**

444 Madison Ave., New York 22, N. Y.

Export Department, 13 East 40th St., New York 16, N. Y., Cables "ARLAB"

**audiodiscs • audiotape • audiofilm • audiopoints**

**how fast is it?**



The speed of any relay, including the Sigma Series 41 Sensitive Relay pictured above, varies widely depending on circuit conditions.

Here are two test circuits. In each case, the same relay is used, the coil current is the same and the oscillogram shows the operating time.

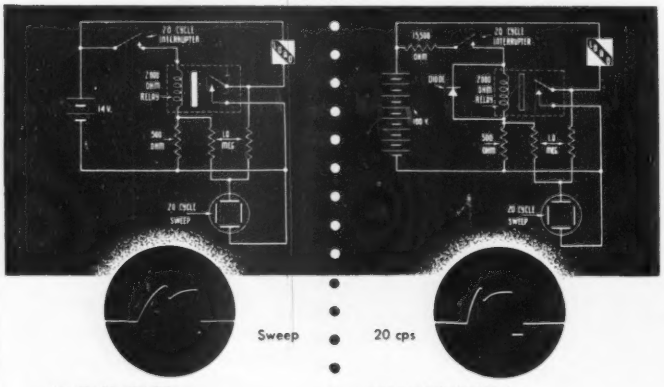


***IN THIS CASE —***

The oscillogram shows a gradual rise of coil current, based on the signal derived across the 500 ohm resistor. The first downward step is caused when the relay contact in closing grounds the load and removes some of the input voltage from the 'scope. Reverse curvature in the trace is due to back emf induced in the relay winding by the armature motion. The next and much larger downward step is the result of opening coil circuit by the interrupter. The small dot at its lower end indicates the delay in breaking the load cricuit, after which the trace moves upward from reappearance of voltage across open contacts. The whole cycle shows a substantial operating delay, and a period of contact closure much shorter than that in which voltage is applied to the coil.

***HERE HOWEVER —***

Although the final relay current is identical, as is the relay, it is obvious that the electrical time constant is much shorter, the current rises faster, and the contacts close sooner. Another "wrinkle" has been introduced in the diode shown across the coil. It is polarized so as not to pass battery current; but upon interruption of the circuit, it provides a low impedance path for dissipation of the stored energy in the relay, which in the other case was dissipated in an arc at the interrupter contacts at high voltage without significant current flow. In this case, the current flow is appreciable and holds the relay on for a considerable length of time.

Not only is the relay now much faster, but the contacts are now closed for a time approximately equal to that during which the coil is energized.

Thus it is evidently difficult to state operating time of a relay unless circuit conditions are prescribed — and this is no academic qualification. (Those wishing to duplicate the above displays will recognize that the two resistors shown as 1.0 megohm should be varied to give a desirable relative magnitude to the two signals, and may in fact take the form of a potentiometer.)

SIGMA

SIGMA INSTRUMENTS, INC.

62 PEARL ST., SO. BRAINTREE, BOSTON 85, MASS.




having a 60-db range, together with a 10-db fill-in attenuator.

## Hydrogen Thyratron

RADIO CORP. OF AMERICA, Harrison, N. J. The 3C45 is a hot-cathode, three-electrode hydrogen thyratron designed for pulsing service involving high repetition rates, high peak currents and low average currents in low-impedance circuits. It is especially useful for pulsing magnetron oscillators and other oscillators having a power input up to 50 kw. Features include short deionization time, low voltage drop, high peak anode current capability, ambient-temperature operating range of −50 to +90C, and positive-control characteristic which permits zero-bias operation utilizing positive triggering pulses.



## Radiation Measurement Instrument

RADIATION COUNTER LABORATORIES, INC., 5122 W. Grove St., Skokie, Ill. The Omniometer is a new, single, all-purpose instrument for the measurement of radiation. It may be employed with all types of sensing elements such as Geiger,

FOR RADIO  AND

TV  SOLDERING THAT LASTS...

USE...


For any soldering job that demands freedom from corrosion and conductive flux residue . . . for ease of working and unequalled consistency . . . there is nothing better than Federated Rosin Core Solder.

Each Rosin Core Solder composition . . . there is a variety for different purposes . . . is a tin and lead alloy with a rosin flux that is effective but not corrosive. Because the rosin residue is chemically inactive, current leakage at radio and television frequencies is prevented.

Federated Rosin Core Solder is a quality product that is unsurpassed for the permanence of the bond it produces . . . for the consistently easier soldering job it does! Look for it in 1, 5, 20, 25, and 50-pound sizes on the familiar orange and black metal spool. Listed by Underwriters' Laboratories Inc.

*Federated Metals Division*

Federated first in the non-ferrous field. FMD

**AMERICAN SMELTING AND REFINING COMPANY • 120 BROADWAY, NEW YORK 5, N. Y.**

# HOW EDISON HELPED RCA BEAT the DOPPLER EFFECT

*Edison Temperature Control in RCA Crystal Oven Maintains Oscillator Frequency to Accuracy of 0.00005%.*

Equipment used in the monitoring of television transmitters employing the offset carrier system requires a degree of frequency accuracy and long term stability unheard of a short time ago. The most exacting requirements are imposed at the upper end of the newly assigned U.H.F. channel, where monitor accuracy must be held to 5 parts in ten million.

At this high order of accuracy, single checks against a stable reference source such as WWV are inadequate because the Doppler effect in transmissions reflected from the ionisphere causes variations amounting to 50% of the allowable monitor tolerance over a 24 hour period.

Engineers at the Radio Corporation of America found the solution in a new crystal oscillator so stable that readings can be taken over a relatively long period of time without recalibration. In this way accurate average frequency values can be obtained which cancel out the variations caused by the Doppler effect.

The heart of this oscillator is the new RCA VC-1-F crystal unit. Mounted in the TMV-129-P oven and temperature-controlled by an Edison sealed-in-glass thermostat, the oscillator maintains the required accuracy of 0.00005% for periods in excess of the 30 day minimum specified.

Let us send you, free, specifications on Edison sealed thermostats. Ask for bulletin No. E-3009. Edison thermostats feature stability measured in years; control within ± 0.1°F and capacity to 115 volts 8 amperes d.c. or 1000 watts.

Thomas A Edison
INCORPORATED
INSTRUMENT DIVISION
*Lakeside Avenue, West Orange, N. J.*

MANUFACTURERS OF
*Electrical Resistance Bulbs*
*Temperature Indicating and Alarm Systems*
*Time Delay Relays*

YOU CAN ALWAYS RELY ON EDISON




proportional and scintillation counters. The meter incorporates two h-v supplies which provide overlapping voltage ranges from 500 to 5,000 v. Changeover can be accomplished by a simple switch. If the sensing element delivers ¼ volt pulses or higher, then access is direct to the scaling circuit. For counting apparatus delivering voltage pulses of smaller magnitude, the pulses are fed into the amplifier input, and then to the scaler.



## Line-Bridging Transformer

SIERRA ELECTRONIC CORP., 810 Brittan Ave., San Carlos, Calif. Converting an unbalanced to a balanced input, the model 122 line-bridging transformer is arranged for direct plug-in attachment to such measuring instruments as carrier-frequency voltmeters, vacuum-tube voltmeters and similar instruments having standard input terminals on ¾-in centers. Flat within 0.5 db from 15 to 500 kc, the new unit is capable of handling a maximum voltage of 100 v. Three styles are supplied for input impedances of 135, 500 and 600 ohms.



## Compact Soldering Iron

KEMODE MFG. CO. INC., 161 W. 18th St., New York 11, N. Y. Requiring no electric current or external heat of any kind, the Quik-Shot soldering iron utilizes a chemical cartridge that heats the iron to working

*The Standard of Quality*

HICKOK

Model 292X
SIGNAL GENERATOR

Frequency Coverage:
125 KC to 220 MC

Calibrated Output:
Less than 1 microvolt,
up to 100,000
microvolts.

Professional engineers and technicians everywhere constantly rely on the accuracy of calibration and long dependability of HICKOK instruments.

In electronic instruments, HICKOK pioneering leadership has been acknowledged for over 42 years.

THE HICKOK ELECTRICAL INSTRUMENT COMPANY
10514 Dupont Avenue • Cleveland 8, Ohio

The Spotlight's On
DALOHM
Miniature
POWER RESISTORS!

WIRE WOUND—
SILICONE COATED
RESISTORS

Complete welded construction from terminal to terminal. Temperature coefficient 0.00002/ deg. C. Ranges from 0.1 Ohm to 55,000 Ohms, depending on Type. Tolerance 0.05%, 0.1%, 0.25%, 0.5%, 1%, 3%, 5%.

**RH TYPE** — Available in 25, 50 and 250 watt sizes. Silicone sealed in die-cast, black anodized radiator finned housing for maximum heat dissipation.

**RS TYPE** — Available in 2 watt, 5 watt, and 10 watt sizes. Silicone sealed offering maximum resistance to abrasion, high thermal conductivity and high di-electric strength.

DEPOSITED
CARBON RESISTORS

Dalohm precision deposited carbon resistors offer the best in accuracy, stability, dependable performance and economy. Available in ½ watt, 1 watt and 2 watt sizes.

Carefully crafted in every respect, Dalohm resistors are true power in miniature — provide the answer to those space problems.

Write, wire or phone George Risk
1300 28th Ave., Columbus, Nebr.
for price and delivery
Telephone 2139

DALE PRODUCTS, INC.



temperatures in 10 seconds and maintains the iron at an average soldering temperature of 800 F for seven minutes. The cartridge is ignited by the impact of a spring rod that is pulled out and released at the back of the handle. The iron is adaptable to all kinds of soldering work where line power is neither available or convenient. Five interchangeable tip sizes from $\frac{3}{8}$ to 1 in. are featured.



## Magnetrons

MICROWAVE ASSOCIATES INC. 22 Cummington St., Boston 15, Mass., has available two 3-cm magnetrons, the 2J42 and its similar but higher powered sequel, the 2J42A (RTMA type 6027). Type 2J42 is a low-powered, 17-w average, packaged magnetron, with a coaxial-to-waveguide output that is stabilized by a cavity integral to the assembly. The anode is of the double-ring type and is fabricated from a new vacuum-cast copper. The 2J42A is identical physically to the 2J42 but is supplied with an additional magnet permitting an increase of average power to 21 watts.



## Insulating Material

THE GLASTIC CORP., 1823 E. 40th St., Cleveland 3, Ohio. A new thin-gage insulating material made from glass fiber reinforced polyester, Glastic-940, is resistant to elevated

let WILLIAMS help you apply ferric oxides to the manufacture of your

ferrites

You'll be well repaid by getting the facts on a special group of Pure Ferric Oxides, developed by Williams especially for use in the manufacture of ferrites.

Williams Ferric Oxides analyze better than 99% $Fe_2O_3$. They contain a minimum of impurities. They are available in a broad range of particle sizes and shapes. Among them, we're certain you'll find one that's "just right" for your requirements. The proper application of Ferric Oxides to the manufacture of Ferrites is our specialty.

Tell us your requirements... we'll gladly send samples for test. Chances are good that our Ferric Oxide "Know How" can save you considerable time and money. Address Dept. 25, C. K. Williams & Co., Easton, Pa.

WILLIAMS
COLORS & PIGMENTS
C. K. WILLIAMS & CO.
Easton, Pa. • East St. Louis, Ill.
Emeryville, Cal.

P. S. We also produce IRN Magnetic Iron powders for the Electronic Core Industry, the Magnetic Tape Recording Industry and others. Write for complete technical information.

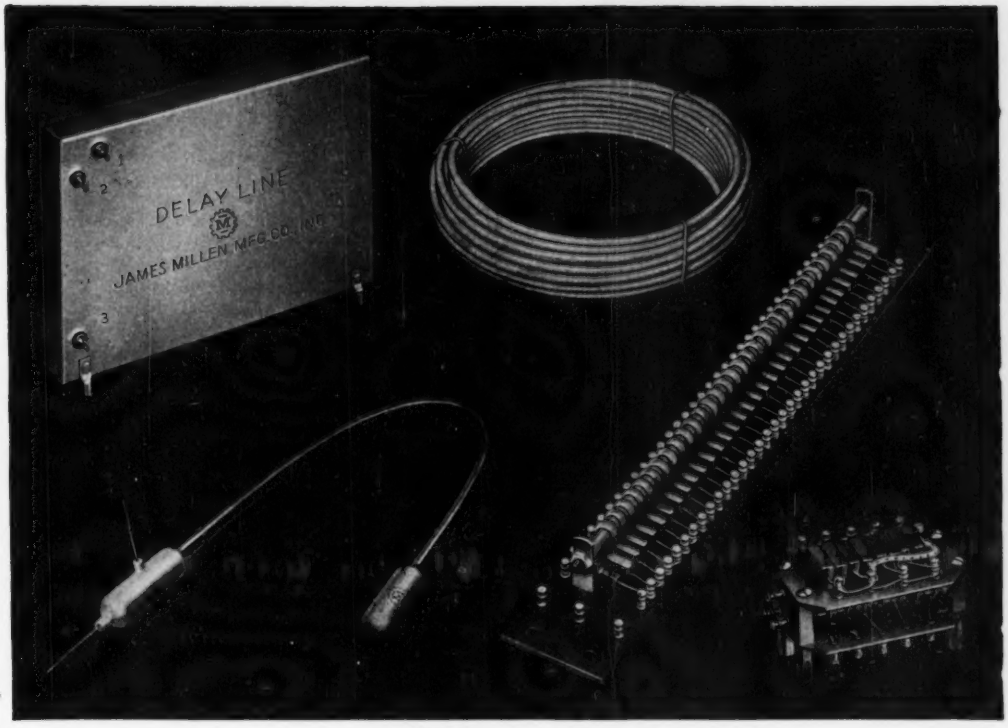


*"Designed for Application"*

## Delay Lines and Networks

**The James Millen Mfg. Co., Inc. has been producing continuous delay lines and lump constant delay networks since the origination of the demand for these components in pulse formation and other circuits requiring time delay. The most modern of these is the distributed constant delay line designed to comply with the most stringent electrical and mechanical requirements for military, commercial and laboratory equipment.**

**Millen distributed constant line is available as bulk line for laboratory use and in either flexible or metallic hermetically sealed units adjusted to exact time delay for use in production equipment. Lump constant delay networks may be preferred for some specialized applications and can be furnished in open or hermetically sealed construction. The above illustrates several typical lines of both types. Our engineers are available to assist you in your delay line problems.**

JAMES MILLEN MFG. CO., INC.
MAIN OFFICE AND FACTORY
MALDEN, MASSACHUSETTS, U.S.A.

MEMBER OF AGMA

● If your requirements are for extra fine-pitch gears and pinions with precision tolerances, send us your prints for quotation. Beaver Gear engineers are trained to assist you in the design and application of this type gear. Our workmen are specialists in manufacturing small and medium size, fine and extra fine-pitch gears to your most exacting specifications.

THE *Finest* IN GEARS

**Beaver Gear Works Inc.**

1021 PARMELE STREET, ROCKFORD, ILLINOIS

*Fine Wire* for TRANSISTORS

In line with our specialization in wire for new applications, we produce wires of composition suitable for the manufacture of Transistors; including GALLIUM GOLD and ANTIMONY GOLD. These alloys have been made to fill a specific need arising from new developments in this field.

Other wires we make regularly for similar application are PHOSPHOR BRONZE, bare or electroplated, and PLATINUM Alloys, produced to meet rigid specifications of tensile strength, size and straightness.

Write for Latest List of Products

SINCE 1901

**SIGMUND COHN CORP.**

121 SOUTH COLUMBUS AVENUE • MOUNT VERNON, NEW YORK




temperatures in electrical apparatus. It has good arc-tracking resistance and dimensional stability. It is available in standard sheet sizes of 24 in. x 36 in. The material may be obtained in $\frac{1}{32}$-in. thickness as required for special insulating applications such as relay build-ups, resistance welding transformer barrier insulation, top-stick material in d-c motors, transformer end wrapping and various tv parts. It is also well suited to applications requiring dimensional stability and heat resistance encountered in aircraft generators, class B motor insulation and small electrical unit manufacturing. Technical data and samples are available.



## Pushbutton Switch

RIVERSIDE MFG. AND ELECTRICAL SUPPLY CO., 10228 Michigan Ave., Dearborn, Mich., has developed a pushbutton switch, to meet military specifications, that opens and closes electrical circuits underwater, functions from 65 F below zero to 165 F above, and withstands salt spray, shock and vibration. The switch has a continuous rating of 10 amperes at 15 v d-c, 30 v d-c, or 125 v a-c. It is a single throw, one circuit switch, furnished either normally open or normally closed. The company has available complete information on this pushbutton switch and on waterproofed toggle switches up to 200-ampere rating.



## Portable Broadcast Amplifier

GENERAL ELECTRIC CO., Syracuse, N. Y., has announced the type BA-

# The PERFECT Wedding

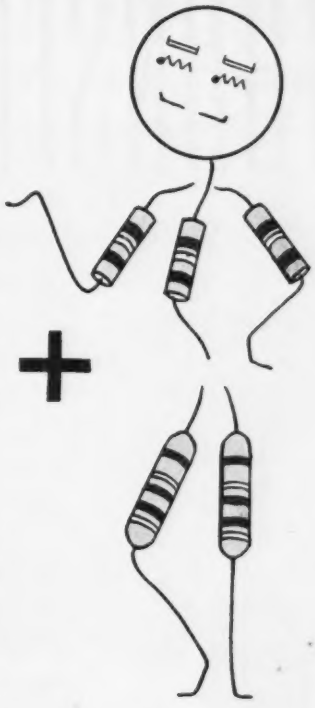

## TYPE 2003 FREQUENCY STANDARD

*The Type 2003 contains, in addition to the tuning fork, all circuit components which are selected or critical.—The tube and remaining components — three resistors and two .01 capacitors — are external and can be laid out and integrated with your equipment.*

**TUNING FORK STANDARD,** hermetically sealed.
**SIZE** — 4½ inches long. 1½ inches diameter.
**SIMPLE EXTERNAL CIRCUIT,** 1 tube, 3 resistors, 2 capacitors.
**TUBE** — Choice of 12AT7, 6201, 5751, 6BF7, 6BG7 or 6021.
**POWER REQUIRED,** 75 to 300 V at 1 to 5 m.a. — 6.3 V at 300 or 350 m.a.
**AVAILABLE** — in 400 or 500 cycles
**ACCURACY** guaranteed to .002%, 15° to 35° C.

*Write for descriptive literature, specifying Type 2003.*

*Also TYPE 2007*
(4½" x 1½")
COMPLETELY SELF-CONTAINED INCLUDING VACUUM TUBE

*Manufacturer of high precision frequency and timing instruments controlled by tuning fork oscillators.*

## American Time Products, Inc.

**580 Fifth Avenue** **New York 36, N. Y.**

OPERATING UNDER PATENTS OF THE WESTERN ELECTRIC COMPANY

# TRANSFORMERS

## HERMETICALLY SEALED TO MIL-T-27 SPECIFICATIONS

**NYT offers a wide variety of transformer types to meet military and civilian specifications, designed and manufactured by specialists in transformer development.**

**Latest NYT service for customers is a complete test laboratory equipped and approved for on-the-spot MIL-T-27 testing and faster approvals.**

**NEW YORK TRANSFORMER CO., INC.**
ALPHA, NEW JERSEY




6-B portable broadcast amplifier for use in a studio as well as on remotes. Flexibility for both types of operation is provided by four built-in preamplifiers and a master mixer. The unit has a built-in a-c power supply, in addition to battery provisions, and it uses low-noise miniature tubes. A built-in 400-cycle tone oscillator permits easy level setting. A new cue amplifier gain control facilitates operation in noisy locations. The entire amplifier is enclosed in a steel case and weighs only 35 lb, including batteries.

### Two-Set TV Coupler

RADIO MERCHANDISE SALES, INC., 1165 Southern Blvd., New York 59, N. Y. The AC-2 two-set coupler is a newly designed unit that permits operation of two sets from a single antenna. The unit equally distributes the signal to both receivers, and there is no limitation as to its location or length of lines between the coupler and either set. It also operates with coaxial cable.



### Reversible Motor

THE GENERAL INDUSTRIES CO., Elyria, Ohio, is producing a reversible 2-pole, four-coil motor for both remote control tv tuner and

# HIGH STABILITY I-T-E RESISTORS
## FOR CRITICAL ELECTRONIC APPLICATIONS

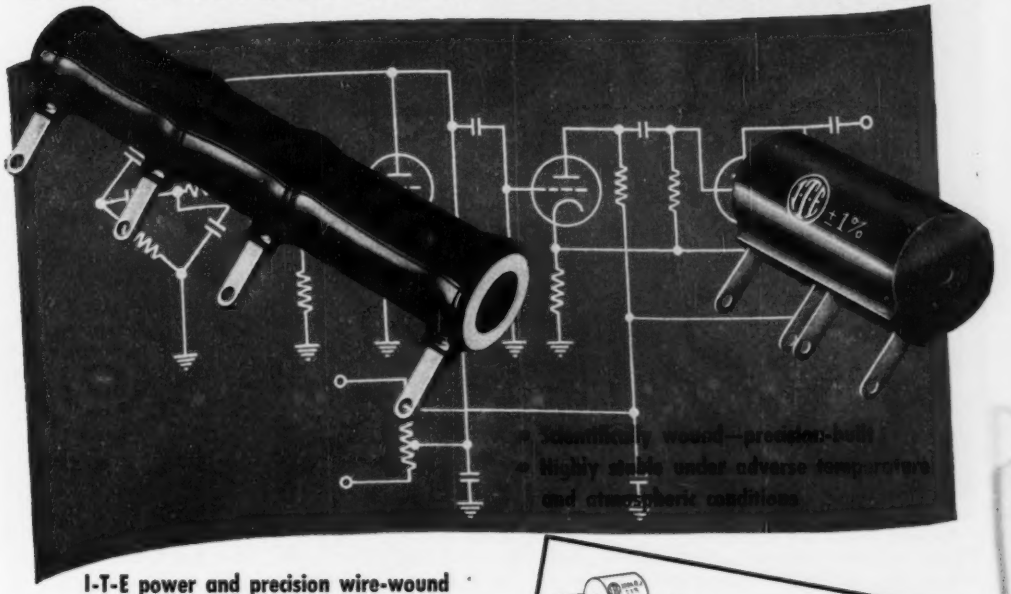


**I-T-E power and precision wire-wound resistors give you maximum stability in critical electronic applications. Here's why:**

### POWER RESISTORS

*Non-hygroscopic ceramic foundations* are highly resistant to heat, shock, and vibration. *Purest resistance wires* are uniformly wound and mechanically tied to prevent shorted turns and excessive hot spots. *Vitreous enamel coating* (organic, if required) provides a glazed moisture-repellent surface with fast heat-dissipation qualities. *Advanced production methods* assure high stability, long life.

Standard fixed resistors: 5-200 watts
Adjustable resistors: 10-200 watts
Oval resistors: 30-75 watts
Ferrule resistors: 12-200 watts
Special resistors: built to specifications to order.

Standard tolerance: ±10%. ±5% and less made



### PRECISION RESISTORS

*High quality wire alloys* are used—free from internal stresses and strains. *Automatic precision winding* assures even tension—eliminates hot spots. *Hermetic sealing* protects against destructive effects of salts, moisture, and atmospheric conditions. *Accelerated aging process* prior to calibration assures accuracy. *Critical quality control* eliminates all resistors which do not come up to high I-T-E standards.

Lightweight—for precision operation up to 125 C.
Surpass JAN R-93 and MIL R-93A specs.
Ratings from 0.01 ohms - 10 megohms, 0.125-5 watts.

Standard tolerance: ±1%. Available in specified tolerances down to ±0.05%.

**For detailed information**—get in touch with your nearest I-T-E representative. Or, write direct to:

I-T-E Resistor Division
1924 Hamilton Street
Philadelphia 30, Penna.

specify I-T-E **RESISTORS**

I-T-E CIRCUIT BREAKER COMPANY • RESISTOR DIVISION • PHILADELPHIA 30, PA.

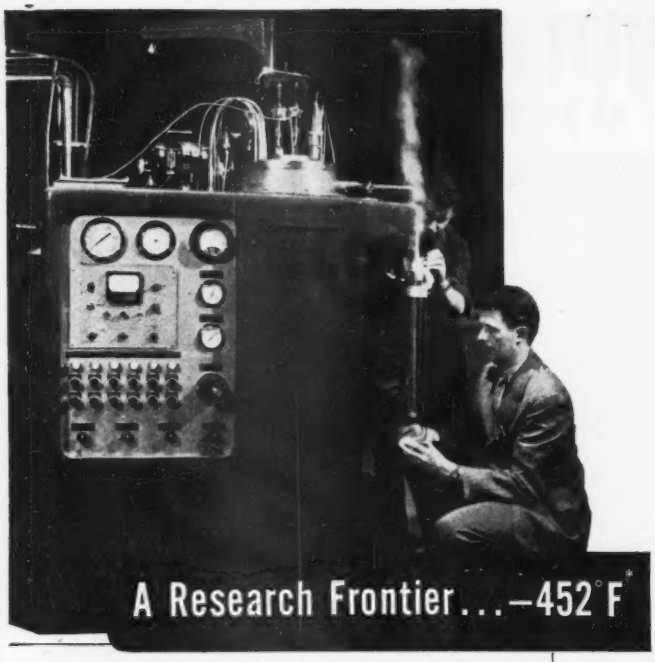

A Research Frontier...—452°F*

THE BASIC TOOL OF LOW-TEMPERATURE RESEARCH IS THE ADL COLLINS HELIUM CRYOSTAT. IT PROVIDES 4 LITERS OF LIQUID HELIUM PER HOUR AND MAINTAINS A TEST CHAMBER TEMPERATURE FROM AMBIENT TO —271° C.

*Boiling point of helium.

**IN THEORY:**

Atoms and electrons are in a state of more perfect order at extremely low temperatures. One can then study more precisely and effectively a number of variations in behavior which may at higher temperatures be masked by thermal motion.

**SUPPOSE THAT:**

Industrial research laboratories apply extreme low-temperature phenomena to your industry. Today, superconductors, chemical kinetics, heat capacities, property studies, are research projects . . . tomorrow, look for advances in instrumentation, metals of extraordinary hardness, accurate previews of chemical reactions. The rapid growth of this new research frontier may well affect your industry . . . how, when, or where is up to the research scientist, who, by using liquid helium, can more effectively and precisely study this new world near absolute zero.

Send for Cryostat Folder E12-1 and booklet on Low-Temperature Physics.

ARTHUR D. LITTLE, Inc.
*Mechanical Division*
30 MEMORIAL DRIVE • CAMBRIDGE, MASS.

ADL Mechanical Division



rotating antenna applications, as well as other small motor applications in which accurate reversing action is required. Designated the model O, it can be furnished either as split-phase capacitor type or split-phase resistance type, depending upon application requirements. It is designed for 24-v a-c or less, 6 cycles, and may be used either horizontally or vertically without affecting performance characteristics. The model illustrated with 3 leads is designed for use with spdt switch. Adaptation with 4 leads for use with dpdt switch is available where increased output is desired.



## Picture Tube Rejuvenator

CREST LABORATORIES, INC., Whitehall Building, Far Rockaway, N. Y., has introduced the model C picture tube rejuvenator that can be used on all standard cathode-ray tubes regardless of size. It is a simple plug-in unit that can serve a dual purpose: it can be used either as a flasher type reactivator or as a permanently installed rejuvenator.



## Sweeping Oscillator and Signal Generator

DECADE INSTRUMENT CO., Caldwell, N. J., has announced a precision combined h-f decade-switched sweeping oscillator and signal generator. The Deca-Sweep eliminates

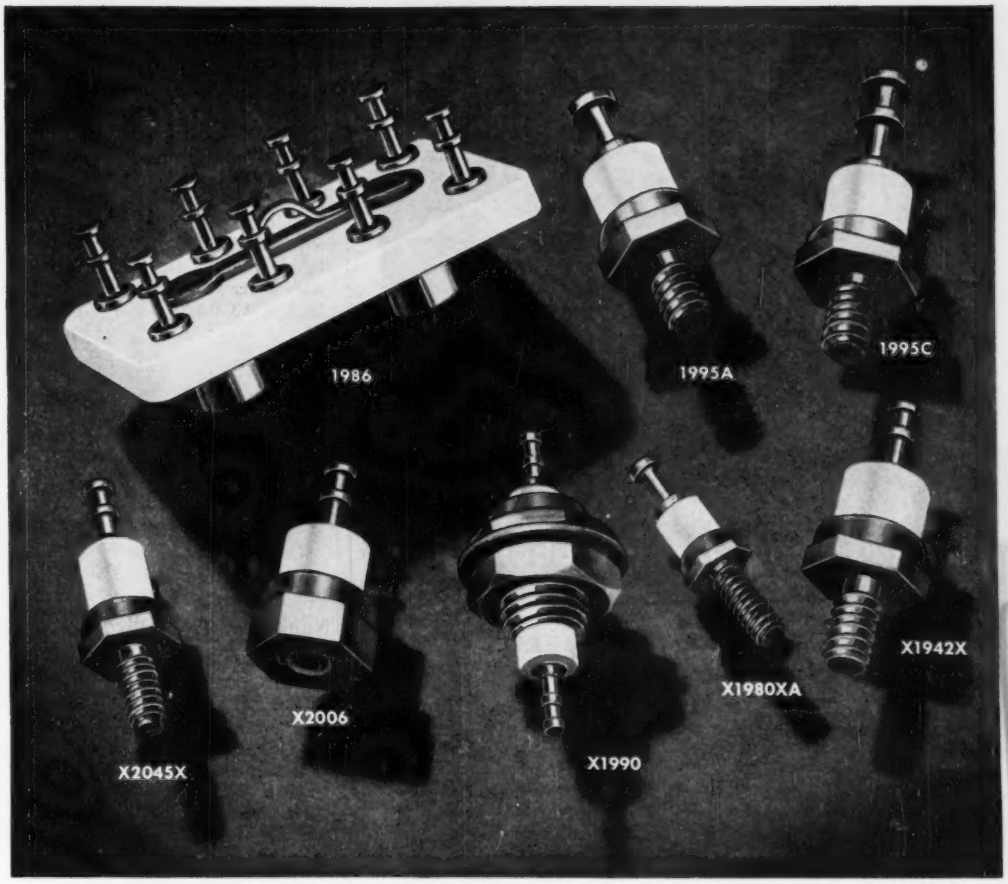


Units shown magnified approximately 2½ times

# Make *sure* of meeting government "specs" . . . see C.T.C. for ceramic insulated components

You have to be 100% on-the-beam if your equipment is to withstand the conditions it must undergo in military service.

That's why manufacturers using electrical and electronic components turn to C.T.C. for their ceramic insulated units. Our long experience and constant dealing with government requirements have gained us a wide acceptance as an outstanding supplier to those working on U. S. contracts . . . especially for the armed forces.

Whatever your needs in ceramic insulated terminals, feed-throughs or terminal boards you can depend on C.T.C. We meet the most exacting government standards for materials, tolerances, finishes, moisture prevention and anti-fungus treatment. Finishes on metal surfaces for instance, can be hot tinned, electro-tinned, cadmium plated, silver plated or gold plated to your requirements. All ceramic units in our standard line are grade L-5, silicone impregnated.

C.T.C. offers a consulting service at no extra charge to help solve your special problems. For all specifications and prices, write to Cambridge Thermionic Corporation, 437 Concord Avenue, Cambridge 38, Mass. West Coast Manufacturers contact: E. V. Roberts, 5068 West Washington Boulevard, Los Angeles 16 and 988 Market Street, San Francisco, California.

**CAMBRIDGE THERMIONIC CORPORATION**

*custom or standard . . . the guaranteed components*

For our complete listing of C.T.C. electronic and electrical components, see Electronics Buyers Guide.

## The Simple and Economical...

# S14-C OSCILLOGRAPH
## is an essential in every laboratory
6 or 12 elements

**For general laboratory use in industry and in colleges, for testing and research everywhere, the New S14-C Economy Oscillograph is doing the job.**

This versatile high-quality oscillograph is opening up new and wide fields for oscillography because it is so easy to use and because its cost is so low. Attachments of many kinds are available for every possible need.

**Many types of galvanometers are available for almost any sensitivity or frequency response requirement.**

Daylight loading and unloading
9 record speeds, 1/10 to 40 inches per second
6-inch chart, sensitized paper or film
Smooth and positive chart drive
Viewing screen
Precision optical components
Fine-line and accurate records
Precision time-coordinate device
Operates from a light socket

**WRITE FOR BULLETIN 2D1-K FOR DETAILS**

***Write for your free copy of Hathaway Engineering News***

Hathaway
INSTRUMENT COMPANY
1315 SO. CLARKSON STREET • DENVER 10, COLORADO




point-by-point measurements of high frequencies. It is equipped with a precision attenuator and output meter. A maximum output of 3 volts is available at 600 ohms. A variable output impedance down to a few ohms (for low output levels) is provided on a second jack, permitting any load impedance. The output level is constant within 1 db for all output frequencies. Full-scale meter ranges are provided for 10, 3, 1, 0.3, 0.1, 0.03 and 0.01 volts.



### Non-Short Test Clip

GRAYHILL, 4524 West Madison St., Chicago 24, Ill. Completely insulated, the series No. 16 alligator-type test clip can be freely used side by side without danger of shorting out. The new clip also offers such features as silver contacts for low-contact resistance, brass current-carrying members silver soldered for easy soldering of the lead and positive spring action for good contact. The finger grips are of general purpose thermosetting phenolic.



### UHF Attenuators

EMPIRE DEVICES, INC., 38-25 Bell Blvd., Bayside 61, N. Y., present

# it's a magic world for homemakers!

## —*thanks to the accuracy, dependability and long life of* Telechron® motors

Pressure cookers speed cooking—
but timing must be accurate.

To be dependable, automatic timers on
washing machines must start instantly.

Refrigerators last a long time.
So should the automatic defrost timer.

**A**ccurate timing by Telechron motors has helped take much of the drudgery out of household chores.

Telechron timing motors are true synchronous motors. Rotors make one complete rotation for each cycle of the alternating current source—and are instantly self-starting (reach full speed in 1/20th of a second). This is especially advantageous for such uses as home appliances where many applications require intermittent operation of the timing motor, and demand instant, dependable starting. Similarly, because Telechron synchronous motors do not need close clearances between rotor and stator, they will remain quiet throughout their long life.

Get complete facts on the broad line of Telechron synchronous timing motors. Application engineering service assures proper selection. Write for catalog IS-120. Telechron Department, General Electric Company, 411 Homer Ave., Ashland, Mass.



**Type H3 Motor**—Used for the range timer and refrigerator defrost timer. Also recommended for such light-duty applications as timing and switching.



**Type B3 Motor**—A medium-duty motor that's ideal for washing machine timers, and other switching applications. Also recording and controlling mechanisms.

Telechron®
MARK OF TIMING LEADERSHIP

All of us here at the Rectifier Division are rather proud of the parts we play in the production of Sarkes Tarzian "Centre-Kooled" Selenium Rectifiers. Barbara, shown here color-coding, is no exception.

If you are not familiar with the wide variety of applications of Sarkes Tarzian Rectifiers, your inquiry is invited. Our staff of engineers is ready to assist you with your power conversion problems.

*Where ††'s are used Specify*

A most complete Selenium Rectifier Handbook is available at 50c. Write us or see your dealer.

**Sarkes Tarzian, Inc.**

Sarkes Tarzian

**RECTIFIER DIVISION**

**Dept. E-5, 415 North College Ave., Bloomington, Indiana**



their new laboratory standard uhf attenuator, model AT-50. This is a resistive T-network of concentric line construction, with a frequency range from d-c to 4,000 mc. Vswr is better than 1.1 to 1.0 at all frequencies within said range; attenuation-standard: 3, 6, 10, 20, 40, 60 db, with an accuracy to ± 0.5 db. Rated power is 250 mw continuous, 500 w peak dissipation. The company also has available model AT-60 uhf power attenuator, which has a power dissipation of 2 w continuous, 2 kw peak.



## High-Fidelity Amplifier

WAVEFORMS, INC., 333 Sixth Ave., New York 14, N. Y., offers a new model of its high-fidelity amplifier system. The A-20-6 amplifier features a continuously-variable electronic filter for sharp treble cutoff of high-frequency noise and distortion, with a cut off range of 2,500 cycles to full 20,000-cycle response. A 20-db boost or cut bass and treble controls, a loudness control, and a four-channel input selector with independent level adjusts for each input channel are also included. An output is provided for a tape recorder.



## Resistor Board

MINI-MOUNT CO., 773 Driggs Ave., Brooklyn 11, N. Y., has developed

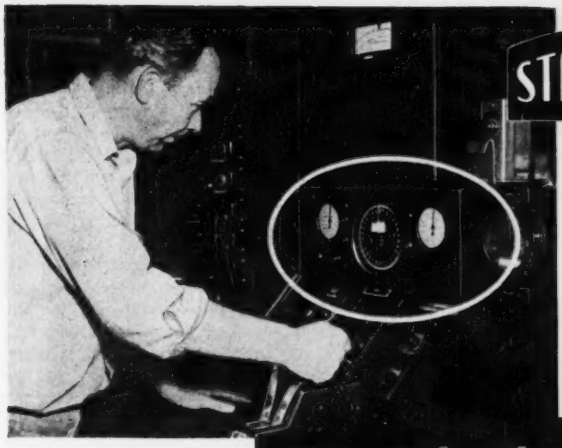

STANDARD

SINCE 1884

**WRIGHT AERONAUTICAL DIVISION**
**CURTISS-WRIGHT CORPORATION**

This photograph, taken in one of the experimental cells of the Wright Aeronautical plant at Woodridge, N. J., shows a STANDARD Chronotachometer installed in their test panel.

## Not Only Chronotachometers . . .

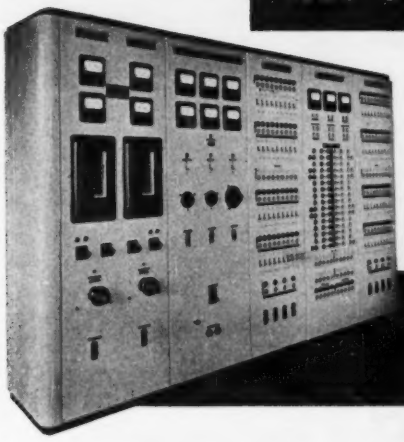

**WILSON DAM (T. V. A.)**

This experimental control and distribution switchboard handles various power supplies for their Chemical Laboratory Building.

## plus "flexlab" Control and Distribution Switchboards

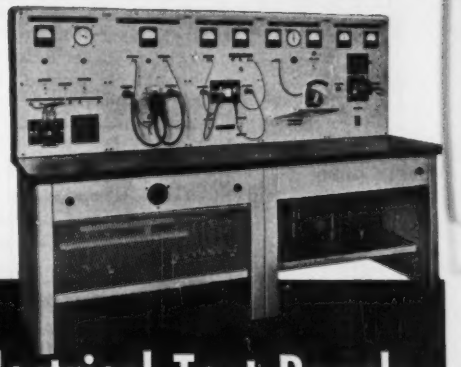

**WESTINGHOUSE ELECTRIC COMPANY**

This specially designed unit is for the control and test of aircraft timers, series relays, contactors, servo motors, and booster coils. It is typical of the wide range of custom-built equipment by STANDARD.

## . . . but all kinds of Custom-built Electrical Test Panels

# THE STANDARD ELECTRIC TIME COMPANY

**97 LOGAN STREET • SPRINGFIELD 2, MASSACHUSETTS**



**What is your Delay or Regulating Problem?**

For the most effective solution use the
**SIMPLEST, MOST COMPACT**
**MOST ECONOMICAL**
**HERMETICALLY SEALED**

# AMPERITE
## THERMOSTATIC DELAY RELAYS

STANDARD

**Provide delays ranging from 2 to 120 seconds.**

- Actuated by a heater, they operate on A.C., D.C., or Pulsating Current.
- *Hermetically sealed.* Not affected by altitude, moisture, or other climate changes.
- Circuits: *SPST only*—normally open or normally closed.

**Amperite Thermostatic Delay Relays** are compensated for ambient temperature changes from −55° to +70°C. Heaters consume approximately 2 W. and may be operated continuously. The units are *most compact, rugged, explosion-proof, long-lived,* and—*very inexpensive!*

MINIATURE

*TYPES:* Standard Radio Octal, and 9-Pin Miniature.

***PROBLEM? Send for Bulletin No. TR-81***

# BALLAST-REGULATORS

T9 BULB

- Amperite Regulators are designed to keep the current in a circuit ***automatically regulated*** at a definite value (for example, 0.5 amp).
- For currents of 60 ma. to 5 amps. *Operates on A.C., D.C., or Pulsating Current.*
- Hermetically sealed, light, compact, and most inexpensive.







Maximum Wattage Dissipation: T6½L—5W. T9—10W.

Amperite Regulators are the simplest, most effective method for obtaining ***automatic regulation*** of current or voltage. ***Hermetically sealed,*** they are not affected by changes in altitude, ambient temperature (−55° to +90°C), or humidity. Rugged; no moving parts; changed as easily as a radio tube.

***Write for 4-page Technical Bulletin No. AB-51***

AMPERITE CO., Inc. 561 Broadway, New York 12, N. Y.
In Canada: Atlas Radio Corp., Ltd., 560 King St., W., Toronto 2B




a new type of molded resistor board, a method of mounting electronic components in a very small space. The board measures 1¼ in. × 2 in. × ⅜ in. with two standoffs provided for mounting. The standoffs have holes provided for No. 5 screws and can be stacked in tiers. The 36 holes are numbered to provide a convenient means for both initial layout and servicing. There are no metal lugs required—the pigtails on the electrode components provide the soldering terminal points. Once it is inserted and looped over, the electronic component is rigidly mounted to the board and can be conveniently soldered to. Ten to fifteen components can easily be mounted on each board and preassembled into subassemblies.



### Precision Oscilloscope

EL-TRONICS, INC., 2665 N. Howard St., Philadelphia 33, Pa. A recent low-priced laboratory precision oscilloscope combines flexibility and accuracy in a new design; a vertical amplifier of 5-mc bandwidth with 4 in. of vertical deflection without overload; and a sweep oscillator variable from 10 cycles to 150 kc. The vertical amplifier has a sensitivity of 20 mv rms per inch of deflection; a frequency response (sine wave) of 20 cycles to 5 mc that is down 3 db at 5 mc; a square-wave response that is an excellent duplication of all square waves between 50 cycles and 1 mc with a maximum tilt of 5 percent for 50 cycle square wave; and a maximum input potential of 1,000 v peak-to-peak. The horizontal amplifier has a sensitivity of 0.3 v rms

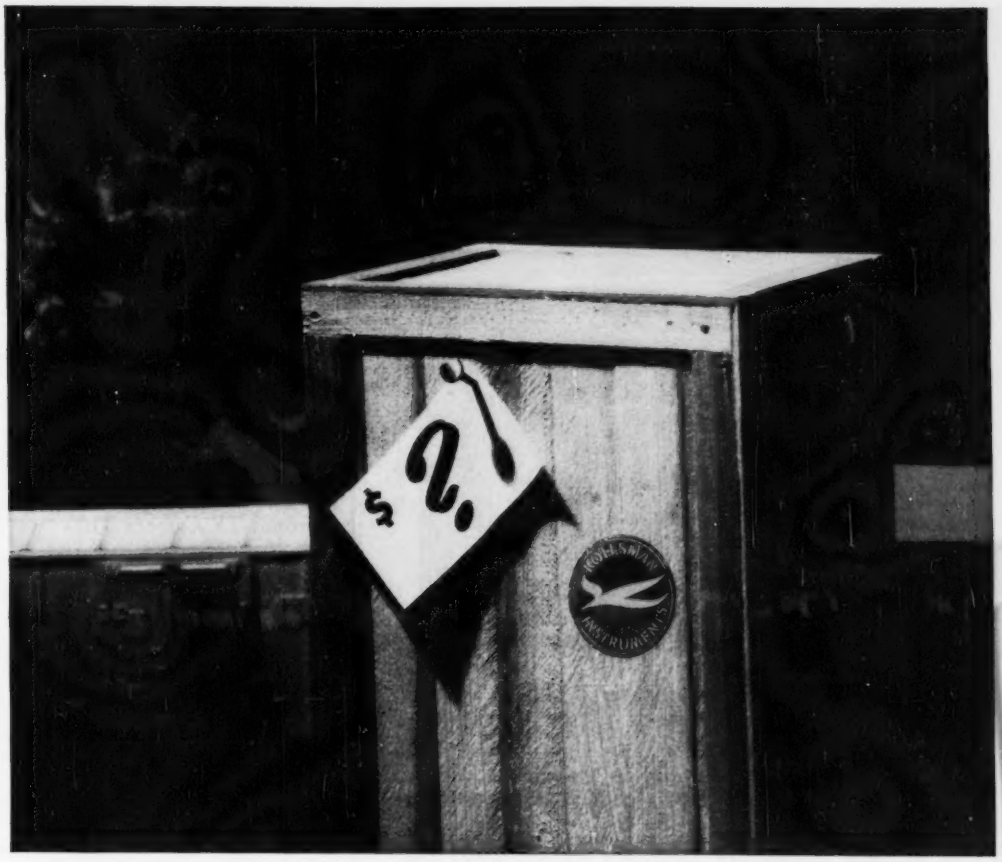

# *Ever try to price-tag precision?..*

Absolute precision in a vital instrument—what's it worth?

> . . . to the bomber pilot trusting to Kollsman, instruments checked to one-ten-thousandth of an inch for accuracy.
>
> . . . to the ship's captain, banking all on the precision of his Kollsman sextant.

At times such as these, can precision ever be price tagged? Yet its vital presence, or absence, is oftimes the margin between victory or chaos.

Today—to maintain a free, strong America—Kollsman is devising, developing and manufacturing instruments of utmost precision, dependability and quality in the fields of:

**Aircraft Instruments and Controls • Miniature AC Motors for Indicating and Remote Control Applications • Optical Parts and Optical Devices • Radio Communications and Navigation Equipment**

And to America's research scientists, seeking the answer to problems of instrumentation and control—the facilities of Kollsman Research Laboratories are immediately available.

KOLLSMAN INSTRUMENT CORPORATION

ELMHURST, NEW YORK — GLENDALE, CALIFORNIA

SUBSIDIARY OF *Standard* COIL PRODUCTS CO. INC.

**NEW!** *Type 2004 Voltage Calibrator*

**MAKES YOUR OSCILLOSCOPE AN ACCURATE VISUAL VOLTMETER!**

- MEASURES PEAK TO PEAK VOLTAGE MAGNITUDE OF COMPLEX OR SINUSOIDAL WAVEFORM FROM 10 MILLIVOLTS TO 100 VOLTS WITHIN ±2%.
- DIRECT READING FRONT PANEL METER INDICATES LOCATION OF AC AXIS WITH RESPECT TO NEGATIVE VOLTAGE PEAK. ACCURACY ±3%.
- PROVIDES EXTERNALLY AVAILABLE SQUARE WAVE FOR CHECKING AND RECOMPENSATING SCOPE PROBE ATTENUATOR.
- ELIMINATES REPEATED DISCONNECTION OF CALIBRATOR LEADS BY USE OF FRONT PANEL SWITCHES.

**SPECIFICATIONS**

**Voltage Ranges:** 100, 30, 10, 3, 1, 0.3, 0.1, 0.03, 0.01 volts peak-to-peak full scale.

**Duty Cycle Range:** 5% to 95%, direct reading.

**Accuracy:** Voltage — ±2% of full scale. Duty cycle — ±3%.

**Calibrator Frequency:** Approximately 1 KC.

**Input capacity:** The internal wiring of the calibrator will add approximately 20 mmf to the signal lead.

**Power Source:** 105 — 125 volts AC, 60 cps, 65 watts.

**Size:** 10½" H x 7" W x 8" D.

**Price:** $165. F.O.B. Plant.

*WRITE FOR BULLETIN C852 TODAY!*

Manufacturers of a complete line of TV and Radar Test Equipment

TIC **Tel-Instrument Co. Inc.**

50 PATERSON AVENUE • EAST RUTHERFORD, N. J.




per inch of deflection, and a frequency response that is flat to 300 kc. The recurrent sweep oscillator has a frequency range from 10 cycles to 150 kc in 6 steps.

### Small TV Camera Tube

RADIO CORP. OF AMERICA, Harrison, N. J., has announced a small tv camera tube for industrial television applications. Utilizing a photoconductive layer as its light-sensitive element, the type 6198 Vidicon has a sensitivity which permits televising scenes with 100 to 200 footcandles of incident illumination on the scene. The new tube provides 400-line resolution, employs magnetic focus and magnetic deflection, and operates with relatively low d-c voltages. It measures about 1 in. in diameter and 6¼ in. in length.



### Snap-Action Switch

MICRO SWITCH, a division of Minneapolis-Honeywell Regulator Co., Freeport, Ill., has announced a waterproof, snap-action switch incorporating potted, waterproof

# Flexible

## Improved New
# VARGLAS SILICONE
## Tubing and Sleeving

**Now** Varglas Silicone has been made more flexible. Sharp turns and 90° bends cause no cracking or peeling — no loss of dielectric strength.

As pioneers in the manufacture of silicone sleeving and tubing, we know this is the greatest improvement made during the past ten years. Unexcelled where high temperatures must be withstood for several hours — not just for 15 minutes. You need not sacrifice abrasion resistance and toughness to get flexibility. The new Varglas Silicone sleeving and tubing will pass cold bend tests at 35° to 40° LOWER temperature than formerly.

*The only Class H insulation with all these features:*

*Efficient* from 500° F. to — 85° F.

*Moisture and Fungus Resistant*

*Flame Resistant* — Self extinguishing

*Abrasion Resistant*

*Dielectrically Strong* with average readings up to 7,000 volts.

*Available* in 10 colors — at no extra cost.

***Samples*** of Varglas Silicone products as well as samples of our complete line of tubing and sleeving are available in a convenient sample folder. Just drop us a line telling us your problem and its peculiarities.

**Varflex CORPORATION**

*Makers of Electrical Insulating Tubing and Sleeving*

**VARFLEX *Sales Co., Inc.***

308 N. Jay St., Rome, N. Y.

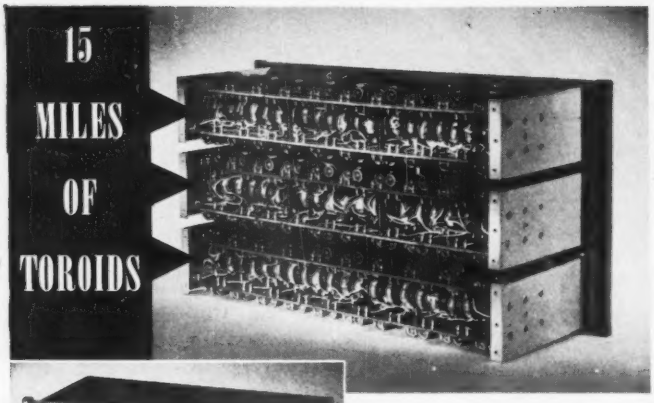




*Between input and output terminals of this Signal Corps test instrument, design engineers used 65 Lenkurt wedding-ring toroids to simulate 15 miles of wire line. The unit brings field conditions into the laboratory for testing communications systems. Composed of 1-, 2-, and 5-mile sections, the set offers a choice of line lengths and provides facilities by which either dry- or wet-weather conditions can be reproduced at the flip of a switch.*

**TYPIFYING OUTSTANDING ADVANTAGES** of Lenkurt precision-molded cores and precision-wound toroidal coils, this application features compactness and light weight, ease of mounting and assembly.

**WHEN YOUR DESIGN** problems call for maximum performance from filters, tuned circuits, and inductors, we invite you to draw upon Lenkurt's rich experience in obtaining the maximum performance from available materials.

**MODERN FACILITIES** at Lenkurt, one of the largest installations of its kind in the world, offers a dependable source of supply—geared to your largest quantity needs and your most-exacting quality requirements. Ask for literature on these outstanding components; recommendations and quotations on your specific problems.

**LENKURT ELECTRIC SALES COMPANY**
San Carlos 1 California

Lenkurt




terminal leads and a hermetically sealed contact chamber. Electrical rating of the type 4HS switch is as follows: 10 amperes inductive load, or 25 amperes resistive load, 28 volts d-c; 1 ampere inductive or resistive load, 125 volts a-c. The switch can be had with single-pole, single-throw or double-throw contact arrangement.

### Decade-Inductor Units

HYCOR CO., INC., 11423 Vanowen St., North Hollywood, Calif. The 700 series decade-inductor units are necessary for design and experimental work on audio filters, equalizers and tuned circuits at frequencies between 150 and 20,000 cycles. Four units are available in ranges from 10 × 0.001 henry to 10 × 1.0 henry. When all four units are connecting in series, 11, 110 steps from 0.001 henry to 11.11 henrys are obtained. Dimensions are 5¼ in. long × 3 in. wide × 2¼ in. high.



### Ferro-Resonant Flip Flop

COMPUTER RESEARCH CORP., 3348 W. El Segundo Blvd., Hawthorne,

# NEW COMPACT, LIGHTWEIGHT HIGH-VOLTAGE RECTIFIERS

## One-third the size of existing tubes.

**These exclusive new Westinghouse heavy-duty, high-voltage rectifiers permit more efficient design of mobile equipment where reduced weight and space are desired.**

They are one-third the size of existing tubes with comparable ratings!

This advanced design permits the tubes to carry peak currents of 900 ma. (average currents of 150 ma.) without overloading. The high-wattage thoriated tungsten filaments require only three seconds' heating. Filament terminals may be operated either up or down.

Designers should evaluate these and other unique advantages of the Westinghouse WL-6102 and WL-6103 rectifiers. For further information write Westinghouse Electric Corporation, Electronic Tube Division, Dept. A-111, Elmira, N. Y.

**Maximum Ratings**

| | WL-6102 Oil Immersed | WL-6103 Air Cooled |
|---|---|---|
| Peak Inverse Voltage | 40 KV. | 20 KV. |
| Peak Current | 900 MA. | 900 MA. |
| Average Current | 150 MA. | 150 MA. |
| Filament Voltage | 5.25 V. (5.0 V. Center) | 5.25 V. (5.0 V. Center) |
| Filament Current | 7.6 AMP (7.2 AMP. Center) | 7.6 AMP. (7.2 AMP. Center) |
| Height | 2-13/16 IN. | 2-15/16 IN. |
| Diameter | 2-1/16 IN. | 2-1/16 IN. |
| Weight | 3½ OZ. | 8½ OZ. |

**Typical Operation**

| | WL-6102 | WL-6103 |
|---|---|---|
| *Single Phase, Full-Wave* | | |
| Full Transformer Secondary Voltage (RMS) | 28,300 V. | 14,100 V. |
| DC Output Voltage to Filter | 12,700 V. | 6,300 V. |
| DC Output Current | .300 AMP. | .300 AMP. |
| *3-Phase, Half-Wave* | | |
| Transformer Secondary Voltage (RMS) | 16,400 V. | 8,200 V. |
| DC Output Voltage to Filter | 19,100 V. | 9,500 V. |
| DC Output Current | .450 AMP. | .300 AMP. |

**Westinghouse WL-6102**
Oil Immersed 40 KV Rectifier:
Only 2¾" high,
Weighs only 3½ ounces

**Westinghouse WL-6103**
Air-Cooled 20 KV Rectifier:
Weighs only 8½ ounces
*Tubes pictured in actual size*

**RELIATRON™ TUBES**

ELECTRONIC TUBE DIVISION

Westinghouse Electric Corporation
Box 284, Elmira, N. Y.

YOU CAN BE SURE...IF IT'S Westinghouse

ET-95005

# BOGART
MANUFACTURING CORPORATION

Since 1942

*Engineers and Manufacturers of the finest*
*MICROWAVE COMPONENTS and PRECISION EQUIPMENT*



COAXIAL TERMINATION

MICROWAVE TRANSMISSION COMPONENTS *and* SPECIALIZED ELECTRONIC ASSEMBLIES

- DUPLEXERS
- ROTATING JOINTS
- DIRECTIONAL COUPLERS
- CRYSTAL MIXERS
- FEEDHORNS
- MAGNETRON COUPLERS
- PHASE SHIFTERS
- OSCILLATING JOINTS
- BROADSIDE ARRAYS
- DOUBLE-STUB TUNERS
- CAVITIES
- WAVEGUIDES
- —AND SPECIAL DESIGNS

Bogart is fully equipped to execute stamping, spinning, electroplating, and special precision machine work. Our laboratory is fully equipped to electrically test all products of our manufacture.

Inquiries and problems concerning the manufacture, development and calibration of any microwave units are cordially invited. *Write to...*

BOGART MANUFACTURING CORPORATION
315 SIEGEL STREET • BROOKLYN 6, N. Y.




Calif. A new model MC, 100 kc ferro-resonant flip-flop has been developed as an efficient replacement for the vacuum tube in certain counting, amplifying and control applications. by using non-dissipating reactive elements the problem of heat dissipation is virtually eliminated. The new unit will not wear or burn out, and can be mounted in any circuit. It is also immune to high acceleration and shock. Specifications include: a-c requirements—1.6 mc, 1 watt at 12 v rms; trigger input impedance—5 mh in series with 25 ohms d-c resistance; trigger power requirements—pulse, 8 to 16 v and 1 to 5 μsec duration; outputs may swing between − 3 and + 21 v or between − 3 and − 21 v (by reversing output rectifier diode). The two outputs, opposite in phase, are capable of delivering 30 ma at 21 v each. Rated pulse frequency is 100,000 pps.

## Toggle Switch

MICRO SWITCH, Division of Minneapolis-Honeywell Regulator Co., Freeport, Ill., has developed a hermetically sealed precision toggle switch whose performance and operating characteristics are unaffected by environmental conditions. Although designed especially for aircraft, it can be used in a wide variety of installations for which other switches are unsuitable. Mechanical life tests indicate the switch has a life expectancy far greater than the 25,000 operations normally anticipated for hand-operated switches. The basic switch has a spdt contact arrangement. Tentative ratings are: 5 amperes motor

# NEW COMPACT . . . DEPENDABLE

MAGNATRAN

## UNITIZED RECTIFIERS

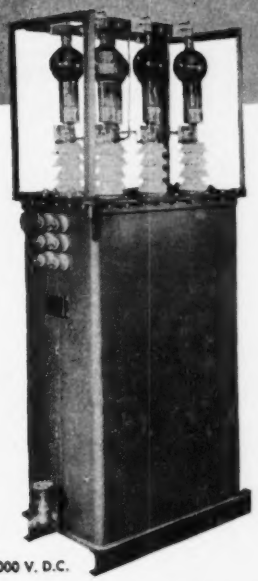

34 kw 17,000 V. D.C.

For high voltage D.C. sources . . lower initial cost . . . minimum upkeep . convenient – ready to connect to A.C. line and D.C. load . . compact – requires minimum floor space.

Dependability and long life factors are:

- Filament and plate transformers immersed in Askarel provide increased cooling and insulation.
- Special winding and insulation arrangements to withstand impulse surges.
- Vacuum filling removes all moisture
- Connected for out of phase filament operation to prolong tube life.

Independent bushing for plate and filament A.C. source.

Fireproof vaults are not required with Askarel . . . Output voltages available to 20 K.V.D.C. . . . Companion filter chokes obtainable in suitable ranges.

Askarel Immersed Filter Reactor 50,000 Volt Test

## –all your large or high voltage magnetic equipment can now be supplied and co-ordinated by *ONE DEPENDABLE SOURCE*

Magnatran is operated by personnel having unusual and outstanding knowledge in the transformer engineering and manufacturing field. Thus Magnatran, a new name, is backed by reputation and experience requiring little further introduction to the industry. A partial list of Magnatran quality products is shown below. Submit your requirements for our informational details.



Askarel Immersed 3-Phase Plate Transformer. Motor Driven Tap Changer 50,000 Volt Test

### AIR . . . OIL . . . ASKAREL

MAGNATRAN PRODUCTS

**Plate Transformers . Filament Transformers**
**Filter Reactors . Modulation Transformers**
**Distribution Transformers**
**Pulse Transformers . Testing Transformers**
**Precipitation Transformers**
**General Purpose Transformers**
**Hi-Voltage Power Rectifiers**

Oil Immersed Modulation Transformer

A NAME SYNONYMOUS WITH EXPERIENCE

## MAGNATRAN INCORPORATED

TRANSFORMERS AND ELECTRICAL EQUIPMENT

WALTER GARLICK, JR., PRESIDENT

246 SCHUYLER AVE., KEARNY, NEW JERSEY

MAGNATRAN Trade Mark Pending



# EAD ENGINEERING gives you "2 for 1"

**MODEL J31E-23**

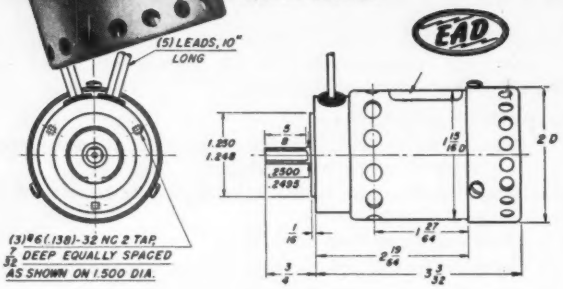


Here, designed into one small frame, is a variable frequency capacitor motor capable of operating at dual frequency ranges of 50/60 cycles or 360/1600 cycles. Another oustanding EAD engineering achievement . . . one motor that does the work of two!

**SPECIFICATIONS**

Continuous duty • single phase • 115 volts AC • Ambient temperatures: −55°C to +85°C • Weight: 1 lb., 1 oz. • Meets military specifications for humidity, salt, shock, vibration and tropicalization.

**Applications:** Airborne equipment (fans, blowers, pumps and other suitable uses.)

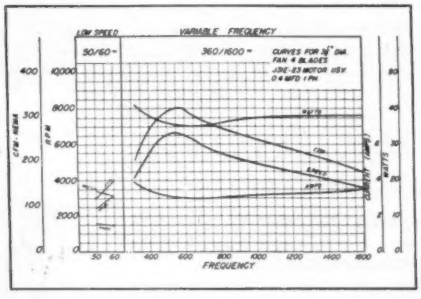


**Solving special problems is routine at EAD**

If your problem involves rotating electrical equipment, bring it to EAD. Our completely staffed organization will modify one of our standard units or designs and produce a special unit to meet your most exacting requirements.

**EASTERN AIR DEVICES, INC.**

585 DEAN STREET, BROOKLYN 17, NEW YORK




load 30 v d-c; 10 amperes inductive load 30 v d-c; 25 amperes resistive load 30 v d-c; 1.0 ampere a-c for any type of load, 125 v a-c.



## TV Picture-Tube Test Adapter

ELECTRONIC INSTRUMENT CO., INC., 84 Withers St., Brooklyn 11, N. Y., has released the new model CRA television picture-tube test adapter. Carefully designed for accuracy and safety, it gives a quantitative measurement of cathode emission, and tests for filament continuity and interelement shorts. It comes complete with standard 12-pin tv tube socket, octal plug-in connector and features an extra long 4-ft cable that enables the picture tube to remain in the set while testing.

## Four-Channel Switch

RADIO MERCHANDISE SALES, INC., 1165 Southern Blvd., New York 59, N. Y. Model 4CS four-channel switch will switch four antennas into one receiver, or will operate any one of four receivers from a single antenna. The unit is engineered to reduce the coupling effect between the antenna in use and those that are idle—an effect that

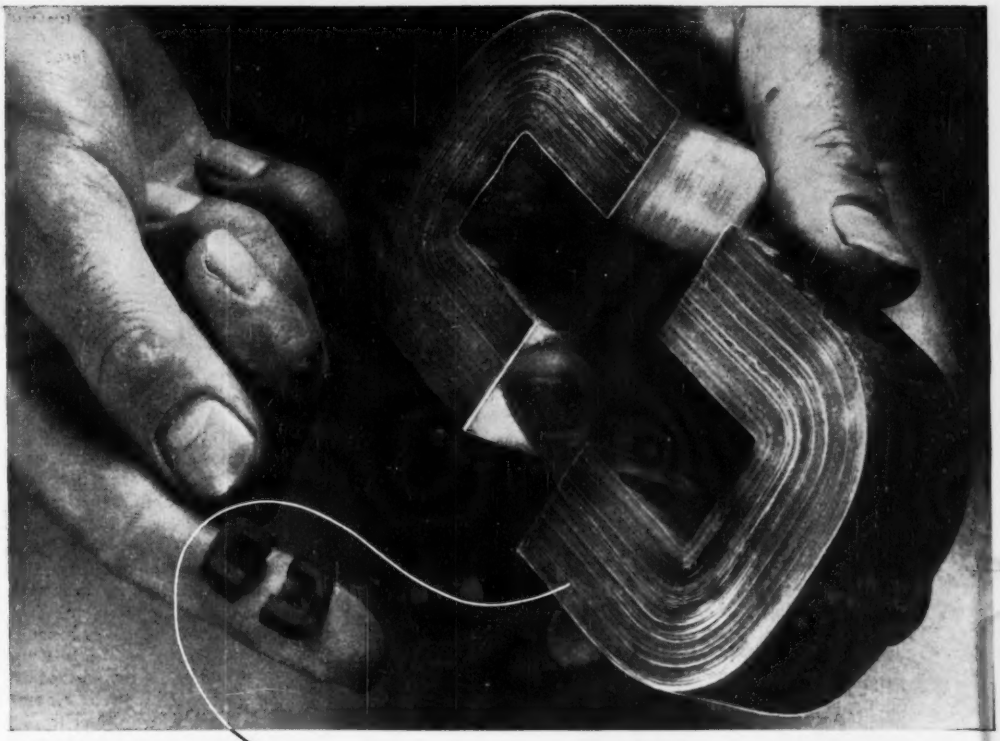

# SILECTRON C-CORES...BIG or LITTLE

## ...any quantity and any size

*Wound from precision rolled oriented silicon steel strip as thin as .00025"*

WAD 4363

For users operating on government schedules, Arnold is now producing C-Cores wound from ¼, ½, 1, 2, 4 and 12-mil Silectron strip. The ultra-thin oriented silicon steel strip is rolled to exacting tolerances in our own plant on precision cold-reducing equipment of the most modern type. Winding of cores, processing of butt joints, etc. are carefully controlled, assuring the lowest possible core losses, and freedom from short-circuiting of the laminations.

We can offer prompt delivery in production quantities—*and size is no object, from a fraction of an ounce to C-Cores of 200 pounds or more.* Rigid standard tests—and special electrical tests where required—give you assurance of the highest quality in all gauges. ● *Your inquiries are invited.*

**THE ARNOLD ENGINEERING COMPANY**

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

General Office & Plant: Marengo, Illinois

# NEW STEVENS THERMOSTAT

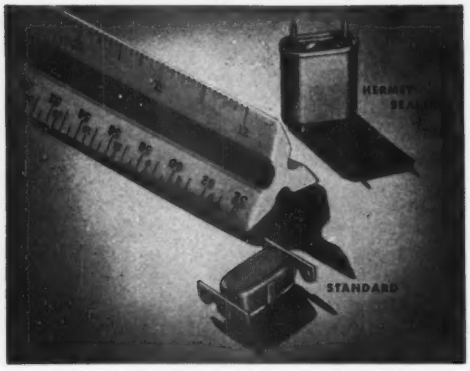





- **close temperature control**
- **clean make and break**
- **fast response**

Compactly designed for use in communications equipment, electronic devices and apparatus demanding a high degree of temperature stability, Stevens Type C* thermostats feature an electrically independent bi-metal that responds *only to heat from controlled device.*

Typical temperature curve at left shows how this construction completely eliminates artificial cycling or life-shortening "jitters." Current flows readily through stainless steel or alloy contact spring . . . does not pass through high resistance bi-metal. Contacts open only when bi-metal overcomes spring pressure and friction of bi-metal strip against contact spring surface—*for a clean, positive break.*




Components are permanently riveted to dimensionally stable Alsimag base to further insure against erratic operation. Heavy-duty silver contacts assure long life.

Standard and hermetically sealed Stevens Type C thermostats are carefully pre-calibrated in pots simulating actual service conditions; spot life-tests assure quality control. Specify Stevens Type C thermostats for closer temperature control—*longer life.* A-5200

*PATENT APPLIED FOR

**STEVENS** *manufacturing company, inc.*
MANSFIELD, OHIO




generally has been considered one of the drawbacks in the use of conventional types of switches.



## High-Frequency Counters

DECADE INSTRUMENT CO., Caldwell, N. J. Frequency counting in higher ranges, with equal precision, is now possible with Decaviders. No additional signal level is required and there is no loss of accuracy. Decaviders are connected in series with the input of standard frequency counters. Standard counter ranges of up to 10 mc, up to 1 mc and up to 100 kc can be extended by several Decavider models respectively to: 10 to 20 mc, 10 mc to 100 mc, 1 mc to 10 mc and 100 kc to 1 mc. The last three have 9 ranges. Decaviders also respond to transient waveforms, providing the spectrum is within the pass band of the Decavider amplifier and within the ranges listed above.



## Toroidal Power Transformer

MILLIVAC INSTRUMENT CORP., 444 Second St., Schenectady 6, N. Y. has introduced a new toroidal power transformer that eliminates hum pickup in audio amplifiers. Transformer MT-1001 replaces ordinary

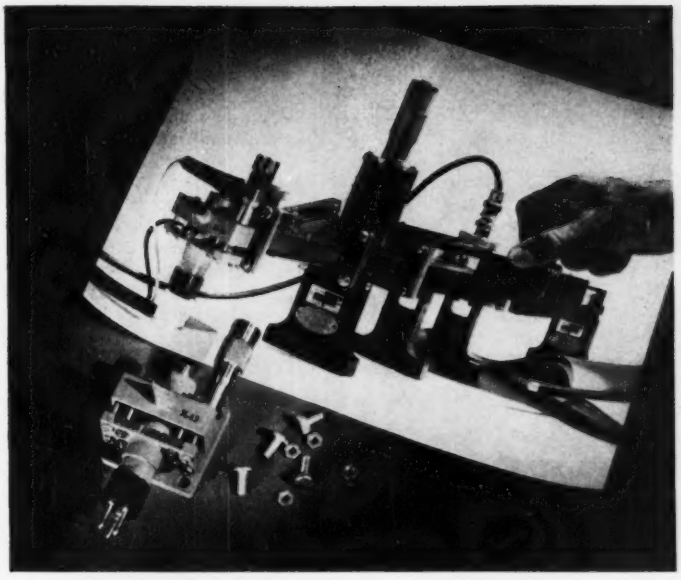

VARIAN associates

# VERSATILE X-BAND SIGNAL SOURCE

**IN LABORATORIES** throughout the electronic field, the Varian X-13 Klystron is widely used as a general-purpose x-band signal source. In the typical setup above (checking load reflection), note the compactness, the convenience of connection, and the way the tube bolts directly to the waveguide.

**OUTPUT POWER** typically reaches half a watt at center frequency and exceeds 150 milliwatts over the full frequency range 8.2 to 12.4 kmc. The X-13 exhibits extremely low microphonic levels and operates directly into matched waveguide. Tuning is done with a single control. The tube is air cooled and has clearance dimensions of 4½ by 2½ by 2½ in., weight of only 6 oz.

Typical Power Output - Varian X-13 Klystron
(Beam Voltage, 500 v)




**OTHER VARIAN KLYSTRONS** extend and expand the functions of the X-13. An extensive line of tubes with designs based on that of the X-13 offers a wide selection of output powers, types of tuning devices and terminations, as well as capabilities for withstanding vibration and shock ranging far beyond 30 times gravity.

**SEND FOR DATA** on these or other klystrons from the extensive Varian line, many of which are necessarily unpublicized. You are invited to submit your microwave problems to the Varian application-engineering group for recommendations.

Varian X-13 reflex klystron

. . . 8.2-12.4 kmc

. . . 150-500 mw

* Trade Mark

VARIAN associates
990 VARIAN STREET · SAN CARLOS 1, CALIFORNIA

FIELD ENGINEERING REPRESENTATIVES IN PRINCIPAL CITIES

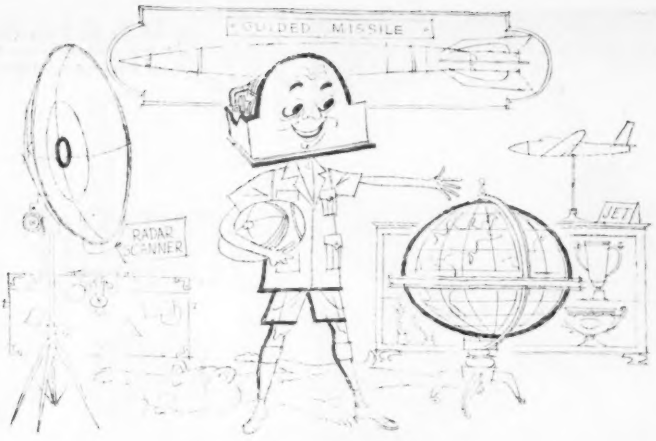


## GYRO LOOKING FOR NEW WORLDS TO CONQUER

*We're mighty happy* with the performance of our Cageable Vertical Gyro as an autopilot component in fighters and guided missiles – and in radar stabilization systems.

But we feel that this gyro – which can be caged in under ten seconds, uncaged in only three seconds – has a lot of undeveloped possibilities.

*Some of them* we know. But you may have problems and applications of which we are not aware.

So if you get any ideas after you've looked over the specs below, drop us a line.

*And remember*, here at Honeywell we're specialists in gyros, have become one of the leaders in the field. Our gyro "family" – which includes other vertical, rate and the extremely sensitive Hermetic Integrating Gyros – is now available to manufacturers who require *precision* performance.

If you'd like to know more about any of the products in our gyro line, we'd be pleased to send details. The address is Honeywell Aero Division, Dept. 401 (E), Minneapolis 13, Minnesota.

### Cageable Vertical Gyro JG 7044A Specifications

**Power Requirements:** Gyro motor: 115 volts, 400 cps ± 10%, single-phase. Erection motors: 30 volts, 400 cps, single-phase. Caging circuit: 28 volts dc.
**Power Load:** Gyro motor: 50 watts max. (starting); 20 watts max. (running). Erection motors: 5 watts (each). Caging operation: 12 watts (operating); 6 watts (standby).
**Gyro Speed:** 22,000 rpm. (minimum).
**Angular Momentum:** 4.75 x $10^6$ gm-$cm^2$/sec.
**Roll Axis Freedom:** 360°.
**Pitch Axis Freedom:** ± 85°.
**Caging Time:** 10 seconds. (max.).
**Gyro Run-down Time:** 8 min. (min.).
**Erection Rate:** 2° to 6° per minute (factory adjustment).
**Drift Rate:** 30° per hour (maximum).
**Accuracy:** 0.15° of true vertical in each axis.
**Resolution:** 1/13° each axis.
**Environment:** Designed to meet AAF Spec. 27500D.
**Weight:** 5 lbs.



MINNEAPOLIS **Honeywell**
Aeronautical Controls




power transformers in high gain amplifiers where an absolute minimum of hum pickup through magnetic field radiation is desired. It is precision wound on a ring core without air gaps and radiates less than 0.01 gauss at 5 in. from its surface. By parallel or series connection and doubler or tripler circuits the following d-c voltages for plate supply may be obtained: 350, 700, 1,200 and 1,800. The transformer has 2 separate heater windings which are rated 6.3 v and 1.5 amperes.

### Small Torque Motor

MIDWESTERN GEOPHYSICAL LABORATORY, Tulsa, Oklahoma. The model 9, a small and powerful torque motor, is a precision linear actuator primarily designed to stroke pistons in hydraulic servovalves. However, it is being utilized in many engineering fields as a basic transducer to convert a few watts of power from an electronic amplifier to a linear mechanical motion with considerable force. Specifications are: midposition force, 9.5 lb; stroke, ± 0.015 in.; weight, 19 oz; no-load natural frequency, 425 cps; coil resistance, 3,400 ohms each; and balance current, 20 ma.



### Subminiature Shield

THE STAVER CO., INC., Bay Shore, Long Island, N. Y., has introduced

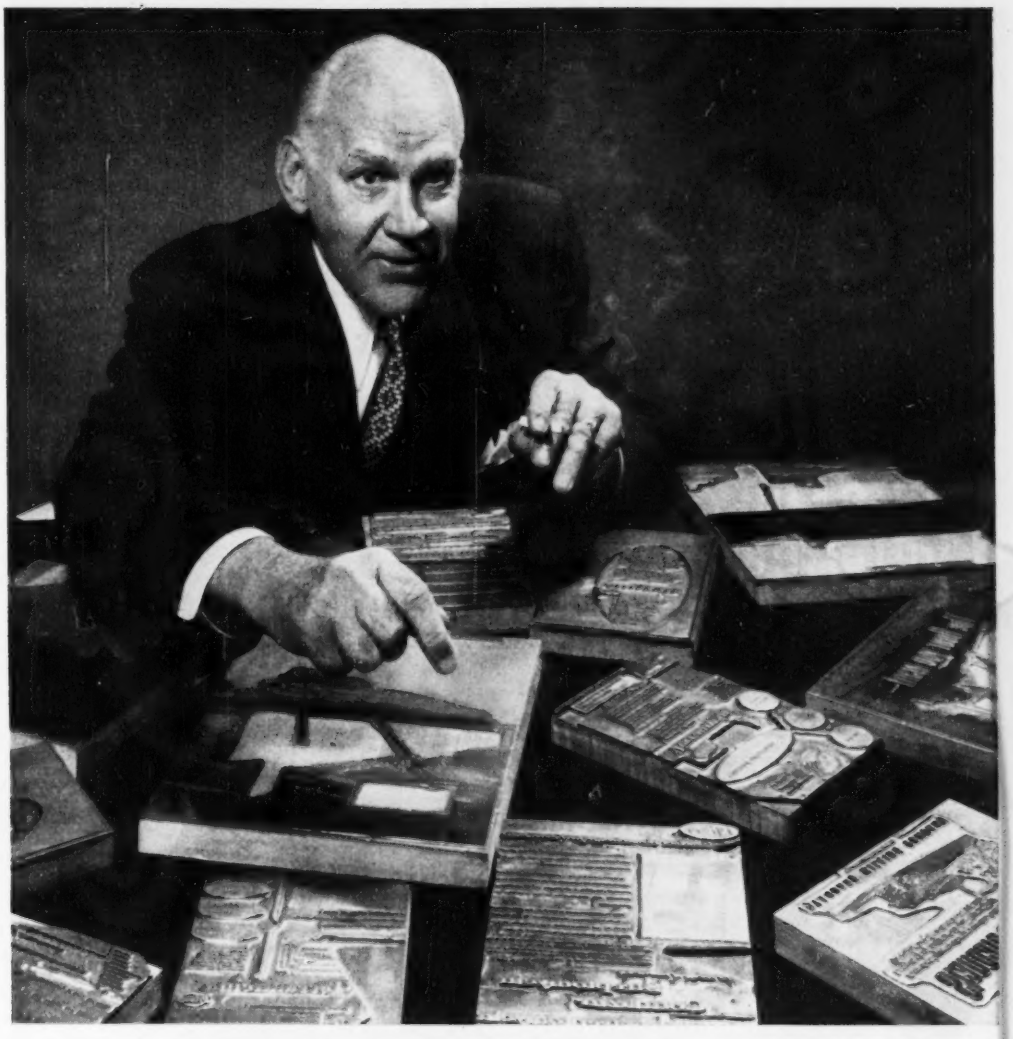

**"We want speed at any price**
**...yet we use the cheapest air service!"**

*—Richard E. Crowe, President, Globe Electrotype Company*

"We ship electrotypes to publications all over the country—from 30 to 300 in a single day. That's a lot of deadlines!

"We've made it a rule to specify Air Express.

"When Air Express started in 1927, we were among its first customers. We've used it ever since. And, in all that time, we've NEVER HAD ONE SINGLE KICK on an Air Express shipment! That's quite a record, and I've checked it with our people here.

"We've tested other air services. Air Express is consistently faster and more dependable. AND COSTS LESS!•On most of our shipments, Air Express rates are the *lowest*, by a few cents to several dollars. Those differences add up to thousands of dollars in a year's shipping.

"I would advise anyone who is confused about shipping claims to test Air Express and keep a record of results. It convinced us."

**AIR EXPRESS**

**GETS THERE FIRST**

*Division of Railway Express Agency*
*1952—our 25th year of service*

inside this package on your Jobber's shelf...

is the world's toughest transformer

CHICAGO

**S-TYPE**
Steel base cover fitted with phenolic terminal board. Convenient numbered solder lug terminals. Flange-mounted unit.

there's nothing TOUGHER
THAN CHICAGO "*Sealed-in Steel*" CONSTRUCTION

**H-TYPE**
Hermetic sealing meets all MIL-T-27 specs. Steel base cover is deep-seal soldered into case. Ceramic bushings. Stud-mounted unit

**C-TYPE**
With 10" color-coded leads brought out through fibre board base cover. Lead ends are stripped and tinned for easy soldering. Flange-mounted unit

CHICAGO "New Equipment" transformers (available in 3 mountings) feature one-piece drawn-steel cases—the strongest, toughest, best-looking units you can buy. The one-piece seamless design, enclosing an electronically perfect construction, provides the best possible electrostatic and magnetic shielding, with complete protection against adverse atmospheric conditions. For *every* application: Power, Bias, Filament, Filter Reactor, Audio, MIL-T-27, Stepdown—ask your electronic parts distributor for CHICAGO "Sealed-in-Steel" Transformers—the world's toughest with that *extra* margin of dependability.

**Free "New Equipment" Catalog**

Get the full details on CHICAGO'S *New Equipment Line*—covering 'Sealed-in-Steel" transformers for every modern circuit application. Write for your Free copy of this valuable catalog today, or get it from your distributor.

CHICAGO TRANSFORMER
DIVISION OF ESSEX WIRE CORPORATION
3501 ADDISON STREET • CHICAGO 18, ILLINOIS

CHICAGO TRANSFORMER
TRADE MARK REG.




the Sub-Mini-Shield, a combination shield, clip and mount. Heat is effectively dissipated through an aluminum wrap-around shield. Tube diameters from a minimum 0.366-in. diameter to a maximum 0.400-in. diameter are held securely since the shield is of the overlap type, thus allowing for close contact between tube and shield. The shield mount, made of spring brass or phosphor bronze as an alternate material, serves to clamp the shield firmly to insure good contact between tube and socket under severe conditions of vibration. Minimum mounting center distances between mounts is ⅜ in. Shield lengths are obtainable for tube types T3-1, T3-2, T3-3 and T3-4.



## H-V Rectifier

TAYLOR TUBES, INC., 2312 West Wabansia Ave., Chicago 47, Ill., has introduced the type 8020 high-voltage rectifier tube. It is rated at 40 kvp inverse or forward in air, 60 kvp in oil, an average current of 100 ma, with instantaneous peak-current capacity of 2 amperes. The tube construction of Nonex glass with standard four-prong base uses special oil-resisting silicone basing compound to eliminate loose bases caused by oil immersed operation. The construction also features a treated tantalum anode for stability and long life and a filament of the thoriated tungsten type to operate at 5 volts, 6 amperes. Life expectancy of the tube is over 5,000 hours if operated within ratings. Its maximum physical dimensions are

# When it's Electrical Protection–

*Rely on* **BUSS FUSES**

**for TELEVISION • RADIO • RADAR • INSTRUMENTS • AVIONICS**

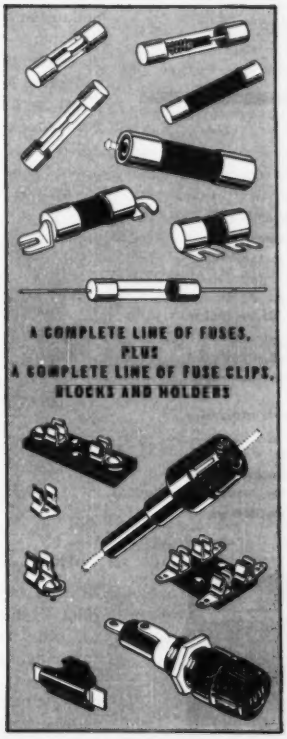


The most vital quality of a fuse is *dependability*, for the sole purpose of a fuse is to protect wiring and equipment far more costly than the fuse itself.

If the fuse cannot be depended upon to *open when it should* — but not before — it may become a hazard or a nuisance.

To be sure that a BUSS fuse will always operate as it should under service conditions, each and every BUSS fuse is individually tested in a highly sensitive electronic device that automatically discards any fuse that is not correctly calibrated, properly constructed and right in all physical details.

That is why manufacturers and service men throughout the nation have learned that they can best rely on BUSS Fuses.

**GOT A PROTECTION PROBLEM?**

BUSS Fuse engineers have more than a third of a century's experience behind them, in designing and developing the right fuses to meet industry's ever-expanding need. Send us your drawings and specifications. We'll be glad to work with you.

**GET THE FACTS—*mail this handy coupon today...***

BUSSMANN Mfg. Co. (Division of McGraw Electric Co.)
University at Jefferson, St. Louis 7, Mo.

Please send me bulletin SFB containing complete facts on BUSS small dimension fuses and fuse holders.

Name.....
Title.....
Company.....
Address.....
City & Zone.....State.....1152
ELRC

**BUSSMANN MANUFACTURING CO.,** University at Jefferson, St. Louis 7, Missouri *Division McGraw Electric Company.*

National
PROVEN DEPENDABLE QUALITY
Components

**CAPTIVE NUTS**

National Captive Nuts of stainless steel may be pressed into aluminum and certain types of brass sheet metal to provide integral flush-mounted tapped holes in a wide variety of sizes. Four basic types have been designed for metal thicknesses of 1/16", 3/32", 1/8", 5/16" and 1/4".



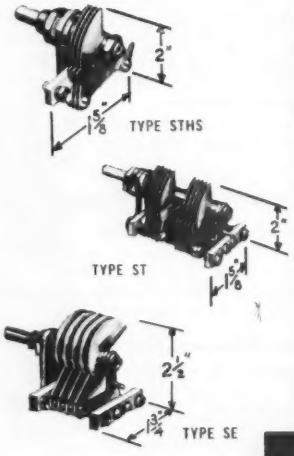


**VARIABLE CONDENSERS**

National makes a complete line of quality variable condensers covering a wide range of capacities and uses. A few types are shown.

Type ST (180° rotation) has straight line wave-length plates. Type SS has straight-line capacity plates. Both types are available in single bearing, double bearing and split stator double bearing models.

Type SE (270° rotation) has straight-line frequency plates.

National's engineering staff is available to manufacturers for designing condensers to special requirements.

Write for drawings and specifications.

*Write for drawings*

National
EST. 1918
NATIONAL COMPANY, Inc.
MALDEN, MASSACHUSETTS



8 in. in length and 2 5/6 in. in diameter.

## Small D-C Relay

RADIO CORP. OF AMERICA, Harrison, N. J. Type 203W1 hermetically-sealed miniaturized d-c relay was designed for use throughout the electrical systems of military aircraft. It is designed to meet the requirements of MIL-R-5757. Weight is only 3 oz and the relay can be operated in any position. Its 6-pole, double-throw construction features palladium contacts rated to handle 2 amperes with a resistive load at 26.5 volts d-c and 1 ampere with an inductive load at the same voltage. Contacts are arranged in a break-before-make sequence.



## Voltage Booster

I.D.E.A., INC., Regency Division, 7900 Pendleton Pike, Indianapolis 26, Ind. To solve the problem of annoying fluctuations in tv picture size due to drops in line voltage, the company has designed a new voltage booster which maintains a 117-v power supply regardless of

# Magnetostriction

**ONCE A LABORATORY CURIOSITY . . . NOW SERVING SCIENCE IN SURPRISING WAYS . . . WITH THE HELP OF**

**Nickel**

Like Hertzian waves, Roentgen rays, and radioactivity . . . magnetostriction was once just a physicist's plaything.

Early experimenters noted with interest the unusual behavior of magnetized ferromagnetic materials . . . the "spontaneous" dimensional changes; and inversely, the permeability changes when dimensions were forcibly altered.

But as magnetostriction developed from laboratory demonstration to practical application, it was discovered that few materials offered sufficiently high magnetostrictive response. When the essentials of economy, workability, and availability were considered, the number of suitable materials was still more limited.

Both research and practice have now established Nickel as a satisfactory solution to this problem. Nickel's magnetostrictive contraction of approximately thirty parts per million is exceeded only by a few special alloys.

Nickel offers, in addition, excellent corrosion resistance, good resistance to the destructive effects of extreme temperatures, plus strength and hardness equal or superior to that of low-carbon steel. For special applications, even greater hardness can be obtained in Permanickel through heat treatment, with only a small loss in mechano-magnetic characteristics.

Nickel is in short supply because of defense needs, but if you are interested in magnetostrictive oscillators . . . either for manufacture or application . . . INCO's Technical Service Department will gladly put at your disposal data accumulated from both research and practice.

For your reference files, write for: *"Magnetostriction"* and *"66 Practical Ideas for Metal Problems in Electrical Products."* The International Nickel Company, Inc., 67 Wall Street, New York 5, N. Y.

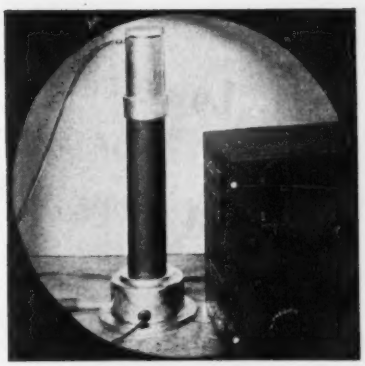

Bacteria Killer. A 9 Kc magnetostrictive oscillator used for sterilization in the chemical and pharmaceutical industries. The magnetostrictive material is laminated Nickel. Made by Raytheon Manufacturing Co., Waltham, Mass.

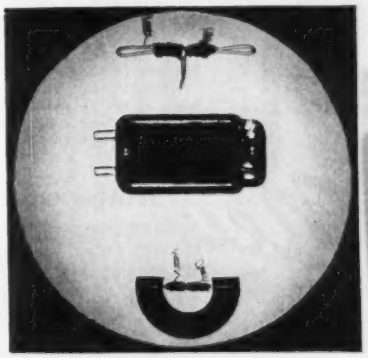

Phonograph Pick-Up: The magnetostrictive unit in this device is a 20-mil Nickel wire which is stretched between the poles of a horseshoe magnet. Variations in torsion caused by deflections of the needle produce flux variations in two pick-up coils that are wound around the stretched Nickel wire.

**A FEW OF MANY APPLICATIONS FOR MAGNETOSTRICTIVE EQUIPMENT**

- **"Sonar" and related devices for detecting submarines and ships.**
- **Raytheon's "Fathometer", for determining depth of waters; locating schools of fish.**
- **Electrical filters, such as band pass filters for radio receiving sets.**
- **Homogenization and sterilization of milk.**
- **Acceleration of chemical reactions and cavitation effects.**
- **Strain gages.**
- **Vibration and engine detonation.**
- **Phonograph pick-ups.**
- **Frequency control of oscillators operating below 100 Kc.**
- **Dust and smoke precipitation.**

Nickel INCO Alloys

MONEL® • "R"® MONEL • "K"® MONEL • "KR"® MONEL
"S"® MONEL • NICKEL • LOW CARBON NICKEL • DURANICKEL®
INCONEL® • INCONEL "X"® • INCOLOY • NIMONICS® • PERMANICKEL®

# Look to Hetherington for the Latest, Most Dependable Switches!

*New!*



**Cylindrical toggle switch is a real space saver**

**T1000** Designed for MIL-S-6745 uses

This sturdy little T1000 Hetherington toggle switch reduces size and weight approximately 25% by comparison with rectangular switches. Features include exceptionally positive cam-roller snap action; effective contact wipe; maximum protection against contact wear or arcing damage and strong lever operating action. Only 2 9/16" long x 3/4" diameter. Weighs 1 ounce.
Write for Bulletin S-1.

*New*

**Miniature "Push-Push" and Rotary Types J100 and R1000**



Compactness, light weight and maximum durability characterize these unique Hetherington switches. Widely used for aircraft seat light control, the Series J100 "push-push" switch utilizes a sturdy cam-roller design operated by a positive escapement-type push-button action and is readily adaptable to many uses. The Series R1000 switch is a rotary action unit with indicator knob. Both types operate on either 28 v.d.c. or 115 v.a.c. 60 cycles current. Rated 20 amperes resistive.
Write for Bulletin S-1.

**HETHERINGTON**
**SWITCHES**
FINE PUSH-BUTTON AND SNAP-ACTION TYPES
PANEL INDICATOR LIGHTS
SWITCH-INDICATOR LIGHT COMBINATIONS
AIRCRAFT AND ELECTRICAL EQUIPMENT ASSEMBLIES

**HETHERINGTON, INC., Sharon Hill, Pa.**
West Coast Division: 8368 W. Washington Blvd., Culver City, Calif.




line voltage variations from 90 to 130 v. The VB-1 booster can also be used to get peak performance from any electrical device drawing 350 w or less. Since it is an automatic transformer with tapped primary, it can be used with equal efficiency in high-voltage areas to decrease line voltage.

### Twin-Headed Wire Stripper

THE ERASER CO., INC., 110 S. State St., Syracuse 2, N. Y. Model D-8 twin-head stripper uses proper wheel grades and settings for high-production stripping of leads of two different gages. The space regulator screw (at front of head) adjusts the minimum spacing to the bare diameter of the wire and prevents damage to the wire. A pressure regulator (on top of head) permits stripping all the wires in the lead with one pass. The stripper shown is equipped with a single wheel and stripper blade for stripping close to the coil. Two-wheel heads are also available. The wheels are specially engineered for the exact type and gage of wire being stripped.



### Crystal Calibrated Standard

THE HICKOK ELECTRICAL INSTRUMENT CO., 10514 Dupont Ave., Cleveland 8, Ohio. Model 680 r-f marker and crystal calibrator is designed for use in the shop, labora-

# WORKSHOP...

*is proud to announce its new UHF antenna**

## the ultimate in–

SIMPLICITY
RUGGEDNESS
RELIABILITY

**Simplicity**—because the radiating and structural portions are coincidental. Cross sectional view at lower left clearly illustrates its clean cut revolutionary design.

**Ruggedness & Reliability**—come from complete elimination of small, delicate connectors and breakable insulators. Antenna breakdowns are virtually impossible.

**High Gain** of 11 db over a tuned dipole for the 12 wavelength model. Power gain of 14.

**Perfect Circularity**—maximum variations of less than 0.5 db from mean value in horizontal pattern.

**Vertical Pattern** . . . 4.2° . . . VSWR less than 1.1 to 1 with best match at video carrier frequency . . . will handle 50 KW power . . . and a host of other features.

This is only part of the story on this new development. Specifications indicate its unusually high performance and operating dependability. Write or call for complete information.



Cross-sectional view showing the four vertical tubes that form the radiating system. These tubes are actually slots and are further subdivided into resonant sections. They are fed by a single vertical inner conductor.

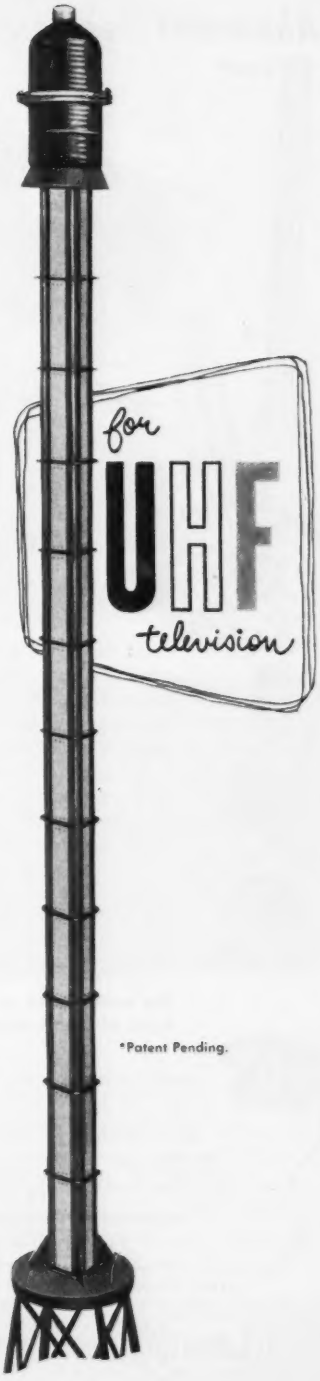


*Patent Pending.

**WORKSHOP ASSOCIATES DIVISION**
**THE GABRIEL COMPANY**
Endicott Street • Norwood, Mass.
DESIGNERS AND MANUFACTURERS OF A COMPLETE LINE OF MICROWAVE ANTENNAS

As the result of several years of investigation and research, Lord engineers have developed successful techniques for bonding silicone to metal. This extends the advantages of bonded rubber into the wider temperature range from —100° to +500°F.

A number of Lord Vibration-Control Mountings are available with silicone elastomers, and new designs are being engineered to take full advantage of the properties of this new material.

You can solve many product problems with Lord bonded-silicone parts which are used to isolate vibration and reduce operating noise, and protect parts from excessive stresses.

20th National Exposition of Power and Mechanical Engineering
Grand Central Palace, N. Y., Booth No. 558 December 1-6 1952

***The easiest way to get the full story of the advantages of LORD BONDED SILICONES is to write or call . . .***

**BURBANK, CALIFORNIA**
Joe B. Hartley
George E. Behlmer
233 South Third Street
ROckwell 9-2151
CHarleston 6-7481

**CHICAGO 11, ILLINOIS**
Robert T. Daily
Kenneth L. Hanson
Perry C. Goodspeed, Jr.
520 N. Michigan Ave.
MIchigan 2-6010

**DALLAS, TEXAS**
Bruce O. Todd
1613 Tower Petroleum Building
PRospect 7996

**DAYTON 2, OHIO**
W. Webster Dalton
238 Lafayette Street
MIchigan 8871

**DETROIT 2, MICHIGAN**
Everett C. Vallin
7310 Woodward Ave.
TRinity 5-8239

**NEW YORK 16, NEW YORK**
Vincent Ellis
Jack M. Weaver
280 Madison Avenue
MUrray Hill 5-4477

**PHILADELPHIA 7, PENNSYLVANIA**
George P. Harrington
725 Widener Building
LOcust 4-0147

**ERIE, PENNSYLVANIA**
Paul E. Dailey
Harry C. Sapper
1635 West 12th Street
2-2296

**LORD MANUFACTURING COMPANY • ERIE, PA.**

LORD BONDED RUBBER

HEADQUARTERS FOR
**VIBRATION CONTROL MOUNTINGS**
**. . . BONDED RUBBER PARTS**




tory and factory, to check oscillators, generators and front-end or overall response curve of a tv receiver. The heterodyne detector and magic eye tube, which is a built-in feature, gives a visual zero-beat indicator to be used for calibration. A phone jack is provided at the back for an audible zero-beat. The 2.5-mc crystal, when beat with the vfo, gives an r-f generator calibrated to ±0.05 percent at 2.5-mc intervals over the range 53 to 89 mc and 174-217 mc on fundamentals, and to 868 mc on harmonics.



## Decimal Counting Units

BERKELEY SCIENTIFIC CORP., 2200 Wright Ave., Richmond, Calif., has available a line of decimal counting units that are plug-in type, direct-reading, electronic counters capable of operating at speeds up to 1,000,000 counts per second and resolving paired pulses separated by as little as 0.8 μsec. The decimal counting unit counts from 0 to 9 and presents an illuminated numerical reading on the front panel. No interpolation is necessary. The tenth pulse resets the counter to 0 and simultaneously generates one pulse, which may be applied to the input of a following counter or other device. Reset to 0 of one or more units is accomplished by momentarily opening the grid return circuit. The units may be connected in cascade indefinitely to create an electronic counter or scaler having any desired number of decimal places.

## Record Measurements

TELECOMPUTING CORP., Burbank, Calif. Faster, more accurate meas-

# THIS ELECTRONIC NOSE SNIFFS OUT LEAKS

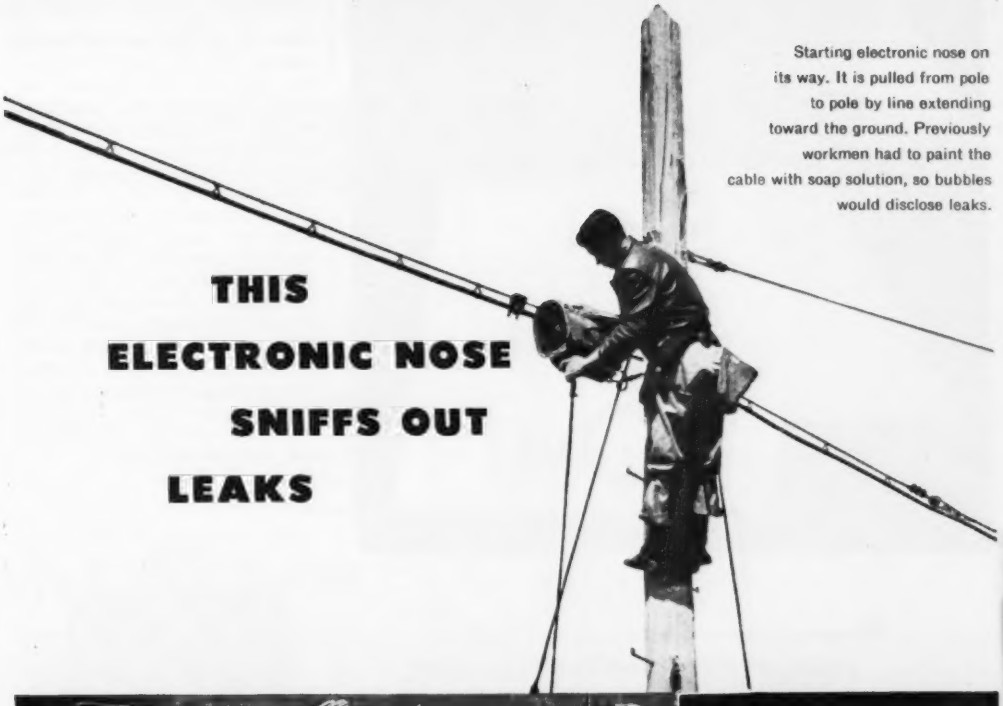

Starting electronic nose on its way. It is pulled from pole to pole by line extending toward the ground. Previously workmen had to paint the cable with soap solution, so bubbles would disclose leaks.

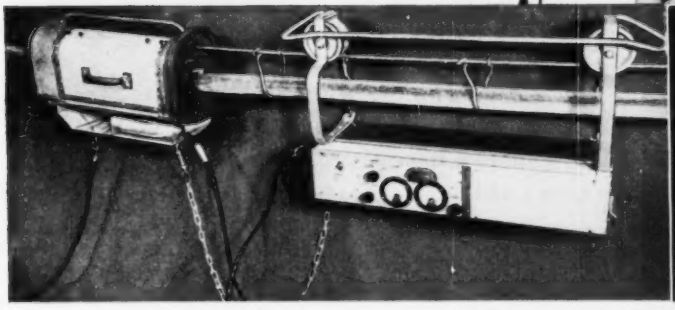

For test, the cable is cleared of protective nitrogen or air, and filled with Freon gas. Case at left collects escaping gas which operates Freon-sensitive detector underneath. At points where Freon escapes through sheath cracks, the box at right—a combined control unit and power supply—rings a bell. Workmen mark the point of leak for later repair.

After years of buffeting by the wind, even tough telephone cable sometimes shows its age. Here and there the lead sheath may crack from fatigue or wear through at support points. Before moisture can enter to damage vital insulation, leaks must be located and sealed.

To speed detection, Bell Laboratories scientists constructed an electronic nose which *sniffs* out the leaks. Using an electrically operated element developed by the General Electric Company, the device detects leaks of as little as 1/100 cubic foot per day. Sheath inspection can be stepped up to 120 feet per minute.

Thus Bell scientists add findings in other fields to their own original research in ways to make your telephone system serve you better. On the other hand their discoveries are often used by other industries. Sharing of scientific information adds greatly to the over-all scientific and technological strength of America.

**BELL TELEPHONE LABORATORIES**

*Improving telephone service for America provides careers for creative men in scientific and technical fields*

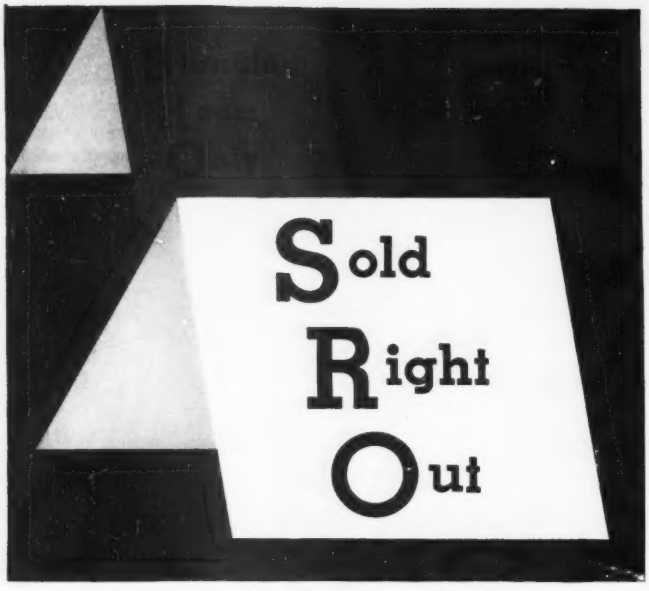


We're sorry, but we think it's only fair to tell possible new customers our Standing Room Only sign must be changed to Sold Right Out!

The design and production facilities of our microwave department are now taken over by the increasing requirements of our present customers. Because of our responsibility to them, this situation may continue quite a while.

We are sorry to say this because we enjoy making new friends. But we feel that we should tell those who might be interested in our engineering and manufacturing facilities, that for some time we may not be able to serve them.

Any change in the situation will be announced in this publication.

L. H. TERPENING COMPANY
DESIGN • RESEARCH • PRODUCTION
Microwave Transmission Lines and Associated Components
16 West 61st St. • New York 23, N. Y. • Circle 6-4760




urements of film and oscillograph records are now possible with the development of the Universal Telereader. The unit measures records ranging from 16 and 35-mm film to 12-in. oscillograph paper up to 100 ft in length. It can handle either translucent or opaque records. Three interchangeable projection lenses are provided with the Telereader to permit record magnification of 2X, 4X and 11X, depending on the need. When used with companion instruments such as the Telecordex and a summary punch, the Telereader can print its measurements in decimal form on a typewriter supplied with the Telecordex, as well as recording such information into punched cards.



### Magnetic Tape Recorder

ECTRO, INC., Delaware, Ohio. The Parlo-Tape is a completely portable, two-speed tape recorder operating from self-contained batteries. Recordings can be started instantly by turning the knob to RECORD position, or played back by turning the knob to LISTEN position. Its automatic volume control feature provides for a stable recording level at various distances from the microphone. The 3¾-in.-per-second tape speed is for general use, and at this speed the recording time on 5-in. 600-ft reel will be 30 minutes. By reversing the reels on the reel spindles an additional 30 minutes of recording time can be added to the same tape, a total of one hour recording on one 5-in. reel of tape. The 7½-in. speed allows a total of ½ hr recording on the 5-in. reel at maximum fidelity and full frequency range. All or part of the

# TRAN-COR 3X-0 doubles transformer capacity

In Delft, Holland, an x-ray machine manufacturer recently increased the rating of this portable x-ray unit 100 per cent without increasing its weight. He did it by changing transformer core material from the equivalent of AISI Hot-Rolled Type M-14 to Armco TRAN-COR 3X-0. Machine rating increased from 600 volt-amperes to 1200 volt-amperes.

## CAPACITY LIMITED BY WEIGHT

As long as this manufacturer was limited to the old magnetic material there was no way to raise machine capacity without increasing transformer weight. A heavier transformer would mean a heavier unit—too difficult for women operators to push around. Armco TRAN-COR 3X-0 with its advanced magnetic properties solved the problem.

Perhaps you would like to decrease transformer weight, increase capacity, or maybe design for a combination of these benefits. If so, write for the booklet, "Armco Oriented Electrical Steels." It has complete design data on the 14 mil thick Armco TRAN-COR 3X-0 and 2X-0, suitable for wound or stamped laminations. For wound cores only, ask about Armco TRAN-COR 4W-0 and 3W-0 in 12 mil thickness.

ARMCO STEEL CORPORATION

4512 CURTIS STREET, MIDDLETOWN, OHIO • PLANTS AND SALES OFFICES FROM COAST TO COAST • EXPORT: THE ARMCO INTERNATIONAL CORPORATION

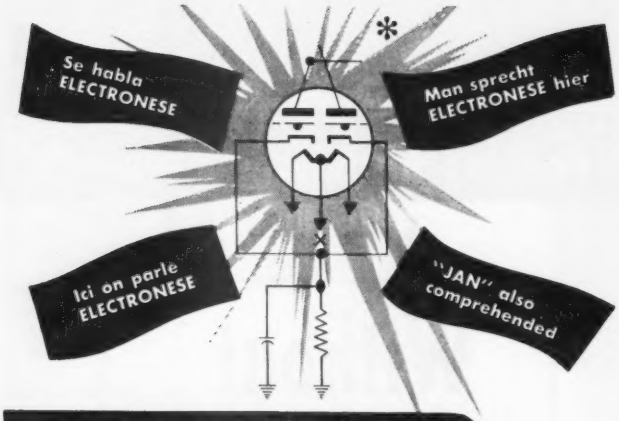


**ever see such signs?**

**We might display their like at MILO. Our men know components! Recognize them because they have used them. Know the lines by name, catalog number, purpose, JAN-specs; and by more conventional description. Our resistor men won't "stick" you. We have the best makes, in a greater variety of values and tolerances. Our "pot" men know A-curves from C-tapers—are shaft experts, too.**

With our stock and our staff we ourselves could design and produce electronic devices. We have engineers, technicians and skilled workers from various branches of electronics — now devoted to making MILO the smartest place to buy components and test equipment.

We do not claim ENIAC. We do not understand Einstein on Mass vs. Energy, unless it means fat men aren't necessarily lazy. We *do* speak your language when you talk of electronic parts.

**Save time and temper and legal tender, too. Order from MILO.**

**Check List (P-X) of Leading Brands in Stock**

| | | |
|---|---|---|
| Par-Metal | Simpson Electric | Ungar Electric |
| Potter & Bromfield | Solo Electric | United Transformer |
| Precision Apparatus | Sprague | Ward Leonard |
| RCA | Standard Transformer | Weller |
| Raytheon | Superior Electric | Westinghouse |
| Sangamo | Sylvania | Weston |
| Shallcross | Tung-Sol | Xcelite |
| Shure Bros. | Triplett | (others) |

**JAN-APPROVED COMPONENTS**

**FREE CATALOG!**

Chief Engineers, Purchasing Agents, Qualified Executives! Write now on your company letterhead for MILO's edition of the 1953 Master. Please address Dept. E-11.

*If you haven't guessed: Our coy "Primitive" is just a 12AU7 in a Vertical Sweep Generator — with *overloaded* grids.

**The ONE source for ALL your electronic needs**

MILO RADIO & ELECTRONICS CORP.
*Electronics for Industry*
200 GREENWICH STREET, NEW YORK 7, N.Y. • Phone BEekman 3-2980
Teletype NY1-1839 • Wire MILO-WUX-N.Y. • Cable MILOLECTRO-N.Y.




tape can be erased right on the machine and reused again and again.



## Oscillograph Probes

SCALA RADIO Co., 2814—19th St., San Francisco 10, Calif. The B.Z.1 signal-tracing probe can be used to locate dead i-f stages, mark ratio-detector curve, calibrate marker generator, adjust video amplifiers, check output of a sweep generator, view response of single i-f stage and trace buzz pulse in sound i-f strip. It can also be used with vtvm. The unit contains a demodulator of low-capacitance, high-impedance design, useful to 225 mc. Other models are the B.Z.2 low-capacitance probe, and the B.Z.3, a 100-to-1 voltage-divider probe.



## Portable Oscillator

SOUTHWESTERN INDUSTRIAL ELECTRONICS Co., 2831 Post Oak Road, Houston 19, Texas, has available a new portable oscillator designed as a source of signal power for field use. Model MB-1 oscillator derives its operating power entirely from self-contained batteries and covers a frequency range of 2 to 20,000

# A Molehill of Difference Can Make a Mountain of Trouble in Waveguides

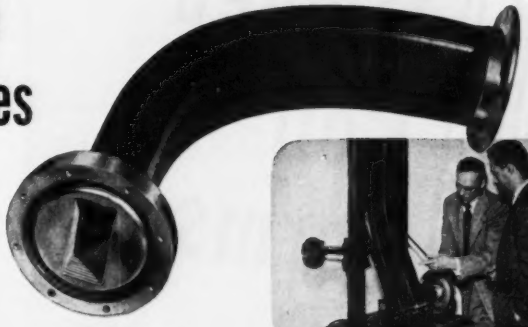

***Remember this traffic-stopper*** at the 1952 IRE Show in Grand Central Palace? It's a torture test. Flexed well over 1,000,000 times, Waveflex flexible Waveguides gave no evidence of failure or loss of physical or electrical properties.

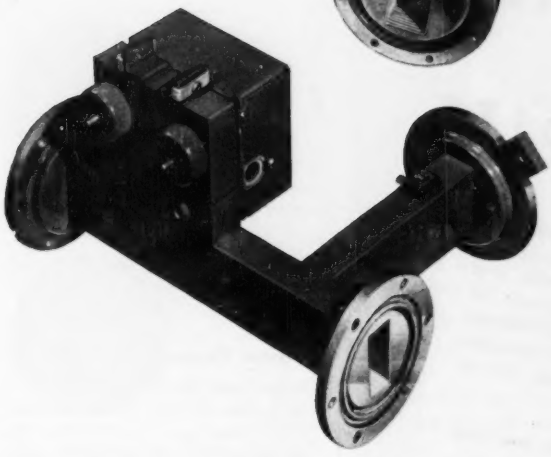



***Fabricated to precision methods,*** Titeflex flexible and rigid Waveguides are produced to the closest tolerances and to exacting specifications. Titeflex maintains strict quality control and inspection from raw materials to finished products.

. . . A little difference in waveguides—imperceptible to the eye—can jeopardize a costly investment.

If you want to be sure of your electronic equipment, if you want to reduce operational failures, insist upon Titeflex microwave components.

***Send for free catalog*** of uses, properties, and specifications.



***No Waveguide gets by*** this department without a thorough electrical check-up. Every single Titeflex Waveguide is tagged before shipment with its test score on JAN-W-287 specifications for flexible Waveguides or JAN-W-85A for rigid Waveguides.

## Let Our Family of Products Help Yours

**Titeflex**

✓ Check products you are interested in.

☐ SEAMED AND SEAMLESS METAL HOSE

☐ PRECISION BELLOWS

☐ IGNITION HARNESS

☐ IGNITION SHIELDING



☐ ELECTRICAL CONNECTORS

☐ RIGID AND FLEXIBLE WAVE GUIDES

☐ FILTERS

☐ FUSES

TITEFLEX, INC.
524 Frelinghuysen Ave.
Newark 5, N.J.

MAIL COUPON TODAY

Please send me without cost information about the products checked at the left.

NAME _____

TITLE _____

FIRM _____

ADDRESS _____

CITY _____ ZONE ____ STATE _____

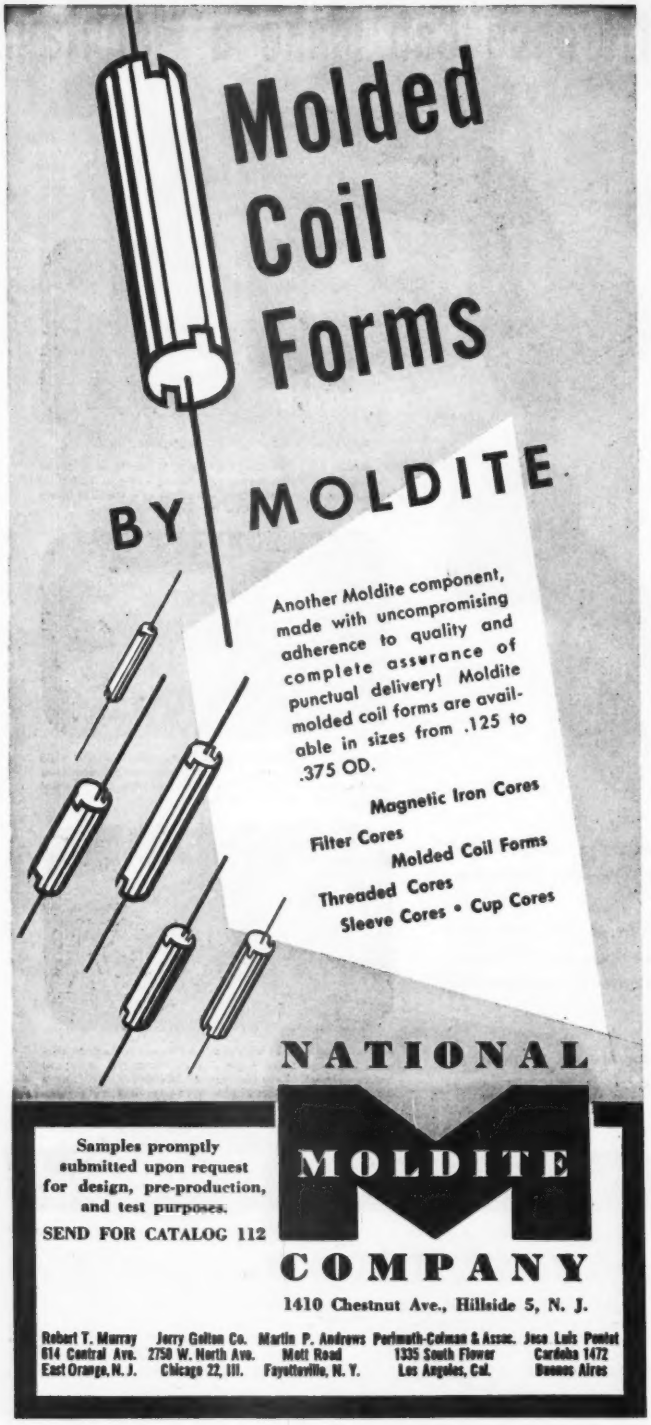
Molded Coil Forms
BY MOLDITE
Another Moldite component, made with uncompromising adherence to quality and complete assurance of punctual delivery! Moldite molded coil forms are available in sizes from .125 to .375 OD.
Magnetic Iron Cores
Filter Cores
Molded Coil Forms
Threaded Cores
Sleeve Cores • Cup Cores
NATIONAL
MOLDITE
COMPANY
Samples promptly submitted upon request for design, pre-production, and test purposes.
SEND FOR CATALOG 112
1410 Chestnut Ave., Hillside 5, N. J.
Robert T. Murray 614 Central Ave. East Orange, N. J.
Jerry Golton Co. 2750 W. North Ave. Chicago 22, Ill.
Martin P. Andrews Mott Road Fayetteville, N. Y.
Perlmuth-Colman & Assoc. 1335 South Flower Los Angeles, Cal.
Jose Luis Pontet Cordoba 1472 Buenos Aires




cps in 4 decade ranges. An output voltage of 5.5 v is delivered to a 2,000-ohm load and the instrument has an internal impedance of approximately 400 ohms. Distortion is less than 1 percent in the audio spectrum and the dial is accurate to within 2 percent of its indication. The unit is equipped with a switch that decreases the battery gain when the full output is not required, and thereby increases battery life to 100 hours or more for intermittent service.




## Power Pentode

RADIO CORP. OF AMERICA, Harrison, N. J., has introduced a power pentode of the 9-pin miniature type for use in the final video-amplifier stage of tv receivers. The type 6CL6 has very high transconductance, low interelectrode capacitances and high output-current capability. These features make possible the design of wide-band video circuits having a voltage gain of 40 to 45. Providing high plate current at low plate voltages, it can supply sufficient peak-to-peak output voltage to drive large picture tubes with high efficiency and low amplitude distortion.



## Capacitive Network

SANGAMO ELECTRIC CO., Marion, Ill., has developed type BTN capacitor

# Want an oscilloscope camera NOW?



Scope Image — Film Recording

1. Single-frame photography of stationary patterns using a continuously running sweep.



Scope Image — Film Recording

2. Single-frame photography of single transients using a single sweep.



Scope Image — Film Recording

3. Continuous-motion photography employing film motion as a time base.



Scope Image — Film Recording

4. Continuous-motion photography employing oscilloscope sweep as a time base.



FILM MOTION TIME BASE — FILM MOTION AND SCOPE SWEEP

5. Continuous-motion photography employing combination of film motion and oscilloscope sweep as a time base.

Fairchild Oscillo-Record Cameras are now available *from stock* for immediate shipment. With these units you can make *permanent* photographic records of oscilloscope traces, thereby eliminating possible errors in making hand sketches from memory. In time-saving and convenience alone, these cameras will pay for themselves many times over.

## FAIRCHILD OSCILLO-RECORD CAMERA IS UNUSUALLY VERSATILE

Users of the Fairchild Oscillo-Record Camera like its versatility. Designed for both still and continuous-motion photography on 35-mm film, it records non-recurring phenomena that are too rapid for visual study, others that are so slow that continuity is lost, and the occasions where very high-speed transients are combined with very slow-speed phenomena. For some idea of the types of jobs this instrument can do, study the examples at the left. Each solves a particular problem. Oscillo-Record camera users especially like its:

- **CONTINUOUSLY VARIABLE SPEED CONTROL**—1 in/min. to 3600 in/min.
- **TOP OF SCOPE MOUNTING** that leaves controls easily accessible.
- **PROVISION FOR 3 FILM LENGTHS**—100, 400 or 1,000 feet.




1. Camera, 2. periscope, 3. electronic speed control. Accessories include 400- and 1,000-ft. film magazines, magazine adaptor and motor, universal mount for camera and periscope, binocular split-beam viewer.

## FAIRCHILD TAKE-UP CASSETTE FOR SHORT RUNS

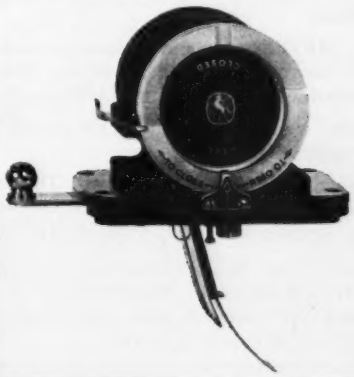

Where only a few pictures are required for quick development and study, a small Take-up Cassette is available as an accessory. The convenience afforded by this unit results in the saving of considerable time in handling short runs and reduces film wastage to a minimum. It is easily attached to the top of the camera by means of an adapter. A built-in knife permits short lengths of exposed film (up to 10 feet) to be cut off and removed with the cassette for developing.

Complete information about applications and operation of both the Fairchild Oscillo-Record Camera and the Fairchild-Polaroid Oscilloscope Camera is available. Write today to *Fairchild Camera and Instrument Corporation, 88-06 Van Wyck Boulevard, Jamaica 1, New York, Department 120-18A3.*

FAIRCHILD
OSCILLOSCOPE RECORDING CAMERAS

# 3 WAYS
## TO MAKE PANELS, LIDS and DOORS
# RF TIGHT



Thermatron built by Radio Receptor Co., Inc.

1. **Machine mating surfaces to closest tolerances.** *Costly and difficult!* And the close fit is often destroyed by warping, corrosion and normal use.

2. **Install numerous latches, screws, bolts or other fastenings.** *Also costly!* And makes maintenance more difficult, more time-consuming.

3. **USE METEX ELECTRONIC WEATHERSTRIPPING.** *The simple, sure, economical way!*

Made of resilient, compressible *knitted* metal wire mesh, METEX strips and gaskets "close" these openings just as a weatherstrip "closes" windows and doors.

Because they are metallic, METEX strips and gaskets are conductive. Because they are knitted, they are flexible and resilient. They will conform to surface irregularities with no loss in shielding efficiency.

Close manufacturing control assures uniformity in the resiliency and dimensions best adapted to specific applications.

METEX electronic strips and gaskets are easy to install. They are not expensive—in fact, they may well save more than their cost by eliminating the need for many operations formerly thought necessary.

*It will pay you to investigate the production and performance advantages of METEX Electronic Weatherstripping. A bulletin giving detailed information is yours for the asking —just write on your company letterhead.*

**METAL TEXTILE CORPORATION**
KNITTERS OF WIRE MESH FOR MORE THAN A QUARTER CENTURY

METEX

Main Office & Plant, Roselle, New Jersey  Canadian Plant, Hamilton, Ont.




network, a multisection, metal encased, hermetically sealed paper dielectric unit. Its multiple sections can be internally connected to provide a selection of either capacitive pi, Y or delta networks. Type BTN can be provided with mineral oil, pentachlordiphenyl, or electrical grade waxes as impregnants. It is claimed to be advantageous for use in airborne equipment power frequency circuits where the compact single-unit construction offers space and weight saving advantages.

### Secondary Standards of Low Capacitance

MACLEOD AND HANOPOL, INC., 10 Roland St., Charlestown 29, Mass. Convenient means for calibrating instruments used for measuring low values of capacitance are now available in the model 388 set of secondary standards of low capacitance. The set comprises two T networks, three auxiliaries and a set of cables for connecting the standard to various instruments. The nominal values of the networks are 0.075 and 7.5 μμf; the auxiliaries modify the networks so that values of 0.001, 0.0075 and 0.75 μμf can be obtained. All elements have Q of 200 or better and temperature coefficient of less than 0.05 percent per deg C.

### High Temperature Coils

DOUGLAS-RANDALL, INC., 102 High St., Westerly, R. I. Capable of continuous operation in the 450 to

# SONAR

by Edo

**THE WAKES** . . . of more and more vessels churn over water accurately scanned by Edo sonar. A major electronic development in underwater detection equipment, Edo sonar will measure depths over far greater ranges with accuracy, clarity and legibility never before achieved.

Because of such development work in its electronics laboratories, Edo has become a major supplier of sonar equipments for the United States Navy.

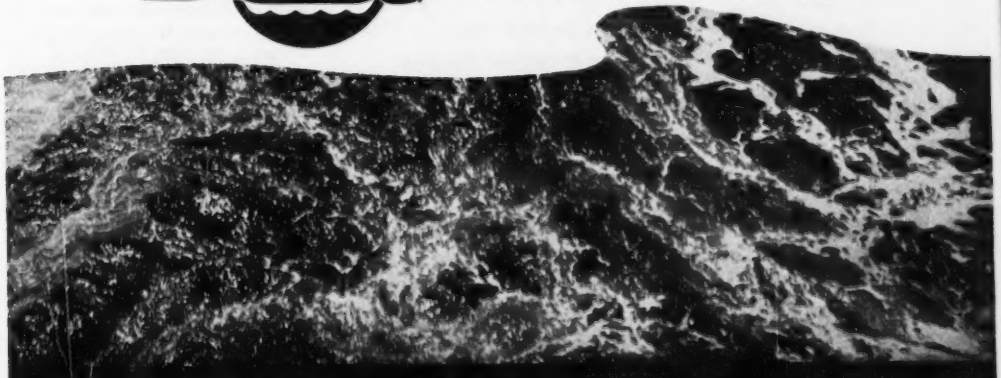

**EDO CORPORATION** College Point, L.I., N. Y. SINCE 1925

DIGITAL

COMPUTER

RESEARCH

Your inquiry is invited concerning a position on our staff if you are experienced in the design and development of automatic data processing systems for military, industrial and commercial applications.

Logical Design
Component Development
Programming
Magnetic Recording
Circuit Design
Input & Output Devices

**HUGHES**

*Research and Development Laboratories*

*Engineering Personnel Department*

*Culver City, Los Angeles County, California*

Assurance is required that the relocation of the applicant will not cause the disruption of an urgent military project.



650 F range, yet occupying little more space than conventional windings, the high-temperature coils now available satisfy many needs in the construction of electrical and electronic apparatus for use in jet aircraft and guided missiles. They are particularly suited to solution of miniaturization problems since their ability to operate at high temperatures allows increased self-heat in magnet coils and in field coils of induction or synchronous motors. These coils, wound, with wire sizes 30 through 44, can be furnished on round or rectangular bobbins or as interleaved windings, with lug terminals or flexible leads, and for a-c or d-c service. They will withstand accelerations of 10 to 20 g.

## Ignitron

NATIONAL ELECTRONICS, INC., Geneva, Ill., recently announced an addition to its line of industrial tubes. Model NL-5822 ignitron is a metal, water-cooled mercury pool tube designed especially for frequency-changer resistance welders. It utilizes an all-copper cooling system that provides exceptional cooling efficiency. The mercury-pool cathode permits the tube to handle extremely high currents on an intermittent basis. The baffle construction reduces deionization time and permits satisfactory operation under severe conditions of commutation. A technical data sheet is available.

## Labeling Machines

POPPER & SONS, INC., 300 Fourth Ave., New York 10, N. Y., are now

# "HIPERSIL® CORES helped us design 99 96/100% Perfect Amplification!"

McIntosh Engineering Laboratory, whose new output circuit is the first major advancement in years of audio amplifier design, credits Hipersil Cores with a vital contribution to its development.

"Hipersil Cores reduced the weight of our driver and output transformers by 30 pounds; enabled us to cut the height of our assembly from 20 to 7 inches. Further, by holding losses to a minimum, these cores eliminated the high distortion which is characteristic of larger cores at low output levels."

You can cut size, weight and assembly costs in all types of electrical and electronic transformers with Hipersil Cores. They combine highest permeability with lowest losses in a wide range of sizes, all frequencies (1 through 12 mil cores). Greater flux-carrying capacity and increased mechanical strength help to make them the best cores on the market. For specific information on how to apply them to your product, write Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-70630

YOU CAN BE SURE... IF IT'S
Westinghouse
HIPERSIL CORES

**GIANT in miniatures**

The inevitable process of "separating the men from the boys" is still going on in the comparatively new electronics industry. Yet Volkert has already established itself as the leading independent supplier of stamped components for miniature tube sockets, and other precision stampings.

Volkert was the *first* to produce shield bases for sockets on a progressive die in a one-press setup. Through Volkert's creative die engineering, a cost-saving method was initiated to stamp the tiny contacts *two at a time*. And now Volkert turns out over *one hundred million* contacts every year.

Add to these achievements Volkert's modern production facilities, its ability to work with all types of specialty metals, and its emphasis on precision *plus* automaticity—and you have the reasons why Volkert is your *best* source for *all* precision stampings at low cost.

Volkert's outstanding facilities for design engineering, tooling, production, assembly and inspection—all combined under a single roof—are described in a 16-page booklet, "3-Way Facilities for Precision Stampings." Write for your copy.

•

**John Volkert Metal Stampings, Inc.**
222-34 96th Avenue
Queens Village 8,
L. I., N. Y.

**For design...tooling...production and assembly of precision stampings**

**Volkert**




distributing in the U. S. the Rejafix marking and printing machines. The machine will, by use of metal types or cuts, mark, print or decorate any material such as glass, plastics, ceramics, rubber, metal or paper. The impressions may be indelible or washable as desired. Standard machines range from small hand operated ones to large fully automatic units. Rejafix machines are in operation in many places and are successfully marking and printing on products such as capacitors, resistors, tubes and cable.



## Diode Tester

COMPUTER RESEARCH CORP., 3348 W. El Segundo Blvd., Hawthorne, Calif., has developed an instrument for testing the dynamic as well as static characteristics of crystal diodes. The new instrument tests both forward and back characteristics under static and dynamic conditions, telling how the diode will perform before one mounts it in the circuit. The diode tester occupies a space less than one-half cu ft, and will accommodate diodes with forward currents of 0 to 100 ma and back currents of 0 to 1,000 μa. Forward voltage is measured to an accuracy of 2 percent and back current to 3 percent. The tester is adaptable to high speed, volume testing and operates on 115-v, 60-cycle current, using 100 w or less.

## Digital Computer Tube

GENERAL ELECTRIC CO., Syracuse, N. Y. Type GL-5965 miniature twin triode is designed for use in several of the different circuits used in digital computers. It incorporates a special heater-cathode construction designed for depend-

JFD

**JFD MFG. CO.**
BROOKLYN 4, N.Y.
BENSONHURST 6-9200
*world's largest manufacturer of tv antennas & accessories*

*leading manufacturers use*

**JFD PISTON TYPE VARIABLE TRIMMER CAPACITORS**

*in both civil and military equipment*

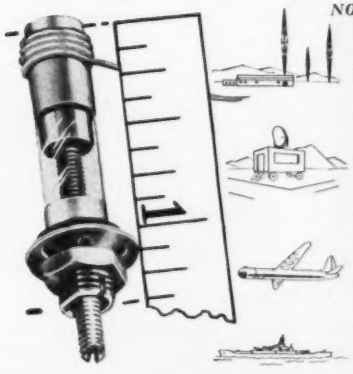

*NO OTHER LIKE IT!*

- Spring loaded piston made of special invar alloy having extremely low temperature coefficient of expansion.
- Silver band fused to exterior of precision drawn quartz or glass tube serves as stationary electrode.
- Piston dimensional accuracy is held to close tolerance maintaining minimum air gap between piston and cylinder wall.
- Approximately zero temperature coefficient for quartz and ± 50 P.P.M. per degree C. for glass units.
- "Q" rating of over 1000 at 1 mc.
- Dielectric strength equals 1000 volts DC at sea level pressure and 500 volts at 3.4 inches of mercury.
- 10,000 megohms insulation resistance minimum.
- Operating temperatures, −55 C. to +125 C. with glass dielectric. And −55 C. to +200 C. with quartz dielectric.
- Over 100 megohms moisture resistance after 24 hours exposure to 95% humidity at room temperature.

Write for Form No. 199

**HIGH CAPACITY (300 Liters Per Minute) assured with this New WELCH TWO-STAGE DUO-SEAL® VACUUM PUMP**

**GUARANTEED VACUUM—.0001 mm (0.1 Micron)**
**FASTER PUMPING AT ALL PRESSURES**

**Exceptionally Quiet Operation**

**Built-in Trap prevents oil from backing up into system.**

**Indicator window shows oil level at all times.**

**Convenient oil drain permits oil change without dismantling system.**

Patent No. 2337849

No. 1397-B

**COMPACT**
Size 26 x 14½ x 18½ inches

**COMPLETE $515.00**

**W. M. WELCH SCIENTIFIC COMPANY**
DIVISION OF W. M. WELCH MANUFACTURING COMPANY
ESTABLISHED 1880
1515 SEDGWICK STREET DEPT H CHICAGO 10, ILLINOIS, U.S.A.

**4 Channel Recording on ¼" Tape**



The Brush Models BK-1502N Magnetic Record/Reproduce Heads are precision aligned, dual channel units. They are designed so that they may be stepmounted side-by-side to provide 4 channels of ¼" tape.

- **Individual channels are cast into one integral block of especially selected synthetic resin**
- **All gaps in precise alignment**
- **Mu metal shields between individual channels**
- **Individual channel width, 0.044"**
- **Center to center spacing between channels ..... 0.125"**
- **Gap width ..... 0.0004"**
- **Total inductance, 75 millihenrys**
- **Total resistance ..... 85 ohms**
- **Special design features can be supplied to meet your requirements**

Model BK-1502N Record/Reproduce Heads, like all other Brush Magnetic Recording Components, are the products of Brush engineering leadership and Brush skills in precision production.

Write us for help on your magnetic recording problems. Your inquiries will receive the attention of capable engineers.

THE Brush DEVELOPMENT COMPANY
3405 Perkins Ave. • Cleveland 14, Ohio
Piezoelectric Crystals and Ceramics
Magnetic Recording Equipment
Acoustic Devices • Ultrasonics
Industrial & Research Instruments
BRUSH

# FILTER PACKS

**simplify miniaturization of radio-interference filters for multiple circuits**

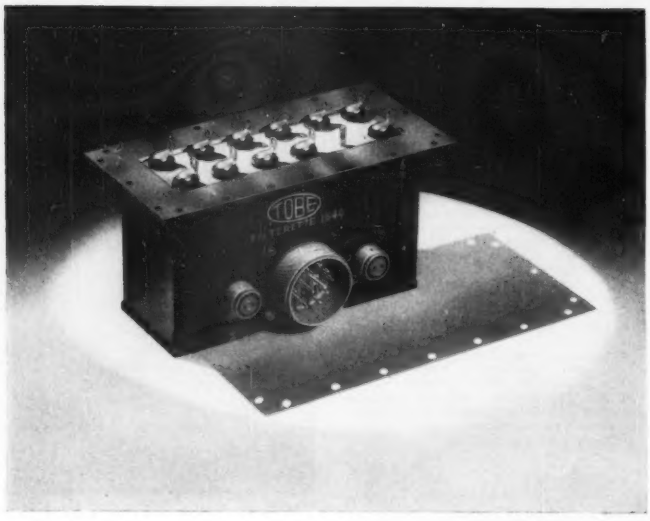

TOBE FILTER PACKS combine, in a single, compact case, all the elements needed to suppress radio interference in many separate circuits. The result — better miniaturization than can be obtained with individual filters in each circuit, plus reduction of space that must be pressurized, yet no sacrifice of filter performance.

Tobe Filterette No. 1540 is typical of the filter packs we can build to *your* requirements. In a housing only 6⅜ x 3¾ x 2-7/16, with a mounting flange flat to ±0.010 inch for lead-in to pressurized chambers, this unit provides eleven circuits rated up to 12 amperes at 115 volts a. c. and having the attenuation shown in the curve below.

For help with any interference problem, call on Tobe — specialist in filtering since 1929, originator of modern filtering methods.




TOBE

**TOBE DEUTSCHMANN**

CORPORATION

NORWOOD, MASSACHUSETTS




ability under frequent "on-off" switching conditions. When used in "on-off" control applications it will maintain its emission capabilities after long periods of operation under cutoff conditions. Average characteristics with 150 v on the plate are: cathode bias resistor, 220 ohms; amplification factor, 47; approximate plate resistance, 7,250 ohms; transconductance, 6,500 microhms; and plate current, 8.2 ma.

### Picture Tube Tester

VIDAIRE ELECTRONICS MFG. CO., Lynbrook, N. Y. The Kine-Test quickly and accurately determines any defects in a tv picture tube. It is also designed to check simultaneously filament voltage, first-anode voltage, bias voltage and the video signal. With a Kine-Lite, which is about the size of a radio tube, it is intended that the tv picture tube be checked without removing it or the chassis from the cabinet. It is meant to let the serviceman merely plug his pocket-sized Kine-Lite into the picture tube socket and have all the necessary information revealed in a matter of seconds.



### Standing Wave Detector

MICROWAVE ASSOCIATES INC., 22 Cummington St., Boston 15, Mass. Type 1022 standing-wave detector is designed for precision low-level

impedance measurements in the millimeter region when used with a suitable source and amplifier. Vswr's as low as 1.01 can be read accurately in the region from 34 to 36 kmc. The unit consists of a slotted section of RG-96/U waveguide milled from a solid piece of brass and silver plated. A movable carriage is provided carrying a spring-loaded adjustable coupling probe, a silicon diode detector socket, and coaxial output fitting that will mate with a UG-88/U or equivalent BNC cable connector. A total longitudinal probe displacement of 0.750 in. is available. Probe position can be read accurately to 0.001 in. Total insertion length of the unit is 3.25 in.

### Equalizer Preamplifier

McINTOSH LABORATORIES, Binghamton, N. Y., has introduced a new equalizer preamplifier, model C-104 and C-104A. It is similar to the previous model, AE-2A, but incorporates greater simplicity of control and an additional turnover frequency. The unit can be used as the control center for any sound reproducing system. Five input channels are provided: for tv audio, f-m/a-m tuner, low-level microphone, high-level magnetic cartridge and low-level magnetic cartridge. There are separate, continuously variable bass and treble controls, providing 20-db bass attenuation and 20-db accentuation, independent of treble control; 15-db treble accentuation, 20-db attenuation, independent of bass control.

### Miniature Microphone

THE ASTATIC CORP., Conneaut, Ohio. Model 54M3 miniature microphone employing crystal element is a high-


DELAY LINES

lumped-constant type

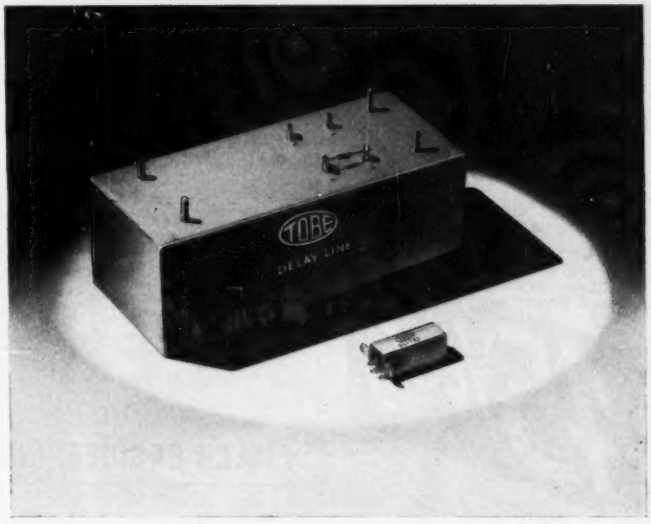


TOBE DELAY LINES

Typical delay lines, designed and manufactured by Tobe, are shown above. Available in large and small sizes, with performance characteristics to meet your specifications, Tobe delay lines have all the structural features required for modern military and commercial applications. Let us quote on your requirements.

Call on Tobe, also for pulse capacitors, pulse-forming networks, radio-interference filters, and capacitors for all electrical and electronic uses.

TOBE DEUTSCHMANN
CORPORATION
NORWOOD, MASSACHUSETTS

Original BEEDE ELECTRIC METERS

HAVE STOOD THE TEST FOR OVER

45 Years

ACCURACY
DURABILITY
MODERN DESIGN

HAVE KEPT THEIR REPUTATION CLEAN ALL THESE YEARS



CATALOG or INFORMATION on REQUEST

BEEDE

ELECTRICAL INSTRUMENT CO., INC.

PENACOOK, N. H.

ELECTRONIC GLASS WORKING EQUIPMENT for RADIO, TELEVISION TUBES, INCANDESCENT LAMPS, GLASS LATHES for TELEVISION TUBES

We make Transformers, Spot and Wire Butt Welders, Wire Cutting Machines and 500 other items, indispensable in your production. Eisler Engineers are constantly developing New Equipment. If you prefer your own designs, let us build them for you. Write to Charles Eisler who has served The Industry over 32 years.

Machines for small Radio Tubes of all kinds:

High Temperature Hydrogen Electric Furnaces

Hydrogen atmosphere heating chamber, hydrogen drying tower, water cooled unloading chamber, heat control with air cooled transformer with 11 position tap switch. Automatic temperature control (optional) standard furnaces from 1" bore 1800° C. to 8" bore 1100° C. Molybdenum wound heating units, loading and unloading chambers equipped with safety doors. Supplied with hydrogen flow gauges. Made to order in many sizes.

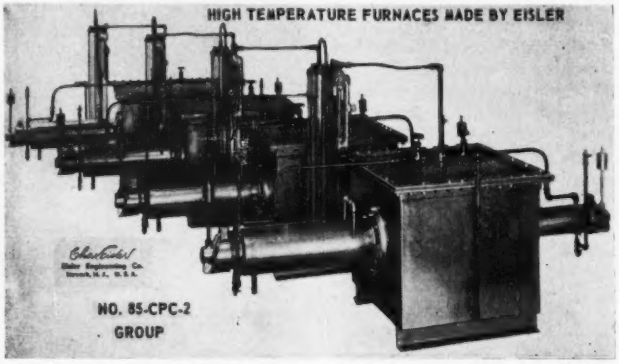


EISLER ENGINEERING CO., Inc. 751 So. 13th St. Newark 3, N. J.

*There is Always One Leader in Every Field*

BODNAR INDUSTRIES, INC.

*Leads in the Field of*

TRANSILLUMINATED PLASTIC LIGHTING PLATES

*because of*

QUALITY • UNIFORMITY • PERFORMANCE • QUANTITY PRODUCTION PROMPTLY
DESIGN AND LAYOUT "KNOW-HOW SERVICE"

NEW YORK — 19 Railroad Ave., New Rochelle (Home Office)
TEXAS — Box 4116 Station A, Dallas
OHIO — 2001 Maiden Lane, Springfield
CALIFORNIA — 11055 Cumpston St., N. Hollywood
CANADA — 313 Montreal Trust Bldg., 67 Yonge St., Toronto

DEMONSTRATION PANEL MIL-P-7788 (AN-P-89) Sent on Letterhead Request

TYPE "M"



NOW available to you . . . without costly sub-contracting problems

MIL-B-233A SPARE-PARTS BOXES...

FOR THE PROTECTION OF ON-BOARD REPAIR PARTS

Stock standard TYPE M STEEL SPARE OR REPAIR PARTS BOXES, made in strict accordance with Military Specifications.

To better service your need for Specification Spare-Parts Boxes we have put them on a mass production line.

Write for Size and Price Chart

19 STOCK SIZES AT PUBLISHED PRICES!

DOLIN METAL PRODUCTS INC.
319 LEXINGTON AVE., BROOKLYN 16, N. Y.

output unit (−51 db below 1 v per microbar). The top grille is a circular metal stamping, 1¾ in. diameter and ½ in. deep. Housing and handle are combined in a single die cast unit. The microphone is nondirectional when mounted in its base. Recommended for recorder, p-a, conference and other uses, its response (30 to 10,000 cps) is flat to 1,000, gradually rising to 6,000 cps. It is furnished with 5 ft of rubber covered, single-conductor shielded cable and protector sleeve at the microphone.



### Miniature Delay Line

ADVANCE ELECTRONICS CO., P. O. Box 394, Passaic, N. J. Type 506 miniature continuously variable delay line is essentially a condensed r-f cable with one conductor changed into a long thin coil and the other conductor spaced closely to the first, thus producing a large amount of time delay yet maintaining low attenuation at high frequencies. It provides continuously variable time delay from zero to several hundreds of millimicroseconds. It features small size and weight, fast rise time, excellent stability, hairline accuracy and complete freedom of time jitter.



### Radar Range Computer

GENERAL ELECTRIC CO., Syracuse, N. Y., has available a new circular

from
millivolts to hundreds
of volts
AIRPAX CHOPPERS
operate well
and reliably

**A-580**
**400 CYCLES**
**120 VOLTS**
Normal angle is 80°, with an external .039 capacitor a ZERO angle is obtained, drive to square wave. Hermetically sealed, SPDT contacts. Contacts are rated at 2ma, 100 volts. Voltage may be as high as 200.

**A-586**
**60 CYCLES**
**6 VOLTS**
Remarkably long life chopper! Hermetically sealed with a 6.3 volt coil; adjusted to a 45° phase lag at 60 cycles; contact dwell time about 160°. Operates over tremendous temperature range of our other units.

**A-589**
**400 CYCLES**
**6 VOLTS**
Withstands 10g vibration operating; 50g non-operating; can be used reliably from −70 to 100° C. Phase lag 65°, drive to square wave, adjusted for 380 to 420 cycles. Hermetically sealed; rugged, stable.

positive performance
from 70° below
to 100° C
or while being
vibrated or shocked
far beyond
usual test extremes!

AIRPAX
DESIGNERS PRODUCTS ENGINEERS
MIDDLE RIVER, BALT. 20, MD.




## . . . using AUBURN molded plastics for 26 years

AUBURN BUTTON WORKS had already celebrated its 50th anniversary in 1926 when it received the initial order for compression molded parts from the Tabulating Machine Company of Binghamton, N. Y., a wholly-owned operating subsidiary of INTERNATIONAL BUSINESS MACHINES CORPORATION.

From that first order, and to the present, AUBURN has been a major producer of plastic components for IBM. Today, using processes of injection, transfer and compression molding, extrusion and reinforced plastics, AUBURN supplies custom molded parts for IBM products.

- Outstanding versatility in the design and production of plastics to meet both volume and precision specifications explains why many of America's foremost corporations have chosen AUBURN for custom molded plastics.
- We at AUBURN have steadily expanded facilities and modernized equipment to remain a leader in plastics. Equipped to mold any material by any modern method, AUBURN maintains high quality control standards.
- For the complete story of AUBURN and how it can solve your problem in plastics, plus information on our newest molding facility, vacuum forming of thermo-plastic sheets, write today for a free illustrated booklet.

**Auburn Button Works, Inc.**
550 McMaster Street, Auburn, N. Y.
Founded in 1876 Telephone 3-5320

---



see your distributor or write directly for free booklet on "using your oscilloscope in vibrator maintenance."

**7 out of 10 major police departments use**

**JAMES**

**the picture tells why . . .**

PATENTED POSITIVE CONTACT ACTION, SUPERIOR PERFORMANCE OF JAMES "RED BALL" COMMUNICATIONS VIBRATORS IS BEST SEEN BY THEIR CLEAN OSCILLOSCOPE WAVEFORM PICTURE—YOUR INSURANCE AGAINST EXCESSIVE "HASH" AND LOW OUTPUT VOLTAGE. JAMES PERFORMANCE MEANS BETTER COMMUNICATIONS.

**JAMES VIBRAPOWR COMPANY**
4036 N. Rockwell St. • Chicago 18, Ill.

---

**CABINETS • CHASSIS • PANELS • RACKS**

Planning ELECTRONIC EQUIPMENT ?

**Investigate the ECONOMIES of PAR-METAL HOUSINGS !**



We manufacture Metal Housings for every purpose — from a *small receiver* to a *deluxe broadcast transmitter*. And the cost is low!

Because we *specialize in the Electronics field*, Par-Metal Products excel in *functional streamlined design, rugged construction, beautiful finish*, and economy.

Remember, Par-Metal equipment is made by *electronic specialists*, not just a sheet metal shop.



**PAR-METAL**
**PRODUCTS CORPORATION**
32-62 — 49th ST., LONG ISLAND CITY 3, N. Y.
Export Dept.: Rocke International Corp.
13 East 40 Street, New York 16, N. Y.

**WRITE FOR CATALOG !**

type slide computing rule, which solves quickly the equation for determining the maximum detection range of radar. The device, about 8 in. in diameter, is for calculating the free-space maximum range when the equipment design characteristics are known. On the reverse side of the circular calculator are provisions for determining antenna gains, power ratios and vertical coverage. The numerical calculation of the performance of a pulsed radar involves seven variables, all raised to exponential powers between one and three, a tedious and time-consuming task. The new slide rule provides a means for drastically reducing the time necessary to perform the same calculations many times, with varied quantities.



### Studio Picture Monitor

POLARAD ELECTRONICS CORP., 100 Metropolitan Ave., Brooklyn 11, N. Y., announces a studio picture monitor, model M-104C, using a 12-in. kinescope. The unit consists of a prelined screen kinescope removable from the front. It is ideal for studio use or remote monitoring of telecasts. It is completely self-contained and presents a tv picture of black and white or color signals in black and white at the turn of a switch. The input signal is 1 volt peak-to-peak and the input impedance is 470,000 ohms. Resolution is in excess of 450 lines.

### Combustion Analyzer

VICTORY ENGINEERING CORP., Springfield Road, Union, N. J. Model 140-A combustion tester com-


EDIN Simplifies Your Instrumentation with this New Expandable Consolette Recorder

Start with a 2 Channel System





Add units, as you need them, to make a 4, 6 or 8 Channel System.

The Consolette gives you rack mounted dimensions with option of Direct Coupled, Condenser Coupled or Carrier Amplifiers; a wide variety of chart speeds and galvanometer types; full writing desk for review of intelligence; and an efficient, modern and beautifully designed instrument.

MAIL COUPON TODAY!

THE EDIN COMPANY
207 Main St., Worcester 8, Mass., Dept. B
Gentlemen:
Send complete information on ☐ the new Edin Consolette ☐ Recording Instruments ☐ Companion Amplifiers.
Name.....
No.....Street.....
City.....State.....
Position.....

THE EDIN COMPANY
207 Main St. • Worcester, Mass.

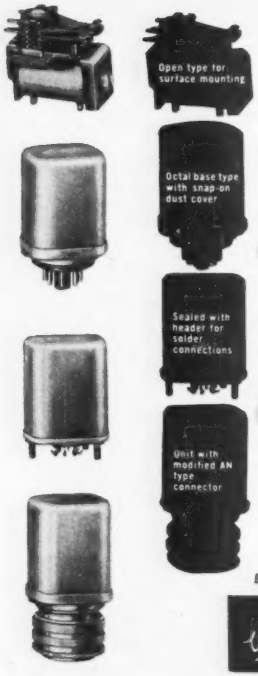
Open type for surface mounting
Octal base type with snap-on dust cover
Sealed with header for solder connections
Unit with modified AN type connector

*a rugged little space saver . . .*

*MIDGET TELEPHONE TYPE RELAYS SERIES (80)—OPEN TYPE FOR SURFACE MOUNTING, OR IN HERMETICALLY SEALED CONTAINERS.*



This vibration and shock-proof Midget Type Relay is the answer to numerous applications where unfailing operation is necessary. In fact, it is built to meet rigid Army and Navy specifications. This "rugged little space saver" is a compact, multiple contact relay which has been developed over years of specialized engineering in the field by Signal Engineering and Mfg. Co., manufacturers of a comprehensive line of relays and signals of various designs and sizes.

**Write for Bulletin MTR-6**

*Engineering Representatives in Principal Cities.*

Wheelock RELAYS SIGNAL
ENGINEERING & MFG. CO.
THE WEST IS IT MANUFACTURING

**ENGINEERS!**
Mechanical
Electrical
Electronic
Instrument

*Come to New Hampshire to Work!*

**Escape from the nerve-racking, ulcer routine of the city — *come to New Hampshire to work!* Live in a quiet country village with good schools, healthy climate, low cost of living. Enjoy, within a short drive, the beautiful lake region . . . the magnificent beaches . . . the incomparable mountains . . . or the nearby cultural advantages of a big city.**

**Yes, as an experienced engineer, *you will like New Hampshire* — and the opportunities it affords for BETTER LIVING with a BETTER FUTURE for you.**

***Northeastern Engineering, Inc. is a young, progressive company that is offering excellent positions to qualified engineers. If this advertisement interests you, send us a resume and salary requirements, along with a photograph.***

**NORTHEASTERN ENGINEERING, INC.**
MANCHESTER,
NEW HAMPSHIRE

LE **HEAT RESISTANT WIRES FOR EVERY APPLICATION . . .**

**DON'T DELAY**

**Winter will soon be here and you will be glad if you have protected vulnerable pipe lines with Lewis heating cable. Specially insulated Nickel Chrome conductor will operate satisfactorily at 500°F.**

*Write for quote*

**HEATING UNITS**
**HEATING ELEMENT**
**RESISTANCE LINE CORD**
**THERMOCOUPLE WIRE**
**ASBESTOS LEAD & FIXTURE WIRE**
**INSULATED RESISTANCE WIRE**
**FIBERGLAS INSULATED WIRE**
**WIRE TO ANY SPECIFICATIONS**

***Send your electronic control, communications or appliance wiring specifications for a recommended solution by our engineers.***

**FOR A TRIAL ORDER OR A CARLOAD *consult***

LE **THE LEWIS ENGINEERING CO.**
*Wire Division*
NAUGATUCK CONNECTICUT

bines the accuracy of a laboratory Orsat-type tester with ease of operation. All three important factors in furnace operation—$CO_2$ content of flue gas, temperature of flue gas and draft over fire—are measured by this improved two-probe instrument. Features include: a glass-coated electronic thermistor; a gas analysis cell with built-in temperature compensator; and a filter drier requiring only 6 to 8 squeezes of a hand aspirator. The unit is vibration and shock proof.

### Boron Trifluoride Counters

RADIATION COUNTER LABORATORIES, INC., 5122 West Grove St., Skokie, Ill., has available a new boron trifluoride neutron counter. This two atmosphere (150 cm Hg) enriched $BF_3$ counter is of all aluminum construction (except for the anode, Kovar seal and connector), which insures minimum neutron capture in the counter shell. The end sections of the counter are "heli-arc" aluminum-welded, and the whole counter is helium leak-tested before filling. It is baked at 100 C for 12 hours while being evacuated. A guard ring type construction is utilized. Three counters are available in pressures of 150 and 12 cm Hg., and in three standard sizes: 1 in. x 6 in.; 1 in. x 12 in.; and 1 in. x 20 in. active length.

### Small Triode-Pentode

SYLVANIA ELECTRIC PRODUCTS INC., 1740 Broadway, New York 19, N. Y., is producing a miniature

PROTECTED
*Every step of the way*

**From our mill right up to your machines Republic Aluminum Foil is Guarded from Damage.**

Coils of Republic Aluminum Foil in sturdy individual boxes are protected right up to the moment of use. This Republic development guards the famous clean, straight-cut edges of Republic foil against nicks and dents so that maximum production is the rule.

Gage uniformity is another trademark of Republic Aluminum Foil. Modern electronic devices maintain a constant check that assures accuracy and maximum yield from every coil.

Republic capacitor foil is available in widths of 1/4" and wider, and in gages from .00017" to .005".

**REPUBLIC FOIL & METAL MILLS**
**INCORPORATED**
**DANBURY CONNECTICUT**

Branch Sales Offices: 209 W. Jackson Blvd., Chicago 6, Ill.
666 Mission St., San Francisco 5, Cal.

REPUBLIC

# S. S. White MOLDED RESISTORS

The All-Weather Resistors

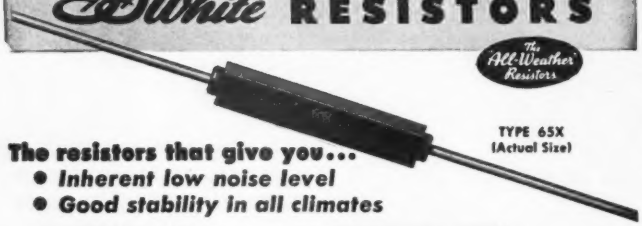

TYPE 65X (Actual Size)

**The resistors that give you...**

- *Inherent low noise level*
- *Good stability in all climates*

**STANDARD RANGE**

1,000 OHMS TO 9 MEGOHMS

These resistors are used extensively in commercial equipment, including radio, telephone, telegraph, sound pictures, television, etc. They are also used in a variety of U.S. Navy equipment.

**HIGH VALUE RANGE**

10 TO 10,000,000 MEGOHMS

This unusual range of high value resistors has been developed to meet the needs of scientific and industrial control, measuring and laboratory devices — and of high voltage applications.

**SEND FOR BULLETIN 4906**

*It gives details of Standard and High Value Resistors, including construction, characteristics, dimensions, etc. Also described are S.S. White 80X Resistors, designed for extremely high voltage equipment. Copy with Price List sent on request.*

THE S. S. White INDUSTRIAL DIVISION
DENTAL MFG. CO.
Dept. R, 10 East 40th St.
NEW YORK 16, N. Y.

WESTERN DISTRICT OFFICE: Times Building, Long Beach, Calif.

# AGASTAT

TRADE MARK

TIME DELAY RELAY

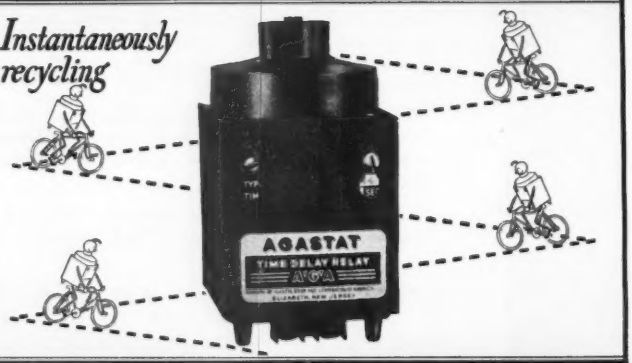


Small ~ Compact ~ Few moving parts ~ Easily mounted
Operates in any position
Time delay range, 1 second to 5 or more minutes

A'C'A DIVISION OF ELASTIC STOP NUT CORPORATION OF AMERICA
1027 NEWARK AVENUE • ELIZABETH 3 • NEW JERSEY

# "FLY" VHF

on BENCH or RAMP
*with the compact*

# ARC SIGNAL GENERATOR

**ARC Signal Generators permit quick, accurate check-out of aircraft before take-off, as well as fast, dependable bench checks and trouble shooting.**



**TYPE H-14** 108-132 Megacycles

Standard signal source for complete testing of VHF Airborne omnirange and localizer receivers in aircraft or on the bench. Checks up to 24 omni courses, omni course sensitivity, to-from and flag-alarm operation, left-center-right on 90/150 cycle and phase-localizers, and all necessary quantitative bench tests. For bench checks, 0-10,000 microvolts; for ramp checks, RF output 1 volt into 52 ohm line. Equal to Mil. SG-66/ARM-5.

**Price: $942.00 net, F.O.B. Boonton, N. J.**

**TYPE H-12** – VHF Signal Generator, a 900 to 2100 mc source of cw or pulse amplitude-modulated RF. Power level 0 to –120 dbm. Internal pulse circuits with controls for width, delay, and rate, and provision for external pulsing. Frequency calibration better than 1%. Built to Navy specs for research, production testing. Equal to Military TS-419/U.

**Price: $1,950.00 net F.O.B. Boonton, N. J.**

***Write today for complete details***

Aircraft Radio CORPORATION
Boonton, New Jersey

Dependable Electronic Equipment Since 1928

9-pin medium-mu triode and sharp cutoff pentode contained in one envelope, designated 6 X 8. The tube is designed as a combined mixer and oscillator in tv receivers using an i-f of approximately 40 mc. The pentode mixer section of the 6 X 8 provides low grid No. 1 to plate capacitance as compared with a triode mixer. This reduces feedback problems often encountered in mixers when using an i-f in the vicinity of 40 mc. The low output capacitance enables the tube to work into a high impedance plate circuit resulting in higher mixed gain. The type 6 X 8 is also well suited for use as a mixer in a-m/f-m receivers.

### Pressure Transducer

THE BETA CORP., P.O. Box 8625, Richmond 26, Va. The type 3 electrokinetic transducer makes use of the streaming potential developed by a polar liquid flowing through a porous plug to provide a high-sensitivity means of measuring fluctuating or transient pressures over extended ranges of both amplitude and frequency. In the configuration shown the case may be baffle mounted for measuring air blasts and shock waves up to 100 psi or adapted to measure pressures in pipes or tubing. The unit provides a sensitivity of 250 mv per psi at a resistive output impedance of less than 100,000 ohms. The frequency response at the diaphragm extends from 0.25 cps to above 30 kc.

### Audio Oscillator

WAVEFORMS, INC., 333 Sixth Ave., New York 14, N. Y., announces a new model 510-B wide-range audio oscillator, featuring improvements in stability and precision. Frequency changes less than 0.5 percent with line-voltage variations from 95 to 130 v and less than 1.0 percent with temperature variations of 0 to 150 F. Standard calibration accuracy is 2.0 percent, but


# Accessibility UNLIMITED... with GRANT ELECTRONIC EQUIPMENT SLIDES

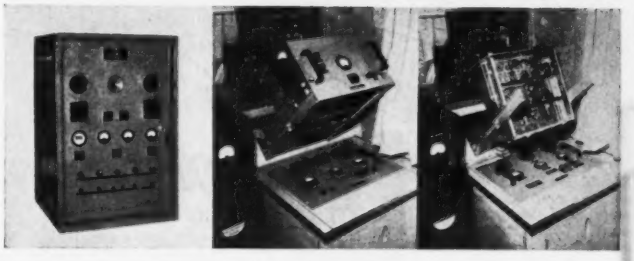

Photo shows Raydist navigation, tracking and surveying system master station where components are installed in vertical position, using Grant Slides at top and bottom of rack. Developed by Hastings Instrument Co., Inc., Hampton, Va.

**Grant No. 363 Slide applicable where unit is desired to slide fully out of chassis and tilt for servicing of parts otherwise inaccessible. Capacity: 100lbs./pair. Telescoping, 3 section slide with ball bearing action. Aluminum with steel ball spacers.**

**There is a Grant Slide to meet every requirement... whether to tilt a unit a total of 180 degrees, lock unit in closed, open or pivoted position or meet load requirements from 25 to 2,000 lbs.—call upon, depend upon—Grant, the foremost name in Sliding Devices!**

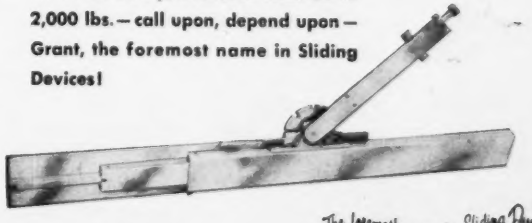

*The foremost name in Sliding Devices*

*Write Electronic Design Division for Complete Catalogue*

**GRANT PULLEY & H'DW'E. CO.**

**31-87 Whitestone Parkway, Flushing, L. I.**

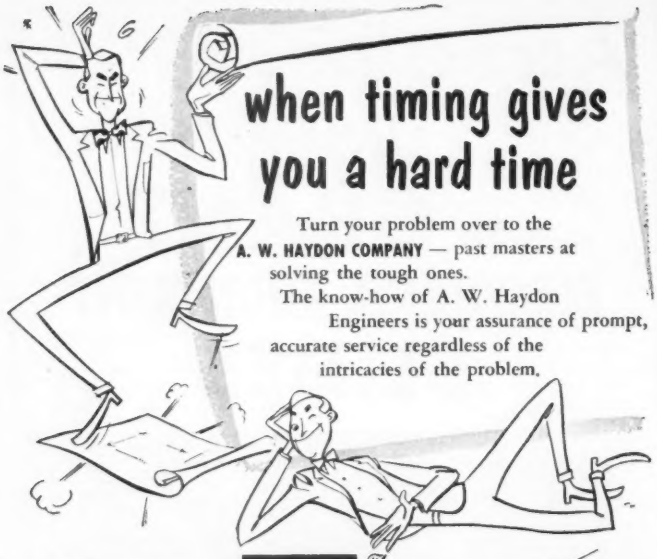

# when timing gives you a hard time

Turn your problem over to the **A. W. HAYDON COMPANY** — past masters at solving the tough ones.

The know-how of A. W. Haydon Engineers is your assurance of prompt, accurate service regardless of the intricacies of the problem.

Send for catalog.

Would you like to work with us? We need qualified engineers and skilled model makers *now*. Excellent opportunities for men who are looking to the future.

The A. W. HAYDON COMPANY
235 NORTH ELM STREET
WATERBURY 20, CONNECTICUT
Design and Manufacture of Electrical Timing Devices

# REGULATED DC SUPPLY

FOR

SCHOOLS — LABORATORY — INDUSTRIAL

**MODEL PR-248B**

- √ OUTPUT VOLTAGE DC: 190 to 275
- √ OUTPUT CURRENT DC: 250 milliamperes
- √ HEATER SUPPLY: 6.3 volts @ 6 amp
- √ REGULATION: ½% for line or load variation
- √ RIPPLE: Less than 5 millivolt
- √ IMPEDANCE: Output less than 2 ohms
- √ FUSED: Line and output

*ALSO AVAILABLE FOR RACK MOUNTING*

**Specially Priced At $88.50**

ALCO ELECTRONICS MFG. CO.
102 Marston St. Lawrence Mass.

MIL-B-233A
JOINT ARMY-NAVY
SPECIFICATIONS

SPARE AND REPAIR

# PARTS BOXES

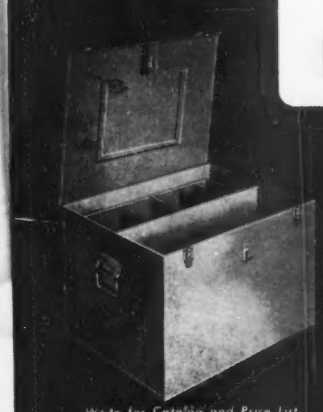

Manufactured to meet material, workmanship and finish requirements of Army-Navy specifications.

Accessories: Internal framing, partitions, trays and wood chucks as required.

Complete Facilities under one roof for quality mass production, including Heliarc welding, baking and finishing. Whistler and Wiedermann equipment for short runs. Tool and die engineering and designing. Completely conveyerized finishing facilities. Large assortment of stock and special dies for radio and television and electronic field.

Write for Catalog and Price List.

ART-LLOYD
Metal Products Corp.

2973 Cropsey Ave., Brooklyn 14, N. Y. • CO 6-5100
PRECISION SHEET METAL PRODUCTS, MASS PRODUCTION SPECIALISTS.

for the ELECTRONIC INDUSTRIES

# Quality Ribbons STRIPS

**MOLYBDENUM**
**TUNGSTEN**
**TANTALUM**
**FORMED PIECES**

•

***Your Special Metals Rolled to Thin Sizes & Close Tolerances***

•

YOUR INQUIRIES WILL RECEIVE PROMPT ATTENTION

H. CROSS CO.
15 BEEKMAN ST., N. Y. 38, N. Y.
WOrth 2-2044 and COrtlandt 7-0470

accuracy of 1.0 percent is available on special order. Other features include miniature size, only 6 in. high, 4¼ in. wide, and 5 in. deep; unusually wide frequency range of 18 cycles to 1.2 mc; distortion under 0.2 percent over most of the useful range; and constant output within ± 0.5 db. A 600/150 ohm line matching transformer is available. Total weight is 6 lb and the instrument operates on any power-line frequency from 50 to 400 cycles.

## Audio Input System

PICKERING AND CO., INC., Oceanside, L. I., N. Y. Type 410 audio input system (equalizer-preamplifier) is designed to serve as an audio control center. Three input channels are provided; two are for high-level audio signals, and one for magnetic-type pickups. The pickup channel provides 40-db gain at 1,000 cycles and 6 db per octave of bass boost below the low-frequency turnover. Used with a high quality power amplifier the controls provide complete flexibility for volume and tone balance. It is self-powered and operates from a 115-v a-c line. Three a-c outlets on the rear of the chassis are controlled by the a-c switch on the panel, permitting this unit to be used as a master power control for the other components of the system.



## Terminal Block

CURTIS DEVELOPMENT AND MFG. CO., 3266 North 33rd St., Milwau-

PREVENT TROUBLE BEFORE
IT STARTS...WITH NON-CORROSIVE
FASTENINGS by HARPER
The successful continuous operation of electronic equipment depends upon a multitude of small parts. Of major importance are the bolts, nuts, screws, washers, and rivets used in its assembly.
Harper has had years of experience in producing standard and special fastenings for manufacturers of electronic equipment. Today this company is the largest producer specializing in fastenings of brass, naval bronze, silicon bronze, Monel, nickel, stainless steels, and aluminum. Over 7,000 different items are carried in stock.
There is a Harper distributor near you with stocks ready to fill your order. For better fastenings, write The H. M. Harper Company or see your Harper distributor.
THE H. M. HARPER COMPANY
8244 LEHIGH AVE., MORTON GROVE, ILL.
Mail coupon below for complete catalog on Harper Everlasting Fastenings. Harper metallurgists and engineers will work with you on any fastening problem.
HARPER
EVERLASTING FASTENINGS
Specialists in all Non-Corrosive Metals
The H. M. Harper Company
8244 Lehigh Avenue
Morton Grove, Illinois
Please send me catalog on Harper Everlasting Fastenings.
Name.....
Position.....
Company.....
Address.....
City.....Zone.....State.....



## BUILD IN OVERLOAD PROTECTION

***...or prevent single-phasing***

This tiny, low cost Heinemann Silic-O-Netic Relay puts overload protection right into your circuits . . . or it can prevent single-phasing on three-phase motor applications.

TIME DELAY to allow for starting in-rush or temporary overloads is provided by a hydraulic-magnetic principle . . . and the complete time element is hermetically sealed, forever free of dirt and atmospheric conditions. Delay characteristics are inversely proportional to overload. They are unaffected by ambient temperature . . . and available with curves to suit your requirements.

Send for informative Bulletin 5001A.




**HEINEMANN**

**ELECTRIC COMPANY**

97 Plum Street, Trenton 2, N. J.

***Armor Clad Tips***

## CUT SOLDERING COSTS

***last up to 10 times longer***

Sheathed in a special protective metal, Stanley Armor Clad Tips never lose their shape. There's no time lost resharpening tips, production soldering moves "non-stop". And many industrial users report Armor Clad Tips last from 3 to 10 times longer than ordinary all-copper tips. Made in a variety of shapes and sizes, screw and plug-in types, for all standard make irons. See your distributor.

**FREE!** New illustrated folder on Stanley Soldering Irons and Armor Clad Tips.

**STANLEY TOOLS, NEW BRITAIN, CONN.**

THE TOOL BOX OF THE WORLD

**STANLEY**

Reg. U.S. Pat. Off.

**HARDWARE • TOOLS • ELECTRIC TOOLS • STEEL STRAPPING • STEEL**

## sub-miniature AND moisture-proof

## IN-RES-CO S-15 & S-30 WIRE WOUND RESISTORS

***THE ECONOMICAL SOLUTION*** where moisture proof resistive elements of comparatively small size are required for commercial applications. Type S-15 is ⅜" long by ¼" diameter; type S-30 measures ¾" by ¼" diameter. Both types are moisture proof and capable of high performance over long periods of continuous service. IN-RES-CO Resistors for every ordnance or civilian requirement are available at a cost that solves circuit design problems both performance-wise and cost-wise. Check up now, on the complete line of IN-RES-CO quality wire wound resistors.

TYPE S-15
¼" DIA. x ⅜" LG.

TYPE S-30
¼" DIA. x ¾" LG.

**INSTRUMENT RESISTORS CO.**

COMMERCE AVENUE — IN-RES-CO — UNION, NEW JERSEY

***FOR JAN SPECIFICATION RESISTORS*** — consult the new illustrated literature describing the complete In res-co line. Write for your copy today!

*APPLICATION-DESIGNED RESISTORS FOR ELECTRONICS AND INSTRUMENTATION*

kee 16, Wisc. The FTB terminal block has been developed to satisfy the quick connect and disconnect requirements in experimental work. It is of the feedthrough type with solder or screw connections on one side and has provisions to receive banana plugs on the other. The new unit is factory assembled in any number from 1 to 16 terminals. Terminals are separately insulated and held permanently in a metal strip. It is conservatively rated at 300 v between terminals of opposite polarity and to ground, 20 amperes.

### Thermal Switch

RADIO MERCHANDISE SALES, INC., 1165 Southern Blvd., New York 59, N. Y. Introduced primarily as a televiewing convenience device, the model TH-SW thermal switch permits automatic operation of lamps, rotor, booster and similar devices through operation of the tv receiver. In addition to this convenience, neatness of wiring arrangement and protection against operating electrical units overnight are other advantages claimed for the unit. The switch is compact and mounts easily to the wall. A spare outlet is provided for independent operation of other electrical devices.



### Spectrum Analyzer Adapter

MICROWAVE ASSOCIATES INC., 22 Cummington St., Boston 15, Mass. Type P-530 spectrum analyzer


## High Temperatures? Small Space? Severe Conditions?

## Hook-Up Wire

Today's trend towards miniaturization makes severe demands on electronic wiring. That is why so many leading electronic equipment manufacturers specify Rome Synthinol 901. A resin plasticized polyvinyl chloride thermoplastic compound, it is Underwriters' approved for *temperatures up to 105° C.*, as a special small-diameter type with no assigned voltage, as well as for regular 300 and 600 volt ratings.

Where space is a problem, Rome Cable engineers have developed a small-size hook-up with with an *8 mil wall* of Rome Synthinol 901 insulation and an exceptionally small over-all diameter. With nylon sheath maximum diameters run from as small as .051" for 24 AWG to .100" for 16 AWG.

What's more Rome Synthinol 901 has greater resistance to heat deformation, baking embrittlement, shrinkage, cracking, solvents, moisture and flame, plus improved solderability. It is available in distinct, permanent colors, either plain or with outer coverings.

***MILITARY TYPE HOOK-UP WIRE***

Rome Cable is a manufacturer of military types SRIR, SRHV and WL, complying with Army-Navy-Joint Specification JAN-C-76, as well as shipboard types SRI and SRIB conforming to Specification MIL-C-915. Insulated with Rome Synthinol thermoplastic compound, these wires are manufactured in the complete range of specification sizes.

Whatever your requirements, you can depend on Rome for electronic wires of the highest quality. The coupon will bring you descriptive literature.

MAIL IT TODAY.

ROME CABLE CORPORATION
DEPT. E-11, ROME, N. Y.

Please send me information on Electronic Wiring.

Name .....

Company .....

Address .....

City ..... State .....

***IT COSTS LESS TO BUY THE BEST***

ROME CABLE CORPORATION
ROME, NEW YORK and TORRANCE, CALIFORNIA

CLIMATE-PROOF PACKAGING

CARGO

**Here's a quick solution to**

# MILITARY PACKAGING

**CARGO PACKERS CLIMATE-PROOF PACKAGING**

Meets all Specifications for Signal Corps, Navy and Air Force Shipments of Electronic Equipment with Facilities that include—

- SPECIAL PACKAGING EQUIPMENT
- EXPERTS IN MILITARY SPECIFICATIONS
- ECONOMICAL ASSEMBLY LINE METHODS
- FULL COMPLIANCE IN EVERY DETAIL
- COMPETENT CONSULTING SERVICE

NEW ILLUSTRATED BROCHURE explains in detail how Cargo Packers can economically handle all details of your military packaging problems. You save valuable plant space, costly equipment and the need for experienced specification packaging experts. Find out now, how Cargo Packers production line methods save you time, money, endless detail work, and costly errors. Request your copy, now!

**CARGO PACKERS**
*INCORPORATED*
73 RUTLEDGE STREET
BROOKLYN 11, NEW YORK




*Whatever the Weather-*
aloft or aground—Be sure of reliable precision control with
ELECTRO SNAP



**HERMETICALLY-SEALED LIMIT SWITCHES**

Reliable in any environment. Electric-Snap *Hermetically-Sealed* Limit Switches with working parts sealed in an atmosphere of dry, inert gas are unaffected by heat, cold, moisture, dirt and temperature cycling. Available with both mountings and actuators to fit them to *retro-fit programs* as well as *new aircraft designs.* Also preferred for industrial precision-switch applications where utmost dependability is essential.

**Write for FREE Basic Switch and Catalog**

***Environment FREE!***
**PROOF AGAINST**
• *Cold and Heat*—from −100° to +250° • *Altitude* • *Dirt* • *Moisture* • *Oil* • *Corrosion* • *Ice Jamming*

ELECTRO SNAP
**ELECTRO-SNAP SWITCH & MFG. CO.**
4218 WEST LAKE STREET • CHICAGO 24, ILLINOIS

**PIX** WIRE FORMING SPECIALISTS

Precision Parts to meet your Production and Engineering needs. From .002" dia. to .125" dia. Radio tube parts—Stampings—Drawings Modern facilities, high-production equipment.

Metal Crystal Holder Parts
Send sketch or print for quotation.

**PIX MANUFACTURING CO., Inc.**
**24-B Bedford St., Newark 3, N. J.**

**FS** MICROMETER HEAD
*for the Electronics Industry*



LARGE, LEGIBLE, EASY TO READ CALIBRATIONS, PLUS A THIMBLE STOP TO PREVENT THREAD JAMMING, ARE FEATURES FOUND IN FS MICROMETER HEADS WHICH HELP ENGINEERS SPEED UP THEIR WORK. THESE AND MANY OTHER FEATURES ARE DESCRIBED IN THE NEW BULLETIN ON FS MICROMETER HEADS, OBTAINABLE ON REQUEST.

**FREQUENCY STANDARDS**
P. O. BOX 66, EATONTOWN, N. J. • TELEPHONE ASBURY PARK 1-1018

3

adapter consists of a complete set of r-f plumbing to convert any existing S or X band spectrum analyzer to the frequency range centered at 35,000 mc. Input sensitivity will vary with the noise figure of the spectrum analyzer receiver with which it is used, but threshold sensitivities of 70 db below 1 mw are to be expected. The unit is composed of a 2K25 klystron operating at X-band and powered from the spectrum analyzer power supply. Oscillator output is fed through a variable attenuator to a mixer where its fourth harmonic is mixed with the incoming millimeter signal. Signal input enters through a UG-381/U connector and RG-96/U waveguide. The i-f output of the mixer is a type N connector.

## Versatile Test Instrument

TELEVISION EQUIPMENT CORP., 238 William St., New York 38, N. Y., announces a new type of test instrument, the Syncroplex, a multiwaveform generator and pulse synchronization unit. At repetition rates of 1 cps to 100 kc it provides: (1) sawtooth waves; (2) square waves or square pulses, 1 μsec to 1 second duration with rise time of 0.15 μsec; and (3) integrated or differentiated versions of the square waves and pulses. Other applications of the unit include: oscilloscope sweep phaser, delayed pulse generator, oscilloscope trace expander, frequency divider, and pulse-time or pulse-width modulator.

## Square-Wave Generator

NEW LONDON INSTRUMENT CO., P.O. Box 189, New London, Conn. The compact type 150-A square-wave


Headquarters for . . .

HUDSON
RADIO & TELEVISION CORP.

RCA AUTHORIZED DISTRIBUTOR

In Stock for Prompt Delivery!

Hudson carries a complete line of
RCA TUBES
to meet every Industrial, Laboratory and Communications requirement.

VOLTAGE REGULATORS • RECTIFIERS
POWER TUBES • THYRATRONS
MONOSCOPES • CAMERA TUBES
IGNITRONS • PHOTOTUBES
CATHODE RAY TUBES
OSCILLOGRAPH TUBES
COLD-CATHODE TUBES
VACUUM POWER TUBES
VACUUM & GAS RECTIFIERS
and ALL SPECIAL-PURPOSE TUBES

Complete Line of
RCA TEST EQUIPMENT
RCA BATTERIES
RCA PARTS

FOR FAST SERVICE on RCA TUBES, TEST INSTRUMENTS, BATTERIES, PARTS . . . Call Hudson your complete, dependable source!

FREE!
New 1953
HUDSON
CATALOG




Includes The New, larger edition of
JAN Cross Reference GUIDE

The most complete buying guide of its kind! INCLUDES the latest JAN CROSS-REFERENCE GUIDE and all types of fully approved JAN COMPONENTS. Over 196 pages of the latest and largest selection of Industrial Electronic Equipment, Tubes, Test Instruments, Recording and High Fidelity Audio and Sound Equipment. Complete lines. Wide selection. All Standard Makes in Stock for Prompt Delivery at LOWEST PRICES!

Send for your FREE Copy Today

One Call for All!

HUDSON
RADIO & TELEVISION CORP.
48 WEST 48th ST. • 212 FULTON ST.
New York 36, N. Y. New York 7, N. Y.
Circle 6-4060

Hudson Radio & TV Corp. Dept. M-11
48 West 48th St., New York 36, N. Y.
☐ Please send FREE copy 1953 Hudson Catalog
☐ Ship the following: .....
.....
Name ..... Title .....
Firm .....
Address .....
City ..... Zone ..... State .....

# ATR

*Makes it easy*

to DEMONSTRATE AND TEST D.C. APPARATUS FROM A.C. LINES



## "A" BATTERY ELIMINATORS

For DEMONSTRATING AND TESTING AUTO RADIOS

New Models . . . Designed for testing D.C. Electrical Apparatus on Regular A.C. Lines. Equipped with Full-Wave Dry Disc Type Rectifier, Assuring Noise-less, Interference-Free Operation and Extreme Long Life and Reliability.

ATR ✓ NEW MODELS ✓ NEW DESIGNS ✓ NEW LITERATURE

"A" Battery Eliminators, DC-AC Inverters, Auto Radio Vibrators

*See your jobber or write factory*

AMERICAN TELEVISION & RADIO CO.

*Quality Products Since 1931*

SAINT PAUL 1, MINNESOTA—U. S. A.

# MICROWAVE RESISTORS TELEWAVE TYPE R

SMALLEST RESISTOR AVAILABLE

(Ideal for Miniaturization)

**TYPICAL APPLICATIONS**

- Power measurement at any frequency
- Matched terminations for waveguides or coaxial lines
- Resistive power pickup loops
- RF pads or attenuators
- Dummy loads
- Temperature measurements
- Impedance matching

**TYPE R RESISTORS** employ noble metal film deposits on specially selected heat resistant glass.

**FILM THICKNESS** offers negligible skin effect, at microwave frequencies.

**POWER CAPACITY** of 1/4 watt provides high power handling ability.

**PHYSICAL STRUCTURE** is ideally suited to impedance matching in standard coaxial line and waveguides.

**FINISH.** Coated with a special silicone varnish to protect the film.

**SPECIFICATIONS**

Resistance: 50 ohms standard, other values on request.
Tolerance: 5% or 10%
Wattage: 1/4 watt continuous duty at 25°C.
Size: 1/16 inch diam. x 3/16 inch long
Terminals: Tinned sections 1/16 inch long
Film Length: Type R-063 — 1/16 inch
Type R-093 — 3/32 inch
Temperature Coefficient: approx. 0.0019 ohms/ohm/°C.
Power Sensitivity: Approx. 10 ohms/watt

AVAILABLE FOR IMMEDIATE DELIVERY

**TELEWAVE LABORATORIES, INC.**
100 Metropolitan Ave. • Brooklyn 11, New York

SEALING
DIPPING
POTTING
IMPREGNATING

INSULATING
FUNGUSPROOFING
MOISTUREPROOFING
HEAT CONDUCTING

# WAXES BIWAX COMPOUNDS

Developed and produced for manufacturers of electronic components and other electrical units.

Specifications and samples available on request.

Information relative to your problem or application will enable us to make suggestions and recommendations.

**BIWAX CORPORATION**
3445 HOWARD STREET
SKOKIE, ILLINOIS

## SCOPE DOLLY

**Model 1**

Convenient Height and Viewing Angle
Adjustable to Hold Portable Scopes
Ball Bearing Swivel Rubber Tired Casters
Lightweight Aluminum Construction
Recommended by Laboratories Wherever Used

**$35.00** FOB LOUISVILLE, KY.

Formerly manufactured by UNIQUE DEVICES

*Now manufactured and sold by*

**TECHNICAL SERVICE CORPORATION**
3116 Michigan Drive Louisville 5, Kentucky

generator provides square waves at frequencies from 50 cps to 1 mc with a maximum rise time of 0.05 microsecond on all frequencies. Fixed frequencies are 50, 1,000, 10,000, 100,000 and 1,000,000 cps. Other frequencies are obtainable through the use of an external frequency-control capacitor for which terminals are provided. A pulse for oscilloscope synchronization is available. Output is controllable from 0 to 20 v peak-to-peak and is constant at all frequency settings. Tilt and overshoot are negligible.

### Multiplier Phototube

RADIO CORP. OF AMERICA, Harrison, N. J. Model 6199 is a small, 10-stage multiplier phototube of the head-on type, intended for use in scintillation counters and in other applications involving low-level, large-area light sources. Spectral response covers the range from about 3,000 to 6,200 angstroms with a peak value at approximately 4,000 angstroms. Design features include a semitransparent cathode having a diameter of 1¼ in. on the inner surface of the face end of the bulb; a face with a flat surface 1 in. in diameter to facilitate the mounting of flat phosphor crystals in direct contact with the surface; and 10 electrostatically focused multiplying stages.

## Literature

**Electrical Computer.** Consolidated Engineering Corp., 300 N. Sierra Madre Villa, Pasadena 8, Calif. Bulletin 1802A describes the model 30-103 electrical computer that is designed for rapid solution of as many as 12 simultaneous

e-x-a-c-t-l-y!

*Write for new data bulletin on Transicoil control motors, gear trains, motor-driven inductor generators and servo amplifiers.*

Transicoil's specialized service in the fast-growing control field has played an important part in advancing the control art. From the outset "standard" control types were avoided in favor of highly adaptable basic types. Maximum efficiency has been assured by modifying these basic units to any *needed extent* to meet the *exact* requirements of the applications for which they were intended.

Thus, Transicoil control components are invariably fitted for the job. Their use does not entail any lowering of performance standards as often happens where inflexible, highly standardized components are employed.

Control engineering horizons have been expanded materially as a result of this policy.

TRANSICOIL

CORPORATION

107 GRAND STREET NEW YORK 13, N. Y.

more LISTENING COMFORT with lightweight TELEX headsets!!

THE ONLY PERSONAL PART OF ANY COMMUNICATION SYSTEM

*MONOSET
The modern styling and dependability and superior performance of the TELEX Monoset have made old fashioned headphones obsolete. Magnetic.

*DYNASET
New dynamic under-chin TELEX Dynaset, with more highs and lows of both music and speech, is the delight of radio and TV monitors. Weighs only 1.25 oz.

Modern, lightweight, durable . . . Easily adjustable and built for hard usage, TELEX Headsets give top quality reception without the punishment of extra weight and pressure.

*TWINSET
This lightweight 1.6 oz. TELEX Twinset pipes signal directly into the ear, blocking out background noises and banishing listening fatigue. Magnetic.

*EARSET
Sensitive TELEX Earset slips onto ear and is preferred by all who use single-phone headsets. Weighs only ½ oz. and leaves other ear free for phone calls or conversation.

STANDARD OF THE WORLD FOR QUALITY HEADSETS

*Trade Mark

Telex produces headsets to manufacturers' specification

Commercial Communications - Electronic Laboratories
Office Transcribing Machines - Radio Monitoring
Telecasting - Amateur Radio - Record Stores - Theaters
Phone-Order Boards - Wired Music Installations

For complete information on any of the above headsets, write

TELEX, ELECTRO-ACOUSTIC DIV.
Department 9-C • St. Paul 1, Minnesota
In Canada, ATLAS RADIO CORP., Toronto

TELEX
HEARING AT ITS BEST



ONE OF A SERIES OF
Modernized...
REGULATED POWER SUPPLIES



MODEL 300A

A laboratory instrument designed to meet research requirements

- 0 to 500V DC at 0 to 300MA
- HV regulation within 0.2V at any setting
- HV hum level within 2MV
- 0 to -150V bias, stabilized, 5MA max.
- 6.3V AC filament, 6A

Send for Bulletin E-300A

Also available: general purpose units for industrial or laboratory use.

Universal Electronics Co.
2012 South Sepulveda Boulevard
Los Angeles 25, California

Louthan PRECISION-MADE PORCELAINS for Electronic Applications

The high quality porcelain insulators you need are assured by Louthan's careful workmanship and close inspection. Louthan specializes in Vitrified, Refractory, and low-loss Steatite porcelain insulating parts, with the clean, smooth surfaces, the good mechanical strength, the specified electrical properties, and the dimensional accuracy your applications demand.

Louthan production facilities are geared for volume production and prompt deliveries. Send us your inquiries today.

EXCLUSIVE REPRESENTATIVES:
H. B. ZEIGER, New York 17, N. Y. • GLENN GARNER CO., Chicago 6, Ill. • WM. F. HOEFER, Pasadena, Calif.

THE LOUTHAN MANUFACTURING COMPANY
A Subsidiary of Harbison-Walker Refractories Co.
EAST LIVERPOOL, OHIO



•for RESEARCH•
DEVELOPMENT
SOLID
ULTRA-SONIC
DELAY LINES

RICHARD D. BREW and CO., INC.
106 CONCORD AVE., BELMONT 78, MASS.

linear equations. The computer described, applicable to many fields such as electrical circuit study, aircraft flutter analysis, and statistics, is fast and accurate, yet priced within the budget of the average laboratory. It has been used widely for rapid reduction of mass spectrometer and infrared spectrophotometer data.

**Laminated Plastics.** The Formica Co., 4614 Spring Grove Ave., Cincinnati 32, Ohio, has issued a new general catalog describing 50 standard grades of Formica laminated plastics for industrial usage. Printed in colors, the 16-page illustrated publication features a new edition of the Formica comparator chart. In this chart the major characteristics of each grade are described and a quantitative grading system permits easy choice of the material best suited to special requirements. The catalog also shows typical uses of Formica in sheets, tubes, rods, molded and postformed shapes for electrical, chemical and mechanical applications.

**Microwave Equipment.** Radio Corp. of America, Camden 2, N. J. A new 20-page informational booklet provides a semitechnical description of microwave radio systems. It is fully illustrated with photographs, diagrams, charts, graphs and maps. Seventeen chapter headings include terse descriptions of microwave radio, how it works, propagation characteristics, operational advantages, economic factors influencing choice of frequencies and desirable design characteristics. Other chapters deal with multiplexing, telemetering and remote control features of microwave systems, while in other categories practical information as to who can use microwave, how to plan a microwave system, selecting station sites and other valuable information is presented.

**Subminiature Tubes.** Raytheon Mfg. Co., 55 Chapel St., Newton 58, Mass., has announced six new reliable subminiature tube types in a booklet just off the press. Included are a dual diode, three dual triodes of amplification factors of 20, 35 and 70, a voltage regulator tube,

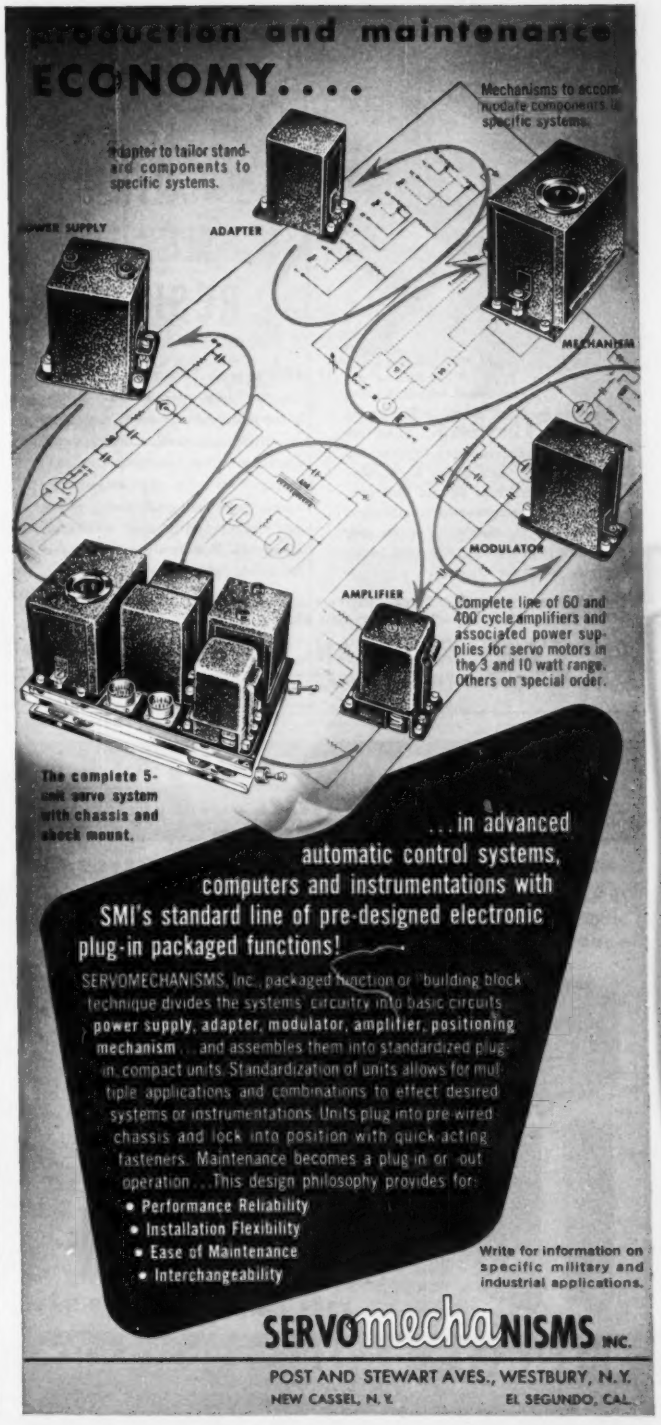
production and maintenance
ECONOMY....
Adapter to tailor standard components to specific systems.
Mechanisms to accommodate components in specific systems.
POWER SUPPLY
ADAPTER
MECHANISM
MODULATOR
AMPLIFIER
Complete line of 60 and 400 cycle amplifiers and associated power supplies for servo motors in the 3 and 10 watt range. Others on special order.
The complete 5-unit servo system with chassis and shock mount.
...in advanced automatic control systems, computers and instrumentations with SMI's standard line of pre-designed electronic plug-in packaged functions!
SERVOMECHANISMS, Inc., packaged function or "building block" technique divides the systems' circuitry into basic circuits: power supply, adapter, modulator, amplifier, positioning mechanism... and assembles them into standardized plug-in compact units. Standardization of units allows for multiple applications and combinations to effect desired systems or instrumentations. Units plug into pre-wired chassis and lock into position with quick acting fasteners. Maintenance becomes a plug-in or -out operation... This design philosophy provides for:
• Performance Reliability
• Installation Flexibility
• Ease of Maintenance
• Interchangeability
Write for information on specific military and industrial applications.
SERVOmechaNISMS INC.
POST AND STEWART AVES., WESTBURY, N.Y.
NEW CASSEL, N.Y.
EL SEGUNDO, CAL.




for HIGH MEGOHM RESISTORS

Type H Resistors are furnished with resistance values as high as 50 million megohms ($5 \times 10^{13}$ ohms). Their advanced design insures highest stability with extremely low noise level, polarization effects, and voltage and temperature coefficients. Available in sizes suitable for any circuit requirement. Standard resistance tolerance ± 10%.

RPC Type H Resistors are rugged, durable units jacketed in polyethylene to provide maximum protection against mechanical damage and humidity. These resistors are eminently suited for electrometer circuits, radiation equipment, photo cell circuits and as high resistance standards. Moderately priced. Write for catalog today.

ALSO MANUFACTURERS OF HIGH QUALITY PRECISION WIRE WOUND RESISTORS, HIGH FREQUENCY RESISTORS AND HIGH VOLTAGE RESISTORS. WRITE TODAY FOR CATALOG.

rpc RESISTANCE PRODUCTS CO.
714 RACE STREET • HARRISBURG 2, PA.

Precision drilling made easy!

*Phillips & Hiss* 204-C



6" Throat
0-⅛" Capacity
1" Quill Travel

**Sensitive "Feel"**
**Sensitive Speed Control:** Foot-operated, leaves both hands free

**High Precision:** Selected Chuck and Bearings. Spindle true within .0004". Table square .0006" in 5" circle. Permanent accuracy, castings annealed and ground.

WRITE: Bulletin E2
Phillips & Hiss Co., Inc.
1155 N. McCadden Place
Hollywood 38, California

PRIMARY BATTERIES
*for your Specialized Needs*

DRY TYPES
78 Standard Industrial, Laboratory and Government Types.

LAB-BILT BATTERIES
Our engineers will design and create to your requirements. Send us your specifications.

HI-DRIVE MINIATURE MOTOR

Precision-built, low-cost, battery-operated—available for delivery now.

RESERVE TYPES
Water activated "One Shot" Batteries.

*Send for FREE Catalog*

SPECIALTY BATTERY COMPANY
A Subsidiary of the RAY-O-VAC Ray-O-Vac Company
MADISON 10, WISCONSIN

INSTRUMENT HOUSINGS PANELS • CHASSIS

*Manufactured to your Requirements*

MECHANICAL & ELECTRICAL ASSEMBLIES

•

STAMPINGS, ALL METALS

A complete manufacturing service: *Fabricating, Stamping, Screw Machine Work, Assembling.*

Precision work, experienced fabrication, dependable service.

SEND DRAWINGS FOR ESTIMATES!

STAMFORD METAL SPECIALTY COMPANY
*Metal Work of Every Description*
429 West Broadway, New York 12, N. Y.



# MACDONALD Proportional TEMPERATURE CONTROL

The THYRATRON Control allows PROPORTIONAL regulation of output power to electrically heated furnaces. Instead of turning current on-and-off, or adjusting the time of application of full power, the power level is continually monitored in accordance with the furnace demand. In this way the number of expansions and contractions of the heated elements is greatly reduced, increasing heater element life. The controller operates proportionally from a resistance thermometer, and thus insures maximum sensitivity of control.

**SPECIFICATIONS:**

Resistance Thermometer Actuated
Controls up to 7½ amperes @ 220V
Standard Ranges: —55 to 200°C; 0-1000°F; 0-1000°C
Controls to 0.1°C (0.01°C or better with improved furnaces)

**W. S. MACDONALD CO., INC.**

University Road • Cambridge • Massachusetts

# Build your future at BOEING!

THE revolutionary B-47 medium jet shown above, and the new, still-classified B-52 eight-jet heavy bomber, are two striking examples of Boeing engineering leadership. Other Boeing engineering projects include secret guided missiles programs, nuclear-powered aircraft, and exploration of supersonic flight.

If you are an engineer interested in exciting, long-range projects with a future, look into Boeing opportunities.

Here at Boeing you'll share the prestige of Boeing leadership that has been growing for 35 years.

**There are opportunities at Boeing right now for experienced and junior engineers in all fields, for aircraft**

- DESIGN
- DEVELOPMENT
- RESEARCH
- PRODUCTION
- TOOLING

**also for servo-mechanism and electronics designers and analysts, and for physicists and mathematicians with advanced degrees.**

Work in Seattle or Wichita. Boeing provides a moving allowance, offers special training, a salary that grows with you—and a future of almost limitless range. You'll be proud when you say, "I'm a *Boeing* engineer!"

***Write today to address below or use coupon***

**JOHN C. SANDERS,** Staff Engineer—Personnel
**Dept. H-11**
**Boeing Airplane Company, Seattle 14, Wash.**

Engineering opportunities at Boeing interest me. Please send me further information.

*Name* _____
*Address* _____
*City and State* _____

# TRANSFORMERS

35 YEARS OF ENGINEERING PROGRESS ESTABLISHED 1917

## built to MIL-T-27 specifications




We have had considerable experience in designing and building transformers to MIL-T-27 specifications. Our testing equipment includes facilities to test over a temperature range from minus 50°C to plus 85°C. In addition, Corona test equipment, hot, cold, salt water bath equipment, and vacuum equipment to conduct impregnation tests and assimulate high altitude conditions are available.

**ACME ELECTRIC CORPORATION**
3111 WATER ST. CUBA, N.Y.

**Acme ACME Electric**

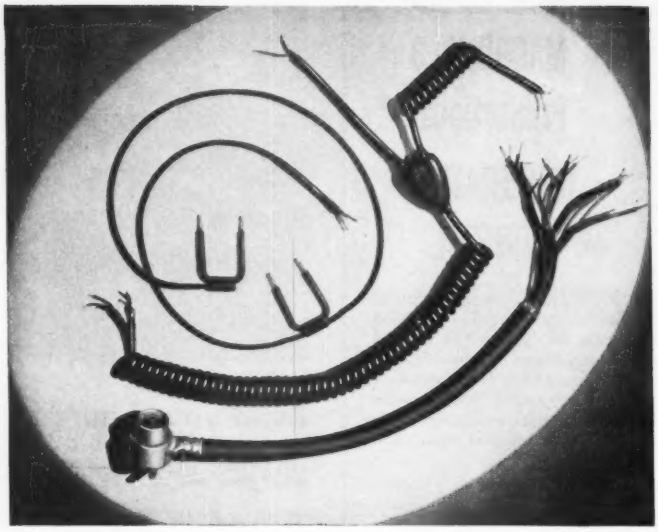

FOR *Special* CORD SETS
CALL ON
WHITNEY BLAKE

Special cord sets of flexible cord, shielded communications wires and multiple conductor cables, equipped with molded rubber or plastic fittings are among the many quality products offered by Whitney Blake.

If standard molds cannot be adapted to individual applications, Whitney Blake is prepared to design and make special molded junctions and other fittings to provide the water and impact resistance, small size, light weight and protection from tampering so important to many of today's applications.

Whitney Blake has over thirty years experience in the cord set field and more than fifty years in producing well built wires. The close control exercised in the production of Whitney Blake cord and cable and the extensive testing facilities make Whitney Blake Cord Sets completely dependable.

If you have a cord set problem our design engineers will be glad to help you solve it.

WELL BUILT WIRES SINCE 1899

WHITNEY BLAKE CO.

NEW HAVEN 14, CONNECTICUT



and a voltage reference tube. With the five reliable subminiature types previously announced the booklet describes a total of eleven types, all of which are available for prompt delivery.

**Instrumentation Bulletin.** The Gulton Mfg. Corp., 200 Durham Ave., Metuchen, N. J., has available technical bulletin KA-1, dealing with instrumentation for shock and vibration testing of electron tubes. Also described is a new test set, which includes accelerometers, amplifiers and filters. The instrument discussed can be used directly with galvanometers, oscilloscopes, or electronic voltmeters, for direct evaluation of shape and magnitude of accelerations.

**Industrial Television.** Diamond Power Specialty Corp., Lancaster, Ohio. Bulletin 1025-A covers the new model 300-B Utiliscope (wired television), the complete installation of which consists of a camera, a small power unit and the monitor or viewing unit. The bulletin is fully illustrated and includes the Utiliscope's advantages, typical uses, circuit design and general information.

**Tubular Trimmers.** JFD Mfg. Co., Inc., 6101 Sixteenth Ave., Brooklyn 4, N. Y. Form No. 199 is a single-page bulletin dealing with a line of piston-type variable trimmer capacitors. Approximately one inch in length, the tubular trimmers described deliver uniform change of capacitance in relation to rotation with excellent resettability. The literature includes illustrations and outstanding features of the units.

**Motor Speed Controls.** General Radio Co., 275 Massachusetts Ave., Cambridge 39, Mass., has issued an 8-page bulletin illustrating and describing in detail all of its Variac motor-speed controls. Technical information including speed-torque curves and typical applications are given on all models. Prices are included.

**Direct-Writing Recorders.** Sanborn Co., 39 Osborne St., Cambridge 39, Mass., has issued a 16-page booklet covering the seven

## RUGGED CONSTRUCTION FOR SUPERIOR PERFORMANCE

The Burlington "Hermetically Sealed" Instrument was designed and is manufactured to conform to JAN specifications for sealed instruments.

**Burlington**

## HERMETICALLY AC – SEALED – DC INSTRUMENT

- Steel case (DC), Brass Case (AC) with copper—cadmium—dichromate finish.
- Excellent shielding due to case material and construction.
- Double strength clear glass.
- Black satin anodized aluminum bezel.
- Glass to metal seal under contolled humidity and temperature conditions.
- D'Arsonval permanent magnet type movement for DC applications.
- Magnetically damped, moving iron vane type movement for AC applications.
- Available in 1½" square, 2½" and 3½" round case types.
- Guaranteed for one year against workmanship and materials.

**BURLINGTON INSTRUMENT COMPANY**
Dept. F-112, Burlington, Iowa

## *Pulse Generator and Calibrator*



MODEL PC-100R

- Paired pulses 5 to 5000 microseconds interval, 50 cycles to 5 Kc. recurrence rate with meter indication
- Width 1 microsecond, rise and decay times 0.1 microsecond, amplitudes 0-75 volts open circuit, 220 ohm internal impedance
- Polarities and amplitudes independently controlled, separate or mixed outputs
- Sync internal or from external positive 10 volt trigger
- Positive 50 volt sync output trigger coincident with fixed pulse, 220 ohm internal impedance
- Time markers 1, 10 or 100 microseconds; negative pulses 0 to 10 volts, 220 ohms internal impedance
- Amplitude calibration 60 cycle square wave, 0.1 to 100 volts in steps
- Model PC-100 cabinet mounted, PC-100R relay rack panel mounted

Incorporates design of
HAZELTINE ELECTRONICS CORP.
Model 1456 Senior Pulser

**TELETRONICS LABORATORY INC.**
WESTBURY, L. I., N. Y.

MANUFACTURERS OF ELECTRONIC INSTRUMENTS AND PRODUCTION TEST EQUIPMENT

## DC - AC CHOPPERS

A model for every use.
10 — 500 cycles
Single pole

60 cycles
Single pole and double pole
Make-before-break contacts

These Choppers convert low level DC into pulsating DC or AC so that servo-mechanism error voltages and the output of thermocouples and strain gauges, may be amplified by means of an AC rather than a DC amplifier.

They are hermetically sealed, precision vibrators having special features which contribute to long life and low noise level.

WRITE FOR THESE CATALOGS . . .
#280A
10-500 cycles
#246C
60 cycles

**STEVENS ARNOLD**
INCORPORATED
22 ELKINS STREET
SOUTH BOSTON 27, MASS.

advantages of its direct-writing recorders for industrial users. The recording equipment described and illustrated is available in completely assembled systems that are ready for use in the laboratory or on the job, or as separate instruments fitted with proper connectors for use or integration with other equipment already owned. Typical users are listed, and chief applications and technical data are included.

**Acoustical Lens.** James B. Lansing Sound, Inc., 2439 Fletcher Drive, Los Angeles 39, Calif. Distributing a uniform sound wave over the entire audio spectrum, the new acoustical lens described in a single-sheet bulletin smooths out the high frequencies. An illustration, dimensional diagram and specifications are included. Also shown are polar diagrams of the directional characteristics of an acoustic lens and a multicellular horn.

**Graphic Recorder.** Francis L. Moseley, 1136 No. Las Palmas Ave., Los Angeles 38, Calif. A single data sheet presents an instrument that combines in convenient form all facilities needed for the graphic recording of test measurements. In seconds the Autograf illustrated and described in the bulletin will plot curves showing the relationship between a dependent and an independent variable—no reading of meters, no columns of data, no French curves. Complete specifications are given.

**TV Studio Lighting.** Kliegl Bros., 321 W. 50th St., New York 19, N. Y. A new tv studio lighting and associated facilities planning manual is now available. The manual, in folder form, is complete with tested sample studio plans and informative pictures of actual studios showing lighting facilities in use.

**Coating Thickness Gage.** Branson Instruments, Inc., 430 Fairfield Ave., Stamford, Conn., has released a 6-page folder describing the theory and operation of the model 600 Coatingage, a portable instrument that is used to measure the thickness of nonmagnetic coatings on magnetic bases and to detect pin-

Why use microwaves?

READ ESSENTIALS OF

# MICRO-WAVES

*By Robert B. Muchmore*
*Hughes Aircraft Co.*

A new book presenting in basic terms—without mathematics—the physical principles and applications of microwaves. Covers wave propagation and reflection, cavity resonators and filters, microwave antennas, electronic devices, noise, microwave radio systems and relays, radar, and microwave measurements.

**1952, 236 pages, $4.50**
*Write for a copy on 10-day approval*

**JOHN WILEY & SONS, INC.**
**440 Fourth Ave. New York 16, N. Y.**

# SECON

**DEVELOPMENT and PRODUCTION METALLURGISTS**

Fine wire and ribbon in base, rare, and precious metals, and alloys for new and highly engineered applications. In small units and sizes, and to close tolerances.

*Further details on request.*

**SECON**

**SECON METALS CORPORATION**
228 East 45th Street, N. Y. 17, N. Y., MU 7-1594

BE SAFE WITH

# Q-max

**A-27**

**LOW-LOSS LACQUER & CEMENT**

- Q-Max is widely accepted as the standard for R-F circuit components because it is chemically engineered for this sole purpose.
- Q-Max provides a clear, practically loss-free covering, penetrates deeply, seals out moisture, imparts rigidity and promotes electrical stability.
- Q-Max is easy to apply, dries quickly and adheres to practically all materials. It is useful over a wide temperature range and serves as a mild flux on tinned surfaces.
- Q-Max is an ideal impregnant for "high" Q coils. Coil "Q" remains nearly constant from wet application to dry finish. In 1, 5 and 55 gallon containers.

*Communication Products Company, Inc.*
MARLBORO, NEW JERSEY
(MONMOUTH COUNTY)
Telephone FReehold 8-1880



# PRECISION POTENTIOMETERS

## Type RL-270:

Wedding ring type . . . five sizes charted below. Gamewell Potentiometers are precision instruments in every respect. They feature close limits in electrical characteristics and mechanical construction, low electrical noise, low torque, and long life. All types operate at —55°C. to +55°C., 95% relative humidity at altitudes up to 50,000 ft. Non-linear windings are available.

| CONDENSED SPECIFICATIONS | RL-272 | RL-270 | RL-271 | RL-275 | RL-277 |
|---|---|---|---|---|---|
| Diameter (in.) | 5 | 3 | 2 | 1½ | 1¼ |
| Rating (watts) | 12 | 6 | 3 | 2 | 1.5 |
| Torque, max. (oz. in.) | 1 | 1 | 1 | ½ | ½ |
| Weight (oz.) | 15 | 6 | 2 | 2 | 1 |
| Mounting: 3 holes ⅜" deep | #8–32 | #8–32 | #8–32 | #6–32 | #4–40 |
| Mounting circle diam. (in.) | 3.250 | 1.750 | 1.250 | 1.000 | 1.000 |
| Max. resistance (ohms) ± 10% | 500,000 | 275,000 | 160,000 | 105,000 | 64,000 |
| Min. resistance (ohms) ± 10% | 460 | 250 | 150 | 105 | 80 |
| Max. useful angle (deg.) | 358±½ | 356±½ | 354±½ | 352±½ | 350±½ |
| Max. resolution (%) | 0.05 | 0.08 | 0.15 | 0.2 | 0.25 |
| Min. resolution (%) | 0.01 | 0.015 | 0.025 | 0.04 | 0.05 |
| Linearity (%) | ±0.10 | ±0.10 | ±0.15 | ±0.25 | ±0.30 |

Standard Shaft: single end, ¾" extension, specify if otherwise.
Double ended shaft special; specify diameter and length.
Multiple sections can be ganged, add ⅜" to the overall length for each additional section.
Terminals will be positioned on the circumference as required for taps and winding angle.
Expected life of all types over 1,000,000 cycles.

***FOR COMPLETE DETAILS SEND FOR BULLETIN F-68-A***

GAMEWELL

**THE GAMEWELL COMPANY**
NEWTON UPPER FALLS 64 MASSACHUSETTS

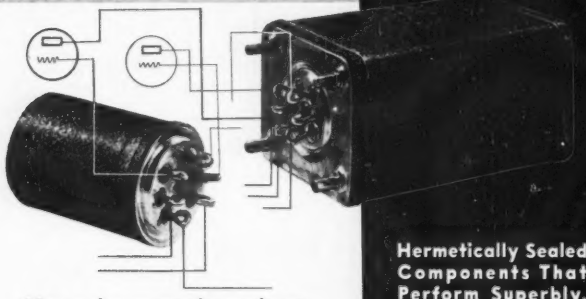

More and more exacting engineers and designers are getting first-hand, *proof* of the rigid, round-the-clock performance standards built into every Milwaukee Transformer Co. product.

Stringent quality control methods combined with modern production facilities and skilled engineering are reasons why you can expect and get "Performance that *Exceeds* the Demand."

Custom-engineered components for MIL-T-27 government, and commercial requirements. Quotations submitted upon request.

Write for your *Free* copy of Catalog MTR-1

Hermetically Sealed Components That Perform Superbly, Lastingly In Airborne, Ground Applications.

AUDIO, POWER, PULSE TRANSFORMERS — REACTORS, FILTER NETWORKS



SPECIALTY ENGINEERING . . . DESIGN, DEVELOPMENT AND PRODUCTION

MILWAUKEE TRANSFORMER CO.

5231 NORTH HOPKINS STREET
MILWAUKEE 9, WISCONSIN




holes in nonconductive coatings on conductive bases. One of the most important applications for the versatile instrument described has been the examination of corrosion-protective coatings for thickness and film continuity. Detailed information on the operation of the equipment is included.

**Metal Fasteners.** Prestole Corp., 1345 Miami St., Toledo, Ohio, has released a series of engineering application bulletins on patented metal fasteners. Both latching and non-latching types of the "C" and "J" clip fasteners are described, with engineering type of illustrations showing complete details of assembly. Engineering application data including dimensions, minimum panel hole sizes, material weights and screw sizes have been tabulated for easy reference.

**Electrical Contact Rivets.** Gibson Electric Co., Pittsburgh 21, Pa. Catalog C-521, just published describes the company's line of electrical contact rivets. Discussed in the 6-page folder are contact rivets made from fine silver, coil silver, silver alloys, palladium and powdered metal compositions designated as Ductile Gibsiloys. Standard sizes of flat, crowned and pointed contact rivets are also listed.

**Medium-Mu Triode.** Lewis and Kaufman, Inc., 50 El Rancho Ave., Los Gatos, Calif. A recent data sheet describes the type 254 medium-mu triode. The tube is illustrated, given outline dimensions and general electrical characteristics. Operating curves are provided for average static characteristics while maximum ratings and typical operation parameters are supplied over three modes of operation: (1) class-B a-f power amplifier; (2) class-C r-f power amplifier, plate unmodulated; and (3) class-C r-f power amplifier, plate modulated.

**Transformers and Reactors.** Southwestern Industrial Electronics Co., Inc., 2831 Post Oak Road, Houston 19, Texas. An 8-page folder technically describes a line of precision engineered transformers and reactors that feature high induc-

# RANGE RATE CALIBRATOR

MODEL 312

**PROVIDES RAPID CALIBRATION OF BOTH RANGE, AND RANGE RATE OF RADAR RANGING SYSTEMS**

**RANGE:** 0–50,000 yds. Accuracy 25%

**RATE:** 0–1,500 knots Accuracy 5%

**PRF** 100–10,000 PPS

**TRIGGER** and **TARGET PULSE**

**INTERNAL** or **EXTERNAL TRIGGER**

Another Product

Write for Bulletin C-3

**MISSOURI RESEARCH LABORATORIES**

2109 Locust

St. Louis, Missouri

# Test Proven Hermetic Sealing

**E3-LW TERMINAL**

"E-Series terminals are applicable on MIL requirements and will withstand thermal shock, vibrations, mechanical strains, and excessive pressures with no impairment of the seal or other functional characteristics. E-3LW terminals are now being used at 1000 psi static oil pressure and undergo 5000 psi tests."

**¼" SHAFT WATERSEAL BUSHING**

"Rotary Waterseal Panel Assemblies, with GRAF-SIL Packing Glands, have an excellent seven year customer history on gas filled pressurized components. They are available for ¼" shafts and for potentiometers and switch bushings."

We welcome your inquires on any phase of design, development or production.

**NEO-SIL CORPORATION**

**26 CORNELISON AVE., JERSEY CITY 4, N. J.**

Over 85% of the torque wrenches used in industry are

# STURTEVANT TORQUE WRENCHES

*Read by Sight, Sound or Feel.*

- Permanently Accurate
- Practically Indestructible
- Faster—Easier to use
- Automatic Release
- All Capacities

*(in inch ounces . . . inch pounds . . . foot pounds (All Sizes from 0-6000 ft. lbs.)*

*Every manufacturer, design and production man should have this valuable data. Sent upon request.*

PA STURTEVANT CO



TYPE A18AF-X1






# PRECISION MOTOR PERFORMANCE

Axial fan blower, 3 phase self-cooled motor is designed to start at a —55° C and feature maximum possible H P per unit weight and volume. The temperature will rise 45° C when fully loaded with 4" 4 blade, 29 degree pitch fan; Silicone wire and impregnation. At full load the input is 94 watts, the line current .54 amperes and the efficiency is 60%.

SPECIFICATIONS

Conform to NEMA Standards and other Gov't specifications.

Continuous duty

| | |
|---|---|
| WEIGHT | 22 oz. |
| C F M | 22 Average |
| R P M | 6250 Average |
| VOLTS | 115 |
| CYCLES | 320-1000 |

can be supplied CW and CCW suitable for 50 to 60 CPS

**AIR MARINE MOTORS INC.**

2183 JACKSON AVENUE, SEAFORD, L. I., N. Y.

WAntagh 2-7309

When you think of

STAINLESS STEEL FASTENINGS

think first of

ANTI-CORROSIVE

**Anti-Corrosive has millions of stainless fastenings *in stock* (probably the largest selection of varieties and sizes in the world) for *immediate delivery*. Anti-Corrosive has the exceptional production capacity that can fill your requirements beyond stock items faster, *better!***




**FREE—A-N Stainless Fastening Selector**

This handy slide-chart instantly identifies A-N Nos. pertaining to stainless steel nuts, screws, bolts, rivets, cotter pins, washers; gives sizes and other data. Write for "Chart 52H" TODAY!

25 YEARS OF LEADERSHIP IN FASTENINGS OF STAINLESS STEEL

Anti-Corrosive Metal Products Co., Inc.

Manufacturers of STAINLESS STEEL FASTENINGS

CASTLETON ON HUDSON, NEW YORK




tances, small size, low frequency response, precisely matched characteristics, hermetic sealing, vacuum impregnation, dual coil (hum-bucking) construction, high-permeability cores and drawn mu-metal shields. The catalog also gives information on the company's special transformers and reactors with detailed specifications of some recent designs.

**Pulse Transformers.** Engineering Research Associates, Inc., 1902 W. Minnehaha Ave., St. Paul 4, Minn. Chief features and characteristics of the type 130A1 three-winding pulse transformer are shown in a single-sheet bulletin. The transformer described is intended for use in triggering and counting circuits, as a blocking oscillator transformer, and for d-c isolation, inversion, pulse-shaping and pulse-transmission circuits.

**Snap-Action Switches.** Micro Switch, a division of Minneapolis-Honeywell Regulator Co., Freeport, Ill., has published a 24-page, two-color, catalog No. 82 of precision snap-action switches. It covers safety, limit and interlock switches designed especially for switching a-c circuits in industrial and commercial applications. The publication gives complete information on each switch including description, dimensions, mechanical characteristics, electrical characteristics and electrical capacities. Also included are technical data and application ideas.

**Soldering Iron.** The Kemode Mfg. Co., Inc., 161 W. 18th St., New York 11, N. Y. A single-sheet bulletin covers the new Quik-Shot soldering iron, listing many of its emergency uses. The unit described reaches working temperature in 10 seconds, maintains soldering temperature for 6 to 8 minutes, has a peak wattage rating exceeding 250 watts and accepts $\frac{3}{32}$-in., $\frac{1}{8}$-in. or 1-in. tips.

**Attenuators.** The Daven Co., 191 Central ve., Newark 2, N. J., announces availability of its latest brochure on attenuators. A wide variety of controls is shown, in-




for lacings that stay put!

# GUDELACE

BRAIDED NYLON LACING TAPE*



**A New and Revolutionary Type of Lacing**

- Saves time, saves money, greatly reduces the number of rejects
- Won't "bite through" insulation
- Won't cut wiremen's fingers or cause dermatitis
- Ties easier, ties tighter and cuts down on slipping of knots

**Let GUDELACE answer your lacing problems.**

*Write for FREE samples and prices.*

*Patent Pending.

GUDEBROD BROS. SILK CO., INC.
Electronics Division
*Main Office:* 12 South 12th Street, Philadelphia 7, Pa.
225 West 34th Street, New York 1, N.Y.

# WASHERS—ALL KINDS



WASHER SPECIALISTS for nearly half-a-century. Dies in stock will produce most sizes. Big runs made with automatic presses. An economical, accurate, and highly reliable source for washers, also all kinds of metal stampings. HAVE WHITEHEAD'S CATALOG ON FILE; write for it.

BEVELED CUP
D-HOLE
RETAINER
LOCK
SPACERS
SPRING TENSION
SQUARE HOLE
STAR LOCK
THRUST
TONGUE

EST. 1903 **WHITEHEAD STAMPING COMPANY**

1691 W. LAFAYETTE • DETROIT 16. MICH.

FOR QUALITY • QUANTITY — *QUICKLY*

SPECIFY **DAGE** RADIO FREQUENCY CONNECTORS

● Dage specializes in the manufacture of the *finest* in Type BNC, Type N and special radio frequency connectors. Your requirements for radio frequency connectors will be met quickly and efficiently by Dage. All Dage connectors are manufactured in strict accordance with military specifications. Write Dage today.

QUALITY QUANTITY QUICKLY **DAGE** DAGE ELECTRIC COMPANY, INC.
62 North Second Street • Beech Grove, Indiana

# THE SAR PULSESCOPE

BY WATERMAN

MODEL S-4-A



*Weight 31.5 lbs.*
*9⅛" x 11¼" x 17¼"*

**Another example of WATERMAN pioneering, a compact, portable instrument for precision pulse measurements adaptable for all electronic work, including radar and TV. S-4-A SAR PULSESCOPE will portray all attributes of the pulse; such as shape, amplitude, duration and time displacement. In S mode of operation, the unit functions as a wide band oscilloscope, with optional video delay, in either repetitive or triggered sweep conditions. In A mode of operation the unit functions as a precision time measuring device, with internal crystal controlled markers available for self calibration. In R mode of operation a desired small segment of A Sweep is expanded to fill the face of the tube for detailed observation.**

Video Amplifier band pass up to 11 mc . . . optional Video delay 0.55 μs . . . Pulse rise and fall time better than 0.07 μs . . . Video sensitivity of 0.5 p to p/inch . . . S Sweep 80 cycles to 400 KC either triggered or repetitive . . . A Sweep 1.2 μs to 12,000 μs, R Delay 3 μs to 10,000 μs . . . Directly calibrated on a precision dial . . . R Pedestal (or sweep) 2.4 μs to 24 μs . . . A & R Sweep Triggers available externally . . . Internal crystal markers of 10 μs ± 50 μs . . . Built-in precision amplitude calibration . . . Operates on 50 to 1000 cycles at 115V AC.

## WATERMAN PRODUCTS CO., INC.

PHILADELPHIA 25, PA.
CABLE ADDRESS: POKETSCOPE

**WATERMAN PRODUCTS INCLUDE:**

| | |
|---|---|
| S-5-A LAB | PULSESCOPE |
| S-10-B GENERAL | POCKETSCOPE |
| S-11-A INDUSTRIAL | POCKETSCOPE |
| S-14-A HIGH GAIN | POCKETSCOPE |
| S-14-B WIDE BAND | POCKETSCOPE |
| S-15-A TWIN TUBE | POCKETSCOPE |

Also RAYONIC Cathode Ray Tubes RAKSCOPES and other equipment

WATERMAN PRODUCTS

# Everybody likes the TARZIAN TUNER!

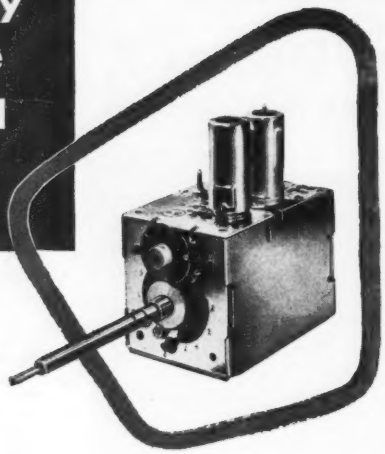

**ENGINEERS** like it because they appreciate the fine, scientifically-engineered qualities and features found in no other commercial tuner unit. And, they are especially enthusiastic about the Tarzian approach to UHF.

**PURCHASING AGENTS** like it because it's competitively priced and offers more value per dollar than any other commercial tuner.

**THE CONSUMER** or set buyer is happy with the excellent performance of his receiver, although he doesn't have the slightest idea of the importance of the TARZIAN TUNER in the satisfactory operation of his set.

**SERVICEMEN** like it because of the simplicity in servicing and aligning.

**SARKES TARZIAN, INC.**

**Tuner Division, Bloomington, Indiana**

TARZIAN MADE PRODUCTS
Tuners
Air Trimmers
Selenium Rectifiers
Cathode-Ray and Receiving Tubes
STATIONS WTTS (5000 WATTS) AND WTTV (CHANNEL 10)
OWNED AND OPERATED BY SARKES TARZIAN IN BLOOMINGTON




cluding r-f attenuators, special units for precision measuring equipment, tone-compensating attenuators, stereophonic controls and "T", balanced-"H", ladder and potentiometer type audio attenuators. Each unit is discussed separately with photographs of the unit, complete descriptions, charts and diagrams.

**TV Broadcast Equipment.** Allen B. DuMont Laboratories, Inc., 1500 Main Ave., Clifton, N. J. A new 20-page booklet on the universal image orthicon tv camera chain model TA-124-E is now available to tv station personnel, prospective tv broadcasters and others in the tv and radio industry. The booklet, profusely illustrated with photos and drawings of the camera and its associated equipment, explains how a single triple-duty chain can be used in studios, in the field and for film pickup. A clearly written specifications section of the booklet gives pertinent facts and figures on power supplies, monitors, generators and similar associated equipment together with the camera unit itself.

**Toroidal Inductors.** Lenkurt Electric Sales Co., 1113 County Road, San Carlos, Calif. Precision-wound high-Q toroidal inductors are listed in the new 4-page bulletin TL-P4. Five different types of coils are available with or without hermetically sealed cases. Included in the bulletins are Q curves and other design data for representative standard values of the varied coil types. The coils listed make available a wide range of inductance values between 1 imh and 80 henrys. Information is also included about the effect of direct current on the inductance values of each type of coil.

**Identification Markers.** Westline Products Division of Western Lithograph Co., 600 E. Second St., Los Angeles 54, Calif. The use of pressure-sensitive self-adhering printed identification for cable, conduit and pipe is described in a recent folder. Method of application and chief features are outlined. A stock list and order form are included.

# U. G. CONNECTORS

*Our Coaxial Cable Connectors Meet All Government Specifications*

★ ALL ORDERS DELIVERED PROMPTLY ★

*Manufacturers of Highest Quality Connectors*

•

## ALLIED INDUSTRIES, INC.

1023 S. 21st STREET
LOUISVILLE 10, KY.

***Phone Arlington 4640***

## DIGITAL COMPUTER ENGINEERS

**ELECTRICAL ENGINEERS and PHYSICISTS**

needed for circuit design and development. Engineers and Physicists with 1 to 4 years experience in pulse circuits, pulse handling techniques, and systems development. Openings also for recent graduates.

- Replies strictly confidential
- Interviews arranged at our expense

*Engineering Research Associates, inc.*

*A Subsidiary of* **Remington Rand**

Leaders in the Development of Digital Computers

1902 W. Minnehaha, St. Paul 4, Minn. • *"You Will Enjoy Living in Minnesota"*

MODEL E-2
## PULSE GENERATOR

- 10 cycles to 1 00 kc repetition rate
- .2 μs to 1,000 μs pulse widths at 100 ohms impedance—100 volts open circuit • 0 to 10,000 μs delays
- 6 output pulses for synchronizing at various intervals during single repetition period



Write for complete data: our bulletin E-B-2

Rutherford ELECTRONICS CO. 3707 S. ROBERTSON BLVD. CULVER CITY, CALIFORNIA

## ASSEMBLY SAVINGS Pay for PEMS

**"Clinched by a squeeze, with the Greatest of Ease"—PEM Nuts are the answer to load bearing threads in steel, aluminum, brass or copper sheets —"Too thin to Thread".**

**More than 600 leading manufacturers have standardized on these self-clinching fasteners because simplified assembly of one or several at a time, with standard tools, soon pays for their low cost.**

**Positive lock prevents turning of fasteners. Reverse side of sheet remains flush. No swedged rim projects.**

**Write for literature and samples for trial, Penn Engineering & Manufacturing Corp., Doylestown, Pa.**



PEM

# PLANTS AND PEOPLE

Edited by WILLIAM P. O'BRIEN

## West Coast Firm Changes Hands

KAAR ENGINEERING CORP. of Palo Alto, Calif., manufacturer of radiotelephone equipment, has been purchased by Pacific Associates, Inc., San Francisco, Calif.

John M. Kaar, who founded the firm 16 years ago, will retain one-sixth interest and will be vice-president, chief engineer and a director.

Pacific Associates plans to supply additional capital for expansion through public offering of its prior preference stock. Sales of some $500,000 are expected in 1952 of which about 90 percent will be two-way mobile radio equipment, with the balance in marine depth sounders, direction finders and accessories.

## Jensen Honored

AXEL G. JENSEN, director of television research at Bell Telephone Laboratories, has been named winner of the David Sarnoff Gold Medal. The award is presented each year by the Society of Motion Picture and Television Engineers "in recognition of recent technical contributions to the art of television."

In July Mr. Jensen was honored for his work in tv research when the Royal Technical University of Denmark awarded him the George A. Hagemann Gold Medal.

He celebrated his 30th anniversary with Bell Labs this year. Joining the Labs in 1922, he spent about four years in radio work. For the next five years he was in charge of a London test station operated in connection with the development of transatlantic short-wave telephone service. In 1930 he returned to the U.S. to work on coaxial cable projects. He has been engaged in tv research since 1935.

A. G. Jensen, winner of SMPTE award

## Companies in Northwest Pool Facilities

THE Northwest Association of Electronic Manufacturers was formed recently in Portland, Ore., with membership open to firms operating in Oregon, Washington and Idaho. Purpose of the organization is trade promotion, attraction of new electronic industry to the area and mutual assistance.

The 17 manufacturing firms now included in the group are planning to pool their facilities for large contracts, pool orders for common supply items, establish industry job classifications and act as a clearing house for available surplus inventory facilities.

## Electric Regulator Completes Plant

CONSTRUCTION of the new 15,600-sq ft plant and administrative building of the Electric Regulator Corp. in Norwalk, Conn., has been completed. The modern plant houses extensive laboratory, toolroom and assembly facilities for the production of the Regohm, an electric circuit controller that has found wide application in power equipment for government and industrial use. Other products will be developed here in addition to the basic Regohm unit, including associated control equipment and regulating and control systems.

The plant is currently employing more than 110 people. It is expected that this number will be substantially increased under the impact of defense production demands and a rapidly expanding civilian business.



Electric Regulator's new plant

## Williams Joins Telecomputing Corp.

JAMES V. WILLIAMS has been named project engineer for the Telecomputing Corp., Burbank, Calif., manufacturer of electronic data analysis equipment. He was former senior development engineer with International Business Machines Corp., and will be working with Telecomputing's development agreement between that company and IBM.

## CEC's New Plant in Operation

CONTROL ENGINEERING CORP., formerly of Canton, Mass., is now in operation at its new enlarged headquarters located on a seven-acre tract in Norwood, Mass.

The new building provides space for the development of a new line

### OTHER DEPARTMENTS featured in this issue:


| | Page |
|---|---|
| Electrons At Work | 168 |
| Production Techniques | 266 |
| New Products | 310 |
| New Books | 414 |
| Backtalk | 430 |

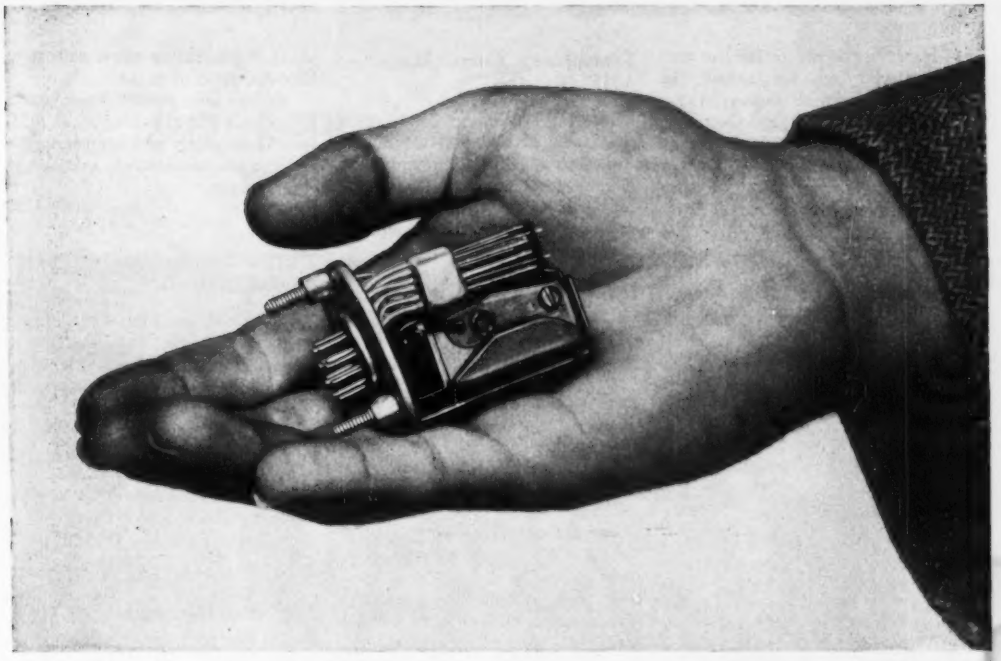

# New G-E Relay Doubles Tip Pressure

## Hermetically-sealed unit has larger magnet, no extra weight

Double the average tip pressure, 40-55 grams, is delivered by the larger magnet structure of the new G-E relay without exceeding Air Force-Navy specifications for size and weight.

The new relay, the first specifically designed for hermetic sealing, will withstand 50g operational shocks and instantaneous voltage surges up to 1500 volts rms *without failure*.

### LONGER RELAY LIFE

The large magnet, polyester stack insulation, and silver-tipped contacts assure reliable, long-lived operation in aircraft, shipboard, portable land-based equipment and other systems which must meet Air Force-Navy specifications.

In every way, this new G-E relay is in a world of its own—sealed in a standard size enclosure against dirt, salt spray, high humidity, and widely varying air pressures.

### RELIABLE SHIPMENT

This new device is now in full production and shipment can be made to meet your schedules.

Ask your nearest G-E office for more information, and send the attached coupon today. *General Electric Company, Schenectady 5, New York.*

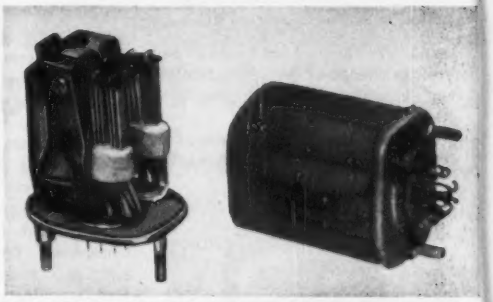

**THE LARGER MAGNET** is made possible by an exclusive G-E design which utilizes the relay housing for structural support, thus eliminating much of the weight of internal bracing.

**GENERAL ELECTRIC**

**General Electric Company**
**Section C 730-41**
**Schenectady 5, New York**

**Gentlemen:**

**I would like__ copies of Bulletin GEA-5729 on hermetically-sealed relays for:**

**_____ reference only** **_____ an immediate project**

**Name** ..... **Title** .....

**Company** .....

**Address** .....

**City** ..... **State** .....

of instrumentation for the commercial market to supplement the company's current industrial instrument line and its electronic equipment manufactured under government contract for use in radar installations, guided missiles and gunfire control systems.

## Giannini & Co. Adds to Staff

Two appointments were recently announced by the G. M. Giannini & Co., Inc. of Pasadena, Calif., manufacturers of precision instruments and controls for aircraft, missile and industrial measuring applications.

B. J. Garnett was named assistant chief engineer, airborne equip-

B. J. Garnett, assistant chief engineer

ment. For the past ten years he had been in charge of design of aircraft and missile components for Vard Inc. of Pasadena.

John Bodnar is now manager of potentiometer sales. He was for-

J. Bodnar, manager of potentiometer sales

merly an engineer with Radio Corp. of America, and also served as sales engineer for the Brush Development Co.

## Transducer Corp. Made AMF Division

MERGER of Transducer Corp. of Boston, Mass., with its parent company, American Machine & Foundry Co., has been announced. Transducer, formerly AMF's electronic subsidiary, now becomes the company's electronic division.

A leading manufacturer of electronic and ultrasonic trainers for the Air Force, Transducer was purchased by AMF as its electronic subsidiary in 1948. Its products are employed for instruction of radar gunners and navigational bombardiers. It also makes radar systems and precision computers adaptable to radar work on a sub-contract basis.

Currently the new AMF electronic division is working on more than $17,000,000 worth of government contracts in 315,000 sq ft of floor space at 1085 Commonwealth Ave., Boston, Mass., with a labor force of more than 1,400 employees.

## Consulting Office Opened

LEONARD R. KAHN announces the opening of an electronics and communications consulting office at 22 Pine St., Freeport, L. I., N. Y.

Before opening his office Mr. Kahn was associated with Crosby Laboratories where he specialized in communication studies. While with Crosby Labs he worked on diversity receiving systems, single-sideband reception, the design of phase - modulation transmitting equipment, frequency modulation anaylsis and classified Armed Forces projects.

## Westinghouse Engineer Receives Award

PHILIP E. VOLZ, section engineer for the Westinghouse Electronic Tube Division, has been named a winner of the $200 award in a continuous contest for the best patent disclosure out of each 50 submitted by engineers of the Division. Mr. Volz's disclosure concerned an improved method of increasing the power and efficiency of high-frequency generating tubes salient to the operation of radar.

He has been with the company's Electronic Tube Division since 1951, and is currently an engineer in the microwave generators section of the division.

## Philco Inaugurates Radio Division

IN RECOGNITION of the size and importance of its radio business, Philco Corp. is establishing a separate Radio Division so that even greater emphasis can be put on all phases of the company's activities in the home and auto radio field.

William H. Chaffee has been appointed vice-president of the newly-formed division, which is under the direction of Frederick D. Ogilby.

## Engineer Becomes Sales Exec

TO HEAD UP a newly created national sales engineering organization, Bendix Aviation Corp. has named Lawrence J. Straw as Mobile Sales Manager.

Straw joined Bendix in February 1952, having previously been associated with Capehart-Farnsworth. Prior to this he had been associated with Raymond Rosen Engineering

L. J. Straw, new Mobile Sales Manager for Bendix Radio

Products in Philadelphia as an electronic engineer responsible for equipment and system design of telemetry projects for the U. S. Air Force and the AEC, and as an electronic engineer at the Philadelphia

for "Bridgeport" BRASS CO. Service

OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

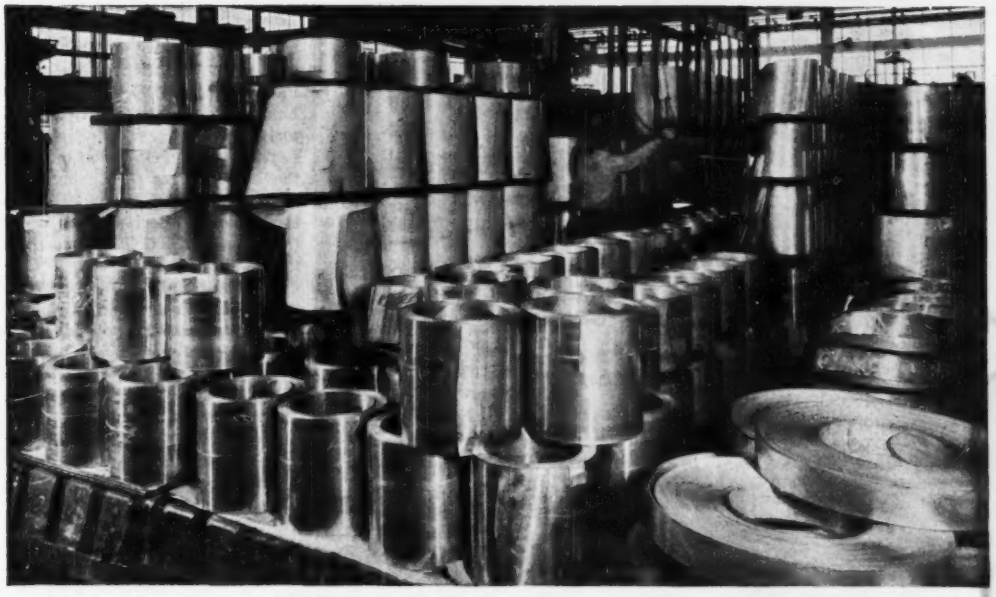

# Brass with a higher "I. Q."

**Are you using metal with a sufficiently high "I.Q." (Inner Quality) to give your product**

**...the quality you are aiming for?**

**..lower production cost?**

**..fewer rejected parts?**

**...greater metal economy?**

**...higher strength, toughness and resistance to wear and corrosion?**

## BRING YOUR METAL PROBLEMS TO BRIDGEPORT BRASS

Bridgeport metals have the high "I.Q." you need. They are specially made to meet your particular requirements in alloy composition ... width and gauge tolerances ... temper ... grain size ... surface ... ductility ... machinability ... and other physical, mechanical and electrical properties.

Bridgeport mill products are made under strict laboratory control to meet customer specifications *exactly*.

The Bridgeport laboratory will gladly work with you to help solve your metal problems.

**Mills in Bridgeport, Conn. and Indianapolis, Ind.**
**In Canada: Noranda Copper and Brass Limited, Montreal**

**BRIDGEPORT BRASS COMPANY**

"Bridgeport" Brass

30 GRAND STREET, BRIDGEPORT 2, CONNECTICUT

pyroferric
iron
cores
ACTUAL SIZE
PYROFERRIC IRON CORES
are scientifically manufactured, under strictest quality controls and rigid maintenance of close electrical and mechanical tolerances.
PYROFERRIC services
are available for the engineering of your core production requirements . . . your letterhead request for Catalog 22A
will bring you complete information including the manufacture of iron cores, their electrical properties, materials, design considerations, standardization data, uses and other helpful data.
PYROFERRIC
621 EAST 216 ST., NEW YORK 67




Naval Base where he was responsible for vhf, uhf and radar systems design on the Aircraft Carrier Conversion Program.

## Pettit Wins Achievement Award

ANNOUNCEMENT of the new Western Electronic Achievement Award to Dr. J. M. Pettit of Stanford U. was the culmination of the recent Pacific Region IRE conclave at the Long Beach, Calif., Municipal Auditorium.

The award, first to be made by the 7th Region of IRE, honored Dr. Pettit for major contributions to electronics. Selection was made from among 5,000 IRE members in the Pacific Region.

In 1949 Dr. Pettit was awarded the Presidential Certificate of Merit for his outstanding work during World War II and since in the field of electronics. His war work at Radio Research Laboratories involved detailed supervision of the development of the AN/APR-1 and AN/APR-4 radar search receivers. He also assisted in getting them into production.

## Skiatron Gets Research Director

HENRY F. IVEY, formerly associated with the Westinghouse Electric Corp., was recently appointed director of research and development of the Skiatron Electronics and Television Corp.

In his new post he will coordinate Skiatron's activities in the field of subscription television, where the company has developed a pay-as-you-see system, and will also jointly develop, with Wayne B. Nottingham, the company's dark-trace tube for use in the military and industrial fields.

## Raytheon to Lease New Plant

NEGOTIATIONS are being completed by Raytheon Mfg. Co., of Waltham, Mass., for a lease of the South Lowell Ordnance Plant previously occupied by Davis Aircraft Co. on Woburn St. in South Lowell, Mass.

Engineering and production work

# TRANSFORMERS

**MIL-T-27**

**& COMMERCIAL**

- Pulse
- Audio
- Power
- Filter Choke
- Filament
- RF Coils

***Custom Built to Your Specifications***

**WE SOLICIT ONLY SAMPLES and SHORT RUN PRODUCTION**

**Present Delivery Schedule: 2-4 weeks**

**STERLING TRANSFORMER CORP.**

**297 North 7th St., Brooklyn 11, N. Y.**

# ACME'S *New* REGULATED D.C. POWER SUPPLIES

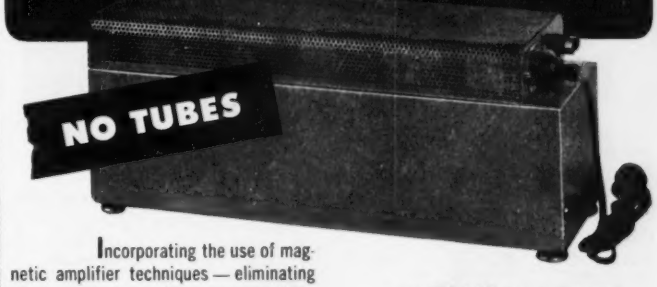


Incorporating the use of magnetic amplifier techniques — eliminating all vacuum tubes — this new Acme Regulated Power Supply provides an extremely dependable, trouble-free precision unit for both industrial and laboratory use. Because of the absence of all tubes, the equipment will give a **minimum** of 20,000 hours continuous service. It is available in a variety of voltages and frequencies.

**Write for complete information.**

Acme **Model S-715** 60-cycle Regulated Power Supply. 300 volt D.C. output with ±1% regulation from 0 to 200 MA, with less than .1% ripple.

**acme** ELECTRONICS, INC.

ACME ELECTRONICS, INC., 300 N. LAKE AVENUE, PASADENA 4, CALIF.

# IS ELECTRIC COMPONENT COORDINATION

YOUR JOB?

Live and work in California's most favorable smog-free region. Well-established expanding company with unlimited opportunity for advancement.

Applications engineer capable of analyzing large-scale customer requirements and making engineering decisions concerning filters, transformers, and associated components. Familiarity with toroidal inductors using powder-iron cores desirable.

Send full background particulars to:

*Gerd D. Wallenstein*
LENKURT ELECTRIC COMPANY
1105 County Road
San Carlos, California

# AVAILABLE IN 14 COLORS*

*Featuring*

# Tensolon HI-TEMP HOOK-UP WIRE

- EXTRA FLEXIBILITY
- FREE STRIPPING
- HIGH DIELECTRIC
- RATING -55 TO +250°C

*Black, brown, red, orange, yellow, green, blue, violet (purple), grey (slate), white, tan, pink (flesh), light green, light blue.

Built to meet rigid government requirements, Tensolon Hook-up Wires are available in sizes from AWG30 through 20 with stranded silver-plated copper conductors and the patented **Tensulated** Teflon® covering which eliminates pin holes and other irregularities.

**SPECIAL KIT FOR LABORATORY REQUIREMENTS —**
Twelve 100 ft. rolls of AWG 22, in assorted colors in convenient compact container **$124.00**

**TENSOLITE INSULATED WIRE CO., INC., TARRYTOWN, N. Y.**

**what are "home-made" coils costing you?**

"Home-made coils cost us far too much", you'll say when you balance *all* the costs, wasted time and materials, production delays and excessive rejects against Clippard production-engineered coils.

Clippard specialists have made a career of coil and sub-assembly work . . . quickly turn out runs of 1,000 . . . 10,000 . . . 1,000,000 or more units using specially designed high-speed equipment of laboratory accuracy.

For you, as for many of the nation's leading electronic and electrical manufacturers, they'll whip production delays, hasten delivery dates, cut costs.

Often, Clippard works out design improvements that save money, critical materials and valuable time.

Devote your production facilities to more profitable work. Turn your coil winding and sub-assembly jobs over to Clippard. Savings will be greater than you thought possible.

WRITE TODAY, describing your requirements.

**PRODUCTION TESTING Resistors and Condensers?**

Send for catalog sheets describing Clippard PR-5 Resistance Comparator and PC-4 Capacitance Comparator. Each will soon earn its keep in your plant by allowing unskilled operators to check more than 30 components per minute with laboratory accuracy.

*Clippard*

**INSTRUMENT LABORATORY INC.**

7350-90 Colerain Road • Cincinnati 24, Ohio

MANUFACTURERS OF R. F. COILS AND ELECTRONIC EQUIPMENT

**Phone JAckson 4261**




of an undisclosed nature for the U. S. government will be carried out there initially, with about 700 employees, but it is expected that operations will be enlarged on a gradually increasing scale as new employees are added and trained.

## Weathers Opens New Plant

WEATHERS INDUSTRIES, manufacturers of f-m phonograph pickups, announce the opening of a new one-story modern factory at 66 E. Gloucester Pike at Barrington, N. J. The plant was formerly located in West Collingswood, N. J.

One of the new plant's many features is the series of sound laboratories and listening rooms devoted to the perfection of sound reproducing equipment.

## Motorola Promotes Samuelson

ROBERT E. SAMUELSON has been promoted to chief engineer, Motorola Research Laboratory, Phoenix, Arizona.

R. E. Samuelson, new chief engineer

Immediately prior to this recent appointment Dr. Samuelson was head of the Communications Research Section.

## Culver Joins Trinity U.

CHARLES A. CULVER, senior physicist for Southwest Research Institute and dean of professional development at the Essar Research Center, has been appointed chairman of the department of physics at Trinity University, San Antonio, Texas.

He was chief high-frequency

XCELITE Hand Tools
PREFERRED BY THE EXPERTS

## Get XCELITE Nutdrivers in a complete range of sizes!

You'll wish you'd done it sooner when you see how a complete set of XCELITE Nutdrivers speeds—and eases the job! You can choose from a blade length of 6" down to Stubby (3 1/4" overall). You can get all regular nut drivers in nine nut sizes, 3/16" to 1/2", Stubby drivers in 1/4", 5/16" and 3/8". And XCELITE hollow shaft nut drivers come in seven nut sizes—insulated if desired. WRITE today for our complete catalog!

**XCELITE INCORPORATED**
*(formerly Park Metalware Co., Inc.)*
Dept. C
ORCHARD PARK, N. Y.

*Originators—*
*Not Imitators*

*For Originality*
LOOK TO XCELITE

Presenting
**OPPORTUNITIES**
*for*
**ENGINEERS**
*and*
**SCIENTISTS**

The
*Franklin Institute*
FOUNDED 1824

In Our Research & Development Laboratories

**FIELDS OF INTEREST ARE:**

- Electrical Computer Design & Development
- Mathematical Analysis of Physical Problems
- Industrial & Military Instrument Design
- Industrial & Marine Power Drives
- Modern Communications Theory
- Electrical Machinery Design
- Circuit Analysis • Servomechanisms
- Air Traffic Control

*Permanent Employment, Liberal Employee Benefits, Opportunity for Study in Local Colleges.*

Send Resume of Education & Experience, Salary Desired & Photograph to PERSONNEL DEPARTMENT, BENJAMIN FRANKLIN PARKWAY at 20th ST., PHILADELPHIA 3, PA.

*Here's the Answer...*

to your OPEN WIRING CABLE SUPPORT PROBLEMS

*Use the* ALL NYLON "NyLoc" CABLE CLIPS
*for tough conditions and unusual heat, etc.*

NEW!

*Use the* ETHYL CELLULOSE "EthoLoc" CABLE CLIPS
*for average conditions and maximum economy*

Send for details and FREE samples.
**WECKESSER COMPANY**
5267 N. Avondale Ave. Chicago 30, Ill.

# photograph it!

***A photo record is quicker, more accurate; and it may prove to be priceless.***

THE ADVANCED single-lens reflex design of the 35-mm. PRAKTICA FX makes it easier for you to get expert photomicrographs, oscillographs, extreme close-ups, copy work, etc., in black and white or natural color. Use it for: Recording lab and field observations, quality control, inspections, photographing equipment in field, training personnel, etc. Excellent for the home photographer, too. From $99.50 to $199.50 (tax incl.).
The Praktica Co., Inc.,
48 W. 29 St., N. Y. 1, N. Y.



**39 tested ideas Free for you!**

PRAKTICA FX



35-MM. SINGLE-LENS REFLEX CAMERA

The Praktica Co., Inc. Dept. F-112
48 West 29th Street, N. Y. 1, N. Y.
*Please send me a copy of* "PHOTOGRAPHY IN SCIENCE AND INDUSTRY."
Name.....
Position.....
Company.....
Address.....
City.....Zone...State.....

Autosyn*

SYNCHROS

Precision-Built by

ECLIPSE-PIONEER

For more than 18 years, Eclipse-Pioneer has been a leader in the development and production of high precision synchros for use in automatic control circuits of aircraft, marine and other industrial applications. Today, thanks to this long experience and specialization, Eclipse-Pioneer has available a complete line of standard (1.431" dia. X 1.631" lg.) and Pygmy (0.937" dia. X 1.278" lg.) Autosyn synchros of unmatched precision. Furthermore, current production quantities and techniques have reduced cost to a new low. For either present or future requirements, it will pay you to investigate Eclipse-Pioneer high precision at the new low cost.

*REG. TRADE MARK BENDIX AVIATION CORPORATION

**AVERAGE ELECTRICAL CHARACTERISTICS—AY-200 SERIES****

| | Type Number | Input Voltage Nominal Excitation | Input Current Milliamperes | Input Power Watts | Input Impedance Ohms | Stator Output Voltages Line to Line | Rotor Resistance (DC) Ohms | Stator Resistance (DC) Ohms | Maximum Error Spread Minutes |
|---|---|---|---|---|---|---|---|---|---|
| Transmitters | AY201-1 | 26V, 400~, 1 ph. | 225 | 1.25 | 25+j115 | 11.8 | 9.5 | 3.5 | 15 |
| | AY201-4 | 26V, 400~, 1 ph. | 100 | 0.45 | 45+j225 | 11.8 | 16.0 | 6.7 | 20 |
| Receivers | AY201-2 | 26V, 400~, 1 ph. | 100 | 0.45 | 45+j225 | 11.8 | 16.0 | 6.7 | 45 |
| Control Transformers | AY201-3 | From Trans. Autosyn | Dependent Upon Circuit Design | | | | 42.0 | 10.8 | 15 |
| | AY201-5 | From Trans. Autosyn | Dependent Upon Circuit Design | | | | 250.0 | 63.0 | 15 |
| Resolvers | AY221-3 | 26V, 400~, 1 ph. | 60 | 0.35 | 108+j425 | 11.8 | 53.0 | 12.5 | 20 |
| | AY241-5 | 1V, 30~, 1 ph. | 3.7 | — | 240+j130 | 0.34 | 239.0 | 180.0 | 40 |
| Differentials | AY231-3 | From Trans. Autosyn | Dependent Upon Circuit Design | | | | 14.0 | 10.8 | 20 |

**Also includes High Frequency Resolvers designed for use up to 100KC (AY251-24)

**AY-500 (PYGMY) SERIES**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Transmitters | AY503-4 | 26V, 400~, 1 ph. | 235 | 2.2 | 45+j100 | 11.8 | 25.0 | 10.5 | 24 |
| Receivers | AY503-2 | 26V, 400~, 1 ph. | 235 | 2.2 | 45+j100 | 11.8 | 23.0 | 10.5 | 90 |
| Control Transformers | AY503-3 | From Trans. Autosyn | Dependent Upon Circuit Design | | | | 170.0 | 45.0 | 24 |
| | AY503-5 | From Trans. Autosyn | Dependent Upon Circuit Design | | | | 550.0 | 188.0 | 30 |
| Resolvers | AY523-3 | 26V, 400~, 1 ph. | 45 | 0.5 | 290+j490 | 11.8 | 210.0 | 42.0 | 30 |
| | AY543-5 | 26V, 400~, 1 ph. | 9 | 0.1 | 900+j2200 | 11.8 | 560.0 | 165.0 | 30 |
| Differentials | AY533-3 | From Trans. Autosyn | Dependent Upon Circuit Design | | | | 45.0 | 93.0 | 30 |

*For detailed information, write to Dept. C.*

ECLIPSE-PIONEER DIVISION of Bendix AVIATION CORPORATION

TETERBORO, NEW JERSEY

Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N. Y.




engineer for Canadian Radio Corp. from 1920 to 1923, professor of physics at Carlton College from 1923 to 1946, and professor at Park College from 1947 to 1951. Dr. Culver holds various U. S. and foreign patents relating to communications engineering.

## Melpar Staff Additions

RALPH I. COLE, formerly technical director of the Rome Air Development Center, and Vernon C. Weihe, formerly systems engineer for the Air Transport Association, have joined the engineering staff of Melpar, Inc., Alexandria, Va.

Mr. Cole is chairman of the IRE Professional Group on Engineering Management and a member of the Research and Development Boards Radar Panel.

R. I. Cole

Vernon Weihe was formerly chief engineer of the Communications and Navigation Laboratory at the

V. C. Weihe

DANDUX
specification designed
CANVAS
and leather
PRODUCTS

Carbine Clip Bag — Padded Instrument Bag

BG BAGS—CW BAGS
CARBINE CLIP BAG
TOOL ROLLS—BAGS & CASES
for
Ordnance Equipment
Radio Equipment
Electronic Equipment
Radar Equipment

C. R. DANIELS, INC.
DANIELS, MD.
75 West St. — New York 6, N. Y.
549 W. Randolph St. — Chicago 6, Ill.

LICK SOLDERING FATIGUE!

—with the new HEXACON
FEATHERWEIGHT
MODEL 30H

So light its weight is hardly noticeable, but more powerful than its wattage rating indicates. Hatchet design makes it more comfortable and practical to use than a soldering pencil. No transformer required.

WEIGHT—5½ OUNCES (LESS CORD); WATTS—40 OR 60; TIP DIA.—BOTH ⅛" AND ¼" TIPS FURNISHED WITH EACH IRON; PRICE— $5.50

Write today for catalog describing the complete line of screw tip, plug tip and hatchet irons.

HEXACON ELECTRIC CO.
130 WEST CLAY AVE.,
ROSELLE PARK, N. J.

HEXACON

Check the performance of this
HERMETICALLY SEALED
TERMINAL*
Kel-F molded by BRILHART

See why over 1,000,000 are now in use by the biggest names in industry!

- 2000 volts, RMS-Corona Free
- Flashover . . . 7500 volts RMS Min.
- Insulation Resistance . . . 1,000,000 Megohms
- 60 Cycle test . . . 5000 volts (RMS)
- Current rating . . . 15 Amperes
- Air, helium, oil pressure tests . . . 20 lbs per sq. inch
- Temp. . . .—100°C. to +150° C. cont.

Custom problem? Write today!

*PAT. PENDING

BRILHART RESEARCH CORPORATION
MINEOLA, L. I., N. Y.

IF THE WIRING FAILS



SO DOES YOUR PRODUCT'S REPUTATION

FOR DEPENDABLE PRODUCT WIRING USE
UNILECTRIC WIRING SYSTEMS
TRADE-MARK

Year after year — for over ten years — UNILECTRIC has produced millions of wiring systems, for more than 150 leading manufacturers of electric and electronic products. From controls to complex armed forces equipment, these wiring systems have consistently met the most exacting requirements and provided substantial savings to each customer.

To assure utmost dependability plus cost saving engineering assistance, low cost production and "on-schedule delivery" investigate UNILECTRIC today.

UNILECTRIC WIRING SYSTEMS
TRADE-MARK
Manufactured by
UNITED MANUFACTURING & SERVICE COMPANY
409 SOUTH 6th STREET • MILWAUKEE 4, WISCONSIN

WHAT'S
GOING
TO
INFLUENCE

**your choice of fasteners?**

Speedier assembly . . . better appearance . . . fewer rejects . . . greater strength . . . quantity runs?
Whatever your choice, you will benefit by investigating THE MILFORD METHOD, an integrated service of fastener research, design, engineering, and production collaboration.

Give wings to work . . . use rivets and rivet-setters identified by the flying "M" trade mark . . . a symbol of quality for quality products of metal, leather, cloth, plastic, wood and paper. With an eye to the future, inquire about THE MILFORD METHOD to-day!

MILFORD
the name to rivet in your memory for fasteners

the MILFORD RIVET & MACHINE CO.
EST. 1919

MILFORD, CONN., 855 Bridgeport Avenue

AURORA, ILL., 806 Ill. Avenue

ELYRIA, O., 1106 W. River Street

HATBORO, PA., 26 Platt Street



Wright Air Development Center. He was a member of the American delegation to the Civil Aviation Organization, and technical advisor to the American Government at several international conferences.

## RTMA Continues to Grow

SEVEN new members, five active and two associate, were submitted to RTMA membership by the board of directors at a recent meeting in New York City. The new members are:

Daystrom Electric Corp. of Poughkeepsie, N. Y.; Delco Radio Div. of General Motors Corp., Kokomo, Ind.; Eldico of New York, Inc., of Douglaston, N. Y., Investors Diversified Services, Inc., of Minneapolis, Minn.; Johnson Electronics of Orlando, Fla.; Lyman Electronic Corp. of Springfield, Mass.; and Rockbar Corp. of New York, N. Y.

## IRE Announces 1953 Fellow Awards

FORTY-NINE leading radio engineers and scientists were named Fellows of the Institute of Radio Engineers by the board of directors at a meeting held in September in New York City. The Institute annually bestows the award of Fellow, its highest membership grade, on those who have made outstanding contributions to radio engineering or allied fields.

Presentation of the awards with citations will be made by the president of the Institute at the annual banquet on March 25, 1953 at the Waldorf-Astoria Hotel in New York during the 1953 IRE National Convention.

Recipients of the Fellow Award, which takes effect Jan. 1, 1953, are as follows:

Edward W. Allen, Jr., of the FCC; Jean P. Arnaud of Direccion General Fabricaciones Militaros (Argentina); Benjamin B. Bauer of Shure Brothers, Inc.; J. W. Bell of Smith & Stone, Ltd., Canada; Leonard J. Black of the U. of California; H. G. Booker of Cornell University; William E. Bradley of Philco Corp.; John L. Callahan of

FOR
FREQUENCY
**Stability**
IN
**Mobile**
EQUIPMENT . . . .

make sure your crystals are made by Standard Piezo.

For years, our Crystals have been standard as original equipment with leading manufacturers and for replacement purposes by large operators of mobile equipment.

Precise, accurate, Standard Piezo Crystals are available for *ALL* types of mobile communication equipment.

***Request catalog E for complete details.***

**Standard Piezo**
**COMPANY**
CARLISLE, PENNSYLVANIA

---

**SAVE EXPEDITING!**
**CALL**
**E. C. I.**
**BArclay 7-2241**
Serving the industrials with direct distribution of electronic parts

**The DIRECTORY of ELECTRONICS SUPPLY**
Your Center for
Components • • Military
Test Equipment • • Commercial
- Germanium Diodes
- Five Star Tube Line
- Receiving — Transmitter Industrial Tubes

**Electronics Center, Inc**
118 Duane Street, New York 7, N. Y.

---

**Specify GM SERVO MOTORS** PRECISION ENGINEERED

*RELIABLE PERFORMANCE • RUGGED CONSTRUCTION*

In the operation of • GUNFIRE CONTROLS • ROCKET CONTROLS
GUIDED MISSILES • AIRCRAFT CONTROLS • INDUSTRIAL CONTROLS

G-M Servo Motors can be supplied to meet rigid military specifications with regard to humidity, temperature range, vibration and altitude. Available in 2, 4 or 8 pole construction and for frequencies from 60 to 400 cycles.

Write today for complete information.


¾ ACTUAL SIZE

Another product of GM **LABORATORIES INC.** 4336 NORTH KNOX AVENUE CHICAGO 41, ILLINOIS

---

**Portable**
**12-channel**
**Oscillograph Recorder**
**for applications requiring an instrument of minimum size and weight**

Heiland DENVER

*Type A-500 12-channel*
*6-3/4" x 9-13/16" x 12-3/4"*
*33 lbs.*

**The Heiland A-500 Portable Oscillograph Recorder** has been designed and developed for recording strains, pressures, accelerations, temperatures, etc. under conditions requiring an instrument of minimum size, light weight and extreme versatility. Incorporated in the "500" are many features found only in much larger instruments... simultaneous viewing and recording... four "quick change" paper speeds... easy loading and operation...

**For complete information** on the Heiland A-500 and the possible application of this instrument to your particular problem, write or wire...

**The Heiland Research Corporation**
**130 East Fifth Avenue, Denver 9, Colorado**

**dependable instruments**

Heiland DENVER

MARCONI TELEVISION

# VENEZUELA INSTALLS MARCONI

*Dr. Rodriguez Jimenez, Venezuelan Consul-General in London, at the signing of a contract in the London consulate on 9th July, 1952, to provide British equipment for a television service at Caracas.*

**Equipment for the Caracas Television Station, sponsored by "Televisa," includes**

- 5 kW vision transmitter
- 3kW sound transmitter
- Associated aerial system
- Complete studio installation
- Complete mobile O/B television unit, with two camera channels and micro-wave links

**MARCONI** *of England*

**television transmitting equipment**

MARCONI'S WIRELESS TELEGRAPH CO LTD · CHELMSFORD · ESSEX · ENGLAND



RCA; K. A. Chittick of RCA; Arthur A. Collins of Collins Radio Co.; Edward U. Condon of Corning Glass Works; W. W. Eitel of Eitel-McCullough, Inc.; Harry Faulkner of the British Post Office, London, England; Enoch B. Ferrell of Bell Labs; Warren R. Ferris of Naval Research Laboratory; Lyman R. Fink of General Electric Co.; Lawrence R. Hafstad of the Atomic Energy Commission; F. Hamburger, Jr., of Johns Hopkins U.; Lewis B. Headrick of RCA; Philip J. Herbst of RCA; John Hessel of Signal Corps Engineering Labs; Hans E. Hollmann of U. S. Naval Air Missile Test Center, Point Mugu, Calif.; T. A. Hunter of Hunter Mfg. Co.; Eric J. Isbister of Sperry Gyroscope Co., Div. of Sperry Corp.; Edward C. Jordon of the U. of Illinois; Frank G. Kear of Kear and Kennedy, Washington, D. C.; Ronold W. P. King of Cruft Laboratory, Harvard U.; Royce G. Kloeffler of Kansas State College; Edmund A. LaPort of RCA; Russell R. Law of RCA; William A. MacDonald of Hazeltine Electronics Corp.; Jack A. McCullough of Eitel-McCullough, Inc.; J. A. Morton of Bell Labs; Allen B. Oxley of RCA Victor Co., Ltd., Canada; Albert Preisman of Capitol Radio Engineering Institute, Washington, D. C.; John C. R. Punchard of Northern Electric Co., Ltd., Canada; Jan A. Rajchman of RCA; J. A. Ratcliffe of Cambridge U., England; Stephen O. Rice of Bell Labs; Walther Richter, consulting engineer of Milwaukee, Wisc.; A. A. Roetken of Bell Labs; William M. Rust, Jr., of Humble Oil & Refining Co.; Jorgen Rybner of the Royal Technical U. of Denmark; Daniel Silverman of Stanolind Oil & Gas Co., Tulsa, Okla.; Archie W. Straiton of the U. of Texas; Irven Travis of Burroughs Adding Machine Co., Philadelphia, Pa.; Bertram Trevor of RCA Labs; Harry W. Wells of Carnegie Institution of Washington, D. C.; and Charles J. Young of RCA.

## Board Reorganizes RTMA

SINCE his election as chairman of the RTMA board of directors at the June convention, A.D. Plamondon, Jr., has assumed the additional

you can count on *Laboratory Control...*

**to bring you finer**

# PRECISION
## COIL BOBBINS

Never-ending Laboratory Control of all materials assures you of Precision Bobbins that are lighter in weight, yet up to 20% stronger—better insulated bobbins that have more resistance to moisture and greater heat dissipation qualities. Increased coil winding space is a feature, too. Bobbins made round, square, rectangular; any ID, OD, length; of dielectric Kraft, Fish Paper, Cellulose Acetate or combinations.

Send for New Arbor List of over 1,500

★ ★ ★

**PRECISION PAPER TUBE CO.**

2041 W. CHARLESTON ST., CHICAGO 47, ILL.
*Plant #2: 79 Chapel St., Hartford, Conn.*
*Also Mfrs. of Precision Paper Tubes*



## 40 MC TO 225 MC TV AMPLIFIERS

With the Model 212TV Amplifier — SKL — introduces for the first time a single broad band chain amplifier type booster capable of amplifying all 13 television channels simultaneously. Because of its stability and reliability — a tube failure means only a slight loss of gain, not amplifier failure — the Model 212TV Amplifier can be safely left unattended for long periods of time. Its low noise level, high output, and low impedance make the Model 212TV Chain Amplifier ideal for television distribution systems in hotels, apartment houses, sales rooms, television stations, cities and towns.

**SPECIFICATIONS**

- **BANDWIDTH** 40 MC — 225 MC
- **IMPEDANCE** 180, 52 and 72 ohm unbalanced, 300 ohm balanced
- **GAIN** ..... 21 db
- **OUTPUT VOLTAGE** 6 volts peak maximum
- **RESPONSE** ± 2 db over bandwidth
- **POWER SUPPLY** 117V, 60 cps, 55 watts

*Write today for further information*

**SKL SPENCER-KENNEDY LABORATORIES, INC.**
186 MASSACHUSETTS AVE., CAMBRIDGE 39, MASS.



*Just Published!*

REVISED SECOND EDITION OF

## FUNDAMENTALS OF ENGINEERING ELECTRONICS

By WILLIAM G. DOW,
*University of Michigan*

Here is a realistic and quantitatively usable conception of the principles that govern the internal behavior of electronic devices—a concept essential to the engineer who is to work logically and effectively with electronic circuits.

Basing his presentation on a clear, accurate, and authoritative knowledge of the fundamentals of charged-particle behavior, Professor Dow has arranged and described these fundamentals to appeal to the engineer's analytical approach. Principles of particular importance are selected for study; illustrations of these principles are drawn from engineering practice; and physical concepts are treated to permit ready determination of magnitudes. A great many changes and additions have been made in this second edition, making it an even more valuable reference than the first edition.

CONTENTS — Potential Distribution Diagrams ★ Electron Ballistics ★ Cathode Ray Devices ★ Electrostatic Fields in Space-Charge Control Tubes ★ Space-Charge Control of Current ★ Triodes, Tetrodes, Pentodes ★ Thermionic Cathodes ★ Electrons in Metals and Semiconductors ★ Amplifier Circuit Principles ★ Amplifier Coupling ★ Oscillators ★ Microwave Electron Tube Principles ★ Random Velocities ★ Ionization and Excitation of Atoms ★ Photosensitive Devices ★ Current Flow in Gases ★ Plasma Boundary Regions ★ Arc and Glow Transient Phenomena ★ Gaseous-Conduction Rectifying Devices

1952 626 pages, illustrated $8.50

*Mail coupon for copy on 10 day approval*

APPROVAL COUPON

JOHN WILEY & SONS, INC.
440 Fourth Ave., New York 16, N. Y.

On 10 days' approval, send Dow's *Fundamentals of Engineering Electronics*. I will remit $8.50 plus postage, or return book postpaid. (Offer valid only in U. S.)

Name .....

Firm name .....

Address .....

City ..... Zone .... State .....

E-102

SAVE POSTAGE: *We pay postage if payment is enclosed. Same money-back return privilege.*

# RVC-2* PRECISION POTENTIOMETERS

*featuring*

## "UNITIZED" CONSTRUCTION

**Each potentiometer a complete unit**
**Individual units may be stacked in any desired combination**
**No common shaft — Shaft coupling by means of drive pin and spring loaded crank arm assembly‡**
**Units held together with cast aluminum two-section clamp ring†**
**Universal mounting plate unit machined to servo precision**

***Quantity production, prompt deliveries, standardization and economy — achieved through "Unitized" Design — no sacrifice of quality, accuracy or reliability.***
***Write for Bulletin A11 today.***

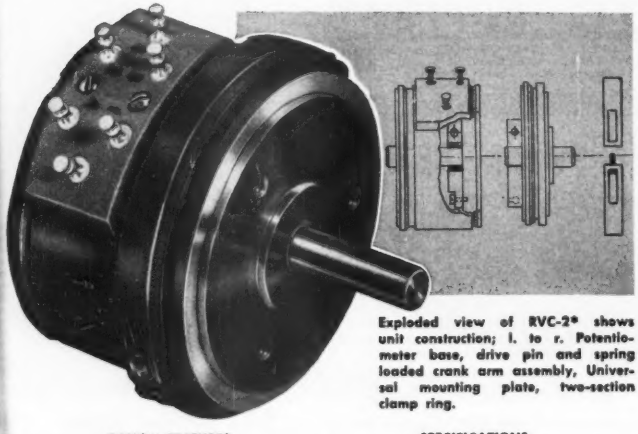

**Exploded view of RVC-2* shows unit construction; l. to r. Potentiometer base, drive pin and spring loaded crank arm assembly, Universal mounting plate, two-section clamp ring.**

**DESIGN FEATURES:**
Dual Paliney spring contacts to winding, precious metal take-off contacts; Bases—precision machined aluminum, black Alumilite finish; Oilite bushings, stainless steel shaft.

**SPECIFICATIONS:**
Independent linearity ± 0.5% std., available to ±0.3%; Taps to ±.6%; Electrical rotation 320° std., tol. ± .3°; Std. Resistance values 100-100,000Ω; Rotational Life app. 1,000,000.

*Servotrol manufactures under license agreement with Technology Instrument Corp.*

‡ PAT. NO. 2,543,228 † PAT. NO. 2,543,673

*See us at Booth 91 National Electronics Conference*

**ENGINEERING REPRESENTATIVES**

Cleveland, Ohio PRospect 1-6171
Chicago, Ill. — UPtown 8-1141
Rochester, N. Y. — Monroe 3143
Canaan, Conn. — Canaan 649
Dayton, Ohio — Michigan 8721
Arnprior, Ontario, Can. — Arnprior 400
New York, N. Y. — MUrray Hill 8-5858
Cambridge, Mass. — ELiot 4-1751
Hollywood, Cal. — HOllywood 9-6305
Dallas, Texas — Dixon 9918

Servo trol **SERVOTROL COMPANY**

114 WEST ILLINOIS STREET, CHICAGO 10, ILLINOIS ● TEL. SUPERIOR 7-3082
EASTERN BRANCH OFFICE—FRAMINGHAM CENTRE, MASS. ● TEL. FRAMINGHAM 4421




duties of president of the association under a reorganization plan adopted in September.

Upon recommendation of the special Organization Committee, headed by former board chairman Robert C. Sprague, the board of directors also elected Glen McDaniel, who had resigned as RTMA president, to be RTMA general counsel, and promoted general manager James D. Secrest to executive vice-president.

The board of directors also voted to expand the special Organization Committee to include representatives of the Technical Products and Amplifier and Sound Equipment Division, after which president Plamondon appointed director Fred R. Lack as a member of the committee for the Technical Products Division, and director Arie Liberman as a member for the Amplifier and Sound Equipment Division. Other members of the Organization Committee, all past RTMA presidents, are: directors Max F. Balcom, Paul V. Galvin, Leslie F. Muter and chairman Robert C. Sprague.

## High Award Winners Named by IRE

WINNERS of three high awards to be presented during the IRE National Convention in March 1953 in New York were recently announced by the Institute.

John M. Miller, superintendent of Radio Division 1 of the Naval Research Laboratory, Washington, D. C., has been named the recipient of the Medal of Honor for 1953, the highest award of the radio engineering profession. The Institute gave the award "in recognition of his pioneering contributions to our basic knowledge of electron tube theory, of radio instruments and measurements, and of crystal oscillators."

The 1953 Morris Liebmann Memorial Prize, given annually by the Institute for a recent important contribution to the radio art, went to John A. Pierce, senior research Fellow at Harvard U. He is noted for his contributions to the development of the loran system of long range radio navigation which

# Runzel WIRE CORD and CABLE

## "Products of Science"

The Runzel Laboratory insures that every inch of Runzel wire, cord and cable is thoroughly tested before shipping. Your wiring needs in hook-up lead-in, shielded wire and cords, speaker cords and all types of insulated wire products, in almost endless variety of colors, sizes and specifications, are available from this centrally located plant.

WRITE FOR SAMPLES

**RUNZEL** CORD & WIRE CO.
4723 Montrose Avenue
Chicago 41, Illinois



## You'll SAVE MONEY in Your SHOP With

# PALMGREN

### The Only Table Having Rotary Feed Combined with DUAL CROSS FEEDS!

This PALMGREN TABLE is sensational in price, construction and performance. Just what shops need for accurate, precision work. You can rout straight or curved, rabbet, drill, sand or mortise. Do hundreds of jobs as milling slots, grooves, keyways, squares, hexagons, curves, flats, dovetails, indexing and laying out work.

Designed for use on Drill Press or Milling Machine. It handles all types of metal and woodworking operations and makes your drill press a vertical milling machine. Precision built. It permits close tolerances. Rotary Feed is calibrated in degrees. Cross Feeds in thousandths. Cross slides and feeds are 2½" each side of center—4½" overall. Adjustable gibs on cross slides—4 to 1 worm and gear ratio in rotary feed. 4 Bolt slots—2 lock screws.

No. 83 ROTARY TABLE Only $54.50

| No. | BASE KEYWAY | T-Slots | TABLE DIA. | BASE DIA. | HEIGHT | WEIGHT | PRICE |
|---|---|---|---|---|---|---|---|
| 83 | 5/8" | 5/8" | 8" | 6 1/4" | 5" | 28 lb. | $54.50 |
| 82 | Same as above without Rotary Feed | | | | | 26 1/2 lbs. | $39.75 |

only $8.75 "M" Base $3.00

### QUICK, ACCURATE Setups—End Delays—Spoilage with this Angle Vise

Solve all your difficult angle jobs! End make shift methods, delays and spoilage with this famous PALMGREN ANGLE VISE. Ideal for Drilling, Milling, Grinding, Filing, Fitting, Marking and hundreds of jobs requiring speed and accuracy of angles on machine or bench. Set at any angle up to 90 degrees and lock—it's ready for use. Accurately graduated, every part of vise is accurately machined. Jaws of steel 2½" wide. 1 Plain, 1 Grooved for holding round pieces. Auxiliary Bases for machine or bench use. Swivel "M" Base shown $3.00 Extra. Order NOW! Today!

*Write for Circular No. 302*

No. 000 Vise Mounted on SWIVEL "M" BASE

**CHICAGO TOOL and ENGINEERING CO.**

*Mfrs. of PALMGREN PRODUCTS Since 1918*

8380 South Chicago Avenue Chicago 17, Ill.



Opportunities at

# BECKMAN

for

## ENGINEERS - SCIENTISTS

### To Develop Instruments and Electronic Components

Use your training, aptitudes and experience in the following (or allied) fields:

Spectroscopy . . . Precision Electronics
Optics . . . Physics . . . Electromechanics
Mechanics . . . Feedback Systems

Men who combine fields will find our projects especially interesting. Typical developments include spectrophotometers at all wavelengths, pH meters, electrometers, flame photometers, computers, radiation instruments, titrators and others to be announced.

Unusual opportunities in all divisions: Helipot and Beckman Instruments—So. Pasadena, California; Berkeley Scientific—Richmond, California. Our company is a leader in the fast growing instrument industry, *which is not dependent for its future on military contracts, but is of fundamental importance to all types of research and industry.*

*Write for application and information about our company.*

Personnel Department

**Beckman Instruments, Inc.**

1001 El Centro Street
South Pasadena 59, California



## ELECTRIC INSTRUMENT & CONTROL HEADQUARTERS

# YES, OFF-THE-SHELF SERVICE



*Electro-Tech* maintains one of the largest and most complete stocks in the country of electrical meters, instruments and industrial control equipment—representing over 250 top lines.

***Yes, our warehouse is bulging with standard stocks of***

| | | |
|---|---|---|
| Counters | Solenoids | Toggle Switches |
| Panel Meters | Tachometers | Shunts (Electrical) |
| Transformers | Thermometers | Meggers |
| Switchboard Meters | Thermostats | Solenoid Valves |
| Micro Switches | Rectifiers | Pyrometers |
| Photo Electric Equipment | Rheostats | Multimeters |
| Relays | Timers | Oscilloscopes |

and Laboratory Standard Instruments



In addition, we manufacture and stock *Special Test Equipment • Electric Heating Units • Current Transformers • Pyrometers • Thermocouples • Rectifiers.*

FOR SPEED
Wire — Code RDL
Teletype — NY 1-2906
Phone — BArclay 7-4209

Our laboratory is available for repair work, rescaling, recalibration and special calibration of your electrical and industrial instruments. Often months are saved by rescaling and calibrating *stock* instruments to *your* specifications.

"The Industries Buying Guide" our GENERAL CATALOG E-11 FREE

*CONSULT US ABOUT YOUR REQUIREMENTS*

**ELECTRO-TECH EQUIPMENT CO.**
55 LISPENARD ST., NEW YORK 13, N. Y.

For Parts that must be
TAKEN OFF–PUT BACK–BUTTONED TIGHT

LION FASTENERS

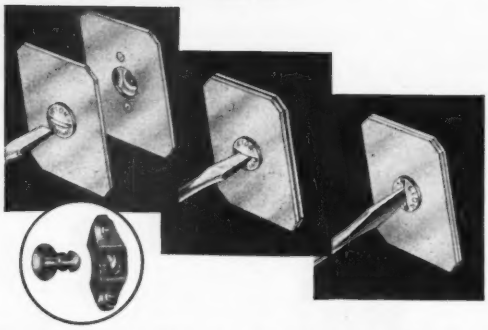

LOCKS TIGHT WITH A QUARTER TURN
*Always at correct tension*

Lion Fasteners are *right* for buttoning parts that must be removed repeatedly for inspection, maintenance, or other reasons.

Vibration and shock can't loosen a Lion Fastener. Even an inexperienced service man can't replace it wrong. A quarter turn opens it. Another quarter turn locks it. The tension is *designed into it.*

Lion Fastener Spring Assembly is quickly spot welded or riveted in place. The stud cannot be lost. It is grommeted tight to the sheet. They will button sheets .040 plus or .020 minus over or under standard rating. The misalignment is as much as .156. The one-piece forged stud is tested to 1425 lbs. Write today for demonstration kit and application data.

***TYPICAL APPLICATIONS:*** INSPECTION PLATES • COWLING
ELECTRICAL PANELS • CABINETS • DUCTWORK

***Free*** DEMONSTRATION KIT contains sample Lion Fasteners to help you visualize their adaptability to your product. Write on your company letterhead. No obligation.

LION
FASTENERS, INC.
500 MAIN ST., HONEOYE FALLS, N. Y.



was widely used by the armed services during World War II, and more recently for his conception of the RADUX system of long range navigation now under development for the government.

Frank Gray, research engineer of Bell Telephone Laboratories, was awarded the Vladimir K. Zworykin Television Prize Award for 1953, given annually by the Institute for an outstanding contribution to television. A pioneer in the tv field, Mr. Gray early in the 1930's developed principles, the importance of which has only recently been recognized, and which are embodied in the color television system currently under development by the industry-sponsored National Television System Committee.

## RTMA Names Thirteen to TV Committee

THE BOARD chairman of the RTMA, A. D. Plamondon, Jr., has appointed a 13-man television committee and renamed Dr. W. R. G. Baker as chairman of the group for the ensuing year. The top-level committee directs the tv activities of the RTMA.

Following is the membership of the committee:

W. R. G. Baker (chairman) of General Electric Co.; Benjamin Abrams of Emerson Radio & Phonograph Corp.; Robert S. Alexander of Wells-Gardner & Co.; Max F. Balcom of Sylvania Electric Products Inc.; H. C. Bonfig of Zenith Radio Corp.; John W. Craig of Crosley Div., Avco Mfg. Corp.; Allen B. Du Mont of Allen B. Du Mont Laboratories, Inc.; J. B. Elliott of RCA Victor Division of RCA; E. K. Foster of Bendix Radio Division; Paul V. Galvin of Motorola Inc.; W. J. Halligan of The Hallicrafters Co.; L. F. Hardy of Philco Corp.; and W. A. MacDonald of Hazeltine Electronics Corp.

## Telecommunication Services Made Available

FORMATION of Microwave Services, Inc., New York City, was recently announced. It will provide consulting and construction services in the field of telecommunication.

## Fine Wire Specialists



*1700 Inches of No. 50 Wire on This Meter Coil*

Want really micro-fine wire? Write for price list on our full line of highest quality enameled magnet and Litz wire. Immediate delivery. All sizes — Numbers 44 to 52 (.002" to .0008").

**THE INSTRUMENT WIRE COMPANY**

**150 Church Street • Guilford, Conn.**

# ZOPHAR

WAXES

COMPOUNDS

**Zophar Waxes, resins and compounds to impregnate, dip, seal, embed, or pot electronic and electrical equipment or components of all types; radio, television, etc.**

**Cold flows from 100°F. to 285°F.**

**Special waxes non-cracking at −76°F.**

**Compounds meeting Government specifications plain or fungus resistant.**

**Let us help you with your engineering problems.**

ZOPHAR MILLS — QUALITY — SERVICE — INTEGRITY — 106 YEARS

**ZOPHAR MILLS, INC.**
**112-130 26th Street,**
**Brooklyn 32, N. Y.**

*Now*

# PL-4D21

**POWER TETRODE**

125 WATTS PLATE DISSIPATION.
FULL RATINGS TO 120 Mc.
HIGH OVERLOAD CAPABILITIES.
AVAILABLE IMMEDIATELY.

*For data, Write:*

**PENTA LABORATORIES INC.**
**216 North Milpas Street**
**SANTA BARBARA, CALIFORNIA**

*For* **PRECISION** *Requirements*

# WELWYN

**HIGH STABILITY**
**CARBON RESISTORS**

Welwyn carbon deposit resistors are made to conform to tolerances dictated by the most exacting electronic requirements. Rigid quality controls maintain these precise standards to within the narrowest margins.

Values range from 10 ohms to 50 megohms, in ratings of ¼, ½, 1, and 2 watts, and at tolerances of 1%, 2% and 5%. Welwyn Resistors have a high order of stability and retain their characteristics over widely changing conditions of load, temperature, voltage, and ageing processes. Inductive and capacitive reactances, and Johnson Effect are exceedingly low to extremely high frequencies.

*For Complete Data and Specifications, Write to:*

SALES REPRESENTATIVE
**ROCKBAR CORPORATION**
211 EAST 37th STREET, NEW YORK 16, N. Y.

# MINIATURE

## HIGH-RELIABILITY WIRE-WOUND TRIMMER

# POTENTIOMETERS

*Precision-built by Waters, of Waltham*

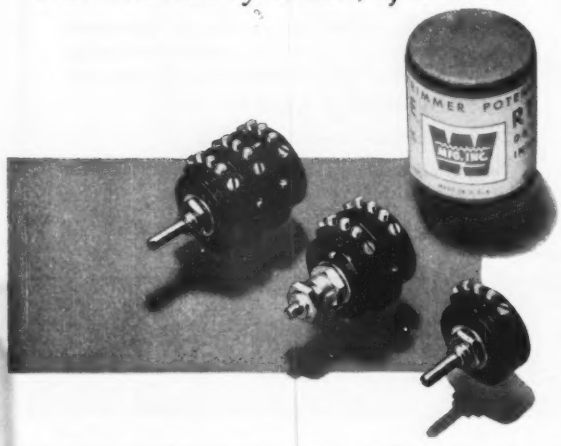

THE WATERS TYPE RT-⅞ SERIES of miniature, wire-wound potentiometers will satisfy your most stringent requirements. Anodized-aluminum bodies with sealed, line-reamed shaft bushings and sealed terminal plates enable these units to meet severe environmental tests — immersion, salt spray, fungus, shock, vibration, wide range of ambient temperatures.

**CHECK THESE SPECIFICATIONS of the RT-⅞**

- *Size* . . . ⅞" diameter, ⅜" depth
- *Weight* . . . only 5/16 ounce
- *Dissipation* . . . 3 watts
- *Temperature* . . . —55C to +80C ambient
- *Rotation* . . . 360-degree continuous
- *Ganging* . . . dual or triple
- *Resistance* . . . ranges: 100 to 50,000 ohms max., linear only




*Waters potentiometers are made in Waltham, the watch city, home of fine workmanship.*

**WATERS MANUFACTURING, inc.**

**Waltham 54, Massachusetts**

APPLICATION ENGINEERING OFFICES IN PRINCIPAL CITIES


# NEW BOOKS

## Primer of Electronics and Radiant Energy

BY DON CAVERLY. *Second edition, 1952. McGraw-Hill Book Co., New York, 343 pages, $5.50.*

THIS is indeed a primer and one of the easiest to read. It is aimed at the people who, having no fundamental business with electrons, protons, neutrons and their varied and magnificent manifestations, yet have a basic curiosity as to what it is all about. The author makes a serious and honest effort to remove the complexities and technicalities that surround the subject and, while he often forgets that his readers are supposed to be abysmally ignorant although anxious to learn and dives off the deep end, in general he succeeds in writing material that virtually anyone can read.

The subjects treated sound technical—electricity, magnetism, radiant energy of all kinds, electron tubes—yet he describes them in terms of one's daily life—sunburn, cooking with infrared, flash lamps, plant growth. At the same time he gives the reader a chance to understand such modern devices as the TR tube, loran, nuclear reactors, the image orthicon or the hydrophone. Even the engineer can find out some things he should know but probably doesn't.—K.H.

## Electrical Engineering Theory and Practice

BY WILLIAM D. ERICKSON AND NELSON H. BRYANT, *Cornell University. John Wiley & Sons, Inc., New York, 523 pages, $6.00, 1952.*

BASED on courses at Cornell for mechanical, civil and chemical engineering students, it is essentially nonmathematical, the stress being on physical analysis. Appendices contain sufficient explanation of the methods of complex notation to the solution of a-c problems to equip the student with this tool.

Aside from straight d-c and a-c theory and the effects of the basic *R*, *L* and *C* components on circuits, there are chapters on d-c machines, electrical instruments and measurements, a-c motors and transformers, a nice chapter on control (synchro

## MINIATURE SLIP RING ASSEMBLIES

**Commutators and other Electro-Mechanical Components**

**PRECISION MADE TO YOUR OWN SPECIFICATIONS**

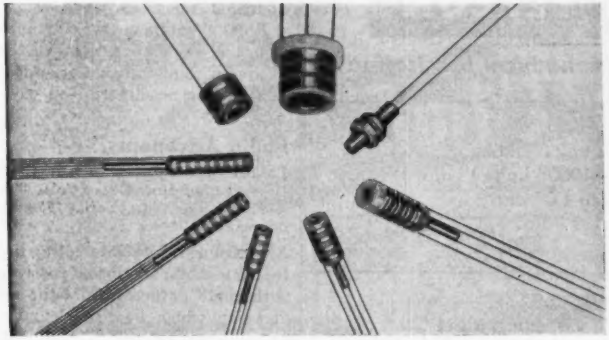

**Our Swiss methods and techniques are geared to meet exacting requirements. We invite your inquiries.**

**COLLECTRON CORPORATION**

**216 EAST 45th STREET • NEW YORK 17, N. Y.**

**MUrray Hill 2-8473**

*Teflon**

**MAGNET, RESISTANCE and ALLOY WIRE**

- Small space factor
- High dielectric
- Unaffected by chemicals or corrosive atmosphere
- Excellent flexibility and abrasion resistance
- Capable of withstanding 250° centigrade
- Sizes: 10 through 50 A.W.G.

**Send for *NEW* Warren Wire Specification 1001**

**WW WARREN WIRE CO.**

**POWNAL VERMONT**

*Producers of Nylon, Plain Enamel and Served Magnet Wire, Tinned and Bare Copper Wire.*

*Du Pont trademark for Polytetrafluoroethylene Enamel

**ETC**

**MULTI-CHANNEL**

## OSCILLOSCOPES



***...for more accurate farther-reaching* TEST, RESEARCH *and* CONTROL**

By facilitating simultaneous observation or strip-film recording of 2, 4 or more transients, ETC multi-channel oscilloscopes pave the way to more accurate research, test and visual control along many lines. Available types cover a broad range of requirements in laboratory research, production testing, electroencephalography, neurophysiology, seismology, explosives, strain and vibration analysis and other fields. Catalog on request to **Electronic Tube Corporation, 1200 E. Mermaid Lane, Philadelphia 18, Pa.**

**MULTI-GUN**

## C-R TUBES

# POLYPENCO TEFLON*

***available for economical fabrication***

| | |
|---|---|
| **ROD** | Extruded .187" dia. to 2.0" dia.<br>Tolerance +.002"—.000" up to 1" dia.<br>Molded 2.25" dia. to 4.0" dia.<br>Beading .030" to .187" dia. |
| **TUBING** | Extruded .50" to 2.0" O.D.<br>3/16" to 1.0" I.D. min. wall ⅛"<br>Molded 1¼" to 8" O.D. at ¼" intervals<br>Wall thickness ⅜"—2¾" |
| **OTHER SHAPES** | Strip thickness .002" to .060"<br>Slab thickness ⅛" to 1½"<br>Special extruded shapes to customer specifications |

## Outstanding properties of TEFLON

| Advantage | |
|---|---|
| WIDE SERVICE TEMPERATURE RANGE | –100°F to +500°F |
| CHEMICALLY INERT | Resists all known acids, alkalies and commercial solvents over the service temperature range. |
| ZERO WATER ABSORPTION | Water will not wet the surface. |
| LOW POWER FACTOR | .05% p.f. constant over entire frequency spectrum. |
| STABLE DIELECTRIC CONSTANT | 2.0 unchanged over entire spectrum. |
| TOUGHNESS AT LOW TEMPERATURE | Izod impact strength –70°F 2 ft. lbs./in. |

*Teflon is a trademark of the E. I. Dupont Co.

***also available to your specifications***

**MACHINED PARTS · MOLDED PARTS**

**POLYPENCO** nylon / teflon

● Write for technical data and prices on Polypenco Teflon and Nylon

The POLYMER CORPORATION of Pennsylvania • Reading, Penna.




systems) and about one-third of the book on electronics aimed to equip the student with an approach to industrial circuit engineering. These chapters are divided essentially into the several kinds of tubes and their functions.

Final chapters cover communications and electronic control systems as used with motors, power supplies and welding machinery.—K. H.

### Radio Astronomy

BY BERNARD LOVELL AND J. A. CLEGG. *University of Manchester. John Wiley & Sons, Inc., New York, 1952, 237 pages, $4.00.*

AN extraordinarily interesting book for any radio engineer possessed with man's natural awe of the universe in which he lives, plus his own interest in the field of radio techniques. It deals with the application of radio measurements to universe exploration.

The first two chapters constitute a brief introduction to astronomy which can be read by anyone, followed by two chapters on the basic radio techniques employed in astronomical research. Then come some 18 chapters on comets and meteors and what has been found out about them by radio, solar disturbances, radio emissions from sunspots and from various parts of the heavens, radio and the aurora borealis, lunar investigation by radio, etc.

Man's use of radio to look further into space has only begun, and as his thirst for more knowledge of what surrounds him is very great, it would be strange indeed if radio-astronomers did not come up with much new and fascinating knowledge.

This book is not for the high-powered experts; rather, it is for the average individual who, perhaps, knows more about radio than astronomy, and is not averse to learning something more about each subject.—K.H.

### An Introduction To Acoustics

BY ROBERT H. RANDALL. *Addison-Wesley Press, Inc.*, 1951, 340 *pages*, $6.00.

WHILE intended primarily as an intermediate college-level physics text, this book provides useful supplemental reference and study material for the engineer. It does

# Only with CO-AX

**AIR SPACED ARTICULATED**

**R.F. CABLES**

**THE LOWEST EVER CAPACITANCE OR ATTENUATION**

*We are specially organized to handle direct enquiries from overseas and*

*Can give* **IMMEDIATE DELIVERIES FOR U.S.A.**

*Billed in dollars. Settlement by your check.*

| LOW ATTEN. Types. | IMPED. Ohms. | ATTEN. db/100ft. of 100 Mcs. | LOAD C. mmf/ft. | O.D." | |
|---|---|---|---|---|---|
| A 1. | 74 | 1.7 | 0.11 | 0.36 | |
| A 2 | 74 | 1.3 | 0.24 | 0.44 | |
| A 34 | 73 | 0.6 | 1.5 | 0.88 | HIGH POWER FLEXIBLE |
| **LOW CAPAC. Types** | **CAPAC. mmf/ft.** | **IMPED. Ohms.** | **ATTEN. db/100ft. 100Mc/s.** | **O.D."** | |
| C 1 | 7.3 | 150 | 2.5 | 0.36 | |
| PC 1 | 10.2 | 132 | 3.1 | 0.36 | PHOTOCELL CABLE |
| C 11 | 6.3 | 173 | 3.2 | 0.36 | |
| C 2 | 6.3 | 171 | 2.15 | 0.44 | |
| C 22 | 5.5 | 184 | 2.8 | 0.44 | |
| C 3 | 5.4 | 197 | 1.9 | 0.64 | |
| C 33 | 4.8 | 220 | 2.4 | 0.64 | VERY LOW CAPACITANCE |
| C 44 | 4.1 | 252 | 2.1 | 1.03 | |

**TRANSRADIO LTD**

CONTRACTORS TO H.M. GOVERNMENT.

118A CROMWELL ROAD LONDON SW7 ENGLAND

*CABLES. TRANSRAD LONDON.*



**WESGO**

BOAT AT 2000° F. PLUNGED INTO ICE WATER DOES NOT CRACK

# CRACK-PROOF CERAMIC SHAPES for Furnace Brazing

- withstand any amount of thermal shock without cracking
- have proven superior to carbon or metal brazing fixtures in positioning vacuum tube components for furnace brazing
- are non-reactive with most metals
- will retain shape at high temperatures
- are clean . . . will not rub off on hands or workpiece
- are permanent . . . will not react with air or reducing gases

**WRITE for DETAILS**

Available in stock forms of boats or slabs. Special shapes made to your individual specifications.

**WESTERN GOLD & PLATINUM WORKS**

589 BRYANT ST. · SAN FRANCISCO, CALIF.



**Available NOW!**

# RUGGEDIZED METERS

...TO MEET SIG. C. SPEC. MIL-M-10304

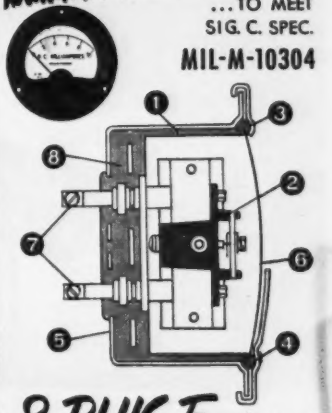


## 8 PLUS Features

**EXTRA "RUGGEDIZED" FEATURES**

1. Meter movement shock-mounted and housed in rubber-lined case.
2. Meter movement supported by die-cast frame for greater strength and increased accuracy.
3. Observation window rubber grommeted and sealed to rubber lining of case—providing hermetical seal of high dielectric materials.
4. Non-rigid mounting of observation window with rubber grommet increases resistance to shock.
5. Each meter designed and built by SUN to highest quality and precision standards.

**EXTRA INSTALLATION ADVANTAGES**

6. Slight convexity of observation window reduces chance of accidental breakage during installation or shipment.
7. Terminals side-tapped and provided with tinned binding screws to facilitate wiring with or without wire lugs or by pressure, soldering or both.
8. Breakage or damage in wiring is reduced through non-rigid mounting of terminals and use of flexible interior conductors.

Building rugged electric meters is not new to SUN . . . For over 20 years, the automotive industry has depended on SUN as one of the largest "D'Arsonval-type" meter manufacturers—to produce rugged, tough meters that will stand up under the abuse and rough handling of portable field instruments used in automotive repair work. SUN "Ruggedized" Meters not only meet Specification MIL-M-10304 (Sig. C)—but also embody many *plus* features that make installation easier, faster and help prevent assembly or shipping damage. Complete data bulletin on SUN "Ruggedized" Meters available on request.

*SUN "Ruggedized" Meters are available as D-C Volt Meters, Ammeters, Milli-ammeters and Micro-ammeters and also may be ordered as rectifier type A-C instruments.* 6000-0

**SUN ELECTRIC CORPORATION**

6383 Avondale Avenue, Chicago 31, Illinois

*Announcing a NEW*
Different kind of Capacitor

Johanson

Concentric High Ratio Air Capacitor

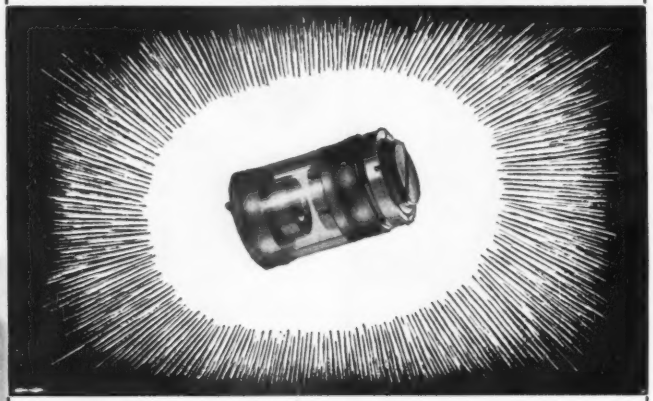

The new Johanson Concentric High Ratio Air Capacitor recommends itself to applications requiring a low minimum capacity, high Q, and stability. It has a maximum capacity of 35 mmfd. and a minimum capacity of 1 mmfd. Because of this ratio of capacity, it has many varied applications in electronic equipment where capacitive adjustments need to be made over a wide range with great accuracy.

The new Johanson capacitor is constructed entirely of silver-plated brass and Pyrex glass, which makes it ideally suited for all applications of a high frequency nature. It is a high Q capacitor at and above 200 mc.

The friction spring of the new capacitor assures a permanent setting of the rotor. The vernier action of the rotor screw allows all adjustments up to eight full turns to be made quickly and precisely.

SPECIFICATIONS

Low minimum capacity, 1 mmf.
High Q — better than 10,000 at 15 mc.
High stability.
High maximum capacity, 35 mmf.
Voltage breakdown over 500V DC.
High ratio — capacity at maximum is 35 times its minimum capacity.

Vernier action — better than 8 turns to accomplish the capacity change.
Capacity against rotation is a linear function.




Requires space .700 x 1" long behind panel.

Write for complete information

Johanson MANUFACTURING CORPORATION
10 ROCKAWAY VALLEY ROAD, BOONTON, N.J.




much to help fill the need for texts at this level. Most of the recent works in the field of acoustics have been directed at more advanced specialists or largely at applied or engineering fields.

Easy informal style and good illustrations make is easy reading. Most of the material on applications, which comprise about half of the book, and much of the material on theory can be followed by the practicing engineer who has neglected his math. The usefulness of the book for self study or review is considerably enhanced by the large number of problems on important topics and by the answers which are given to half of them.

*Objective Acoustics*

The choice of topics seems well balanced and this is important since a 28-page chapter on Speech and Hearing leaves 312 pages for the entire field of objective acoustics. The topics and their treatment in the chapters on theory are conventional. Somewhat less space than usual is devoted to systems with more than one degree of freedom, and somewhat more space is given to interference and diffraction. Here the author draws heavily on the field of optics for analogies.

There is a brief introduction to the velocity potential which is amplified in the appendix. Lumped parameter approximations in acoustic circuits are treated briefly in connection with the Helmholtz resonator, the phase-inverting loudspeaker enclosure and acoustic filters.

*Horns*

The section on horns treats the conical and the exponential but fails to treat the "hyperbolic" family reported by Salmon. Since the conical and exponential are special cases of this family and Salmon's work provides a powerful tool for studying the effect of boundary shapes on performance, it would be desirable to refer to this work.

*References*

More references than are frequently given in texts at this level are included. Some of the references are to recent books of the survey type, so that unfortunately credit to the original workers has been left out. For example, Ballantine's

# INSULATION

**FORMVAR • FORMEX • ENAMEL**

## STRIPPED CLEAN IN SECONDS

with **X-VAR**

1. DIP WIRE in X-VAR for 3 seconds.
2. WITHDRAW and watch coating disintegrate.
3. WIPE CLEAN. Operation completed in seconds.

**X-VAR is non-corrosive, non-creeping — leaves wire ready for soldering. Now in use by leading manufacturers of electrical products. *Write for FREE SAMPLE for testing.***

**FIDELITY CHEMICAL PRODUCTS CORP.**
472 Frelinghuysen Avenue, Newark 5, New Jersey

---

# SHOCKPROOF VACUUM TUBE RETAINERS

These retainers are used to secure Vacuum Tubes and to resist side motion of Vacuum Tubes used in radio equipment which is subject to shock and vibrations. These retainers meet the requirement of all JAN specifications. The insulated portion is made of a melamine base Fibre Glass Phenol which provides 300 volts insulation to ground and withstands a temperature of 350 F. The insulated plate can readily be fastened or released by hand.

Available for envelope types T7, T8, MT8, T9, T12, ST12, T12ZDI, ST14, S14, ST16, T5½, T6½, MT-IC, ST19, T14, ST128CT-9.

*Manufacturers of Electronic Components*

**JAMES IPPOLITO & CO., INC.**
401 CONCORD AVENUE, BRONX 54, N.Y.

---

Specify **BIRNBACH**

# WIRES & CABLES for ALL your ELECTRONIC wiring needs!

## Govt. Spec. Hookup Wire

**JAN-C-76 SRIR-SRHV PLASTIC**
Solid Colors or Spiral Markings

**AIRCRAFT WIRE-NYLON JACKET**
MIL-W-5086 (Supersedes AN-J-C-48a)

**105° C. U.L. APPROVED**
Thermoplastic Hookup Wire

**JAN-C-76 WL GLASS BRAID**
**Also EXTRUDED NYLON JACKETED**
Solid or Tracer Colors

**Multiconductor, Shielded Cables**
To meet Govt. Spec. 271-4945

**COMPLETE WAREHOUSE STOCKS**

- Multiconductor Rubber Covered Cables
- Tinned & Bare Wire
- Magnet Wire
- Formvar Wire
- Vinyl Extruded Tubing
- Shielded Wires
- Insulated Hardware
- Plugs, Jacks, Sockets
- Test Leads, Switches
- Insulators, Steatite, Ceramic
- Terminal Strips

Quality Products for the Electronics Industries Since 1923

Write for Catalog 52-E

BIRNBACH

**BIRNBACH RADIO CO. INC.**
145 HUDSON STREET NEW YORK 13, N.Y.

MICROPOT

PRECISION TEN-TURN POTENTIOMETER

1. You get permanent accuracy because the resistance wire is locked in place. It is precision positioned and moulded integrally with the housing.

2. You get permanently accurate settings, smooth action and low uniform torque provided by the stainless steel, precision ground, double thread lead screw guiding the moving contact.

3. You get precise positioning of the moving contact because of the two bearings supporting the rotor assembly.

4. You get good rigid terminals because they are moulded integrally with the housing.

5. Terminals soldered to ends of resistance element before moulding. Entire resistance circuit is an integral part of the housing.

6. You get accurate setting and resetting due to anti-backlash spring in contact guide.

7. You get a fine resolution because of the 43½" length of resistance wire in the spiral element.

8. You get a resistance output directly proportional to shaft rotation within ±0.1% of the total resistance. Every potentiometer is automatically machine tested for linearity at 101 points.

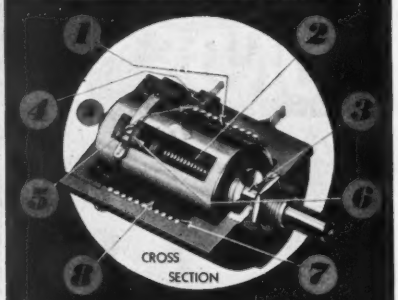


LINEARITY ACCURACY ± 0.1%

Units for immediate shipment:
1,000 to 30,000 ohm range.
Special resistance values made to order.

WRITE TODAY FOR ENGINEERING INFORMATION

BORG EQUIPMENT DIVISION
THE GEORGE W. BORG CORPORATION
JANESVILLE • WISCONSIN



COILS to exact specification for every requirement

QUALITY BUILT COILS FOR RADIO, FM, TV AND GOVERNMENT APPLICATIONS

Uniform high quality, fast delivery and low cost have made Fugle-Miller coils the choice of many leading manufacturers in the radio and electronics industry. All types are supplied including Universal, Bank Wound, Universal Progressive and solenoid coils. JAN specifications are our specialty. Call, wire or write today for prompt quotations.

FUGLE-MILLER LABORATORIES
MAIN STREET, METUCHEN, NEW JERSEY
Telephone: Metuchen 6-2245




important contributions to precise microphone measurements, namely the recognition and computation of the pressure rise due to diffraction and his corrections which made the thermophone a precision device, go unrecognized.

*Errors*

Only minor obscurities and errors which are to be expected in any first edition were observed. Under the discussion of pressure gradient microphones, the orientations of the diaphragm for no and for maximum response are reversed. Although the decibel is a very useful unit in describing hearing, it was historically the sequel to the TU or transmission unit introduced by the Bell Telephone Laboratories in 1923 which in turn superceded the transmission loss of a standard mile of cable.

*Conclusions*

The author points out the value of training in acoustics as a background for more advanced study in nearly all branches of physics and engineering. Brief references to the relation of acoustics to other branches of physics, other branches of science and to industry are made but these might well be expanded if the student and many faculty members are to be convinced that progress in theoretical acoustics did not die with Rayleigh.

The book is not only recommended as a text but as a reference work for the engineer with acoustical interests and the physicists with other specialized interests.—HUGH S. KNOWLES, *Director of Research, Industrial Research Products, Inc., Franklin Park, Illinois.*

## Imperfections in Nearly Perfect Crystals

BY W. SHOCKLEY, J. H HOLLOMON, R. MAURER, F. SEITZ. *John Wiley & Sons, Inc., New York*, 1952, 490 *pages*, $7.50.

IN October, 1950, a symposium was held at Pocono Manor, Pa., on the subject of imperfect crystals. The symposium was sponsored by the National Research Council and was organized by W. Shockley of the Bell Telephone Laboratories with the help of J. H. Hollomon of the General Electric Research Laboratories, and R. Maurer and F. Seitz

## Do You Want to Measure Or Generate Any Frequency

From 20 — 640 M. C.*
Within 10 Parts Per Million?

*Direct Reading VHF Frequency Meter Model FM-3*

Accuracy: ..... ± 0.001 %
Stability: ..... ± 0.001 %
Resetability: ... ± 0.0005 %

*Under certain conditions can be used below 20 mc and above 640 mc.

**GERTSCH PRODUCTS**
INC.
11846 Mississippi Avenue
P.O. Box 13856
Los Angeles 25, California

## MICRODIAL
TEN TURN-COUNTING DIAL

Microdial is composed of two concentrically mounted dials . . . one for counting increments of each turn and the other for counting turns. The incremental dial has 100 equal divisions and is attached rigidly to the shaft so there is no backlash. Thus the contact position is indicated to an indexed accuracy of 1 part in 1000. Rotation is continuous in either direction. There are no stops on the Microdial assembly.

**COMPACT** . . . Microdial has same O.D. as Micropot . . . requires no more panel space.

**CLEAR READING** . . . Forced fast-reading tests showed only 1/20th as many errors with Microdial open window as with next most legible dial. Turn counter distinguishes between 0 and 10 turn readings, and accelerates to avoid confusion on readings near integral turns. Precise readings are made from larger dial with maximum separation of graduations and wide angle visibility.

**CONVENIENT** . . . delivered completely assembled with dials synchronized. Easily mounted in a few seconds. All dials may be locked.




Microdial . . . turn-counting dial, primarily designed for use on Micropot ten turn linear potentiometers . . . use it on any multiturn device having ten turns or less.

BORG EQUIPMENT DIVISION
**THE GEORGE W. BORG CORPORATION**
JANESVILLE • WISCONSIN

## Roanwell

Style No. 2906

### CLOTHES CLIP

Sturdily constructed for maximum life. Finished in semi-gloss black enamel. Ribbed, firm-gripping clamping pads made of hard neoprene. Mounting plate enables clip to be attached to hard surface, such as a switch case. Hard drawn steel spring wire insures optimum spring action.

WITH MOUNTING HOOK FOR USE ON CORDSETS . . . This model utilizes a steel mounting hook which can be hooked directly on a corset molded for this purpose.

DATA SHEETS ON REQUEST.

**ROANWELL CORPORATION**
27 SIXTH AVENUE, BROOKLYN 17, NEW YORK

## Available for Early Delivery!

COMPLETE LINE OF UNIVERSAL PICTURE GENERATING AND MONITORING EQUIPMENT FOR

# COLOR TELEVISION

SIMULTANEOUS, NTSC, FIELD SEQUENTIAL AND OTHER SYSTEMS

TYPICAL SIGNAL SOURCE

**1 AUXILIARY UNIT**
Three 401-AR Gamma Amp.
615-AR NTSC Matrix Adder
402-CR Keyed Clamp Gen.
606-BR Color Burst Gen.
609-BR NTSC Color Keyer
507-BR Sequential Color Keyer
613-BR Regulated Power Supplies

**2 BASIC COLOR SCANNER**
600-P2R Simultaneous Tri-Color Pickup
600-S1R Universal Color Scanner
606-AR Control Panel
616-BR CRT Power Supply
613-BR Regulated Power Supply




**3 DRIVING UNIT**
509-AR-1 Universal Color R-Y Generator
605-AR Color Carrier Gen. & Sampling Divider
603-AR Sync Generator
613-BR Regulated Power Supplies

TELECHROME'S COLOR EQUIPMENT IS NOW BEING USED BY MANY OF THE NATION'S LEADING BROADCASTERS, RECEIVER MANUFACTURERS AND LABORATORY GROUPS.

Laboratory Quality Instrumentation; also custom made to any specific requirements.

COLOR TV **TELECHROME** THROUGH ADVANCED RESEARCH & DEVELOPMENT
88 MERRICK ROAD, AMITYVILLE, N. Y.
TELEPHONE AMITYVILLE 4-4446

*Simplifying* **HF** *Power Measurement*

*Model 67* **TERMALINE**

**DIRECT-READING R-F WATTMETER**

**30 mc to 500 mc**
*(to 1000 mc if specified)*

**50 ohms**

**Triple Range 0-25 watts**
**0-100 "**
**0-500 "**

**Type N Input Connector**
*(Adapter for PL-259 supplied)*



● Model 67 is a larger type Wattmeter than the well-known AN-ME-11/U (our Model 611) R-F Wattmeter. Specifically designed for fixed station transmitters to 500 watts output, it may be used nicely on low range for mobile gear. Provided with an aluminum cased, shock-mounted meter, Model 67 is as simple to use as a DC voltmeter. Now in general use throughout the industry, TERMALINE Wattmeters may be depended upon for fast, accurate and repeatable power readings

**NON-RADIATING**
**... Accuracy — 5%**

**RUGGED CONSTRUCTION**
**... Size — 17" x 9" x 6"**
**Wght. — 30 pounds**

**BIRD ELECTRONIC CORP.**
TERMALINE COAXIAL LINE INSTRUMENTS

1800 EAST 38TH ST.
CLEVELAND 14, OHIO
West Coast:
NEELY ENTERPRISES
HOLLYWOOD 46, CAL.

*optimum solution*



Unicon Type D capacitors employ a newly developed plastic resin film as a dielectric.
The power factor, dielectric absorption, and temperature co-efficient of these condensers are much better than those of oil paper capacitors. They compare favorably in size with metallized paper capacitors of equal ratings and give far superior performance. Operation to 125°C is permissable. When high insulation resistance, without simultaneous low "soakage" and/or low power factor, is required, Type D capacitors make an excellent low-price substitute for Polystyrene or Teflon capacitors.
Unicon always gives your capacitor problems the Optimum Solution.

*unicon*
**PLASTIC DIELECTRIC**
*capacitors*

TYPES IMMEDIATELY AVAILABLE

| Property | Polystyrene | Teflon | Synthetic D |
|---|---|---|---|
| Capacity | .001 up | .001 up | .01 up |
| Voltage | 100 up | 300 up | 200 up |
| Power Factor | .01% | .01% | 0.5% |
| I. R. | $10^4$ meg/mf | $10^4$ meg/mf | $10^3$ meg/mf |
| Max. Op. Temp. | 90°C | 125°C | 185°C |
| Soakage | .02% | .02% | 1.0% |
| Temp. Coef. | −100 ppm/°C | −100 ppm/°C | +500 ppm/°C |
| Bulk at lowest voltage given | 5 in³/mf | 10 in³/mf | 1.2 in³/mf |

Capacitors made to your specifications.
Write for catalog EE

**united condenser corp.**
UNICON
337 EAST 139th STREET NEW YORK 54, N. Y.



of the University of Illinois. The important parts of the papers and discussions presented at Pocono Manor are summarized in this book. The list of titles and authors follows:

I. On the Nature of Imperfections in Nearly Perfect Crystals

1. Imperfections in Nearly Perfect Crystals: A Synthesis, Frederick Seitz

2. On the Geometry of Dislocations, W. T. Read, Jr., and W. Shockley

II. The Role of Imperfections in Deformation

3. Imperfections from Transformation and Deformation, C. S. Barrett

4. Experimental Information on Slip Lines, W. T. Read, Jr.

5. X-Ray Diffraction Studies of Cold Work in Metals, B. E. Warren and B. L. Averbach

6. Mechanical Strength and Creep in Metals, N. F. Mott

7. The influence of Dislocations and Impurities on the Damping and the Elastic Constants of Metal Single Crystals, J. S. Koehler

III. Diffusion and Related Phenomena

8. Relaxation Effects in Ionic Crystals, R. G. Breckenridge

9. Studies of Alkali Halides by Photoelectric Methods, L. Apker and E. Taft

10. Diffusion in Alloys and the Kirkendall Effect, J. Bardeen & C. Herring

11. Theory of Diffusion, Clarence Zener

IV. On the Properties and Effects of External and Internal Surfaces of Crystals

12. Surface and Interfacial Tensions of Single-Phase Solids, J. C. Fisher and C. G. Dunn

13. Dislocation Models of Grain Boundaries, W. T. Read, Jr., and W. Shockley

14. Interphase Interfaces, Cyril Stanley Smith

15. Substructures in Crystals, A. Guinier

16. The Properties and Effects of Grain Boundaries, Bruce Chalmers

17. Movement and Diffusion Phenomena in Grain Boundaries, R. Smoluchowski

This book was prepared mainly for specialists in metallurgy and

SYNTRON



SELENIUM RECTIFIERS

Made by a new vacuum process that insures a smooth, uniform selenium film, free from flaws and impurities, and permits the production of larger cells than have been practical heretofore.

Of proven dependability to withstand continuous heavy-duty service, they are available in one inch square to 12" by 16" cells, in stacks or for customer assembly.

*Write for Free Catalog Folder*

**SYNTRON CO.**
241 Lexington Ave. Homer City, Pa.

NEY'S SMALL PARTS PLAY A BIG PART IN PRECISION INSTRUMENTS

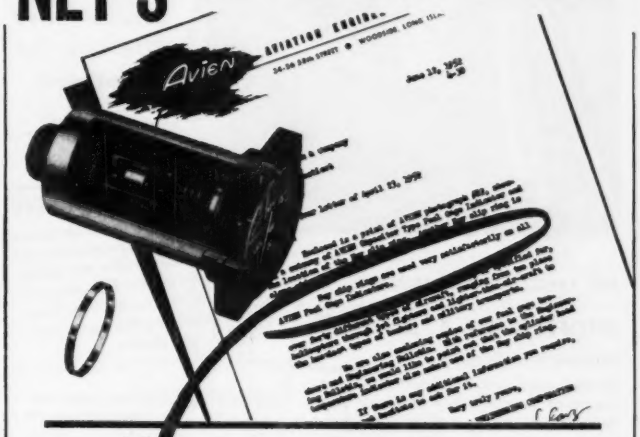


NEY slip rings are used very satisfactorily on all AVIEN Fuel Gage Indicators.

Do you have our Bulletins R-12, R-13, and R-14?

**THE J. M. NEY COMPANY, 179 Elm St., Hartford 1, Conn.**
*Specialists in Precious Metal Metallurgy Since 1812*

18NY52A

ELECTRONIC ENGINEERS
•
PHYSICISTS
•
TECHNICIANS

Are you interested in a permanent, challenging position where you can master a wide variety of problems in the field of instrumentation and special equipment?

Would you like to work for a moderate sized, long established, progressive company where your capabilities will be fully recognized financially and professionally?

We offer you the opportunity in our Research Department. Send us a statement of your qualifications and experience. We will keep it strictly confidential.

**COLEMAN INSTRUMENTS, INC.**
310 MADISON STREET
MAYWOOD ILLINOIS

made right to work right
**BENDIX-FRIEZ**
high-precision thermistors

Whether you use these temperature responsive resistors in standard or special models, you can be sure of this. *They'll match your needs* for resistance values, size, temperature coefficient, mountings and quality. Made in our own plant under carefully controlled conditions, Bendix-Friez Thermistors know no equal.

**STANDARD TYPES FOR IMMEDIATE DELIVERY**

| Size (inches) | @ +30°C. | @ 0°C. | @ −30°C. |
|---|---|---|---|
| .140 x .75 | 45.0 ohms | 86 ohms | 194 ohms |
| .040 x 1.5 | 12,250 ohms | 26,200 ohms | 65,340 ohms |
| .018 x 1.5 | 35,000 ohms | 82,290 ohms | 229,600 ohms |

*Write for details.*

**FRIEZ INSTRUMENT DIVISION of . .**
**1454 Taylor Avenue, BALTIMORE 4, MARYLAND**
Export Sales: Bendix International Division
72 Fifth Avenue, New York 11, N. Y.



Used in this typical application for sensing the temperature of hydraulic oil.

Bendix
AVIATION CORPORATION

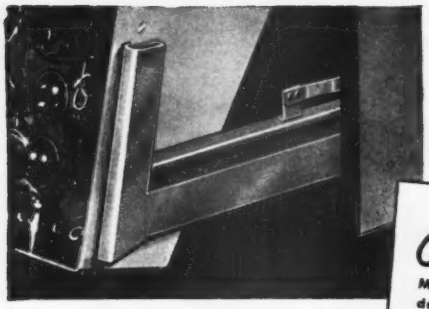

*Try Remler for Service-Tested "Hard-to-Get" Components*

**Custom Components**

Metal-plastic components designed and manufactured to order. Write for quotations specifying electrical and mechanical characteristics. Describe application. No obligation.

**FOR EFFICIENT MAINTENANCE**

**SPECIFY REMLER TILT-UP**

**EQUIPMENT SLIDES**

Remler slide rails for rack or cabinet mounting permit complete withdrawal or inspection of top and bottom of apparatus chassis. Positive . . . self-locking. Full roller type . . . handles equipment up to 50 lbs. Stainless steel for military applications; cadmium plated cold rolled steel or bonderized cold rolled steel. Nickel plated brass rollers; roller studs in stainless or copper flashed cold rolled steel.

**Remler Company Ltd. 2101 Bryant St. San Francisco 10, Calif.**

*Remler*

*Since 1918* **PIONEERS IN ELECTRONICS AND PLASTICS**

**ULTRASONIC SPECTRUM ANALYSIS**

- Ultrasonic Vibration Measurements
- Harmonic Analysis
- Cross Modulation Studies
- Noise Investigations
- Determining Transmission Characteristics of Lines and Filters
- Monitoring Communications Carrier Systems
- Checking Interference, Spurious Modulation, Parasitics, Effects of load changes, shock, humidity, component variations, etc. upon frequency stability.
- Telemetering

**SPECIFICATIONS**

Frequency Range: 2KC-300KC, stabilized linear scale

Scanning Width: Continuously variable from 200KC to zero

Four Input Voltage Ranges: 0.05V. to 50V. Full scale readings from 1 millivolt to 50 volts

Amplitude Scale: Linear and two decade log

Amplitude Accuracy: Within 1 db. Residual harmonics suppressed by at least 50db.

Resolution: Continuously variable. 2KC at maximum scanning width, 500 c.p.s. for scanning width below 8KC.



**EASY FAST**

**MODEL SB-7**

**PANORAMIC ULTRASONIC ANALYZER**

An invaluable new direct reading instrument for simplifying ultrasonic investigations, the SB-7 provides continuous high speed panoramic displays of the frequency, amplitude and characteristics of signals between 2KC and 300KC. The SB-7 allows simultaneous observations of many signals within a band up to 200KC wide. Special control features enable selection and highly detailed examination of narrower bands which may contain signals separated by less than 500 c.p.s. SB-7 is unique in that it provides rapid indications of random changes in energy distribution.

WRITE NOW for Complete Information, Price, Delivery

**PANORAMIC RADIO PRODUCTS, INC.**

**10 South Second Ave., Mount Vernon, N.Y.**
**MOunt Vernon 4-3970**




solid-state physics. The contributors are among the outstanding leaders in their fields.

The work of compiling and editing the manuscripts has been an important and worthwhile task; the result is a valuable contribution to physics and physical metallurgy. —EDWARD N. CLARKE, *Physics Laboratories, Sylvania Electric Products Inc., Bayside, New York.*

## The Nature Of Number

BY ROY DUBISCH, *Fresno State College, California. The Ronald Press Company, Inc., New York, 1952, 159 pages, $4.00.*

THIS book encompasses a well-written and precisely-stated account of the gradual development of the concept of number through the ages and of its rapid flowering in the last century to yield the bases of the modern linear associative algebras of today. Although couched in semi-textbook style, it can yet be read with interest by that large non-classroom audience whose eagerness for mathematical exposition is evidenced by the substantial sales of several editions of books such as Tobias Dantzig's "Number, the Language of Science: A Critical Survey Written for the Cultured Non-Mathematician," Eric T. Bell's "The Magic of Numbers" and Levi L. Conant's "The Number Concept: Its Origin and Development." The present text—less pedestrian in style than Conant's book, somewhat soberer in language and expression than Bell's, and not as concerned with points of philosophical interest as Dantzig's—reads easily; develops its theme fluently, chronologically, and accurately; and offers, *in toto*, an easily-grasped, well-delineated précis of the evolution of a branch of mathematics of prime usefulness to all mankind.

The book has twelve chapters. The semi-popular approach is indicated in the titles: Thus, Chapter 8: "The Great i Solves All" and Chapter 9: "A Shot in the Arm for Complacent Algebraists of the Nineteenth Century." However, despite the nature of these titles, the writing is not facetious nor is the author an amateur of mathematics. Rather, it is that a somewhat

## PATENT ATTORNEYS

Because of our rapid growth and expansion of commercial interests, we've gotten a late start in building an appropriately large patent department. So we now have openings for patent attorneys that carry an unusual opportunity for rapid advancement. And the fact that our organization is one of the more prominent electronics laboratories in the country, provides a degree of security not usually associated with rapid individual growth.

If you are professionally qualified in the field of electronics, we would like to give you more information concerning these positions. You are invited to write:

**HUGHES**

**Research and Development Laboratories**
Engineering Personnel Department
Culver City, Los Angeles County
California

# Attenuators

**Precision and General Purpose, "T" Type**

Both with impedance range from 30 to 600 ohms. Precision resistors held to within ≠1% accuracy . . . general purpose within ≠5%. Also Bal. H types.



**Range Extending**

For use with all makes of V.U. and D.B. meters. All resistors within ≠1%.

**Potentiometers**

Precision and General Purpose grid control types with non-inductive, wirewound resistors. Also dual precision wirewound grid potentiometers.

*Write for Complete Catalog*

N. Y. Stock:
Audio & Video Products Corp. • 730 Fifth Ave., PLaza 7-3091

**CINEMA ENGINEERING COMPANY**
1510 WEST VERDUGO AVENUE BURBANK CALIFORNIA

Export Agents: Frazar & Hansen, Ltd. • 301 Clay St • San Francisco, Calif. U.S.A.

# HERE'S BIG HELP IN TERMINAL WIRING!

*The New* **JONES FANNING STRIP**

The correct wire to correct terminal every time!

Connections are made through Fanning Strip, on bench or anywhere apart from barrier strip, and quickly slipped into assembly.

Use with Jones Barrier Terminal Strips, Nos. 141 and 142, for 1 to 20 terminals.

Simplifies soldering. Insures correct connections. Saves time. Ideal for harness or cable assembly. Brass terminals, cadmium plated. Bakelite mounting. Send for complete data.

Jones — HOWARD B. JONES DIVISION
CINCH MANUFACTURING CORPORATION
CHICAGO 24, ILLINOIS

# JELLIFF RESISTANCE WIRES

## ARE VERY MUCH AT HOME IN A HOT • SPOT

| ALLOY | OHMS PER CMF | MAX. OPER. TEMP. | FORMS † | USES |
|---|---|---|---|---|
| 1000 | 1000 | 500° F | W-R | Compact, stable precision Resistors |
| ALLOY C | 675 | 1700° F | W-R | Appliances and Resistors |
| ALLOY | 650 | 2100° F | W-R | High-temp. Furnaces and Resistors |
| ALLOY 45 | 294 | 930° F | W-R | Precision Applications |

† W—wire R—ribbon

★

Whether the heat is literal (up to 2100F), or figurative in the sense that performance under difficult condition is a *must*, we have an alloy for almost any conceivable requirement. The above Table may suggest possible applications to your products.

★

Complete Technical Data are available from Department 17.

THE C. O. JELLIFF MANUFACTURING CORPORATION SOUTHPORT, CONN.
WIRE DRAWERS SINCE 1840
SCREENS • WIRE CLOTH • STRAINERS • WIRE MESH BELTS • LEKTROMESH • RESISTANCE WIRE • DIPPING BASKETS

# NOTHELFER "NWL" *Special* TRANSFORMERS

*Proven by Past Performance*



Over 28 years' experience in the manufacture of special transformers to meet individual requirements. Built in quality proved by years of actual use.



From 10 VA to 300 KVA Dry-Type only. Both Open and Encased. 1, 2, and 3 Phase. 15 to 400 cycles.



Send for NEW 8 page BULLETIN

NWL **NOTHELFER** WINDING LABORATORIES NEMA

9 ALBEMARLE AVE., TRENTON 3, N. J.



## TELEVISION SIGNAL GENERATOR

**Model 90**

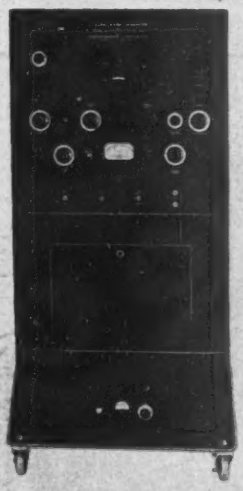

*The first commercial wide-band, wide-range Signal Generator to be developed to meet the exacting standards of high definition television use.*

*Specifications:*

**CARRIER FREQUENCY**

**RANGE:** Continuously variable from 20 to 250 megacycles, in eight ranges.

**MODULATION**

**PERCENTAGE:** Continuously variable from 0 to 100%.

**ENVELOPE:** Sinusoidal, or composite television.

**OUTPUT**

**LEVEL:** Continuously variable from 0.3 microvolt to 0.1 volt balanced to ground (measured at 100% modulation level).

**DIMENSIONS:** Height—58¾" Width—28¼" Depth—25½"

**POWER SUPPLY:** 117 volts, 60 cycles, 700 watts.

Complete Data On Request

**MEASUREMENTS CORPORATION**

BOONTON NEW JERSEY




formidable span of mathematical content is set out with authority, but in rather non-formal style, by one with thorough professional grounding in the mathematical area he covers.

Intelligible reading of this book requires little prior mathematical background other than that gained in the usual course in college algebra. In consequence, the average communications engineer ought to be able to read it without difficulty. The book may be epitomized as affording an easy and interesting introduction to the course of development of the bases of a branch of mathematics (modern algebra) which comprises a powerful tool of analysis for such currently-active areas of communications engineering as network synthesis and information theory.—THOMAS J. HIGGINS, *Professor of Electrical Engineering, University of Wisconsin.*

## THUMBNAIL REVIEWS

DIRECT CURRENT MACHINES. By Charles S. Siskind, Assistant Professor, Electrical Engineering, Purdue University. McGraw-Hill Book Co., 306 pages, $6.00. 1952. Fundamental, up-to-date clearly-presented material for a one-semester course. Mathematical derivations are rigid and widely used.

1952 MODERN PLASTICS ENCYCLOPEDIA AND ENGINEER'S HANDBOOK. Breskin Publications, New York, 1952, 848 pages, $6.00. Designed as a working guide to all phases of plastics production and material selection for companies using or contemplating the use of plastics products or components. Chapters covering molding, extruding, casting, fabricating, finishing and assembling operations and the machines and equipment presently available for plastics processing.

FERNSEHTECHNIK. By F. Kirschstein and G. Krawinkel, S. Hirzel, Stuttgart, Germany, 288 pages, DM 25, 1952. In German. What appears to be a thorough-going text on all aspects of television from the photoelectric effect to the color processes much in recent public discussion. Latest reference is to the literature of January 1950, so it seems to be up to date.

ECONOMICS OF AMERICAN MANUFACTURING. By Edward L. Allen. Henry Holt and Co., New York, 1952, 566 pages, $6.95. Penetrating cross-section view of American industry. Examines nineteen representative industries within five general categories: basic metal, basic nonmetallic, metal-working, textile and allied, and consumer specialty. Topics discussed include export-import, corporate ownership and control, location and capacity of plants, pricing policy, profits, and future outlook. Concludes with extensive bibliography.

CONTROLLERS FOR ELECTRIC MOTORS. 2nd ed. By H. D. James and L. E. Markle. McGraw-Hill Book Co., New York, 1952, 418 pages, $7.00. Retains first edition information about the design, ap-

# LOOKING AHEAD?

If you're a top performer in the field of physics, electronic engineering or design, and you're looking for a *career* as well as a well-paid position, it will pay you to investigate the excellent opportunity we offer.

**BASIC QUALIFICATIONS:**

Minimum of four year's experience in advanced research or development related to:

- PULSE CIRCUITS
- COMPUTERS
- NUCLEAR INSTRUMENTS
- MINIATURIZATION

• • •

ILLUSTRATED BROCHURE on request. Please write (giving summary of your education and experience, plus salary requirements) to:

**BERKELEY SCIENTIFIC**
*division of*
Beckman Instruments Inc.
2200 Wright Avenue
RICHMOND, CALIFORNIA

# ENGRAVING • PROFILING

**for heavy production**
with the Engravo graph TM®

**NEW HERMES, Inc.**
13-19 University Place, New York 3, N.Y.

***DOUBLE BARREL* ADVERTISING**

Advertising men agree—to do a complete advertising job you need the double effect of both Display Advertising and Direct Mail.

Display Advertising keeps your name before the public and builds prestige.

Direct Mail supplements your Display Advertising. It pin-points your message right to the executive you want to reach—the person who buys or influences the purchases.

In view of present day difficulties in maintaining your own mailing lists, our efficient personalized service is particularly important in securing the comprehensive market coverage you need and want.

Ask for more detailed information today. You'll be surprised at the low overall cost and the tested effectiveness of thee hand-picked selections.

**McGraw-Hill Publishing Co., Inc.**
330 West 42nd St., New York 36, N. Y.

Engravo graph TM®

Write for literature describing:
1. Heavy Duty model (as illustrated) — Catalog H 29
2. Portable models — Catalog IM 29

**NEW HERMES, Inc.** 13-19 University Place, N.Y. 3, N.Y.
In Canada: 359 St. James St., Montreal
*World's Largest Manufacturer of Portable Engraving Machines*

# "PERFECT..."

**That's What Production Engineers Say about DANO COILS**

And, it's no accident, of course. The Dano rigid policy of attentive testing and inspecting every coil in all vital stages of production guarantee perfect performance.

*Send us samples or specifications with quantity requirements for our recommendation. No obligation!*

- Ferm Wound
- Paper Section
- Acetate Babbin
- Molded Coils
- Bakelite Babbin
- Cotton Interweave
- Coils for High Temperature Application.

*Also, Transformers Made To Order*

DANO
**THE DANO ELECTRIC CO.**
93 MAIN ST., WINSTED, CONN.

Make a G-M PORTABLE D'ARSONVAL
GALVANOMETER
the Heart of Your Instrument



IN THE AUTOMOTIVE FIELD, the Bear Manufacturing Co. of Rock Island, Ill. uses Series 500 G-M Galvanometers in its new remote-reading Electric Wheel Alignment System (left). Whatever your own particular instrument field, you can achieve this same self-contained portability, ruggedness and high sensitivity with G-M Galvanometers. Complete catalog on request.

G-M LABORATORIES • INC.
4336 NORTH KNOX AVENUE, CHICAGO 41
In Canada: Gossor Canada Ltd., 301 Windsor, Halifax

KUPFRIAN LIGHT DUTY FLEXIBLE SHAFTS — AND COUPLINGS





KUPFRIAN Light Duty Coupling (type CB-82) With Panel Bushing

- AUTOMOTIVE
- ELECTRONIC
- AERONAUTICAL
- INDUSTRIAL

TYPICAL APPLICATIONS




SIMPLIFY YOUR MOTION TRANSMISSION PROBLEMS

- ALLOW GREATER FREEDOM IN PLACEMENT OF PARTS
- USE ASSEMBLIES PREPARED FROM LOW-COST STANDARD COMPONENTS

*Write for Bulletin 5194*

KUPFRIAN MANUFACTURING COMPANY
398 STATE STREET BINGHAMTON, N. Y.



plication, operation, and maintenance of industrial controllers. In addition, it includes chapters on such recent developments as the magnetic amplifier, the dynamo electric amplifier, magnetic clutches, a-c and d-c crane control, and remote and supervisory control.

TELEVISION TECHNOTES. By Martin Clifford, Gernsback Library Book Number 46. Radcraft Publications, Inc., New York, N. Y. 128 pages, $1.50, 1952. For the technicians who have to fix TV sets that get out of whack. Notes on individual models of all manufacturers from Admiral to Westinghouse (in alphabetical order) and literally thousands of models.

THE MEASUREMENT AND CONTROL OF TEMPERATURES IN INDUSTRY. R. Royds. Chemical Publishing Co., Inc., New York, N. Y. 260 pages, $5.00, 1952. Revision of older volume of somewhat different title. Chapters on temperature scales, expansion and electrical thermometers, pyrometers, galvanometers and other indicators and the measurement of rapidly fluctuating temperatures.

AUTOMATIC RECORD CHANGER SERVICE MANUAL. Vol. 4 (1951-1952). Howard W. Sams & Co., Inc., Indianapolis, Ind., $3.00. Comprehensive service information, with increased emphasis on new models of wire and tape recorders.

INDUSTRIELLE ELEKTRONIK. By R. Kretzmann, Elektro Spezial, G.m.b.H., Hamburg, Germany. Verlag fuer Radio-Foto-Kinotechnik, Berlin. Describes, in German, electronic apparatus employed in industrial process control, especially switching methods.

MANAGEMENT CONTROLS IN INDUSTRIAL RESEARCH ORGANIZATIONS. By Robert N. Anthony, Associate Professor, Business Administration, Harvard Business School. 538 pages, $6.75, 1952, Harvard Business School, Boston 63, Mass. How to find "the proper balance between freedom at the laboratory level and direction from the top" for research administrators.

PROCEEDINGS, NATIONAL ELECTRONICS CONFERENCE, 1951, Vol. 7, National Electronics Conference, 852 E. 83rd Street, Chicago 19, Illinois. 736 pages, charts, diagrams, tables, 9¼ by 6¼ inches, cloth, $5.00. Papers—or digests—presented at the 1951 conference. The seventy-nine papers cover electronic research, audio systems, components, computers, high-frequency measurement, information theory, magnetic amplifiers, medical and industrial applications, microwave propagation, servo theory, signal detection, television and tubes.

SURVEY, R-F TRANSMISSION LINES AND WAVEGUIDES. E. S. Winlund. Radio Club of America, 11 West 42 St. New York 18, N. Y., 88 pages, 1951, $1.00. Historical survey, technical data and bibliography through 1951.

THE MANUAL OF CORPORATE GIVING. Edited by Beardsley Ruml in collaboration with Theodore Geiger. National Planning Association, 800-21st Street, N.W., Washington, D. C., 1952, 416 pages, $6.75. Contains sections by 26 experienced donors and recognized experts. Primarily concerned with explaining the specific ways in which gifts can be made to yield the maximum benefits both to the recipient and to the donor.

ULTRAVIOLET RADIATION. By Lewis R. Koller. John Wiley & Sons, Inc., New York, 1952, 270 pages, $6.50. Written for nonspecialists in radiation, to describe available sources of ultraviolet, discuss application techniques, and give pertinent data on filters, mirrors and other accessories used. Many tables and graphs increase the reference value of the book.

# "Wow-Meter"

Improved direct-reading instrument simplifies measurements of wow and flutter in speed of phonograph turntables, wire recorders, motion picture projectors and similar recording or reproducing mechanisms. It is the only meter in existence giving direct steady indication of meter pointer on scale.

The Furst Model 115-R "Wow-Meter" is suitable for both laboratory and production application and eliminates complex test set-ups.

A switch on the front of the panel permits selection of low frequency cut-off and corresponding meter damping for use on slow speed turntables.

*Inquiries Invited on our line of Regulated Power Supplies*
*Frequency Response: ½ to 120 cycles or 10 to 120 cycles*
*Sensitivity: 0.2, 0.5, and 2.0% Wow Full Scale*

**FURST ELECTRONICS**

3324 W. LAWRENCE AVE., CHICAGO 25, ILL.

# ONLY Heminway & Bartlett Produces this Sensational NEW FUNGUS-PROOF NYLON LACING CORD

## Meets Army, Navy and Civilian Requirements

The special synthetic resin coating on Heminway & Bartlett's Nylon Lacing Cord resists the growth of mold and microorganisms—factors most often responsible for the deterioration of linen and cotton lacing cords. In addition, Heminway & Bartlett's Nylon Lacing Cords have high abrasion resistance, low moisture absorption and the finish has the desirable malleability of wax. The finish is also non-toxic to humans.

For fine wire lacing, we have developed a Nylon Flat Braided specially treated Tape. We'll be glad to send you samples of both the Nylon Lacing Cords and the Nylon Flat Braided Tape. Why not write us today!

The Heminway & Bartlett Mfg. Co., 500 Fifth Avenue, New York 36. *Sales Offices:* Chicago, Boston, Philadelphia, St. Louis, Cincinnati, San Francisco, Charlotte, N. C., Gloversville, N. Y.

TYING TWINE

# TAKE A GOOD LOOK!

VICTOREEN POCKET DOSIMETERS FOR EVERY PURPOSE

**LOOK** at the Victoreen dosimeters that have served the medical profession for over twenty-five years.

**LOOK** at the Victoreen dosimeters that serve Government and Atomic Energy Industrial Laboratories.

**LOOK** at the Victoreen dosimeters in "Olive Drab" and in "Navy Gray."

A dosimeter is an instrument which measures the total accumulated quantity (dosage) of X or gamma radiation. The reading is in roentgens regardless of exposure time. Pocket dosimeters, sometimes called pocket chambers, are either direct reading or indirect reading. Direct reading pocket chambers have a built-in optical system and electrometer, which permits the wearer to periodically observe the dosage which has accumulated since the chamber was last charged, thus enabling him to retreat from a hazardous area when the dosage approaches the average daily tolerance. Indirect reading dosimeters require a Minometer (charger-reader) to observe the reading. This reading is usually checked at the end of the working day by a competent technician.

| Model | Type | Full Scale Sensitivity | Conditions |
|---|---|---|---|
| 362 | Indirect | 0.2 r | At or below daily Tolerance Rate |
| 541 | Direct | 0.2 r | At or above daily Tolerance Rate |
| 547 | Direct | 5. r | Emergency |
| 548 | Direct | 50. r | Trained personnel —Emergency |
| 534 | Direct | 5. and 50. r | Civil defense, etc. |
| 506 | Indirect | 100. r | Untrained personnel —Emergency |
| 507 | Indirect | 200. r | Untrained personnel —Emergency |

*Write for Bulletin 3012 B*

Victoreen Instrument

5806 HOUGH AVE. CLEVELAND 3, OHIO

## A NEW PRODUCT
from
## A NEW ADDRESS

CML is pleased to announce
THE MODEL 1440
OMNIPHASE GENERATOR

This unique instrument was developed primarily to make it possible to use two or three CML high power single phase variable frequency generators in combination as a source of variable frequency 2 or 3 phase power. In its own right, the Model 1440 has many uses in the development laboratory.

It covers a range of 17 cycles to 18,000 cycles in 5 ranges. Three output voltages are developed throughout the frequency range (10 volts across 5,000 ohms). The phase of all three voltages is continuously adjustable through 360 degrees by means of panel controls. This makes it possible to set up any desired relationship between the three phases.

●

In case you missed previous announcements, after 14 years in New York City we have moved to our own modern plant at the address indicated below. Read about other new CML products in our new catalog. Write for yours today.

**COMMUNICATION MEASUREMENTS LABORATORY, INC.**

350 Leland Ave., Plainfield, N. J.
Plainfield 4-5502


# BACKTALK

### Tube Testers

DEAR SIRS:

I NOTE an article on page 139 of the June issue of ELECTRONICS entitled "Vacuum-Tube Testers". This article mentions "proposed classification (of tube testers) by RTMA" and lists "RTMA Tube Tester Classifications". I wish to point out that this list of classifications does not in any way constitute a proposal by RTMA. The list was formulated by a committee in an effort to see if agreement among tube tester manufacturers could be reached on such a classification. An agreement was not reached accepting this list and, therefore, this material has been set aside. At the moment there is no proposal under consideration.

VIRGIL M. GRAHAM
*Associate Director*
*RTMA Engineering Department*

### New Diotron

DEAR SIRS:

A RECENT article by Rosenthal and Badoyannis (ELECTRONICS, Sept. 1952, p 128) mentions the Diotron mean-square voltmeter and points out two objectionable properties of the original instrument: zero drift and indeterminate behavior after overload. Later design has successfully dealt with both of these problems and we feel these criticisms do not apply to our instruments now on the market.

In addition, we have offered to rebuild instruments already in the field or to provide copies of the revised circuit diagram to users of the instrument who prefer to do the modifications themselves.

R. D. CAMPBELL
*Electro-Physics Dept.*
*Reed Research*
*Washington, D. C.*

### Delete Five Words

DEAR SIRS:

THE ARTICLE "Nonsynchronous Pulse Multiplex System" in the August 1952 issue of ELECTRONICS is based on a paper presented at the March IRE Convention by Dr. J. R. Pierce and the writer. Quite extensive condensation was required


SILVER GRAPHALLOY
BRUSHES
AND
CONTACTS

*. . . for applications requiring low electrical noise, low and constant contact drop, high current density and minimum wear.*

GRAPHALLOY
TRADE MARK REG. U. S. PAT. OFF.

EXTENSIVELY USED IN
SELSYNS
ROTATING THERMOCOUPLE and STRAIN-GAGE CIRCUITS
ROTATING JOINTS
GUN-FIRE CONTROLS
DYNAMOTORS etc.

Wide range of grades available for standard and special applications.
Brush holders and coin silver slip rings available for use with Silver Graphalloy Brushes.

OTHER GRAPHALLOY PRODUCTS:

Oil-free self-lubricating Bushings and Bearings, Oil-free Piston Rings, Seal Rings, Thrust and Friction Washers, Pump Vanes.

*Write us for Data Sheets and further information. Outline your problem and we will apply our years of accumulated experience toward its solution.*

GRAPHITE METALLIZING CORPORATION
1055 NEPPERHAN AVENUE • YONKERS, N. Y.

# LABORATORY POLI-SCALER

"Model DS-606 Poli-Scaler," for GM or scintillation counting, has plug-in power supply adjustable to any voltage from 0 to 2.5 kv, positive or negative, with two plug-in "Model TU-9" Decade Totalizers feeding into a mechanical register. Resolution time 5μ sec. per pulse pair; direct readings to 8 places.



Additional totalizers may be added to increase counting rate and total count capacities. Includes pulse height discriminator and shaper (0 to 100v) voltage regulator, outlets for time and elapsed time clocks, speaker, remote control, and accessory count rate meter. For descriptive folder write to Dept. 78.

THE Detectron CO.

5631 Cahuenga Blvd., No. Hollywood, Calif.

EEPCO

# ROTARY ELECTRICAL EQUIPMENT

**DYNAMOTOR DY-85, 24 Volt**

Built to rigid military specifications . . . operates from 24 V input . . . output 600 V at 175 milliamperes continuous duty. Temperature range – 20° C to 85° C. Armature dynamically and statically balanced. Two pole construction, with separate removable pole pieces.

- F-M D-C MOTORS AND GENERATORS
- UNIVERSAL MOTORS
- SHADES POLE MOTORS (2-4-6 POLE)
- D-C MOTORS AND GENERATORS
- P-M A-C GENERATORS
- CAPACITOR TYPE MOTORS
- MOTORS DESIGNED FOR SPECIAL APPLICATIONS

★

PRECISION-ENGINEERED describes the dynamotor illustrated above. It is typical of the many special problems which EEPCO engineers have solved in military and industrial applications.

Whether your power problem relates to a highly developed radar unit or an industrial control device, EEPCO is set up to save you time and money. This is possible because of EEPCO's specialized engineering experience in the design and manufacture of precision rotary electrical equipment.

If you have a power problem, simple or complex, we'd like the opportunity to work it out for you.

## ELECTRO ENGINEERING PRODUCTS CO.

Makers of Precision Rotary Electrical Equipment

609 W. LAKE STREET DEPT. E CHICAGO, ILL.

ELECTRONICALLY REGULATED

# LABORATORY POWER SUPPLIES

BENCH MODEL 25

- STABLE
- DEPENDABLE
- MODERATELY PRICED

- **INPUT:** 105 to 125 VAC, 50-60 cy
- **OUTPUT #1:** 200 to 325 Volts DC at 100 ma regulated
- **OUTPUT #2:** 6.3 Volts AC CT at 3A unregulated
- **RIPPLE OUTPUT:** Less than 10 millivolts rms

WIDTH 14" DEPTH 6" HEIGHT 8" WT: 17 LBS.

For complete information write for Bulletin E

LAMBDA ELECTRONICS CORPORATION

CORONA NEW YORK

# PRECISION IN MINIATURE!



**Extended Range AUDIO OSCILLATOR**

- Only 6" x 4¼" x 5".
- 18 cycles to 1.2 megacycles.
- Distortion less than 0.2%.
- Constant output ±0.5 db.
- 600/150 ohm transformer available.

Price $150 *Literature on request*

Waveforms, inc.

333 Sixth Avenue
New York 14, N. Y.

# WHAT MAKES A MAILING CLICK?

Mc GRAW-HILL
DIRECT MAIL LIST SERVICE

Advertising men agree . . . the list is more than half the story. McGraw-Hill Mailing Lists, used by leading manufacturers and industrial service organizations, direct your advertising and sales promotional efforts to key purchasing power.

In view of present day difficulties in maintaining your own mailing lists, this efficient personalized service is particularly important in securing the comprehensive market coverage you need and want. Investigate today.

McGraw-Hill Publishing Co., Inc.

DIRECT MAIL DIVISION

330 West 42nd Street New York, 18, New York

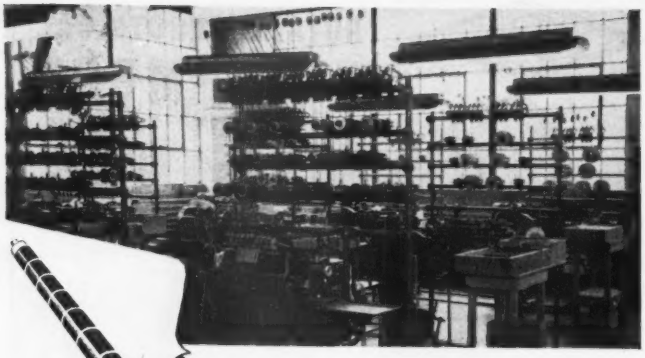

Seven interleave coils as removed from winder

**Here at Coto-Coil . . .**

. . . interleave coil winding machines like these can wind up to 20 coils at a time. Top quality paper or acetate film interleaves insure a high dielectric between layers. After removal from these machines, the coils are separated, leads are extracted, and the coils proceed to the assembly and finishing operations. Such modern production facilities, plus 35 years of experience, combine to make Coto Coils the first choice for engineered coils. Coto-Coil Company, 65 Pavilion Avenue, Providence 5, R. I.

**Coto** PRECISION WOUND **Coils**

**NEW!** . . . an instrument for all your magnetic measuring problems.

**Dyna-Labs**

**D-79 GAUSSMETER**

This precision built instrument measures flux density, determines direction of flow. It locates and measures stray fields and plots variations in strength and checks production lots against a standard. Simple to operate. No ballistic readings . . . no jerking or pulling. Supplied with protective carrying case.

- Other Features -
- Reads 10 to 30,000 Gauss Flux Fields
- Probe is only .025" thick
- Active area .01 square inches
- Overall size 13" x 6-3/4" x 10-1/2"
- Net weight only 10-1/2 lbs
- Power supply 105-125 volts, 50-60 cycles

We invite inquiries. For literature write Department E-11.

**Dyna-Labs** INC.

1075 STEWART AVENUE, GARDEN CITY, L. I., N. Y. GARDEN CITY 3-2700




to prepare this paper for publication and, in general, the editors of ELECTRONICS are to be complimented on this work. Unfortunately, however, a serious error appears in the published article.

On page 120, in the sentence just before the "Conclusion" heading, delete the last four words—"with a synchronous system". In the preceding sentence delete the word "outstanding". It is the nonsynchronous system which has the very large number of distinct and always available separate channel assignments. This tends to offset the lack of economy in the simultaneous use of channel capacity (bandwidth) so that this is not an "outstanding" disadvantage.

The difference between the two types of systems may be clarified by the following example. In an assumed synchronous system, there are exactly 50 separate channel assignments, any or all of which may be used simultaneously. In an assumed nonsynchronous system, there may be upwards of 500 separate channel assignments but only about 10 may be used simultaneously.

Thus the nonsynchronous system is attractive for relatively light traffic use where many stations must have continuous access to the common medium.

ANDREW L. HOPPER
*Bell Telephone Laboratories*
*Murray Hill, New Jersey*

## Aftermath

DEAR SIRS:

I WOULD LIKE to offer a comment on L. E. Garner's description of the improvement in the transient performance of amplifiers by the addition of positive capacitive feedback in his article, "Improving Amplifier Response" (ELECTRONICS, p 213, Sept. 1952).

While the positive feedback usually has to be taken around two stages, suppose, for simplicity, at first, that only one stage is involved. Let the following symbols be used:

$g_m r_L$ = low-frequency gain of one stage
$C_s$ = strong capacitance shunting the load resistance
$C_f$ = capacitance in series with the feedback loop
$r_f$ = resistance in series with the feedback loop
$r_g$ = grid resistance, across which the

# VECO
# VICTORY Thermistors

BEADS
DISCS
RODS
WASHERS

CHECK THESE IMPORTANT POINTS

- Full line of standard thermistors available from stock
- Special thermistors engineered to customers' requirements
- We make all Western Electric type thermistors
- Our thermistors have exceptionally high temperature coefficient and stability
- Technical assistance in your design and engineering problems

A Few Common Uses:

Time delay • Gas analysis • Volume limiting • Surge protection • Vacuum manometry • Flow measurement • Temperature control • Temperature measurement • Radar power measurement • Temperature compensation • Oscillator stabilization • and a host of new applications being developed every day.

*Send for free literature.*

**Victory**
ENGINEERING CORPORATION
Springfield Road
UNION, NEW JERSEY

Telephone UNionville 2-7150

# Phaostron

## CARB-OHM
A DEPOSITED CARBON RESISTOR

HERMETICALLY SEALED

*1% PRECISION RESISTOR*

AVAILABLE FROM ½ to 2 WATTS

"Here is a resistor that will withstand ambient temperatures of 105°C for at least 1000 hours with full rated loads.

"Certified inspection after 1000 hours found these resistors remained within 1% of their original resistance."

Technical information available upon application

ENVIRONMENT FREE ELECTRICAL EQUIPMENT by Phaostron

PHAOSTRON COMPANY, 151 PASADENA AVE., SOUTH PASADENA, CALIF.

# TEST-ADJUST TELEVISION SETS *at YOUR Convenience*

**Even Without Station Test Pattern or in Remote, Weak Signal Areas**




**SUPREME** MODEL 665

**Net Price $389.50**

The SUPREME COMPOSITE VIDEO GENERATOR provides the same type of sync and blanking signal as the TV station—even the equalizing pulses. In addition, it incorporates a video section which generates a special test pattern for analysis and adjustment of TV sets. Other patterns or pictures can be presented by using auxiliary equipment connected to the special "gated" video input section of this versatile instrument. The Model 665 should not be confused with the cross-hatch or bar-pattern generators. The Supreme Model 665 supplies a COMPOSITE VIDEO SIGNAL.

Every TV station sends a COMPOSITE VIDEO SIGNAL when telecasting a program or a test pattern. This COMPOSITE VIDEO SIGNAL is composed of—(1) a synchronizing and blanking signal to lock the free running raster into a frame of two interlaced fields, and—(2) a video signal to control the amount of light and produce the picture (which may be a program scene or a test pattern for analysis purposes).

A television set will produce a picture only when it is supplied with a COMPOSITE VIDEO SIGNAL. To check any TV set properly, you must have a COMPOSITE VIDEO SIGNAL.

Why lose time and money waiting for that ideal scene or test pattern to check a TV set? In fringe or weak signal areas, you are strictly in the "driver's seat" with a SUPREME COMPOSITE VIDEO GENERATOR. Write SUPREME, Inc., Dept. 18, GREENWOOD, MISSISSIPPI for descriptive folder.

Since 1927

**SUPREME**
*Testing Instruments*
"SUPREME BY COMPARISON"

Tube Testers Oscilloscopes
Signal Generators Multi-Meters
For Radio and Television

CONTINENTAL

MINIATURE
Power
CONNECTORS
SERIES 14

RACK TO PANEL TYPE
7-9-10-15 CONTACTS

SERIES 14 FOR #14 AWG WIRE

These precision power connectors were developed to employ the same electrical and mechanical properties as our series 16 but were reduced by 25% in height with a larger solder cup for #14 AWG wire.
The disengagement force is also considerably reduced.

CABLE TO PANEL TYPE
7-9-10-15 CONTACTS



SPECIFICATIONS
MAXIMUM WIRE SIZE . . . #14 AWG
Creepage between contacts 7/32" MIN.
Air Space between contacts 3/32" MIN.
Breakdown voltage between contacts with connector engaged at sea level, normal conditions . . . . . 5500 V.R.M.S.

CABLE TO PANEL TYPE
7-9-10-15 CONTACTS



ALUMINUM HOOD AND CABLE CLAMP IS AVAILABLE FOR ALL TYPES DESIGNATED BY ADDING "H" TO TYPE DESIRED, i.e.: 7-14 PH, Plug with Hood, 7-14 SH, Receptacle with Hood, 7-14 H, Hood only.

CATALOG WITH COMPLETE DETAILS — AVAILABLE ON REQUEST. TO DEPT. E-11-P

DeJUR ELECTRONIC INSTRUMENTS USA
DeJUR AMSCO CORPORATION
45-01 NORTHERN BOULEVARD, L. I. C. 1, N. Y.



feedback and signal are applied
$L_p$ = peaking inductance, if used
$p$ = complex angular frequency
$G$ = gain

With neither inductive peaking nor feedback, the gain of one stage is given by

$$G = \frac{g_m r_L}{1 + C_s r_L p} \tag{1}$$

If peaking is provided by an inductance $L_p$ in series with the load resistance, the gain becomes

$$G = \frac{g_m (r_L + p L_p)}{1 + C_s p (r_L + p L_p)} \tag{2}$$

Instead of inductive peaking, now let positive feedback be applied through the resistance $r_f$ and the capacitor $C_f$ in series. The gain is then given by the feedback formula* as

$$G = \frac{\dfrac{g_m r_L}{1 + C_s r_L p}}{1 - \dfrac{g_m r_L}{1 + C_s r_L p} \cdot \dfrac{r_g C_F p}{1 + (r_g + r_F) C_F p}}$$

$$= \frac{g_m r_L + g_m r_L (r_g + r_F) C_F p}{1 + [C_F(r_g + r_F) + C_s r_L - g_m C_F r_L r_g] p + C_s r_L C_F (r_g + r_F) p^2} \tag{3}$$

Comparison shows that Eq. 3 is identical with Eq. 2 provided

$$C_F = \frac{Lp}{r_L^2 r_g g_m} \tag{4}$$

$$r_F = r_g(r_L g_m - 1) \tag{5}$$

Thus the effect of any amount of inductive peaking (maximally flat or overcompensated) can be simulated by the feedback.

When the feedback is taken around two stages, as would usually be done, one has

$$G = \frac{\left(\dfrac{g_m r_L}{1 + C_s r_L p}\right)^2}{1 - \left(\dfrac{g_m r_L}{1 + C_s r_L p}\right)\left(\dfrac{C_F r_g p}{1 + C_F (r_F + r_g) p}\right)} = \frac{(\text{Linear Function of } p)}{(\text{Cubic Function of } p)} \tag{6}$$

On the other hand, the gain for two stages with inductive peaking is given by the square of Eq. 2. Since the denominator of Eq. 6 is a cubic in $p$, while that of the square of Eq. 2 is a quartic, it will not, in general, be possible to simulate exactly the effect of inductive peaking. However, it is possible to

BIRTCHER
TUBE CLAMPS
Hold Tubes in Sockets under all Vibration, Impact and Climatic Conditions

83 VARIATIONS FOR STANDARD TUBES



NEW CLAMP FOR MINIATURE TUBES

You can't shake, pull or rotate a tube out of place when it's secured by a Birtcher Tube Clamp. The tube is there to stay. Made of Stainless Steel, the Birtcher Tube Clamp is impervious to wear and weather.

BIRTCHER TUBE CLAMPS can be used in the most confined spaces of any compact electronic device. Added stray capacity is kept at a minimum. Weight of tube clamp is negligible.

Millions of Birtcher Tube Clamps are in use in all parts of the world. They're recommended for all types of tubes: glass or metal—chassis or sub-chassis mounted.

THERE'S A BIRTCHER TUBE CLAMP FOR EVERY STANDARD AND MINIATURE TUBE!

*Write for samples, catalogue and price lists.*

THE BIRTCHER CORPORATION
4371 Valley Blvd.
Los Angeles 32, Calif.

choose the constants of Eq. 6 to obtain a desired behavior of $G$ with frequency (maximally flat, or equal ripple). It is impossible, however, to deal with the selection of optimum gain vs frequency characteristics in this letter, the purpose of which is merely to point out the relation of the technique of extending the pass band by feedback to other techniques for accomplishing that purpose.

---

*This is, of course, the expression $A/(1 - A\beta)$, $A$ being given by Eq. 1 and $\beta$ by $r_s C_r p/ [1 + (r_s + r_r) C_r p]$

H. L. ARMSTRONG
*National Research Council*
*Ottawa, Canada*

## Omitted

DEAR SIRS:

WITH RESPECT to our article "Bridge Oscillator has Linear Tuning", which appears on page 134 in the August 1952 issue of ELECTRONICS, an error crept in during the editorial process.

The (1) in column 2 of page 134 should refer to two equations which were deleted, *i.e.*:

$$\omega_o = R/L;\ R_2/R_1 = 1/2$$

and should not appear after the equation with which it is now connected.

Unfortunately this change may make the derivation somewhat more difficult to follow.

BENSON CARLIN
ABE HERSHLER
*Electro-Marine Mfg. Corp.,*
*New York, N. Y.*

## Math Available

DEAR SIRS:

I AM writing in reference to the article entled "Improving Amplifier Response" by L. E. Garner, Jr., which appeared in the *Electrons at Work* department of ELECTRONICS on page 213 of the September 1952 issue.

Mr. Garner stated that he had made no mathematical investigation of why greater bandwidth is afforded by the capacitive coupling feature described in his article. I should like to refer your readers to my article in the DuMont *Oscillographer* where the math ap-

THE NEW
TEC SYNCROPLEX
MODEL—G-101
A MULTIWAVE FORM GENERATOR AND GENERAL PURPOSE UTILITY PULSE SYNCHRONIZATION UNIT

The G-101 provides, at repetition rates of 1 cycle per second to 100 kilocycles per second: 1. Sawtooth Waves, 2. Square Waves or Square Pulses, one microsecond to one second duration with rise time of 0.15 microseconds, 3. Integrated or Differentiated versions of the square waves and pulses. All outputs are simultaneously available and independently variable in amplitude. All outputs may be synchronized, triggered or gated by sine waves, pulses or other complex wave forms.

Additional applications of the SYNCROPLEX include: oscilloscope sweep phaser, delayed pulse generator, oscilloscope trace expander, frequency divider, and pulse time or pulse width modulator. The SYNCROPLEX is an excellent educational demonstrator and useful electronics laboratory accessory. $175 Net FOB N.Y.C.

TEC TELEVISION EQUIPMENT CORP.
238 WILLIAM ST., NEW YORK 38, N.Y.
IN CANADA: THE AHEARN & SOPER CO., LTD., OTTAWA

ALTITUDE CHAMBER

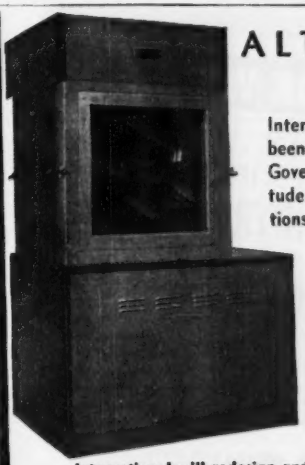

International's Altitude Chambers have been designed to meet and conform to Government specifications governing altitude simulation tests. Any or all conditions can be had in one unit.

- RELATIVE HUMIDITY 10 to 95%
  a) Wet Bulb Control of Humidity range 35°F to 200°F
  b) Dew Point Control of Humidity to —20°F
- TEMPERATURES
  From —150°F to +300°F (or any segment)
- VACUUM
  Maximum limit — 5 microns. Altitude from 3000 to 10,000 feet/min. to 100,000 ft.
- SEALED EQUIPMENT
  Sealed shafts, hand tuning shafts and electrical connections. Utility Ports can be installed at nominal cost.

International will redesign and rebuild your old equipment to up-to-the-minute requirements. Estimates and consultation at no obligation. We welcome your inquiries.

Manufacturers of: Low and High Temperature Chambers • Altitude, Humidity, Explosion and Walk-in Chambers with Vibration test facilities

INTERNATIONAL RADIANT CORP.
40 MATINECOCK AVE. • PORT WASHINGTON, N. Y.

"Made by Engineers for Engineers"

CORNISH

custom CORD SETS

Available in rubber, neoprene and plastic

Tailored to your needs . . . quality controlled from start to finish . . . deadly enemies of CORDelirium! You make the electronic products and we will supply the dependable connecting parts.

Also
"NOFLAME-COR"
The Television Hookup Wire

CORNISH WIRE CO., INC.
50 Church Street, New York 7, N. Y.

LOOK WHAT'S NEW!

MADE TO YOUR SPECIFICATIONS
TECHNITROL *Type* TE
PULSE TRANSFORMERS
SEALED IN CASTING RESIN

NOW YOU CAN SIMPLIFY AND MINIATURIZE YOUR SHORT-PULSE CIRCUITS

Currently available in one physical size—3/4" diam. x 9/16" deep, with 2" leads of No. 20 wire—made to your order within the following range of specifications.

Pulse Width: 0.1 to 2.0 microseconds
Maximum Pulse Repetition Rate: 2.0 mc.
Operating Range: −55° to +105°C.

One or two secondaries may be provided, either inverting or non-inverting.

WRITE US YOUR SPECIAL REQUIREMENTS including a brief outline of the contemplated circuit, or ask for our blank specification sheets.

LOOK AT THESE PRICES!

| | |
|---|---|
| 1 to 3 | $7.50 each |
| 4 to 10 | 6.35 each |
| 11 to 100 | 5.85 each |

Write us for quotations for quantities over 100

TECHNITROL
ENGINEERING COMPANY
2751 North 4th Street, Philadelphia 33, Pa.



pears in connection with the description of a new instrument. The article is somewhat commercial, but I believe that the portion concerning circuit investigation may be of interest.

WILLIAM J. O'MEARA
*Technical Sales Engineer*
*Allen B. DuMont Labs. Inc.*
*Clifton, New Jersey*

## Another 'Tron

DEAR SIRS:

MR. BOCCIARELLI'S low-deflection-power cathode-ray tube (ELECTRONICS, Sept. 1952) brings back memories of an experimental tube produced at General Electric Company in 1940. We were even then conscious of a future demand for big-picture, inexpensive picture tubes short enough for table-model television sets.

An experimental tube was built having a ¾-inch diameter stem attached to a standard 12-inch bulb. By use of a simple triode gun and miniaturized focusing and deflection coils, a stem length of only about 3 inches was required. Simplified manufacture, reduced deflection power and short overall length were achieved at some cost in spot fineness.

The tube was nicknamed the Tittron and was not produced commercially to my knowledge.

FRANK G. WILLEY
*Head, Electronics Engr. Dept.*
*Servo Corp. of America*
*New Hyde Park, N. Y.*

## Touche'

DEAR SIRS:

I AM SURPRISED at your being taken in on so simple a thing as appeared in the item "Rosin-Fume Fan" on page 256 of the August issue of ELECTRONICS.

You can no more reverse the action of a fan "by putting the fan on the motor shaft backward" than you can make a left-hand threaded bolt out of one with a right-hand thread by putting the slot at the other end. The change can, of course, be made by bending the blades as you suggest. Wouldn't it be simpler, though, to simply face a standard fan away from the operator

J. CREIGHTON DOUGLAS
*Town of Mount Royal, Quebec*

# PROFESSIONAL SERVICES

**CROSBY LABORATORIES, INC.**
*Murray G. Crosby & Staff*
Radio - Electronic
Research Development & Manufacturing
Communications, FM & TV
Robbins Lane, Hicksville, N. Y.
Hicksville 3-2191

**R. W. HODGSON**
RESEARCH & DEVELOPMENT ENGINEERS SPECIALIZING IN ELECTRONICS, NUCLEONICS, INSTRUMENTATION, SERVOMECHANISMS & CYBERNETICS
Office—6600 Lexington Ave., Hollywood 38, Calif.
All Mail to Box 874, Sherman Oaks, Calif.
GLadstone 9680

**ALBERT PREISMAN**
*Consulting Engineer*
Television, Pulse Techniques, Video Amplifiers, Phasing Networks, Industrial Appliances
Affiliated with
MANAGEMENT-TRAINING ASSOCIATES
3308-14th St., N. W. Washington 10, D. C.

**DATA ENGINEERS, INC.**
*Engineering that "Counts"*
Designers & Manufacturers of
Data Recording Instruments
4608 Ravenswood Ave., Chicago 40, Ill.

**R. W. HODGSON**
PATENT AGENT SPECIALIZING IN ELECTRONICS
Registered to Practice Before the U. S. & Foreign Patent Offices
Office—6600 Lexington Ave., Hollywood 38, Calif.
All Mail to Box 874, Sherman Oaks, Calif.
GLadstone 9680

**JOSEPH RACKER COMPANY**
*Radar Consultants & Editors*
Technical Manuals
Research and Development
140 Nassau Street, New York 38, N. Y.
Worth 4-1463

**DUBROW DEVELOPMENT CO.**
*Design — Development — M*
Quality Electronic Equipment
347 High St. Burlington, N. J.
Burlington 3-0446

**HOGAN LABORATORIES, INC.**
John V. L. Hogan, Pres.
*Applied Research, Development, Engineering*
Est. 1929. Electronics, Optics, Mechanisms, Facsimile Communication, Digital Computers, Electro-sensitive recording media, Instrumentation.
155 Perry Street, New York 14. CHelsea 2-7855

**W. C. ROBINETTE CO.**
MOTRON DEADBEAT HIGH GAIN SERVOS
Speed control of any Prime Mover ⅛% to .001% average. Electric Transmissions ⅛ to 50 HP plus controls—Zero droop—No load to full load.
802 Fair Oaks Ave. South Pasadena, Calif.
Py 11594

**EDGERTON, GERMESHAUSEN & GRIER, INC.**
*Consulting Engineers*
Research, Development and Manufacture of Electronic and Stroboscopic Equipment
Specialists in High-Speed Photography
160 Brookline Avenue, Boston 15, Mass.

**THE KULJIAN CORPORATION**
*Consultants • Engineers • Constructors*
Electronic Control
Specialists
Utility • Industrial • Chemical
1200 N. Broad St., Phila. 21, Pa.

**SKINNER, HARLAN AND IRELAND, INC.**
*Consulting Engineers*
Specializing in Magnetic Materials and Their Application
Office and Laboratory Indianapolis 7, Indiana

**Eldico of New York Inc.**
Pioneers of Television Interference Elimination from Transmitters, Induction Heaters, Diathermy and etc.
Donald J. S. Merten & Engineering Staff
44-31 Douglaston Pkwy Douglaston, N. Y.
Bayside 9-8686

**MEASUREMENTS CORPORATION**
*Research & Manufacturing Engineers*
Harry W. Houck Jerry B. Minter
John M. van Beuren
Specialists in the Design and Development of Electronic Test Instruments
Boonton, N. J.

**THE TECHNICAL MATERIEL CORPORATION**
*Communications Consultants*
Systems Engineering
General Offices and Laboratory
121 Spencer Place, Mamaroneck, N. Y.

**ERCO RADIO LABORATORIES, INC.**
*Radio Communications Equipment*
Engineering - Design - Development - Production
Pioneers in Frequency Shift Telegraph
Garden City • Long Island • New York

**Eugene Mittelmann, E.E., Ph.D.**
*Consulting Engineer & Physicist*
High Frequency Heating—Industrial Electronics
Applied Physics and Mathematics
549 W. Washington Blvd. Chicago 6, Ill.
State 2-8021

**TELECHROME, INC.**
*Electronic Design Specialist*
COLOR TELEVISION EQUIPMENT
Flying Spot Scanners, Color Synthesizers, Keyers, Monitors, Oscilloscopes and Related Apparatus
J. R. Popkin-Clurman, *Pres. & Ch. Engr.*
88 Merrick Rd. Amityville, L. I., N. Y.

**HARRIS GALLAY**
*Consultant*
MICROWAVE AND
PULSE TECHNIQUES
Belleville 2-4237 60 Perry St., Belleville 9, N. J.

**NIAGARA ELECTRON LABORATORIES**
CONSULTATION - DESIGN - CONSTRUCTION
MFG. THE THERMOCAP RELAY
Specializing in solution of problems of electronic and electro-physical instrumentation for the research of analytical laboratory. Industrial plant problems also invited.
Andover, New York Cable Address: NIATRONLAB

**HARRIS A. THOMPSON**
Microwave Electronic Radar
Electro-Mechanical
Consulting
MFG. & DEVELOPMENT PROBLEMS
2525 Penn., Boulder, Colorado Phone 1202W

**HANSON-GORRILL-BRIAN INC.**
*Products & Mfg. Development*
ELECTRICAL - ELECTRONIC
HYDRAULIC - MECHANICAL
One Continental Hill Glen Cove, N. Y.
Glen Cove 4-1922

**PHYSICS RESEARCH LABORATORIES, INC.**
Applied Mechanics, Thermodynamics, Heat Transfer, Optics, Magnetic and Electrical Devices, Electronics, Nuclear Physics.
507 Hempstead Turnpike,
West Hempstead, L. I., N. Y.

**WHEELER LABORATORIES, INC.**
Radio and Electronics
Consulting—Research—Development
R-F Circuits—Lines—Antennas
Microwave Components—Test Equipment
Harold A. Wheeler and Engineering Staff
Great Neck, N. Y. Great Neck 2-7806

**HIGHLAND ENGINEERING CO.**
*William R. Spittal & Staff*
DESIGN, DEVELOPMENT AND MANUFACTURE OF TRANSFORMERS, CHOKES, ETC.
FOR THE
ELECTRONIC, INDUSTRIAL & ALLIED FIELDS
Main & Urban, Westbury, L.I., N.Y.
WE-7-2933

**PICKARD AND BURNS, INC.**
*Consulting Electronic Engineers*
Analysis and Evaluation
of Radio Systems
Research, Development and Design
of Special Electronic Equipment
240 Highland Ave., Needham 94, Mass.

**YARDNEY LABORATORIES, INC.**
*Research - Design - Development*
Electro-Chemical Generators of Energy
105 Chambers Street WOrth 2-3534, 35, 36
New York 7, N. Y.

# · CONTACTS ·

*FOR THE FIELD OF ELECTRONICS*

We are set up to do all types of

## SUBCONTRACTING

Our modern plant is equipped to do complete testing and development work on civilian and military electronic equipment.

Our Shop is set up to wind Bobbin, spool, form, layer, interwoven, Universal and Pile RF and IF chokes and coils.

Our New Etched Circuit Department can handle all types of work. Contact us for details on your subcontracting needs.

**MICHEL MANUFACTURING CO.**
227 North Water Milwaukee, Wis.

## ELECTRO PLATING

SPECIALISTS IN
**Silver, Cadmium & Zinc Barrel Plating**

**Iridite and Cronak Processes**
*To Government Specifications*
*Government Certified*

**EVEREADY PLATING CO.**
1790 FIRST AV. N.Y.C.
EN 9-1222

## GRC WING NUTS

TOP QUALITY PRICED LOWER

Rust-proof zinc alloy with GRC's recessed-wing finger-grip. All commercial finishes, all popular thread sizes. Special threads or untapped wing nuts; special designs to order.

*Write today for samples and prices — and compare!*

**GRIES REPRODUCER CORP.**
.00 Willow Ave., N. Y. 54 • Phone: MO 5-7400

ELECTRICAL

## COILS

Bobbin, spool, form, layer, interleaved, interwoven types. Made of any material, any finish, for any application.

*Send blue-prints and specifications for prompt quotation.*

**THE FIVE STAR COMPANY**
West Main Street
Plantsville, Conn.

## SUB-CONTRACTING

**MILITARY and COMMERCIAL**
receivers—test equipment
transmitters—controls
sub-assemblies

**TELETRONICS LABORATORY, INC.**
Westbury, L. I., N. Y. Westbury 7-1028

## PRECIOUS METAL PLATING

*(Government Certified)*
★ GOLD ★ SILVER ★ PALLADIUM
★ RHODIUM ★ ALBALOY

**ELECTRO-COATINGS INC.**
1662 W. Fullerton Ave. Chicago 14, Ill.
EAstgate 7-9770

6751 BRYN MAWR AVE.

WALKIE-RECORDALL BATTERY RECORDER-PLAYBACK

Continuous, permanent, indexed recording, up to 4 hrs., only 3c hr. Instantaneous, permanent playback. Picks up sound up to 60 ft. Records conferences, lectures, dictation, 2-way phone & sales talks; while walking, riding or flying. Records in closed briefcase with "hidden mike"! **Write for Detailed Literature.**

**MILES REPRODUCER CO., INC.**
812 BROADWAY Dept E-11 NEW YORK 3 N Y

*Shorted Turn Indicator*
For unmounted coils
MODEL 101C BULLETIN 42
HUNTINGTON BEACH, CALIF
**KARTRON**

## MICA

Gauge Glass Gasket Mica in any size also any other large size for electrical use buy direct from mine owners known for quality, honesty and reasonableness. Airmail your requirements to

**ARUNA BROTHERS**
3 Keeling Road, New Delhi (India)
Cables: "MUKTI".

**EISLER MANUFACTURES COMPLETE EQUIPMENT**
WELDERS FOR SPOT & WIRE BUTT
RADIO, TV TUBE EQUIPMENT & REPAIR UNITS
INCANDESCENT, FLUORESCENT MFG EQUIPMENT
NEON SIGN MAKERS EQUIPMENT, GLASS LATHES
ELECTRONIC EQUIPMENT, VACUUM PUMPS, Etc.
Wet Glass SLICING & CUTTING MACHINES for Lab Use
TRANSFORMERS, SPECIAL & STANDARD TYPES
**EISLER ENGINEERING CO., INC.**
751 So. 13th St. Newark 3, N. J.

## JUST OUT

### RADIO SPECTRUM CONSERVATION

**A Program of Conservation Based on Present Uses and Future Needs**

A realistic review of the properties of radio transmission, and discussion of the course to be pursued to assure maximum benefits in its use. Shows how much can be gained by taking a long-range view of the radio spectrum, after the past fifty years of sporadic development. Gives propagation characteristics of the spectrum, covers the history of allocations and gives an ideal approach to them; gives a critique of the present allocations, and suggests a dynamic program of conservation. **A report of the Joint Technical Advisory Committee of the Institute of Radio Engineers and The Radio-Television Manufacturers Association. 218 pp., illus., $6.00**

## CHECK LIST

**of other recent McGRAW-HILL books**

### ELECTRON TUBES IN INDUSTRY

*Third Edition*

Tells how the electron tube makes industrial processes simpler, cheaper, safer. Explains operating principles of components, tubes, and circuits applied to industrial problems of control, measurement, electronic heating, motor speed control—counting, sorting, and grading. Describes amplifiers, thyratrons, phototubes, and cathode-ray tubes and applications. **By Keith Henney, Editorial Director, and James D. Fahnestock, Assoc. Editor, *Electronics*. 3rd ed., 347 pp., 234 illus., $6.00**

### ELECTRONICS FOR COMMUNICATION ENGINEERS

Saves research time and effort on electronic problems in communications. Its 252 articles from *Electronics* contain a wealth of design equations, charts, nomographs, tables, etc. Covers amplifiers—antennas—audio—cathode-ray tubes—components—electronic music—filters—measurements—microwaves—oscillators—power supplies—propagation—pulses—receivers—transmission lines—transmitters. **Edited by John Markus and Vin Zeluff, Assoc. Editors, *Electronics*. 624 pp., hundreds of illus., $10.00**

### TELEVISION ENGINEERING

*Second Edition*

Covers the whole television process—from studio to receiver—clearly, and in detail. Treats TV technology, operating principles of TV systems, use of equipment. Provides practical working diagrams, complete with values of parts, tube types, etc. Explains color TV, intercarrier sound reception, distributed amplification, and many other phases. **By Donald G. Fink, Editor, *Electronics*. 2nd ed., 721 pp., 512 illus., $8.50**

### SEE THESE BOOKS 10 DAYS FREE

**McGraw-Hill Book Co.,330 W.42St.,NYC(36)**

Send me book(s) checked below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep, plus few cents delivery, and return unwanted book(s) postpaid. (We pay delivery if you remit with this coupon—same return privilege.)

- ☐ JTAC—Radio Spectrum Conservation—$5.00
- ☐ Henney & Fahnestock—Electron Tubes—$6.00
- ☐ Markus & Zeluff—Electronics for Com. Eng.—$10.00
- ☐ Fink—Television Engineering—$8.50

(Print)
Name.....
Address.....
City..... Zone.... State.....
Company.....
Position..... L-11

This offer applies to U. S. only

## SALES ENGINEER

**with Aeronautical and Electronic Experience**

Here is a real opportunity for a good personality—a man with electrical engineering know-how plus a desire to make sales contacts among the large aircraft companies. You would live in and work out of Dallas, Texas. Earnings can go far beyond the normal E.E. levels. Tell us of your qualifications and your interest. Our personnel knows of this ad and your correspondence will be held in strict confidence. Direct inquiries to Ben Boldt, American Phenolic Corporation, 1830 S. 54th Avenue, Chicago 50, Illinois.

*REPLIES (Box No.): Address to office nearest you*
*NEW YORK: 330 W. 42nd St. (36)*
*CHICAGO: 520 N. Michigan Ave. (11)*
*SAN FRANCISCO: 68 Post St. (4)*

### POSITION VACANT

ELECTRONICS EXPERT needed now or later for perfecting and developing instrumentation for combustion research in the field of turbulence and spectroscopy, carried out in Chemical Engineering Department of University of Delaware, Newark, Del. Participation in the research program welcomed but not required. Part-time teaching position in the Physics Department possible if desired. Reply to Prof. K. Wohl, above address.

### SELLING OPPORTUNITIES OFFERED

WE ARE seeking a representative on the West Coast who calls on Electronic Equipment Manufacturers exclusively. We produce a complete line of Drawn Cans and Shields also Stampings for the Electronic Industry. Give full details and advise present lines. Worcester Pressed Aluminum Corp., P. O. Box 1250, Worcester 1, Massachusetts.

WANTED—SALES Engineers for large industrial instrument manufacturer. Prefer men with special training in electronics and graduates of recognized engineering colleges. Will consider Mechanical and Chemical Engineers. Fine opportunity for young engineers with sales aptitude to connect with one of the fastest growing industrial instrument companies in the United States. Locations: Cleveland, New York, Chicago, and Philadelphia. SW-5508, Electronics.

### POSITIONS WANTED

CONSULTANTS WITH 12 years electronics experience, well-equipped large laboratory, desire development and production work. Will demonstrate our efficiency, inventiveness, and economy. Write PW-5673, Electronics.

DUTCH COMMUNICATIONS Engineer, graduate 1938 mechanical, aeronautical and radio Engineering, single, desires responsible work overseas. Highly experienced in large communic. systems and broadcast in Europe, Middle East and South East Asia, thorough knowledge of five languages, adaptable to any situation, no objections against much travelling. PW-5501, Electronics.

Electrical Engineer; 1½ yr. public utility co-op; ½ yr. G.E. test; 2 yr. servomechanism and electronic development, Signal Corps. Desire control development and application work. PW-5541, Electronics.

ENGINEERING PHYSICIST, two years experience in Magnetic Amplifiers, Quality Control, and Instrument Development. Can I fit into your organization? PW-5676, Electronics.

SENIOR B.S., M.S.; has had 12 years of all around experience in instrumentation, servo's, electronics, instrument design & production. Had supervisory operation. Eastern location preferred. PW-5254, Electronics.

### WANTED

**Surplus Telegraphic Equipment wanted.** Keys, Sounders, Relays, Switchboards, etc. W-5423, Electronics.

## Are you looking for a good job with an excellent future?

Positions are open where your ability and initiative will soon be recognized . . . fine opportunities for qualified men:

- **Project Engineers**
  **Electronic**
  **Mechanical**
- **Model Makers**
- **Sales Engineers**

Engineering background essential. Fine opportunities to grow with a young, progressive organization; long-range development work; pleasant suburban surroundings; congenial and cooperative co-workers.

Send complete resume to Personnel Manager,

**A. W. Haydon Company**

**Waterbury, Conn.**

## TRANSISTOR ENGINEER

Transistor engineer, electrical or chemical, experienced design and production, to direct germanium device production. Excellent opportunity. Replies in strict confidence.

P-5646, Electronics
330 W. 42 St., New York 36, N. Y.

## CANADIAN FIRM

well established in Electronic field wishes to affiliate with U. S. company to manufacture electronic components (or complete equipments) in Canada.

*Excellent manufacturing facilities, machine shop and plant with fully trained personnel.*

CW-5496, Electronics
330 W. 42 St., New York 36, N. Y.

## ELECTRONIC PRODUCT WANTED

A small progressive company is interested in manufacturing an electronic item with good market possibilities.

Item may be in any stage of development from idea to production model.

Company facilities include engineering department with laboratory, electrical and mechanical assembly department and machine shop.

BO-5602, Electronics
330 W. 42nd St., New York 36, N. Y.

## ENGINEERS

**ELECTRONIC**
**and**
**Electro-Mechanical**

*MAKE YOUR MOVE IN THE RIGHT DIRECTION*

**POSITIONS THAT POINT TO A SUCCESSFUL FUTURE!**

***Minimum Requirements***

Four years' experience in advanced research and development on Radar Systems, Computers, Wave Guide and Antennas, Servo-mechanisms, Pulse Techniques Gyroscopic Equipment and Related Fields.

*If your skills are now being fully utilized in a vital defense industry, please do not apply.*

Kindly send resume and salary requirements to

**The W. L. MAXSON CORPORATION**

**460 W. 34th St. New York 1, N. Y.**

## MR. MANUFACTURER:

**LOOKING FOR A NEW PRODUCT?**
**ADDITIONAL ITEMS FOR YOUR PRESENT LINE?**
**IDEAS FOR SALE!!**

Patented; Pat. Pend; Unpatented:
Basic Designs
Models Available in Some Cases
*OUTLINE YOUR REQUIREMENTS:*

**M-5424, ELECTRONICS**
**330 W. 42 STREET**
**NEW YORK 36, N. Y.**



## MAKE THIS YOUR HOME FOR IMPORTANT WORK UNDER IDEAL CONDITIONS

- TV RECEIVER DESIGN ENGINEERS
- ELECTRONICS ENGINEERS
- FIELD ENGINEERS
- TEST & INSPECTION ENGINEERS
- LAB. TECHNICIANS

**NEEDED TO WORK ON:** Radar, G.C.A., Mobile Radio, Auto Radio, Airborne Communication & Navigation Equipment, Television, Antennas, Microwave Equipment, Servo Mechanisms, Guided Missiles and Test Equipment Design.

**YOU BENEFIT AT BENDIX RADIO:** from high wages, a modern, air-conditioned plant, paid vacations and holidays, group insurance and a good chance for advancement.

Housing immediately available in the beautiful suburban and country areas that surround the Bendix Radio plant.

*Write, Wire or phone*
*MR. E. O. COLE, DEPT. J.* **Bendix Radio**
DIVISION OF BENDIX AVIATION CORPORATION
BALTIMORE-4, MD. Phone: TOWSON 2200
*Makers of the World's Finest Electronic Equipment*

## P.S.

The advertisement at left tells of attractive opportunities for engineers and technical personnel at The Bendix Radio Division of the Bendix Aviation Corporation in Baltimore.

Bendix Aviation also needs engineers and technical personnel for assignments at its new plant in York, Pennsylvania.

There are openings for electronic engineers, lab technicians, mechanical engineers, draftsmen, technical writers and tool & die designers.

So, here's the chance to get in at the start of a new operation of the Bendix Aviation Corporation . . . and benefit from good pay, interesting work and the chance for rapid advancement.

*If interested in employment at York, Pennsylvania, write giving brief resume of your experience to:*

**Bendix Aviation Corp.**
Dept. Y-1 P.O. Box No. 1202
YORK, PENNSYLVANIA

## ELECTRONIC DESIGNERS

For design and layout of UHF equipment, microwave components and systems.

## RADIO ENGINEERS

Minimum 5 years' experience. For research and development in radio and radar systems and components.

## WHAT MAKES KOLLSMAN A FINE PLACE TO WORK?

Partly, it's the pride of belonging to the organization which designs and manufactures America's finest aircraft instruments . . . a progressive, growing organization in which there's every opportunity to advance.

And a big part of it is in the spirit of cooperation and friendliness which prevails among Kollsman men.

Not to be overlooked is the convenient location in a quiet residential section of Queens . . . and the many liberal benefits such as completely paid life, hospitalization, surgical, accident and health insurance.

**KOLLSMAN INSTRUMENT CORP.**
80-08 45th Avenue, Elmhurst, Long Island, New York

## ENGINEERS AND PHYSICISTS

**BS—MS—Ph.D:**

Responsible positions in mechanical, electrical or electronic engineering, physics or engineering physics for advanced development and design of special equipment and instruments. Prefer men with minimum of two years' experience in experimental research design and development of equipment, instruments, intricate mechanisms, electronic apparatus, optical equipment, servomechanisms, control devices and allied subjects. Positions are of immediate and permanent importance to our operations. Southwestern location in medium sized community. Excellent employee benefits. Reply by letter giving age, experience and other qualifications. All applications carefully considered and kept strictly confidential.

**Ind. Rel. Manager**
**Research & Development Dept.**

**PHILLIPS PETROLEUM COMPANY**
Bartlesville • Oklahoma

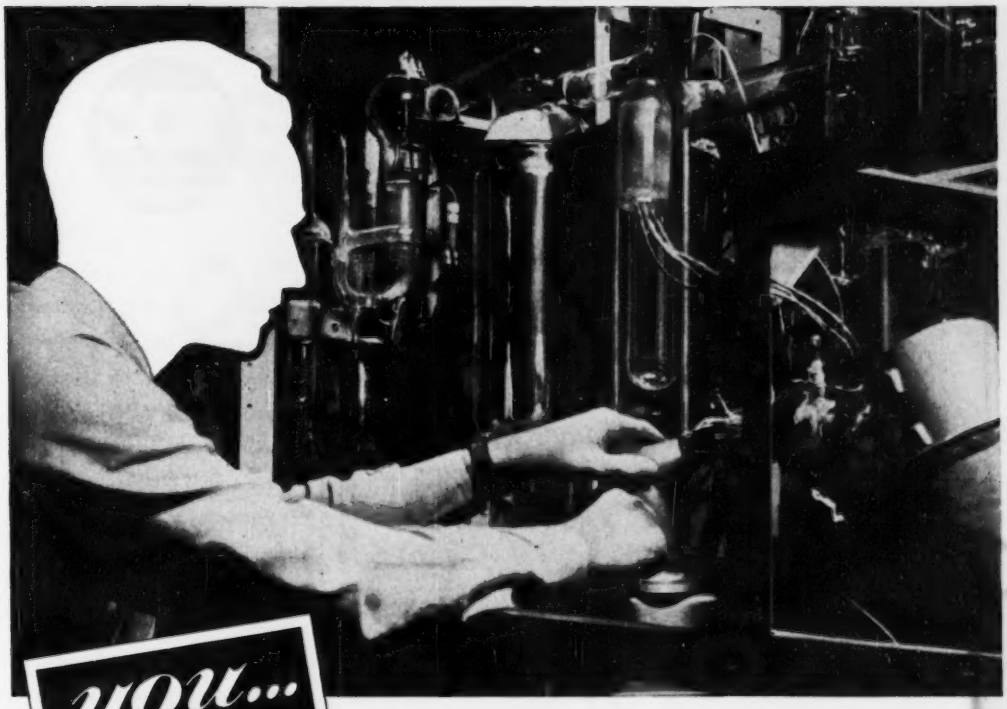

*you...*

# ... are headed for a better future —*when you come to RCA*

If you want to work where you enjoy the highest professional recognition among your colleagues, come to RCA. Here your accomplishments are recognized and rewarded. Here your future is brighter, through challenging assignments that lead to better opportunities, better positions. Here you set goals for future attainment at advanced levels.

If your talent and skill are not being used in a way for which your education and experience has equipped you, come to RCA. Here you will find unusual opportunities to work in close association with distinguished scientists and engineers in research . . . development . . . design . . . and application of specialized electronic equipment for military projects as well as for an ever-increasing line of diversified commercial products.

Positions open are lifelong *career* opportunities. They are not "temporary" jobs. Unlike "feast or famine" industries, RCA has forged ahead regardless of war or depression. You can continue advanced study at recognized universities under RCA's modern tuition refund plan. You and your family enjoy outstanding Company benefits. Yes, your future is better at RCA.

**LIFETIME OPPORTUNITIES FOR**

**ENGINEERS—Electronic . . . Electrical . . . Communication . . . Mechanical . . . Computer . . . METALLURGISTS and PHYSICISTS**

**In Research—Development—Design—Application: in the following fields:**

**RADAR • MISSILE GUIDANCE • SERVO MECHANISMS • COMPUTERS • TRANSFORMERS AND COILS • NAVIGATION AIDS • TELEVISION • ELECTRON TUBES • COMMUNICATIONS TECHNICAL SALES • ELECTRONIC EQUIPMENT FIELD SERVICE**

**Send a complete résumé of your education and experience.**

***Personal interviews arranged in your city.***

**Send résumé to:**
**Mr. ROBERT E. McQUISTON, Manager**
**Specialized Employment Division,**
**Dept. 46K**
**Radio Corporation of America**
**30 Rockefeller Plaza, New York 20, N. Y.**

***RADIO CORPORATION of AMERICA***

# ELECTRONIC ENGINEERS & PHYSICISTS

OUR STEADILY EXPANDING LABORATORY OPERATIONS ASSURE PERMANENT POSITIONS AND UNEXCELLED OPPORTUNITY FOR PROFESSIONAL GROWTH IN

## RESEARCH & DEVELOPMENT

GUIDED MISSILES
TELEVISION
ELECTRONIC NAVIGATION
SOLID STATE PHYSICS
VACUUM TUBES
RADAR

ADDRESS INQUIRIES TO *THE EMPLOYMENT DEPT.* **CAPEHART FARNSWORTH CORP.**
FORT WAYNE, IND.

RICO

## ATTENTION!

### Former Field Engineers

We urgently need men with electronic background, and preferably radar or computer experience, to supervise, instruct and assist in installation—maintenance of electronic equipment.

Excellent starting salary during factory training, plus overtime premium in field. Substantial insurance program. Domestic & overseas assignments available. Salary will be commensurate with experience.

Please forward your personal experience record to:

Personnel Supervisor
Field Eng. Div.

**Reeves Instrument Corp.**
**215 East 91st St.**
**New York, 28, N. Y.**

## WANTED

### Electro-Acoustical Engineer

An engineer experienced in design and development of electro-acoustical or electro-mechanical transducers is wanted by an established, progressive manufacturer of microphones, television boosters and electronic equipment. Must be capable of carrying responsibility for development of new products from initial plans to finished product in transducer field. Position is challenging and desirable. Salary commensurate with experience and ability.

*Contact*
Paul Thompson, Chief Engineer

**The TURNER Company**
917 17th Street N.E.,
CEDAR RAPIDS IOWA

TCC

We, The Telegraph Condenser Co. Ltd., London, England, the largest specialist manufacturers in the United Kingdom of all types of fixed capacitors, seek representatives in the United States.

Primarily, we are not interested in the jobbing market, but desire to extend our present business with leading American Manufacturers of radio and electronic equipment.

Only firms of the highest integrity and with the necessary technical background will be considered.

One of our Executives will shortly visit the United States again. If you are interested to see him on this matter, please submit full particulars to :—

**THE TELEGRAPH CONDENSER COMPANY LIMITED**
NORTH ACTON
LONDON, W.3 · ENGLAND

TCC

# RESEARCH AND DEVELOPMENT

***forge the KEY to America's future in the AIR***
***take YOUR place . . . with GOODYEAR AIRCRAFT***

The continued and steady growth of established research and development projects presents a number of unusual opportunities for outstanding and experienced men.

**SCIENTISTS** **ENGINEERS** **DESIGNERS**

Positions are available in our organization for qualified personnel in the following fields:

- Electrical Systems
- Circuit Analysis
- Analog Computers
- Servomechanisms
- Test Equipment
- Structures
- Aerodynamics
- Applied Mathematics
- Electronics
- Physics
- Stress Analysis
- Flight Test
- Missile Design
- Dynamics
- Microwaves

**Openings also exist for welding engineers, civil engineers, and mechanical engineers with experience in metals fabrication; and for personnel with ability and experience in technical editing, art, and motion pictures.**

Positions are available at several levels, and inquiries are also invited from recent graduates. Salaries are based on education, ability, and experience. Liberal salary, vacation, insurance, and retirement plans are yours if you qualify.

If YOU are interested in a secure future, write, giving full details, to
Mr. C. G. Jones, Salary Personnel Department.

**GOODYEAR AIRCRAFT CORPORATION, 1210 Massillon Road, Akron 15, Ohio**

# ENGINEERS

## WHY NOT INVEST YOUR ABILITY . . . .

**With the Finest Electronic Engineering Team in the West. Excellent Opportunities for Permanent Employment With Hoffman Exist For All Grades of Electronic Engineers, Mechanical Engineers and Engineering Technicians Experienced in Electro-Mechanical Engineering or Any of the Following:**

- Radio Systems MF to UHF
- Receiver Design MF to UHF
- Pulse Techniques
- Selsyn Control and Servo Systems
- Electronic Type Test
- CRT Display Circuits
- Mechanical Design
- Antenna Design

*LIVE IN*
**CALIFORNIA**

Enjoy Advancement and Further Training; Paid Holidays and Vacations; Good Salaries. Applicants Requested to Forward Resume of Education and Experience with Letter of Application To:

ENGINEERING EMPLOYMENT OFFICE

**Hoffman**

**LABORATORIES, INC.**

3761 SOUTH HILL STREET, LOS ANGELES 7, CALIFORNIA

**A SUBSIDIARY OF HOFFMAN RADIO CORPORATION**



# *ELECTRONIC*

**ENGINEERS**
**DESIGNERS**
**DRAFTSMEN**

*INTERESTING DEVELOPMENT WORK IN—*

**Television**
**Color TV**
**AM-FM Radio**
**Direction Finder**
**Ultra-High Freq.**

*WITH ADVANTAGES OF—*
**Permanent Positions**
**Many Employee Benefits**
**Top Wages**

*WRITE OR APPLY TO*

*Personnel Dept.*
1300 N. Kostner Ave., Chicago, Ill.
Call Albany 2-1000, Ext. 145
For Interview

**STEWART-WARNER**
***ELECTRIC***



# ELECTRONIC ENGINEERS

## Mechanical Designers for Research and Engineering

To work in the design and development of new electronic equipment. Excellent working and living conditions, good salaries and exceptional employee benefits. Write, giving full details including education and experience. Personal interviews will be arranged.

**THE NATIONAL CASH REGISTER COMPANY**
Main & K Sts., Dayton 9, Ohio



# ELECTRONICS

## Research & Development

# POSITIONS OPEN

Cornell Aeronautical Laboratory, Inc. has several professionally challenging and rewarding positions open in the field of Electronic Engineering.

The laboratory was acquired in January, 1946, by Cornell University in response to a widespread need for a stable, highly competent research organization in the aeronautical sciences. Since its acquisition the laboratory has grown steadily to a multi-million dollar annual contract level with a staff of over 850.

The laboratory's projects deal largely with applied science. Typical electronics projects include computer design, radar and microwave applications, precision instrumentation, missile guidance, telemetering, and complex control systems.

Professional growth of staff members is encouraged through regular seminars, attendance at meetings of scientific societies, a graduate study tuition refund program, and constant interchange of ideas and discussions with senior level scientists. Salary level and employee benefit programs are on a par with industry. While the pace of projects is high, the informal organization of the laboratory tends more toward a friendly, thought-stimulating, academic atmosphere. Practical scientists and engineers work closely together in making important contributions to America's scientific progress.

A booklet describing the activities and interests of the laboratory has recently been made available for distribution. If you would like to learn more about this unique organization or its personnel needs, please feel free to write. No obligation, of course.

**CORNELL AERONAUTICAL LABORATORY, INC.**
P.O. BOX 235
BUFFALO 21, NEW YORK

# ELECTRONIC ENGINEERS
# MECHANICAL ENGINEERS

## *You GROW at Melpar!*

**Our Engineering Department is organized on a PROJECT basis**

(not by functional sections, with their tendency to narrowness of specialization and limitation of professional growth). Here the member of a project group is in close touch with all phases of the project—responsible for his own share in his particular field but able to see the whole. The engineer in charge of the group, instead of being limited to expertness in producing one kind of unit to be assembled by others, is an executive responsible for ALL phases of the successful completion of the project.

- **FLIGHT SIMULATORS**
- **Computers**
- **Telemetering**
- **Guided Missiles**
- **Airborne Radar**
- **Microwave Receivers**

MELPAR INC.

*Send resumes to:*
PERSONNEL DIRECTOR
MELPAR, INC.
452 Swann Ave. Alexandria, Va.

# ENGINEERS
## LOCATE IN THE
## *Healthful Southwest*
## WITH ATOMIC WEAPONS INSTALLATION

Mechanical Engineers, Electronics and Electrical Engineers, Physicists, Mathematicians, Specifications Engineers, and Technical Writers. A variety of positions in research, development and production open for men with Bachelors or advanced degrees with or without applicable experience.

●

These are permanent positions with Sandia Corporation a subsidiary of the Western Electric Company, which operates the laboratory under contract with the Atomic Energy Commission. The Laboratory offers excellent working conditions and liberal employee benefits, including paid vacations, sickness benefits, group life insurance and a contributory retirement plan.

●

Albuquerque, center of a metropolitan area of 150,000, is located in the Rio Grande Valley, one mile above sea level. Albuquerque lies at the foot of the Sandia Mountains which rise to 11,000 feet. Cosmopolitan shopping centers, scenic beauty, historic interest, year 'round sports, and sunny, mild, dry climate make Albuquerque an ideal home. New residents experience little difficulty in obtaining adequate housing in the Albuquerque area.

Make application to the
PROFESSIONAL EMPLOYMENT DIVISION

# SANDIA
## *Corporation*

## SANDIA BASE
## ALBUQUERQUE, N. M.

We desire personnel of the highest caliber—experienced in the field of airborne automatic electro-mechanical control equipment.

★

## ENGINEERS

**MECHANICAL DESIGN**
**ELECTRONIC**
**SERVO**

## DESIGNERS-LAYOUT MEN

**ELECTRONIC**
**MECHANICAL**

This work deals with the manufacture and development of highly complex equipment of the most advanced type in a new and expanding division of an established firm with 20 years of successful experience in the precision instrument field.

*We cite a few of the good reasons why you might like to join our organization . . .*

**SALARY** increases are based on merit and initiative—two weeks VACATION, HOSPITALIZATION BENEFITS, GM's own INSURANCE PLAN—POSITIONS ARE PERMANENT due to long range manufacturing and developing programs—EXPENSES incident to interviews and moving all absorbed by company—HOUSING and LIVING CONDITIONS among the best and finest of any along Lake Michigan.

- We have a Junior Engineering Training Program of one year for inexperienced engineering graduates. Opportunity to become acquainted with all phases of industry.
- For the convenience and direct use of engineers in our Engineering Department, we have our own model shop where highest skilled mechanics are employed.
- Educational opportunities for advanced degrees available at U. of W., Marquette. Technical engineering offered at Milwaukee Vocational School.

. . . all inquiries answered—write or apply . . .

★ *AC SPARK PLUG DIVISION*

## GENERAL MOTORS CORPORATION

1925 E. KENILWORTH PL. MILWAUKEE 2, WIS.

## CIRCUIT DESIGNER

**Principally DC amplifiers and closed loop systems. Minimum requirement B.S. Degree with major in Electronics. Preference given advance degrees or graduate work. 3 to 4 years experience. Salary open, commensurate with qualifications. Send complete resume, including salary desired. Medium size electronic equipment manufacturer; location Middle West.**

**P-5603,** Electronics
520 N. Michigan Ave., Chicago 11, Ill.

## TWO ENGINEERS

. . . Two engineers, mathematicians or physicists are needed to plan and execute theoretical studies in two general problems of communications and control systems.

Exceptional ability and a Ph. D. or equivalent experience are essential. Training in mathematics and statistics, noise and communication theory, and systems analysis necessary.

Problems involve the synthesis of reliable mechanisms from unreliable components by parallelism or other means, and the application of information and noise theory to radar and communications systems, both as applied to guided missiles.

Send resume including education, scholastic record, experience and references to

**California Institute of Technology**
***Jet Propulsion Laboratory***
**4800 Oak Grove Drive**
**Pasadena 3, California**

## Transformer and Filter Engineers

Experience with toroidal coils, design of wave filters and carrier telephone equipment desired, but not essential.

Company is engineer-owned and operated. Well established, financially sound. Five years of continuous expansion. Future prospects most promising. Suburban Kansas City, Missouri. Salary open. Contact, stating qualifications, Edward J. King, Jr., President,

**COMMUNICATION ACCESSORIES CO.**
**Hickman Mills, Missouri**
***Phone DWight 5410***

## UHF ENGINEERS

### UNUSUAL SALARY OPPORTUNITIES

**Excellent Opportunities for Advancement in our New Research Laboratory Furnished with Finest Equipment.**

**Write Giving Full Details to:**
**Personnel Director, Dept. A.**

**GIBBS MANUFACTURING AND RESEARCH CORPORATION**
**Janesville, Wisconsin**

**ENGINEER WANTED—BOSTON AREA**

We are seeking an engineer who has shown ingenuity in the development of small electro-mechanical devices, switches, relays and the like. A knowledge of relay design principles would be preferable, but not absolutely necessary.
The man who has this ability has a position and a future awaiting him with a 40 year old company that is large enough to offer a secure position, yet small enough for personal contact and recognition. We are expanding our field of operations and are seeking to supplement our present engineering force. Without resorting to extravagant verbiage, we offer a good position with a good future, for a good man. This position is not dependent upon the defense program.
If you think you qualify for this position, please send a short resume of past history, experience and salary expected.
All information will be kept in strict confidence and letters will be acknowledged.

**P-5647,** Electronics
330 W. 42 St., New York 36, N. Y.

## TELREX, INC.
### OF ASBURY PARK, N. J.

*wishes to engage a*

### SENIOR
### ELECTRONIC SPECIALIST

to conduct antenna, filter, converter, research and development particularly at television frequencies. Applicant must possess scientific qualifications together with considerable manufacturing and field experience and a proven record of accomplishments. Must be imaginative, capable of original thinking and able to work with minimum supervision. Frankly, we are looking for an unusually good man and an attractive salary will be offered the right applicant. Write stating qualifications and record.

## PHYSICISTS . . .
## NEW FRONTIERS TO CONQUER

Enjoy great opportunities for personal satisfaction and advancement . . . help keep our nation strong and free . . . investigate the following openings with TRACERLAB, the foremost commercial firm in the field of NUCLEONICS.

Positions are available for PHYSICISTS with training in . . . ELECTRONICS . . . CLASSICAL PHYSICS . . . SOLID STATE PHYSICS . . . NUCLEAR PHYSICS.

Openings exist at several levels and require Bachelor's or Advanced Degree with or without industrial experience. If you feel that you are qualified, we'll be glad to hear from you. Please write:

**Industrial Relations Department**

**TRACERLAB, INC.**
130 HIGH STREET
BOSTON 10, MASS.

## ELECTRONIC ENGINEERS
*5 OR MORE YEARS EXPERIENCE*

Small electronic research and development laboratory, located 8 miles outside of Washington, D. C., has several openings for senior electronic engineers. Degree essential. Varied projects, including considerable Defense work. Liberal salaries dependent upon experience. Excellent personnel policies.

**THE DAVIES LABORATORIES**
*Incorporated*
4705 Queensbury Road, Riverdale, Maryland

## ELECTRONIC ENGINEERS
FOR DESIGN & DEVELOPMENT WORK IN
RADAR
COMPUTERS
DIGITAL TECHNIQUES
with a young progressive company, send resumé of experience and education, with salary requirements, to

Electronic Engineering Company
of California
140 SOUTH ALVARADO STREET LOS ANGELES 4, CALIFORNIA
DUNKIRK 2-7333



## SPECIAL OPPORTUNITIES FOR
## SENIOR ENGINEERS

Convair in cool, clean, beautiful San Diego invites you to join an "engineers" engineering department. Interesting, challenging, essential long-range projects in commercial aircraft, military aircraft, missiles, engineering research and electronics development. Positions open in these specialized fields:

**Radar Systems Missile Guidance Systems**
**Servo-mechanisms**
**Electronic Circuits**
**Microwave Components and Systems**

Generous travel allowances to those accepted. For free brochure, write Mr. H. T. Brooks, Engineering Dept. 900

# CONVAIR
## IN BEAUTIFUL
# SAN DIEGO

3302 PACIFIC HIWAY
SAN DIEGO 12, CALIFORNIA

# ELECTRONIC ENGINEERS

At least 2 years' experience in design of marine communication systems.

# ELECTRONIC DRAFTSMEN

5 years' experience in communication and control systems.

## WHAT NUCLEAR POWERED SHIPS CAN MEAN TO YOUR FUTURE

**STABILITY**—Electric Boat, builders of the world's first atomic-powered submarines, offers you a permanent position on its technical staff, where there have been no layoffs for over 20 years!

**OPPORTUNITY**—The potential of the great new field of nuclear power is unlimited. At Electric Boat, you will join the top ranking ship designers and builders . . . forge ahead in this expanding industry and pioneer many of its peacetime developments.

**HIGH EARNINGS**—Good salary provides an added basis for a secure and rewarding future.

**BETTER LIVING**—You will enjoy a relaxing, leisurely life in the attractive community of Groton, Connecticut (near New London), on Long Island Sound . . . minutes away from every recreational facility. Electric Boat's Housing Bureau will help you relocate.

*NOW—Start your future in nuclear powered ships at Electric Boat! Send Complete resume to Mr. Peter Carpenter.*

## ELECTRIC BOAT

Division of General Dynamics Corp.

GROTON CONNECTICUT

# POSITIONS OPEN

Location

KANSAS CITY, MO.

## Electronic & Mechanical Engineers

**ELECTRONIC ENGINEERS:** Must have considerable development experience in radio transmitting and receiving equipment. Ability to fill position of Senior Project Engineer a requisite.

**MECHANICAL ENGINEER:** Must have development experience in mechanical design of electronic or similar precise equipment. Practical and theoretical knowledge of materials, finishes, sheet metal, and machine shop design are basic requirements. Position is one of considerable responsibility.

**SALARY:** Open.

These positions are permanent.

Write stating educational and professional history direct to:

**Jay V. Wilcox, *President***

**WILCOX ELECTRIC COMPANY, INC.**

**1400 Chestnut St. Kansas City 1, Mo.**

*Dependable communications since 1931*

# ELECTRICAL ENGINEERS

**Unusually attractive research opportunities continue to develop in Battelle's expanding research program. Electronic components, servo-mechanisms, digital and analog computers, ultrasonics, x-rays—these immediate openings illustrate the variety of opportunities in our laboratories. Regardless of the field of specialization, electrical engineers interested in research in any area of electrical engineering are urged to apply. Please reply directly for prompt, confidential consideration, to**

**BATTELLE MEMORIAL INSTITUTE**

505 KING AVENUE

COLUMBUS 1, OHIO

# EXPORT FIELD ENGINEER

To call on Latin-American distributors to solve specialized engineering problems, help in setting up service facilities, train servicemen, etc.

Must have electronic experience. Fluent Spanish essential. Extensive traveling, one month trips. Midwestern headquarters. Permanent position. Excellent opportunity with rapidly expanding organization.

Send full description of all experience, including electronic and non-electronic work, also describe education, past earnings, etc. All replies kept confidential.

## ADMIRAL CORPORATION

SERVICE DIVISION

201 E. NORTH WATER ST. CHICAGO 11, ILLINOIS

# APPLICATIONS ENGINEERS

Electrical or electronic engineers with degree, to act as liaison between tube and set manufacturers and or supervise related laboratory problems. Experience not necessary, excellent opportunity, many employee benefits, good pay. Apply or send resume to:

**TUNG-SOL ELECTRIC, INC.**

**200 Bloomfield Ave. Bloomfield, N. J.**

## ELECTRONIC TECHNICIANS

Our Physics Research Laboratories need technicians to assist in the design, construction and operation of electronic and associated equipment. Training in electronics is essential; a knowledge of machineshop practice, vacuum technology or glassblowing would be an asset. Salary range $2400 - $3720. depending upon qualifications. State particulars as to age, marital status, education and experience in detail, in first letter. Address inquiries to File 9A,

**Atomic Energy of Canada Limited**

**Chalk River, Ontario**

## STAVID ENGINEERING, INC.

has openings for Graduate

**ELECTRONIC ENGINEERS**

**MECHANICAL ENGINEERS**

Experience in Design and Development of Radar and Sonar necessary.

Broad knowledge of Search and Fire Control Systems; Servo Mechanisms, Special Weapons, Microwave, Antenna and Antenna Mounts, etc.

Mechanical Engineer should have experience in packaging of Electronic Equipment to Gov't specifications including design of complex cabinets, shock mount and sway brace structures, Servo Mechanisms.

Positions are available in Field Service and Technical Writing.

Liberal personnel benefits including life, sickness and accident insurance, and a worthwhile pension system. Paid holidays and vacations.

Personnel Office
200 W. Seventh St.
Plainfield, N. J.
Telephone Plainfield 6-4806

## ELECTRONIC ENGINEER

**A Graduate E.E.—or equivalent experience**

. . . we are a well-established precision manufacturing company . . . Our small Product Engineering group is responsible for the introduction and technical supervision of a wide range of commercial and government products, such as: Professional Motion Picture Projection and Sound Equipment, Automatic Dry Cleaning Equipment, Gyros, Servo Systems, etc. Our Product Engineers guide a new project from prototype to production . . . this work involves liaison with the research and production department as well as development of the production design.

*This is a PERMANENT job with an excellent opportunity for a young man with initiative and ability*

**INTERNATIONAL PROJECTOR CORP.**
**55 LA FRANCE AVE.**
**BLOOMFIELD, NEW JERSEY**
**BLOOMFIELD 2-8052**

## INVITATION TO Engineers

Openings are available for qualified Electronic or Electrical Engineers in the rapidly growing Electronics Design Section of Chance Vought Aircraft. This section is responsible for designing, testing and supervising the manufacture of new and improved electronic and electromechanical equipment which will meet the high performance and reliability standards required for operation in modern military aircraft and guided missiles. In addition, it is responsible for surveying the Electronic industry to select the finest electronic parts and equipment for incorporation into Chance Vought designs.

Chance Vought Aircraft, one of the oldest and most progressive aircraft manufacturers in this country, has an outstanding record of producing first line Naval fighter aircraft for over thirty-five years. The company recently entered the guided missile field and is now flight testing its missiles with excellent results.

The Chance Vought plant is located in the Dallas-Fort Worth area which has a metropolitan population of approximately one million and offers the finest cultural and recreational facilities in the Southwest.

Both the experienced and recently graduated engineer with a creative and imaginative interest in the solution of complex problems in the field of Aviation Electronics will find excellent opportunities available in this progressive organization. Positions open at the present time include vacancies of Electronic Test and Development Engineers, Electronic Quality Control Engineers, Circuit Designers, Guidance Engineers, and Servo-Engineers. For further information regarding these opportunities submit resume to Engineering Personnel Section, Chance Vought Aircraft, P. O. Box 5907, Dallas, Texas.

CHANCE VOUGHT AIRCRAFT

DALLAS, TEXAS

DIVISION OF UNITED AIRCRAFT CORPORATION

## OIL FILLED CONDENSERS

| MFD | VDC | Price | MFD | VDC | Price |
|---|---|---|---|---|---|
| 2 | 400 | $ .55 | .1 | 1500 | .49 |
| 5-5 | 400 | 1.65 | .5 | 1500 | 1.25 |
| 1 | 600 | .55 | .5 | 1500 | 2.50 |
| 2 | 600 | .69 | 4 | 1500 | 2.95 |
| 1 | 600 R'd | .69 | .1-.5 | 2000 | .95 |
| 2-2 | 600 R'd | 1.65 | .25 | 2000 | 1.50 |
| 5 | 600 | .95 | .3 | 2000 | 1.50 |
| 4 | 600 | 1.65 | 1 | 2000 | 1.95 |
| 4 | 600 R'd | 1.65 | 3 | 2000 | 3.75 |
| 5 | 600 | 1.75 | .12 | 2500 | 8.95 |
| 6 | 600 | 1.85 | 1 | 2500 | 2.75 |
| 8 | 600 R'd | 1.85 | 1-1 | 2500 | 3.85 |
| 8-8 | 600 | 1.95 | .32 | 2500 | 15.00 |
| 4-4-4 | 600 | 2.50 | .5 | 3000 | 2.40 |
| 4 x 3 | 600 | 2.50 | 1 | 3000 | 3.40 |
| 10 | 600 | 3.25 | 2 | 3000 | 4.50 |
| 1 | 1000 | .65 | .03 | 4000 | 1.25 |
| 2 | 1000 | .90 | 3 x .2 | 4000 | 2.95 |
| 2 | 1000 R'd | .95 | 2 | 4000 | 6.95 |
| 3.5-.5 | 1000 | 1.85 | .1 | 5000 | 1.60 |
| 4 | 1000 | 1.95 | .2 | 5000 | 2.50 |
| 6 | 1000 | 2.50 | 1 | 5000 | 4.85 |
| 8 | 1000 | 3.25 | 2 | 5000 | 18.50 |
| 1 | 1200 | .85 | .5 | 5000 | 29.50 |
| 1-1-1 | 1200 | 1.85 | .01-.03 | 6000 | 1.65 |
| 1 | 6000 | 9.95 | 1 | 25KV | 85.00 |
| .1 | 7000 R'd | 1.79 | .001 | 50KV | 24.50 |
| .1-.1 | 7000 | 5.95 | .025 | 50KV | 42.50 |
| .1 | 7500 | 2.85 | .2 | 50KV | 85.00 |
| 1-1 | 7500 | 22.50 | .25 | 50KV | 95.00 |
| .075-.075 | 8KV | 6.50 | 7.5 | 220VAC | 1.95 |
| 5 | 10 | 16.50 | 1-3 | 330VAC | 1.95 |
| 1 | 10KV | 29.50 | 10 | 330VAC | 3.95 |
| 1 | 12KV | 8.95 | 12.75 | 330VAC | 4.10 |
| 1 | 15KV | 45.00 | 15 | 330VAC | 4.50 |
| .045 | 15KV | 4.70 | 5 | 440VAC | 3.10 |
| .05 | 16KV | 4.95 | 2.9 | 660VAC | 3.50 |
| .075 | 16KV | 9.95 | 7 | 660VAC | 4.25 |
| .25 | 20KV | 19.95 | 8 | 660VAC | 4.50 |
| 1 | 20KV | 54.00 | | | |

### OILMITES

| MFD | VDC | TYPE | Price |
|---|---|---|---|
| .02 | 600 | OM-6002 | $ .45 |
| .05 | 600 | OM-6005 | .48 |
| .1 | 600 | OM-610 | .51 |
| .25 | 600 | OM-625 | .55 |
| .5 | 600 | OM-650 | .60 |
| 1.0 | 600 | OM-601 | .83 |

## COAXIAL CONNECTORS



| | | | | | |
|---|---|---|---|---|---|
| 83-1AC | $ .42 | 83-1RTY | $ .65 | 83-22R | $ .68 |
| 83-1AP | .30 | 83-1SP | .50 | 83-22SP | .90 |
| 83-1P | 1.20 | 83-1SPN | .56 | 83-22T | 1.95 |
| 83-1H | .12 | 83-1T | 1.37 | 83-16B | .15 |
| 83-1HP | .25 | 83-2AP | 1.95 | 83-18S | .15 |
| 83-1J | .75 | 83-22AP | 1.40 | 83-76S | .24 |
| 83-1R | .40 | 83-22F | 2.10 | 83-77S | .55 |
| | | 83-22J | 1.50 | | |

### FULL LINE OF JAN APPROVED COAXIAL CONNECTORS
IN STOCK
UHL—N—PULSE—BN—BNC

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| UG-7/AP | $6.30 | UG-22C/U | $1.65 | UG-37/U | $17.50 | UG-102/U | $ 90 |
| UG-12/U | .95 | UG-23/U | 1.90 | UG-57/U | 2.30 | UG-103/U | .68 |
| UG-15/U | 1.50 | UG-23B/U | 1.90 | UG-58/U | .80 | UG-104/U | 1.40 |
| UG-18/U | 1.25 | UG-23C/U | 1.90 | UG-58A/U | 1.15 | UG-106/U | .15 |
| UG-21/U | .60 | UG-25/U | 1.30 | UG-59A/U | 2.25 | UG-108/U | 2.60 |
| UG-19/U | 1.80 | UG-25/U | 1.35 | UG-83/U | 2.25 | UG-109/U | 2.60 |
| UG-20B/U | 1.80 | UG-27/U | 1.30 | UG-85/U | 1.75 | UG-146/U | 2.55 |
| UG-21/U | .95 | UG-27A/U | 2.95 | UG-86/U | 2.50 | CW-159/U | .60 |
| UG-21A/U | 1.50 | UG-28A/U | 3.75 | UG-87/U | 1.60 | UG-166/U | 32.50 |
| UG-21B/U | 1.35 | UG-29/U | 1.55 | UG-88/U | 1.10 | UG-167/U | 5.85 |
| UG-21C/U | 1.45 | UG-30/U | 2.30 | UG-89/U | 1.35 | UG-171/U | 2.80 |
| UG-22/U | 1.35 | UG-34/U | 16.50 | UG-90/U | 1.60 | UG-173/U | .40 |
| UG-22B/U | 1.65 | UG-36/U | 17.50 | UG-98/U | 1.85 | UG-175/U | .15 |
| UG-176/U | $ .15 | UG-255/U | $2.45 |
|---|---|---|---|
| UG-177/U | .24 | UG-260/U | 1.20 |
| UG-185/U | 1.35 | UG-261/U | 1.20 |
| UG-191/U | .80 | UG-262/U | 1.20 |
| MX-195/U | .75 | UG-273/U | 2.25 |
| UG-197/U | 2.80 | UG-274/U | 2.75 |
| UG-201/U | 2.25 | UG-275/U | 5.50 |
| UG-203/U | .85 | UG-276/U | 2.75 |
| UG-206/U | 1.80 | UG-290/U | 1.20 |
| UG-224/U | 1.20 | UG-291/U | 1.35 |
| UG-236/U | 3.85 | UG-306/U | 2.95 |
| UG-240/U | 2.30 | UG-414/U | 3.25 |
| UG-254/U | 2.75 | UG-625/U | 1.35 |

### QUOTATIONS UPON REQUEST ON ANY CONNECTORS NOT LISTED HERE

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| M-358 | MC-277 | PL-259A | PL-325 | | | | |
| M-359 | MC-320 | PL-274 | SO-239 | 93-C | 49120 | D-163950 | ES-685696-5 |
| M-359A | PL-258 | SO-264 | | 93-M | 49121A | D-166132 | ES-689172-1 |
| M-360 | PL-259 | PL-293 | TM-201 | | | | |

## COAXIAL CABLE

| Type | Price Per M Ft. | Type | Price Per M Ft. | Type | Price Per M Ft. | Type | Price Per M Ft. |
|---|---|---|---|---|---|---|---|
| RG-5/U | $140.00 | RG-13/U | $210.00 | RG-26/U | $175.00 | RG-57/U | $325.00 |
| RG-6/U | 180.00 | RG-17/U | 650.00 | RG-29/U | 50.00 | RG-58/U | 60.00 |
| RG-7/U | 85.00 | RG-18/U | 900.00 | RG-34/U | 300.00 | RG-58A/U | 70.00 |
| RG-8/U | 100.00 | RG-19/U | 1250.00 | RG-35/U | 900.00 | RG-59/U | 60.00 |
| RG-9/U | 250.00 | RG-20/U | 1450.00 | RG-54A/U | 97.00 | RG-62/U | 75.00 |
| RG-9A/U | 275.00 | RG-21/U | 220.00 | RG-55/U | 110.00 | RG-77/U | 100.00 |
| RG-10/U | 240.00 | RG-22/U | 150.00 | | | | |
| RG-11/U | 100.00 | RG-22A/U | 295.00 | | | | |
| RG-12/U | 240.00 | RG-24/U | 675.00 | | | | |

ADD 25% TO PRICES SHOWN FOR QUANTITIES UNDER 500 FT.

## 2 φ LOW INERTIA SERVO MOTORS

KOLLSMAN—45 Volt 60 cycle 4 watts 1500 RPM—now ..... $22.50
PIONEER—10047-2-A 26 volt 400 cycle with 40:1 reduction gear ..... $10.50
PIONEER—CK-14 115 volt 400 cycle—includes damping signal generator (autosyn) ..... $47.50

## HIGH VOLTAGE TRANSFORMERS

G.E.—Pri. 115V 60 cy. Sec. 6250V 80 MA—12.5 KV insulation ..... $18.50
G.E.—Pri. 115V 60 cy. Sec. 6250/3850/2600V 56 MA 12.5 KV Insulation ..... $18.50

## ANTENNAS

AT-4/ARN ..... $8.25
AT-38A/APT (70 to 400MC) ..... 13.70
AT-49/APR-4 (300 to 3300MC) ..... 13.70
AN-65A (P/O SCR-521) ..... 1.50
AN-66A (P/O SCR-521) ..... 1.75
AIA-3CM conical scan ..... 125.00
ASB Yagi—5 element 450 to 560MC ..... 9.80
ASB Yagi—Double stacked 5 element ..... 14.70
ASA Yagi—Double stacked 570 to 430MC ..... 29.40

## RELAYS

Sigma type 4AH—2000Ω 4 ma DC coil—SPDT contacts—hermetically sealed 5 pin plug-in base $3.30
Sigma type 4R—8000Ω 1 ma DC coil—SPDT contacts—enclosed type 5 pin plug-in base ..... $4.25
Stevens Arnold type 171 Millisec relay—900 ohm coil SPST NO contacts ..... $5.50
Cutler-Hammer and Square D type B-7A contactor—24 VDC coil—SPST NO 200 Amp contacts.. $4.75
Price Bros. type 161-M—220 VAC contactor—SPST NO double bk 30A contacts ..... $3.25
G.E. CR5181-1AE—115 V 60 cy. AC contactor—SPST 30 Amp contacts plus 1 aux auxiliary SPDT contacts ..... $14.50
RBM—115 V 60 cy. AC coil—DPDT 3 amp Contacts ..... $3.20

## METERS

1 MA DC 3½" R Dejur Mod 310 (0-4KV scale) ..$5.75
500 Microamps, DC—2½" round—Sun ..... 4.30
1ma. DC Fan type—4" scale (rem. from equipt). 3.95
500 ma. DC 2½" R.—General Electric ..... 2.95
2 amp. RF 2½" Sq.—Simpson ..... 3.15
5 amp. AC 4" R.—JBT ..... 4.11
30 V DC 2½" R.—General Electric ..... 3.95
3 amp. RF 3½" R.—Weston ..... 6.00

## CRYSTAL DIODES

| | | | | | |
|---|---|---|---|---|---|
| 1N21 | $1.10 | 1N27 | $1.79 | 1N41 | $11.25 |
| 1N21A | 1.69 | 1N31 | 6.10 | 1N42 | 18.75 |
| 1N21B | 3.50 | 1N34 | .66 | 1N43 | 1.55 |
| 1N22 | 1.09 | 1N34A | .95 | 1N45 | .94 |
| 1N23 | 1.95 | 1N38 | 1.70 | 1N52 | 1.05 |
| 1N23A | 3.25 | 1N39 | 6.25 | 1N53 | 3.15 |
| 1N23B | 4.25 | 1N40 | 10.50 | 1N54 | .55 |

## TYPE "J" POTENTIOMETERS

| Resis. | Shaft | Resis. | Shaft | Resis. | Shaft |
|---|---|---|---|---|---|
| 50 | SS | 5K | 1/4" | 50K | 3/8" |
| 60 | 9/16" | 5K | 3/8" | 50K | 1/2" |
| 100 | SS | 5K | 1/2" | 100K | SS |
| 200 | SS | 10K | SS | 150K | 1/2" |
| 250 | 1/8" | 10K | 3/8" | 200K | 3/8" |
| 500 | SS | 10K | 1/2" | 250K | SS |
| 500 | 9/16" | 15K | SS | 250K | 3/4" |
| 500 | 1/2" | 15K | 1/2" | 350K | 3/8" |
| 500 | 5/8" | 20K | SS | 400K | SS |
| 500 | 1/2" | 25K | SS | 500K | 1/4" |
| 1K | SS | 25K | 1/4" | 500K | 7/16" |
| 2K | 3/8" | 30K | 1 1/8" | 1 Meg | SS |
| 2500 | SS | 40K | SS | 2 Meg | SS |
| 4K | SS | 50K | SS | Meg | SS |
| 5K | SS | 50K | 1/4" | $1.25 each | |

### DUAL "JJ" POTS.—$2.95 ea.

| | | | | |
|---|---|---|---|---|
| 50 SS | 330 SS | 2500 SS | 2.5 meg SS |
| 100 SS | 500 SS | 10K SS | 5 meg SS |
| 250 SS | 1K SS | 1 meg SS | 1K 25K ½" |

### TRIPLE "JJJ" POTS.—$3.95 ea.

100K/100K/100K ½" 20K/150K/15K ½"

## SOUND POWERED TELEPHONES

U. S. NAVY TYPE M HEAD AND CHEST SETS
U.S.I. A-260 W.E. D-173013
A.E. GL832BAQ
ANY TYPE—$14.88 EACH
TS-10 Type Handsets ..... $9.25

## GENERATORS AND INVERTERS

Eclipse-Pioneer type 716-3A (Navy Model NEA-3A) Output-AC 115V 10.4A 800 to 1400cy. 1ø; DC 30 Volts 60 Amps. Brand new ..... $38.50
Eclipse-Pioneer type 1235-1A. Output-30 Volts DC 15 Amps. Brand New-Original Packing ... $15.50
PE-218 Inverter-28 VDC to 115 VAC 400 cy 1500 VA. (New) ..... $49.50
Pioneer Type 900-1B Inverter-28VDC to 120V 800 cy 7 amp AC (used) ..... $22.65
G. E. Inverter-28 VDC to 120 VAC 800 cy 750 VA 1ø ..... $39.50
ATR Inverter 6VDC to 110 VAC 60 cy 75W. .. $22.95
PU-7/AP Inverter-28 VDC to 115 VAC 400 cy 2900 VA (used) ..... $75.00
Eclipse-Pioneer type 12121-1A Inverter—Voltage and frequency regulated—24VDC 18 Amp input—AC output 115V 3ø 400 cy 250VA 0.7 PF — (New) $225.00

## TEST EQUIPMENT

- Gen. Radio 475B Frequency Monitor ..... *$200.00
- Gen. Radio 681A Freq. Deviation Meter ... $87.50
- 1-72K Signal Generator ..... $48.50
- C-D Quietone Filter Type IF-16 110/220 V AC/DC 20 Amps. ..... *$9.00
- TS-143/CPN Oscilloscope ..... *$395.00
- Dumont 175A Oscilloscope ..... *$225.00
- Gen. Radio 757-PI Power Supply ..... *$27.00
- A.W. Barber Labs. VM-25 VTVM ..... *$85.00
- TS-10A/APN Delay Line Test Set ..... $45.00
- TS-19/APQ-5 Calibrator ..... $75.00
- CWI-60AAG Range Calibrator for ASB, ASE, ASV and ASVC Radars ..... $39.95
- CRV-14AAS Phantom Antenna for Transmitters up to 400 MC ..... $1.75
- 3 CM Pickup Horn Antenna AT-48/UP ..... $9.95
- I-138A Signal Generator—10 cm. ..... *$185.00
- BC-221 Frequency meter ..... *$125.00
- CW—60ABM Frequency Meter—10 CM ..... $97.50
- Weston Model I D.C. Milliameter 150/1500 MA with leather case ..... $75.00

All items New Except Where noted * (Exc. Used Condition.)

## MISCELLANEOUS EQUIPMENT

I-82F Selsyn Indicator ..... $6.95
SCR-515 compl. w/dynamotor, control box ..... 69.50
Amperex 1B98 Gamma Counter ..... 9.87
Powerstat 1226—115/230V Input—0-270V out. @ 9 amp. ..... 37.00
EIMAC 35T Ionization Gauge ..... 5.95
R-7/APS-2 Receiver ..... 49.50
FL-8 1020 cycle filter ..... 2.95
RM-29 remote control unit ..... 8.95
RM-14 remote control unit ..... 8.95
RTA-1B 12/24 V dynamotor ..... 40.00
BC-1206-CM2 Receiver ..... 17.95
ASB-4 Radar equip. Complete ..... 69.75
RCA AVR-15 Beacon Recvr ..... 18.50
Navy DF-14 Direction Finder complete ..... 385.00
CU-24/ART-13 Antenna Loading Cond. ..... 4.95
T-85/APT-5 300-1600 MC Transmitter ..... 175.00
Sola 230807 Constant Volt. Transf. 250 VA. ..... 49.50
PP-107/APT-5 Rectifier Unit for above ..... 42.50
BC-1016 Tape Recorder ..... 3.50
AN/APA-30 ..... 375.00
BC-910A Oscilloscope ..... 147.50
BC-1068 Receiver ..... 57.50
ATI and ATK TV Block Equip. ..... Quote
BC-348 Receiver ..... Quote
RTA-1B Transceiver ..... Quote
T-47/ART-13 Transmitter ..... Quote
Sparti 1521 vacuum relay switch (P/O AN/ART-13) ..... 9.50

## PULSE TRANSFORMERS

### UTAH 9262 9278 9280

G.E. K54J318
G.E. 68G-627
G.E. 68G828
G.E. 68G929G1
G.E. 80G13
G.E. K-2468B
G.E. K-2469A
G.E. K-2744B
AN/APN-9 (90)756-501)
AN/APN-9 (90)756-502)
AN/APN-9 (352-727-0)
AN/APN-9 (352-7251)
Westinghouse 132-AW
Westinghouse 139DW2F
Westinghouse 166AW2F
Westinghouse 176AW2F

### UTAH 9318 9330 9350

Westinghouse 187AW2F
Westinghouse 232-AW2
Westinghouse 232-RW-2
AN/APN-4 Block Osc.
Philco 352-7149
Philco 352-7150
Philco 352-7071
Philco 3°2-7178
Raytheon UX-7390
Raytheon UX-10066
W.E. D-163310
W.E. D-163247
W.E. D-163525
W.E. D-164681
W.E. KS-9563

## AN/APA-23 RECORDER

Sweeps any receiver through its tuning range and permanently records frequency and time of received signals on paper chart. Power input—(motor) 27V DC 1.5A, and (recorder) 80/115V AC 60-2600 cy 13°W.

Originally designed to record pulse or sinewave modulated signals received by an AN-APR-1, AN/APR-2, AN/APR-4, AN/APR-5, BC-348, S-27, SX-28. BRAND NEW ..... $147.50

## SPRAGUE PULSE NETWORKS

7.5 E3-1-200-67P, 7.5 KV, "E" Circuit 1 Microsec. 200 PPS 67 ohms imped, 3 sections ..... $4.30
7.5 E3-3-200-67P, 7.5 KV, "E" Circuit 3 Microsec. 200 PPS, 67 ohms imped, 3 sections ..... $6.75
7.5 E4-16-60-67P, 7.5 KV, "E" Circuit 4 sections, 16 microsec, 60 PPS, 67 ohms imped ..... $9.25
15 E4-.91-400-50P, 15 KV, "E" Circuit .91 microsec. 400 PPS, 50 ohms imped, 4 sections ..... $37.50
15-A-1-400-50P, 15 KV, "A" Circuit, 1 microsec. 400 PPS, 50 ohms imped ..... $32.50

LECTRONIC RESEARCH LABORATORIES
715-19 ARCH ST. PHILA. 6, PA.
Telephones - MARKET 7-6771-2-3
"CABLE ADDRESS—LECTRONIC PHILADELPHIA"

GUARANTEED BRAND NEW

# TUBE SPECIALS

STANDARD BRANDS ONLY

| Receiving Tubes | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0DA | $1.50 | 6AJ5 | 2.50 | 6SJ7GT | .89 | 14A7 | .97 | 3GP1 | 4.95 | 2051 | 1.15 | EL-5B | 8.95 | WE-254A | 5.90 | 805 | 4.50 |
| 01A | .67 | 6AK5 | 1.35 | 6SN7GT | .89 | 14H6 | 1.09 | 4AP10 | 6.75 | 5545 | 32.50 | 4B24 | 5.75 | WE-257A | 2.77 | 806 | 24.50 |
| 0Z4 | .74 | WE-6AK5 | 2.85 | 6SN7WGT | 2.30 | 14H8 | 1.09 | 4AP10A | 8.75 | Transmitting | | 4B25/ | | WE-274A | 8.50 | 807 | 1.70 |
| 0Z4A | .90 | 6AK5W | 3.05 | 6SQ7 | .75 | 14J6 | 1.49 | 5BP1 | 5.75 | & Special | | EL-6CF | 8.95 | 811 | 1.50 | 809 | 1.95 |
| 1A3 | .75 | 6AL5 | .99 | 6SQ7GT | .78 | 14J7 | 1.09 | 5BP4 | 8.75 | Purpose Tubes | | 4E27 | 17.25 | WE-275A | 6.95 | 809 | 2.40 |
| 1A5GT | .72 | 6AL5 | .69 | 6SR7 | .81 | 14P7 | .93 | 5CP1 | 4.95 | OA2 | $1.50 | 4J36 | 150.00 | WE-283A | 4.25 | 810 | 10.95 |
| 1A6 | .72 | 6AL5W | 2.98 | 6SS7 | .99 | 14H7 | .93 | 5CP7 | 9.50 | OA3 | 1.51 | 4J38 | 120.00 | WE-285A | 5.25 | 811 | 3.60 |
| 1A7GT | .91 | 6AQ5 | .59 | 6ST7 | 1.25 | 14J7 | .93 | 5FP7 | 6.95 | OB2 | 1.50 | 4J50 | 375.00 | WE-286A | 7.90 | 813 | 9.80 |
| 1AB5 | .89 | 6AQ6 | .79 | 6T7G | 1.09 | 14N7 | .93 | 5HP1 | 6.75 | OB3 | 1.29 | 4J52 | 400.00 | WE-294A | 5.75 | 814 | 3.95 |
| 1BJGT | .99 | 6AR5 | .79 | 6T8 | 1.11 | 14R7 | .93 | 5HP4 | 5.75 | OC3 | 1.20 | 5D21 | 26.50 | 304TH | 9.75 | 815 | 2.75 |
| 1B4P | 1.17 | 6AS5 | .99 | 6U5 | 1.19 | 14W7 | .93 | 5JP1 | 26.50 | OD3 | 1.15 | 5J23 | 52.50 | 304TL | 9.75 | 816 | 1.60 |
| 1C5GT | .85 | 6AS6 | 2.30 | 6U7G | .84 | 14X7 | .93 | 5JP2 | 26.50 | 1B21A | 2.85 | 5J29 | 18.50 | 307A | 5.50 | 826 | 1.45 |
| 1C6 | .69 | 6AS7G | 4.85 | 6V6 | 1.60 | 19 | .89 | 5JP4 | 26.50 | 1B22 | 3.25 | 6-5B | .85 | WE-309A | 6.45 | 828 | 13.40 |
| 1C7G | .69 | 6AT6 | .63 | 6V6G | .89 | 19T8 | 1.16 | 5LP1 | 19.75 | 1B23 | 9.90 | 6AN5 | 8.95 | WE-310A | 6.45 | 829 | 9.95 |
| 1D5GP | .69 | 6AT6GT | 1.21 | 6V6GT | .79 | 24A | 1.16 | 5LP8 | 19.75 | 2C21 | $1.50 | 6AR6 | 3.35 | WE-313C | 4.15 | 829A | 14.50 |
| 1D7G | .69 | 6AU6 | .69 | 6W4GT | .72 | 24A | .79 | 5MP1 | 10.65 | 1B24A | 39.50 | 6C21 | 29.50 | 316A | .89 | 829B | 14.00 |
| 1D8GT | .71 | 6AV6 | .63 | 6W6GT | .99 | 28A6 | 1.16 | 7HP1 | 8.75 | 1B26 | 3.73 | 6C24 | 62.50 | 327A | 4.25 | 830B | 5.95 |
| 1E5GP | .71 | 6AV6 | 1.60 | 6X4 | .80 | 28L6GT | .89 | 7HP7 | 7.95 | 1B27 | 19.50 | 6J4 | 7.95 | WE-331A | 9.75 | 832 | 7.95 |
| 1F4 | .69 | 6AV6 | 1.20 | 6X5GT | .89 | 28Z5 | .99 | 7HP12 | 14.95 | 1B29 | 2.90 | 10Y | .45 | WE-350A | 5.25 | 832A | 9.95 |
| 1F5G | .69 | 6B7 | .97 | 6Y6G | .99 | 29 | .79 | 7HP14 | 14.95 | 1B32 | 3.95 | 13-A | .80 | 350B | 4.95 | 837 | 1.85 |
| 1F6 | .74 | 6B8 | .99 | 6Z4 | .99 | 29 | .69 | 7LP1 | 14.95 | 1B35 | 12.50 | 15E | 2.35 | WE-356B | 5.45 | 838 | 3.25 |
| 1G4GT | .69 | 6B8G | .85 | 6Z4Y | .79 | 29D7 | 1.75 | 9CP7 | 14.95 | 1B36 | 12.50 | 15R | .95 | 361A | 4.75 | 841 | .99 |
| 1G5G | .69 | 6B8G | .72 | 7A5 | .88 | 30 | .72 | 9LP7 | 9.95 | 1B38 | 32.50 | REL-21 | 2.25 | 368A | 6.95 | 843 | .99 |
| 1G6GT | .69 | 6BA7 | 1.28 | 7A6 | .83 | 30 Spec. | .48 | 10DP4 | 18.50 | 1B40 | 4.95 | 24G | 1.85 | 371A | .95 | 845 | 8.75 |
| 1H4G | .69 | 6BA7 | .88 | 7A7 | .83 | 31 | .62 | 10HP4 | 24.50 | 1B41 | 47.50 | HK-24 | 3.95 | 371B | .95 | 845W | 6.75 |
| 1H5GT | .74 | 6BC7 | 1.10 | 7A8 | .83 | 32 | .99 | 12DP7 | 9.90 | 1B42 | 9.90 | HK-25 | 3.95 | 388A | 2.95 | 849 | 29.50 |
| 1H6G | .99 | 6BD5GT | 1.60 | 7AD7 | 1.44 | 32L7GT | .87 | 12G-P7 | 16.50 | 1B54 | 32.50 | FG-32/ | | WE-399A | 4.70 | 851 | 67.00 |
| 1H6GT | 1.01 | 6BD6 | .99 | 7AH7 | 1.08 | 33 | .99 | 12HP7 | 16.50 | 1B70 | .88 | 5558 | 6.75 | 417A | 16.95 | 852 | 22.50 |
| 1J5G | .74 | 6BF6 | .72 | 7B4 | .83 | 34 | .99 | 9BP1 | 9.90 | 1S21 | 1.50 | RK-34 | .49 | 434A | 17.50 | 860 | 24.50 |
| 1J6G | .95 | 6BF5 | 1.10 | 7B5 | .83 | 35 51 | .79 | 905 | 6.45 | 1Z2 | 3.75 | 35T | 4.95 | 446 | 1.95 | 861 | 24.50 |
| 1L4 | .69 | 6BF6 | .83 | 7B6 | .83 | 35A5 | .89 | Photo Cells | | 2B22 | 2.20 | 35T ton | | 446A | 1.95 | 864 | .99 |
| 1LA4 | .97 | 6BG6G | 1.92 | 7B7 | .83 | 35B5 | .87 | 1P28 | $4.10 | 2B23 | .75 | 5516 | 5.95 | 446B | 2.25 | 865 | 1.25 |
| 1LA6 | 1.10 | 6BH6 | .99 | 7B8 | .89 | 35L6GT | .81 | 1P29 | 1.27 | 2C22 | .75 | 35TG | 4.95 | 450TH | 42.50 | 866A | 1.48 |
| 1LB4 | 1.01 | 6BJ6 | .99 | 7C4 | .69 | 35W4 | .59 | 918 | 1.65 | 2C26 | .49 | REL-26 | .75 | 450TL | 42.50 | 869B | 45.00 |
| 1LC5 | .99 | 6BK7 | 1.60 | 7C5 | .83 | 35Y4 | .81 | 919 | 1.95 | 2C26A | .49 | RK-47 | 4.92 | 451 | 1.39 | 872A | 3.45 |
| 1LC6 | .93 | 6BL7GT | 1.45 | 7C7 | .83 | 35Z4GT | .69 | 923 | 1.35 | 2C29 | .49 | EF-50 | .79 | 471A/ | | 885 | 1.45 |
| 1LD5 | .93 | 6BN6 | 1.59 | 7E5 | 1.20 | 35Z5GT | .59 | 927 | 1.85 | 2C39 | 22.00 | VT-52 | .65 | 1B21A | 2.75 | 876 | 1.60 |
| 1LE3 | .93 | 6BQ6GT | 1.20 | 7E6 | .88 | 36 | .69 | 931A | 6.95 | 2C40 | 16.25 | 53A | 5.69 | SS-561 | 12.50 | 878 | 1.85 |
| 1LH4 | .82 | 6BQ7 | .85 | 7E7 | .83 | 37 | .69 | 1616 | 4.95 | 2C42 | 26.50 | RK-59 | 2.45 | 503A/K | 2.45 | 884 | 3.50 |
| 1LN5 | .91 | 6C5 | .75 | 7F7 | .99 | 38 | .69 | Thyratrons & | | 2C43 | 21.50 | RK-60 | 1.95 | 506AX | 1.47 | 954 | .99 |
| 1N5GT | .85 | 6C8G | .89 | 7F8 | 1.59 | 39 44 | .59 | Ignitrons | | 2C44 | 1.50 | VT-62 Br | 1.15 | 507AX | 1.47 | 955 | .79 |
| 1N6G | .97 | 6C8G | .89 | 7G7 | 1.32 | 41 | .71 | OA4G | $1.32 | 2C46 | 29.50 | RK-63 | 22.50 | 508 | 2.95 | 956 | .99 |
| 1P5GT | .69 | 6C8G | .96 | 7H7 | .83 | 42 | .89 | EL-C1A | 4.75 | 2C51 | 9.75 | VT-67 | .48 | 530 | 17.20 | 957 | .69 |
| 1Q5GT | .99 | 6C10G | 2.48 | 7J7 | 1.32 | 43 | .89 | 2A4G | 1.25 | 2C53 | 12.00 | RK-69 | 2.25 | 531 | 8.25 | 958A | .69 |
| 1R4 | .69 | 6C10 | .83 | 7K7 | 1.32 | 45 | .89 | 2B4 | 2.10 | 2E22 | 1.85 | 72 | 1.32 | 532A | 2.95 | 959 | 1.48 |
| 1R5 | .89 | 6D8G | .83 | 7L7 | .97 | 45Z5GT | .89 | 2C33 | 9.10 | 2E24 | 4.15 | 75 | 1.32 | 5933 | 65.00 | 991 | .99 |
| 1S4 | .71 | 6F5 | 1.10 | 7N7 | .97 | 46 | .81 | 2D21 | 1.55 | 2J21A | 9.95 | RK-75 | 3.50 | 539 | 2.20 | 1003 | .90 |
| 1S5 | .81 | 6F5GT | .83 | 7Q7 | .83 | 47 | .99 | 3C22 | 9.95 | 2J22 | 9.95 | VR-75/ | | 561 | 3.50 | CK-1005 | .79 |
| 1T4 | .81 | 6F6 | .99 | 7R7 | .88 | 48 | 1.60 | 3C33 | EL- | 2J26 | 26.50 | OA3 | 1.51 | WE-615 | .67 | E-1148 | .38 |
| 1T5GT | .71 | 6F6G | .99 | 7S7 | 1.11 | 49 | 1.19 | C1B | 3.95 | 2J27 | 24.50 | 75T | 5.50 | WL-670A | 8.70 | 1291 | 1.20 |
| 1U4 | .86 | 6F7 | .85 | 7V7 | 1.11 | 50 | 1.41 | 3C45 | 17.50 | 2J31 | 39.50 | VR-78/ | .64 | 700A | 24.50 | 1293 | .49 |
| 1U5 | .89 | 6F8G | .91 | 7W7 | 1.11 | 50A5 | 1.41 | 4C35 | 28.75 | 2J32 | 42.50 | VR-90/ | | 700B | 24.50 | 1294 | .49 |
| 1V | .69 | 6G8G | 1.06 | 7Y4 | .73 | 50H5 | .88 | EL-C5B | 9.95 | 2J33 | 39.50 | OB3 | 1.29 | 700C | 24.50 | 1294 | .49 |
| 1X2 | 1.89 | 6H6 | .83 | 7Z4 | .89 | 50L5 | .88 | 5C22 | 53.45 | 2J34 | 39.50 | VT-98 | | 700D | 24.50 | 1299 | .49 |
| 2A3 | 1.28 | 6H8GT | .83 | 10 | .45 | 501 6GT | .79 | C6A | 6.75 | 2J36 | 85.00 | (Br) | 65.00 | 701A | 6.95 | 1602 | 2.25 |
| 2A5 | .79 | 6J5 | .75 | 12A | .65 | 501Y4GT | .79 | C6B | 6.75 | 2J37 | 13.75 | CL190E | 2.00 | 702A | 2.25 | 1613 | 2.00 |
| 2A7 | .89 | 6J5G | .64 | 12A6 | .71 | 53 | .95 | FG-17 | $575.25 | 2J38 | 17.50 | 100R | 2.90 | 702B | 4.25 | 1614 | 2.00 |
| 2B7 | .79 | 6J5GT | .64 | 12AGT | .66 | 55 | .99 | FG-33 | 17.50 | 2J39 | 49.50 | 100TH | 10.25 | 703A | 6.95 | 1616 | 1.97 |
| 2B35 | .94 | 6J6 | 1.20 | 12AJ7 | 1.16 | BK55B | 1.99 | FG-67 | 125.00 | 2J40 | 49.50 | WE-101D | 9.65 | 705A | .95 | 1619 | .99 |
| 2X2 | .89 | 6J7 | .99 | 12AKGT | .77 | L55B | .32 | FG-67 | 14.00 | 2J41 | 175.00 | WE-101F | 3.62 | 705A | 2.75 | 1620 | 6.25 |
| 2X2A | 1.88 | 6J7GT | .79 | 12AH7GT | 1.32 | 56 | .69 | FG-81A | 4.95 | 2J48 | 49.50 | WE-102F | 2.85 | 706AY | 45.00 | 1622 | 2.38 |
| 3A4 | .85 | 6J8G | 1.80 | 12AL5 | .80 | 57 | .89 | | 7.85 | 2J49 | 65.00 | VR-105/ | | 706BY | 45.00 | 1624 | 1.98 |
| 3A5 | 1.89 | 6K5GT | .99 | 12AT6 | .59 | 58 | .89 | FG-95/ | | 2J50 | 39.50 | 0C3 | 1.20 | 706CY | 45.00 | 1625 | .48 |
| 3A8GT | 2.25 | 6K6GT | .69 | 12AT7 | 1.15 | 59 | 1.24 | 5560 | 25.00 | 2J851 | 2.50 | WE-113A | 1.32 | 706FY | 45.00 | 1626 | .39 |
| 3B7 | .57 | 6K7 | .83 | 12AU6 | .79 | 70L7GT | .91 | FG-104/ | | 2J54 | 47.50 | HY-114 | .75 | 706GY | 45.00 | 1629 | .99 |
| 3C6 | 1.15 | 6K7G | .83 | 12AU7 | .79 | 71A | .99 | 5561 | 24.60 | 2J55 | 87.50 | WE-117A | .95 | 707A | 9.95 | 1630 | .99 |
| 3D6 | .57 | 6K8 | 1.22 | 12AV6 | .63 | 75 | .89 | FG-105 | 19.50 | 2J56 | 150.00 | F-123A | 6.95 | 707B | 22.50 | 1631 | 1.38 |
| 3LF4 | .91 | 6K8GT | .96 | 12AW6 | 1.20 | 76 | .69 | FG-106 | 95.00 | 2J61 | 45.20 | WE-124A | 3.88 | 708A | 4.85 | 1632 | .75 |
| 3Q4 | .77 | 6L6G | 1.49 | 12AX7 | 1.09 | 77 | .99 | FG-172 | 39.50 | 2K22 | 37.50 | F-127A | 2.85 | 709A | 4.95 | 1634 | 3.10 |
| 3Q5GT | .83 | 6L6 | 1.87 | 12BA6 | .72 | 78 | .79 | FG-178 | 14.50 | 2K25 | 33.50 | VT-127A | 2.60 | 710A | 1.70 | 1638 | .79 |
| 3S4 | .77 | 6L6G | 1.79 | 12BA7 | .95 | 79 | .89 | RX-233A | 4.95 | 2K26 | 107.15 | AB-150 | 12.50 | 713A | 1.45 | 1641 | 1.95 |
| 3V4 | .77 | 6L6GA | 1.79 | 12BD6 | .99 | 80 | .65 | FG-235A/ | | 2K28 | 34.50 | VR-150/ | | 714AY | 10.75 | 1642 | .79 |
| 6AZ4 | .69 | 6L7 | 1.08 | 12BE6 | .70 | 81 | 5552 | 94.50 | 2K29 | 26.00 | OD3 | 1.15 | 715A | 4.75 | 1643 | 1.17 |
| 6B4GY | 1.59 | 6L7G | .95 | 12C8 | .77 | 82 | FG-271/ | | 2K33 | 295.00 | FG-190 | 12.15 | 715B | 12.75 | 1648 | 1.98 |
| 6T4 | 1.19 | 6N7 | 1.10 | 12F8GT | .79 | 83 | 5581 | 62.50 | 2K45 | 145.00 | HF-200 | 16.50 | 715C | 26.50 | 1946 | .79 |
| 6U4G | .69 | 6N7GT | 1.10 | 12H6 | .69 | 83V | 1.45 | 3932 | 7.95 | 2K54 | 125.00 | 203A | 7.95 | 717A | 4.75 | 1948 | 198.00 |
| 6V4G | 1.07 | 6P5GT | .96 | 12J5GT | .69 | 84 6Z4 | .79 | 394A | 4.77 | 2K55 | 135.00 | 203B | 6.33 | 718AY | 45.00 | 5681 | 2.60 |
| 6W4 | .82 | 6Q7 | .99 | 12K8 | .82 | 85 | .79 | GL-415/ | | 2X2A | 1.85 | 204A | 49.50 | 718BY | 45.00 | 5654 | 9.85 |
| 6X4G | .87 | 6Q7G | .87 | 12Q7GT | .87 | 89Y | .99 | 5550 | 39.50 | 3B22 | | CE-240 | 3.95 | 720BY | 75.00 | 5656 | 6.65 |
| 6Y3GT | .89 | 6R7 | .99 | 12SA7 | .89 | 117L7GT | 1.89 | KU-610 | 12.50 | | EL-1G | 2.95 | 211 | .95 | 720DY | 75.00 | 7193 | .75 |
| 6Y4G | .71 | 6S4 | .72 | 12SA7GT | .89 | 117P7GT | 1.89 | KU-622 | 39.50 | 3B23 | 6.75 | WE-211D | 12.50 | 721A | 4.95 | 8005 | 8.95 |
| 6Z3 | .85 | 6S7 | 1.05 | 12SF5 | .79 | 117Z3 | .97 | KU-628 | 22.50 | 3B24 | 9.95 | WE-211E | 12.50 | 723A | 4.95 | 8008 | 2.49 |
| 6Z4 | 1.11 | 6S7G | .99 | 12SF5GT | .79 | 1177GT | .97 | KU-634 | 22.50 | 3B24W | 9.95 | 212E | 42.50 | 723A/B | 18.50 | 8012 | 2.49 |
| 6A4 | 1.35 | 6S7Y | .84 | 12SF7 | .79 | FM-1000 | 1.59 | WL-652/ | | 3B25 | 4.50 | WE-218A | .34 | 724A | 3.22 | 8013 | 2.75 |
| 6A6 | 1.17 | 6S8GT | .74 | 12SG7 | .99 | Cathode Ray | | 5551 | 62.50 | 3B26 | 3.75 | 219C | 8.95 | 724B | 3.22 | 8013A | 4.98 |
| 6A7 | 1.05 | 6S8Y | .73 | 12SH7 | .73 | Tubes | | WL-654/ | | 3B27 | 3.95 | 221A | 1.95 | 725A | 3.22 | 8020 | 1.39 |
| 6A8 | 1.08 | 6S7 | 1.20 | 12SJ7 | .79 | 2AP1 | $9.75 | 659 | 82.00 | 3B28 | 7.75 | 227A/ | | 726A | 14.50 | 8020 | 1.39 |
| 6AB4 | .99 | 6S7GT | 1.05 | 12SJ7GT | .89 | 2AP5 | 9.75 | WL-672 | 22.00 | 3C24 | 1.85 | 5C27 | 4.40 | 726B | 45.00 | 8025 | 4.95 |
| 6AB7 | 1.05 | 6S8GT | .94 | 12SK7 | .89 | 3AP1 | 10.25 | WL-677 | 39.50 | 3C27 | 6.95 | WE-231D | 2.25 | 726C | 65.00 | 9002 | 1.98 |
| 6AC5GT | 1.19 | 6SP5 | .83 | 12SL7GT | 1.03 | 3AP4 | 10.25 | WL-681/ | | 3C37 | 32.50 | 232CH | 240.00 | 730A | 25.00 | 9003 | 1.98 |
| 6AC7 | 1.11 | 6SP5GT | .80 | 12SN7GT | .99 | 3BP1 | 7.95 | 5850 | 39.50 | 3D21 | 1.95 | WE-244A | 5.20 | 731A | 2.65 | 9003 | 1.75 |
| 6AC7W | 3.25 | 6SP7 | .99 | 12SQ7GT | .79 | 3BP1 | 2.25 | 722A | 3.75 | 3D21A | 4.75 | WE-245A | 2.38 | 801 | 9.80 | 9005 | .98 |
| 6AD6G | .96 | 6SQ7 | .91 | 12SR7 | .89 | 3DP1 | 8.85 | 804 | 1.95 | 3E29 | 14.50 | WE-249B | 6.50 | 801A | .45 | 9006 | 1.98 |
| 6AD7G | 1.31 | 6SH7 | .89 | 12SR7GT | .89 | 3DP1A | 6.75 | 805 | 1.99 | 3J31 | 95.00 | WE-249C | 1.50 | 800 | 1.80 | 9006 | .38 |
| 6AE6G | .99 | 6SH7GT | .89 | 12X3 | 1.19 | 3FP1 | 4.95 | 1625 | 1.80 | 4-125A | 29.50 | 250TH | 22.50 | 801A | .45 | 1N948B | 3.79 |
| 6AF6G | .89 | 6SJ7 | .89 | 12Y3 | .89 | 3FP7 | 6.95 | 1904 | 14.50 | 4A31 | 1.18 | 250TL | 22.50 | 803 | 4.95 | 1N949B | 3.79 |
| 6AG5 | .87 | 6SJ7GT | .89 | 14A4 | .97 | 3FP7A | 6.95 | 2050 | 1.80 | 4B22/ | | WE-252A | 5.65 | 804 | 8.95 | 1N950B | 3.49 |

## IMMEDIATE
### DELIVERY FROM STOCK

| | |
|---|---|
| GENERAL ELECTRIC | ARMA |
| CONTROL INSTRUMENT | BENDIX |
| FORD INSTRUMENT | KETAY |
| HENSCHEL | DIEHL |

*Terms 20% cash with order, balance C. O. D. unless rated. All prices net F. O. B. our warehouse, Phila., Penna., subject to change without notice.*

"CABLE ADDRESS - LECTRONIC PHILADELPHIA"

# SYNCHROS

ARMY ORDNANCE—NAVY ORDNANCE—COMMERCIAL

| | | | | | |
|---|---|---|---|---|---|
| AY-101D | 5D | 6DG | X | 2JD3E1 | C-78148 |
| 1CT | 5DG | 6G | 2JH1 | C-64968-6 | C-78149 |
| 1F | 5F | 7DG | 2JHG1 | C-567101 | C-78154 |
| 1G | 5G | 7G | 2JHH1 | C-56776-1 | C-78410 |
| 1HG | 5N | A | 2JIM1 | C-69405-2 | C-78411 |
| 1SF | 5SF | B | 2J5A2 | C-69406 | C-78414 |
| 5B | 5SG | M | 2J5D1 | C-69406-1 | C-78415 |
| 5CT | 6CT | N | 2J5HA1 | C-77610 | C-78670 |
| | | | | | C-79331 |

SYNCHRO CAPACITORS
SYNCHRO BLOWN FUSE INDICATORS
SYNCHRO BLOWN FUSE INDICATORS

## LECTRONIC RESEARCH LABORATORIES

715-19 ARCH ST. PHILA. 6, PA.

Telephones - MARKET 7-6771-2-3

# Reliance Specials

## GEAR ASSORTMENT

100 small assorted gears. Most are stainless steel or brass. Experimenter's dream! ..... Only $6.50

## HAYDON TIMING MOTOR

1 R.P.M., 115 V., 60 Cycle..... $1.95

## SOUND POWER HANDSET

BRAND NEW

Includes 5 ft. cord.—Uses no batteries or external power source. $18.50 nr

AC LINE CORDS 6 ft. long with molded plug..... 16c

## BALL BEARINGS

| Mfg. No. | ID | OD | Thick. | Price |
|---|---|---|---|---|
| MRC5028-1 | 5 1/2 | 6 1/2 | 1 | $3.75 |
| MRC7028-1 | 5 5/64 | 6 15/64 | 9/16 | 3.50 |
| MRC7021-2RS | 4 1/8 | 5 9/32 | 23/64 | 2.95 |
| MRC106M2 | 1 17/64 | 2 7/16 | 25/64 | 1.75 |
| MRC106M1 | 1 13/64 | 2 7/16 | 25/64 | 1.60 |
| Federal LS11 | 1 1/8 | 2 1/2 | 5/8 | 1.75 |
| Norma S11R | 1 1/8 | 2 1/8 | 5/8 | 1.70 |
| Federal AS41 | 1 1/16 | 1 1/2 | 9/32 | 1.50 |
| Schatz | 3/4 | 1 3/4 | 9/16 | 1.00 |
| Norma 203S | 5/8 | 1 9/16 | 7/16 | .90 |
| ND5202-C13M | 1/2 | 1 3/8 | 1 3/8 | 1.00 |
| ND 3200 | 25/64 | 15/32 | 11/32 | .60 |
| ND R6 | 3/8 | 7/8 | 7/32 | .40 |
| MRC39R1 | 11/32 | 1 1/32 | 5/16 | .45 |
| MRC38R3 | 8/16 | 55/64 | 13/32 | .45 |

## NEEDLE BEARINGS

TORRINGTON B108 ½" wide ⅝" 13/6"..... 30c

## Brand New Meters—Guaranteed

0-10 ma. D.C. 2½"..$3.95 0-80 Amp. D.C. 2½"..$2.50
0-1 Ma. D.C. 3½" DeJur..(Scale Reads 0-4 KV)..$6.75

## SELENIUM RECTIFIERS

Full Wave 200 MA 115V..... $1.75
Half Wave 100 MA 115V..... .91

## TIMING MOTOR

8 RPM 115V 60 cyc
E. Ingraham Co.

**$1.79**

## 400 CYCLE INVERTERS

Leeland Electric Co.

#10880 In: 20-28 V.D.C., 02 A. 8000 R.P.M. Out: 115V. 400 Cyc. 1 phase, 1500 V.A. 90 PF..... $24.95

## 3 AG FUSES

| Amp. | Per 100 | Amp. | Per 100 | Amp. | Per 100 |
|---|---|---|---|---|---|
| 1/8 | $4.00 | 3/4 | $4.00 | 5 | $3.00 |
| 3/8 | 4.00 | 1 | 3.00 | 10 | 3.00 |
| 1/2 | 4.00 | 5 | 3.00 | 15 | 3.00 |

3 AG FUSE HOLDERS (Finger) 25¢

## DELAY NETWORK—ALL 1400Ω

T 114—Approx. 2.2 micro sec. delay..... 95¢
T 115 Similar to T 114 with tap brought out ..... 7 each

## Sound Powered Chest Set RCA—With 24 Ft. Cord

Per Pair
USED $17.60
NEW $26.40

## POSTAGE STAMP MICAS

| mmf | mmf | mmf | mmf | mmf | mmf | mmf | mfd | mfd |
|---|---|---|---|---|---|---|---|---|
| 10 | 40 | 70 | 125 | 240 | 400 | 680 | .0016 | .004 |
| 20 | 47 | 75 | 135 | 250 | 430 | 800 | .002 | .0044 |
| 22 | 50 | 80 | 150 | 270 | 470 | 820 | .0027 | .005 |
| 33 | 51 | 82 | 160 | 300 | 500 | 910 | .0033 | .006 |
| 34 | 56 | 90 | 175 | 330 | 510 | .001 | .0036 | .0055 |
| 35 | 60 | 100 | 180 | 360 | 580 | .0012 | | .0068 |
| 38 | 62 | 110 | 200 | 370 | 600 | .0013 | | .0082 |
| 39 | | 120 | 220 | 390 | 650 | .0015 | | .01 |

### Price Schedules

10 mmf to 820 mmf..... 5¢
.001 mmf to .0016..... 8¢
.002 mfd to .0082 mfd..... 15¢
.01 mfd..... 28¢

## SILVER MICAS

| mmf | mmf | mmf | mmf | mmf | mmf | mfd | mfd | mfd |
|---|---|---|---|---|---|---|---|---|
| 10 | 50 | 100 | 170 | 360 | 510 | .001 | .0024 | .0047 |
| 18 | 51 | 110 | 180 | 370 | 525 | .0011 | .0025 | .005 |
| 22 | 56 | 115 | 208 | 390 | 560 | .0013 | .0027 | .0051 |
| 23 | 60 | 120 | 225 | 450 | 570 | .0015 | .0028 | .0056 |
| 24 | 62 | 125 | 240 | 410 | 680 | .0016 | .003 | .006 |
| 25 | 66 | 130 | 250 | 430 | 700 | .0018 | .0033 | .0068 |
| 27 | 68 | 135 | 255 | 470 | 800 | .0022 | .0039 | .004 |
| 30 | 75 | 150 | 260 | 488 | 900 | .0023 | .004 | |
| 40 | 82 | 155 | 270 | 500 | | | | |

### Price Schedule

10 mmf to 700 mfd..... 10¢
.0011 mfd to .002 mfd..... 20¢
.0022 mfd to .0082 mfd..... 50¢

## PULSE TRANSFORMERS

UTAH—9262 9278 9280 9340
WESTERN ELECTRIC—D166173 D161310
KS8696, KS8565, KS9800, KS9862, KS13161
GENERAL ELECTRIC—80-G-5
JEFFERSON ELECTRIC—C-12A-1318
DINION COIL—TR 1048 TR1049
also 352-7250-2A; 352-7251-2A; T-1229621-60

## COAXIAL CABLE CONNECTORS

| 15¢ UG175/U | $1.20 83-1F | 30¢ 83-1AP | 75¢ 83-1J | 40¢ SO-239 | 12¢ HO OD |
|---|---|---|---|---|---|
| 83-1AC | $0.42 | UG-23/U | 1.20 | UG-175/U | .15 |
| 83-1AF | .30 | UG-23B/U | 1.90 | UG-176/U | .15 |
| 83-1F | 1.20 | UG-23C/U | 1.90 | UG-185/U | 1.20 |
| 83-1H | .12 | UG-24/U | 1.30 | UG-224/U | 1.35 |
| 83-1HP | .25 | UG-25/U | 1.35 | UG-255/U | 2.45 |
| 83-1J | .75 | UG-27/U | 1.30 | UG-260/U | 1.20 |
| 83-1R | .40 | UG-27B/U | 3.45 | UG-261/U | 1.20 |
| 83-1RTY | .65 | UG-28A/U | 3.75 | UG-262/U | 1.20 |
| 83-1SP | .50 | UG-30/U | 2.30 | UG-274/U | 2.75 |
| 83-1SPN | .55 | UG-57B/U | 2.30 | UG-290/U | 1.20 |
| 83-1T | 1.30 | UG-58/U | .80 | UG-291/U | 1.25 |
| 83-2AF | 1.95 | UG-58A/U | 1.15 | UG-306/U | 2.95 |
| 83-2J | 2.10 | UG-59A/U | 2.25 | UG-499/U | 1.25 |
| 83-2R | 1.70 | UG-83/U | 1.95 | UG-625/U | 1.35 |
| 83-22AP | 1.40 | UG-85/U | 1.75 | CW-123A/U | .50 |
| 83-22R | .65 | UG-87/U | 1.60 | M-358 | 1.30 |
| 83-22SP | .90 | UG-88/U | 1.10 | M-359 | .30 |
| 83-168 | .15 | UG-89/U | 1.35 | PL-258 | .75 |
| 83-185 | .15 | UG-102/U | .90 | PL-259 | .50 |
| UG-13/U | 1.70 | UG-103/U | .65 | PL-259A | .55 |
| UG-21/U | .95 | UG-104/U | 1.40 | PL-274 | 1.20 |
| UG-21B/U | 1.35 | UG-106/U | .12 | SO-239 | .40 |
| UG-22/U | 1.30 | UG-146/U | 2.55 | | |
| UG-22A/U | 1.60 | UG-167/U | 5.70 | | |

## NEW COAXIAL CABLES

| | Price per 1000 Ft. | | Price per 1000 Ft. |
|---|---|---|---|
| RG 5/U* | $140.00 | RG 22/U* | 150.00 |
| RG 6/U | 180.00 | RG 22A/U | $285.00 |
| RG 7* | 85.00 | RG 24 | 675.00 |
| RG 8*/U | 100.00 | RG 26/U | 475.00 |
| RG 9*/U | 250.00 | RG 29* | 50.00 |
| RG 9A/U | 275.00 | RG 34/U | 300.00 |
| RG 10 | 240.00 | RG 35 | 700.00 |
| RG 11*/U | 100.00 | RG 41*/U | 295.00 |
| RG 11A/U* | 150.00 | RG 54A/U | 97.00 |
| RG 12 | 240.00 | RG 55* | 110.00 |
| RG 13*/U | 216.00 | RG 57*/U | 325.00 |
| RG 17 | 450.00 | RG 58* | 60.00 |
| RG 18/U | 900.00 | RG 58A/U* | 65.00 |
| RG 19 | 1250.00 | RG 59* | 55.00 |
| RG 20/U | 1450.00 | RG 62* | 75.00 |
| RG 21 | 220.00 | RG 77* | 100.00 |

Add 25% for orders less than 500 feet.
* No minimum order—others 250' minimum.

## UNIVERSAL JOINT ALUMINUM

¼" hole x ½" O.D.
1½" long **85¢**

SPAGHETTI SLEEVING—assortment—90 feet..... $1.00

## TYPE "J" POTENTIOMETERS

| | | | |
|---|---|---|---|
| 100 S.S.* | 1,500 1/4S.S. | 15K 1/4 | 200K S.S.* |
| 150 S.S. | 2,000 1/4 | 25K S.S. | 250K 5/8 |
| 300 S.S.* | 2,500 S.S. | 70K S.S. | 250K S.S.* |
| 400 S.S. | 3,000 3/8 | 90K S.S. | 500K S.S.* |
| 500 S.S. | 4,000 3/8 | 100K 7/16 | 1Meg S.S. |
| 1,000 3/8 | 5,000 3/4* | 100K S.S.* | |
| 1,000 S.S. | 10K 5/8 | 200K 5/8 | |

*Split Locking Bushing **$1.50 EACH**

## TYPE "JJ" POTENTIOMETERS

| Ohms | Shaft | Ohms | Shaft | Ohms | Shaft |
|---|---|---|---|---|---|
| 1000 | S.S. | 30K-10K | 3/8"† | 1 Meg. | 1/2" |
| 10K | 5/16" | 3K-90K | 1/4" | 1 Meg. | S.S. |
| 10K | S.S. | | | 1 Meg. | S.S. |

SD—Screw Driver *—Split Locking Bushing †—With Switch

**PRICE—$2.00 EACH**

## JONES BARRIER STRIPS

| | | | | | |
|---|---|---|---|---|---|
| 2—140Y | $.17 | 3—141W | .27 | 9—141Y | .71 |
| 3—140¾W | .21 | 4—141W | .33 | 12—141 | .64 |
| 6—140 | .28 | 5—141 | .39 | 3—142 | .24 |
| 10—140W | .59 | 5—141¾W | .41 | 2—150 | .43 |
| 10—140¾W | .59 | 7—141¾W | .56 | 3—150 | .60 |
| 3—141¾W | .27 | 8—141¾W | .64 | | |

## TIME DELAY RELAY

Raytheon CPX 24166
1 Min. Delay. 115 V., 60 Cycle

2½ second recycling time spring return • Microswitch contact, 10A • Holds ON as long as power is applied • Fully Cased •
ONLY ..... $6.50

## AN CONNECTORS

IMMEDIATE SERVICE
PHONE! WIRE! WRITE! YOUR NEEDS

## OIL FILLED CONDENSERS

| MFD | V.D.C. | Price | MFD | V.D.C. | Price |
|---|---|---|---|---|---|
| 5.2 | 50 | $0.35 | .25 | 3,000 | 1.25 |
| 6 | 400 | .85 | 1 | 3,000 | 3.95 |
| 3 x 3 | 400 | 1.90 | 3 x .2 | 4,000 | 2.50 |
| 4 | 500 | .85 | 2 | 4,000 | 6.95 |
| 4-4 | 500 | 1.30 | 3 | 4,000 | 7.95 |
| 6 | 500 | 1.35 | .01 | 5,000 | .95 |
| 1 | 600 | .45 | .01-.03 | 6,000 | 1.40 |
| .5-.5 | 600 | .40 | .03-.03 | 6,000 | 1.50 |
| 2 | 600 | .80 | .1 | 6,000 | 9.95 |
| 4 | 600 | 1.63 | .02-.02 | 7,000 | 1.55 |
| 8 | 600 | 2.85 | .02-.03 | 7,000 | 1.60 |
| 10 | 600 | 2.95 | .1 | 7,000 | 1.95 |
| 4 x 3 | 600 | 1.75 | .1-.1 | 7,000 | 2.25 |
| 8-8 | 600 | 1.79 | .1 | 7,500 | 2.25 |
| 1 | 800 | .66 | .3-.3 | 7,500 | 4.50 |
| 1 | 1,000 | .75 | .075-.075 | 8,000 | 1.85 |
| 2 | 1,000 | .95 | .15-.15 | 8,000 | 2.95 |
| 3 | 1,000 | 1.70 | .25 | 20,000 | 19.95 |
| 6 | 1,000 | 2.75 | | | |
| 8 | 1,000 | 3.25 | | | |
| 1 | 1,500 | 1.45 | | | |
| .02 | 2,000 | .65 | | | |
| .1-.1 | 2,000 | 1.30 | | | |
| .1-.5 | 2,000 | 1.65 | | | |
| 3 | 2,000 | 3.75 | | | |
| 8 | 2,000 | 7.95 | | | |

1 mfd 6,000 V.D.C. G.E.

**$9.95**

## PRECISION RESISTORS—¼ WATT—30¢

| | | | | | | |
|---|---|---|---|---|---|---|
| 2 | 10.48 | 12.32 | 14.98 | 62.54 | 147.5 | 705 |
| 2.5 | 10.84 | 13.02 | 15.8 | 79.81 | 220.4 | 2,193 |
| 3.5 | 11.25 | 13.52 | 16.37 | 105.8 | 301.8 | 3,500 |
| 5 | 11.74 | 13.89 | | 123.8 | 366.6 | - |
| 6.68 | | | | 125 | 414.3 | 59,148 |

## PRECISION RESISTORS—½ WATT—35¢

| | | | | | | |
|---|---|---|---|---|---|---|
| .25 | 11.1 | 75 | 400 | 6,500 | 16,000 | 36,000 |
| .334 | 13.15 | 87 | 723.1 | 7,000 | 16,700 | 37,000 |
| .444 | 13.3 | 97.8 | 855 | 7,300 | 17,000 | 45,000 |
| .502 | 15 | 125 | 970 | 7,500 | 19,800 | 47,000 |
| .557 | 25 | 178 | 1,500 | 8,000 | 20,150 | 50,000 |
| .627 | 44.73 | 179.5 | 2,500 | 8,500 | 21,300 | 58,000 |
| .76 | 45 | 180 | 2,850 | 9,800 | 25,000 | 59,000 |
| 1.00 | 46 | 200 | 3,995 | 10,000 | 26,667 | 59,905 |
| 1.01 | 52 | 210 | 4,000 | 12,000 | 30,000 | 68,000 |
| 1.53 | 55.1 | 235 | 4,285 | 14,825 | 32,700 | 79,012 |
| 2.04 | 61 | 260 | 4,451 | 15,000 | 32,888 | 100,000 |
| 3.25 | 65 | 270 | 5,714 | 15,750 | 33,000 | 180,000 |
| 5.26 | 66.6 | 290 | 5,900 | 15,755 | 33,300 | |
| 5.89 | 69 | 298.3 | | 15,810 | 35,888 | |

## PRECISION RESISTORS—1 WATT—45¢

| | | | | | | |
|---|---|---|---|---|---|---|
| .1 | 2.55 | 15 | 60 | 425 | 7,000 | 65,000 |
| .11 | 2.58 | 18 | 80 | 1,530 | 8,250 | 86,000 |
| .2 | 2.6 | 28 | 125 | 2,215 | 9,000 | 65,000 |
| .31 | 2.66 | 30 | 250 | 2,250 | 10,000 | 68,000 |
| .861 | 3.1 | 38 | 270 | 2,850 | 12,000 | 69,000 |
| 1.01 | 3.39 | 45.5 | 312 | 3,300 | 50,000 | 84,000 |
| 1.166 | 5.21 | 54.25 | 420 | 5,221 | | 95,000 |

## PRECISION RESISTORS—1 WATT—60¢

| | | | | |
|---|---|---|---|---|
| 100,000 | 149,500 | 270,000 | 348,000 | 590,000 |
| 105,000 | 150,000 | 296,000 | 399,000 | 600,000 |
| 120,000 | 240,000 | 310,000 | 413,000 | 645,000 |
| 128,000 | 260,000 | 320,000 | 520,000 | 650,000 |
| 130,000 | | | 522,000 | 700,000 |
| 132,000 | | | | 800,000 |

MEGOHM 1 WATT 1%—$1.50; 5%—60¢

## PRECISION RESISTORS—2 WATT—75¢

| | | | | |
|---|---|---|---|---|
| 4,385 | 5,000 | 6,000 | 10,000 | 19,917 |

## DIFFERENTIAL Used $4.95

115 V., 60 Cycle
#C78249
New $9.95



3⅝" dia. x 5⅝" long.
Used between two C7824's as a dampener. Can be converted to 3800 RPM Motor in 10 minutes. Conversion sheet supplied. (Converted)..... $5.50
Mounting Brackets—Bakelite for selsyns, and differentials shown above..... 35¢ pair

## OIL FILLED A.C. CONDENSERS

| MFD | V.A.C. | Price | MFD | V.A.C. | Price |
|---|---|---|---|---|---|
| .2 | 750 | $0.69 | 15 | 440 | 6.25 |
| .8 | 660 | 7.50 | 4.4 | 375 | 2.15 |
| 6 | 660 | 5.95 | 25 | 330 | 3.95 |
| 5 | 660 | 5.45 | 20 | 330 | 6.75 |
| 4 | 660 | 4.95 | 4 | 330 | 2.25 |
| 3 | 660 | 4.45 | 3 | 330 | 1.45 |
| 2.9 | 660 | 4.35 | 1.75 | 330 | .85 |
| 2 | 660 | 3.95 | 20 | 220 | 4.95 |
| 1 | 660 | 2.95 | 7.5 | 220 | 2.00 |

1N34 Crystal Diode..... 79c

300 Twin Lead..... 02½ per ft. $18.95 per M

Dynamotor DM 33A..... $3.75 ea.

Chokes: 30 Hy. 80MA @.. $1.29; 6HY. 80 MA @.... 79c

Power Tap Switch—OHMITE (#312-5 Taps) non-shorting 25A 150 V. A.C..... $3.95

Timer—Industrial Timer Corp. 15 min. on 15 min. off continuous 115 V. A. C. Fully cased Plugs into octal socket ..... $5.50

BC 221 FREQUENCY METER..... $80.00

Mike Connector Amphenol 80-81 Interchangeable with Amphenol 80-M cad plated..... 25c

## 2J1G1 SELSYNS

400 CYCLE BRAND NEW

**$8.95**

Minimum Orders $3 All orders f.o.b. PHILA, PA.

# RELIANCE MERCHANDIZING CO.

Arch St. Cor. Croskey Phila. 3, Pa. *Telephone Rittenhouse 6-4927*

## MOTOR GENERATORS

**2.5 KVA Diehl Elec. Co.** 120DC to 120AC, 60 cy., 1 Ph., Complete with Magnetic Controller, 2 Field Rheos and full set spare parts including spare armatures for generator and motor. New..$295.00
**2 KVA O'Keefe and Merritt.** 115DC to 120AC, 50 cy., 1 Ph. Export rated. New.....$195.00
**MOTOR GENERATOR, TYPE COU-2**
Unit of U. S. Navy TCK-7 Transmitter
Motor: 2 H.P., 230 V.D.C., 10 amps.
Generator: 1800V, D.C., 0.4 A, 500V, D.C., 0.35A, 115 V. D.C., 1.5A, 12 V. D.C., 2A. 3480 R.P.M. Self excited. Brand new including spare armature.....$365.00

## INVERTERS

**Onan M-G.-215H.** Navy type PU/13. Input 115/230, 60 cy., 1 Ph. Output: 115, 480 cy., 1 Ph., 1.2Kw and 28V DC at 4 amps. New.....$295.00
**Leland Elec. Co.** PE206A. Input: 28DC at 38 Amps. Output: 80V, 800 cy. 1 Ph., 485VA. New..$22.50
**G.E. J8169172.** Input: 28DC. Output: 115, 400 cy., 1 Ph. 1.5KVA. New.....$32.50
**G.E. 5AS13155IIA.** Model 218J. Input: 28DC. Output: 115, 400 cy., 1 Ph., 1.5KVA. Regulated. New.....$89.50
**Holtzer-Cabot M.G. 164.** Input: 440, 3 Ph., 60 cy., Output: 70V, 146 cy. 3 Ph., 0.140KVA. New $67.50
**Elecsr. 32DC to 110AC,** 60 cy., 1 Ph. at 2.4 Amps. New.....$39.50

## DYNAMOTORS

**Navy type CAJO-211444.** Input: 105 to 130DC. Output: either 26DC at 20 amps. or 13DC at 40 amps. Radio filtered and complete with line switch. New.....$89.50
**Type PE94CN.** For SCR-522. Brand new in overseas cases.....$19.50

## AMPLIDYNES

**G.E. 5AM21JJ37.** Input: 27VDC. Output: 60VDC. 150 Watts. 4600 RPM. Type MG-27-B. New $34.50
**Edison 5AM31NJ18A.** Input: 27VDC, 44 Amps. 4200RPM. Output: 60VDC at 8.8 Amps., 550 Watts. New.....$22.50

## SMALL D.C. MOTORS

**G.E. 5BA50LJ2A.** Armature 27VDC at 8.3 Amps. Field 60VDC at 2.2A. RPM 4000, H.P. 0.5. New.....$27.50
**Oster E-7-S.** 27.5DC. 1/20HP, 3800RPM. Shunt Wound. New.....$9.50
**Dumore Co. type 6LBG.** 24VDC. 40-1 gear ratio. For type B-4 Intervalometer. New.....$8.50

## BLOWERS

**Westinghouse. Type FL.** 115V, 400 cy., 6,700 RPM. Airflow 17C.F.M. New.....$9.50
**E.A.D. Type 350-CW**—60 cycle—NEW.....$15.50

## SYNCHROS

**Ford Inst. Co.** Synchro Differential Generator, Mod. 3 Type 58DG. 90/90V. 400 cy., Ord. Dr. 173020. New.....$22.50
**Arnser.** Synchro Differential Generator. Type 6DG. New.....$60.00
**Hobart Mfg. Co.** Synchro Differential Synchro Type XIX 115V. 60 cy. New.....$9.50

## PARABOLOIDS

Spun Magnesium dishes 17⅛" dia. 4" deep. Mounting brackets for elevation and azimuth control on rear, 1¼ x 1⅝" opening in center for dipole. Brand new, per pair.....$12.50

## SOUND POWERED CHEST SETS

**U. S. Instrument Co.** No. A-260 Combination headset and chest microphone. Brand new, including 20 ft. of rubber covered cable.....$17.50 each
**W.E. Laboratory Headsets**—Type 316 B, 600 ohms at 1000 C.P.S.
Brand new—Price per set.....$6.50

## RELAYS

Struthers-Dunn 1BXX129, 110 A.C.....$2.60
Advance type 425C, 8PDT, 115 A.C.....$1.95
Leach type 1154A, SPDT, 115 A.C.....$2.35
Leach type 1054, BSN 20-28V D.C.....$2.35
Clare Plug-in base No. 30FMX 115 A.C.....$3.50
G.E. Plug-in base Sensitive K27J853.....$4.50
Western Electric D-163781 Plug-in.....$10.00
Guardian Time Delay type B-9-SPDT.....$2.95
Haydon Time Delay 17717 110V/60.....$4.75

## HI-VOLT CAPACITORS

.25 Mfd., 20KV.....$26.50
.25 Mfd., 15KV.....$22.50
1 Mfd., 15KV.....$44.50
1 Mfd., 7.5KV.....$12.50
2 Mfd., 6.0KVA.....$14.50
50 KV Capacitors also available various sizes. Write for list.

## MODEL AN/APA-10 PANORAMIC ADAPTER



**Provides 4 Types of Presentation:**
**(1) Panoramic (2) Aural**
**(3) Oscillographic (4) Oscilloscopic**
Designed for use with receiving equipment AN/ARR-7, AN/ARR-5, AN/APR-4, SCR-587 or any receiver with I.F. of 455 kc, 5.2mc or 30mc.
With 21 tubes including 3" scope tube. Converted for operation on 115 V, 60 cycle source.
**Price.....$245.00**
Gov't Cost $1800.00.
AN/APA-10 80 Page Tech Manual.....$2.75

## TEST EQUIPMENT

TS-127/U Lavoie Freq. Meter—375 to 725 MC.
TS-47APR Test Osc. 40-500MC.
TS-487/U Peak to Peak VTVM.
AN/APR-1 Receiving sets.
R111A/APR-5A Receiver—1000 to 6000 MC.
AN/APR-4 Tuning Units TN-17 (76-300 MC).
AN/APR-4 Tuning Units TN-18 (300-1000 MC)
AN/APR-4 Tuning Units TN-19 (950-2200 MC).
TU-58 Range "A" Tuning Units (110-370 MC).
AN/APA-10 Panoramic Adapters 115V/60 cycles.

**Repair Parts for BC-348 (H, K, L, R only)**
Also BC 224 Models F, K., Coils for ant., r.f., det., osc., I.F., c.w. osc., xtal filters, 4 gang cond., front panels, dial assemblies, vol. conts., etc. Write for complete list and free diagram.

**HIGH QUALITY CRYSTAL UNITS**
Western Electric—type CR-1A/AR in holders. ½" pin spacing. Ideal for net frequency operation. Available in quantities. 5910-6350-6370-6470-6510-6610-6670-6690-6940-7270-7350-7390-7480-7580-9730. All fundamentals in KC. Good multipliers to higher frequencies.....$1.25 each

## RADAR

Antenna-Trans-Rec. Unit ASG-1.
Radar Set SQ complete with spares.
Modulator type SO-11.
Pulse Timers CUZ-50AGD (8D-5 Radar).
Radar Crystal Units 98.35kc, Raytheon.
1N21B Sylvania Diodes.
Repeater Adapters CRM-50 AFO.
SO Series Accessory Control Panels.
SO Series Transmitter-Receiver unit.
CARD 23AEK Bearing Control Units for SO Series.
Auxiliary Rectifier.

## RADAR ANTENNAS

**Type SO-1** (10CM) assembly with reflector, waveguide nozzle, drive motor, etc. New .....$279.50
**Type SO-3** (2 CM.) Surface Search type with reflector, drive motor, etc., but less plumbing. New in original cases.....$185.50
**Type SO-13** (10CM.) Complete assembly with 21" dish, dipole, drive motor, gearing, etc. New $149.50
Also in stock — spare reflectors, nozzles, probes, right angle bends for SO-1 antennas.

## RECTIFIERS

G.E. No. 6 RC80F16 for 54 cells 10 amps.
Mallory **APS-30**—In: 115/230/60/3. Out: 12/42V-65-130A.
Turret Trainer Supply. In: 220/60/3. Out: 28V-130A.
Complete specs. on request.

**TERMS: Rated Concerns Net 30, FOB Bronxville, New York. All Merchandise Guaranteed. Prices Subject to Change**

## 400 CYCLE TRANSFORMERS

**AUTO.** 400 cy. G.E. Cat. No. 80G184.
KVA. .0455-.520P Volts 460/345/300/115.
New.....$6.95
**FILAMENT**—400/2600 CPS. Input—0/75/80/85/105/115/125V. Output—5V3A/5V3A/5V6A/6.3V 0.5A. No. 7249010—New.....$3.95
**PLATE WECO KS 9569** 800 cy. Pri: 115V, Sec: 1380-0-1350 at .037A (2700 V. Total). Electst shlded. Wt. 2.3 lbs. New.....$2.95
**Plate. Thordarson #T46B89.** 1650 VA. Pri: 105-120V, 500 cy. 1 PH. Sec: 5000V. Center tapped. 1.5KV insulation. Brand new.....$49.50
**PLATE & F'L. WECO** KS9555, 400 cy. Pri: 115V. Sec. #1: 930-0-930. Sec. #2: Three 6.3V windings.....$4.95
**FILAMENT.** 400/2400 cps. WECO KS9553. Pri: 115V. Sec: 8.2V1.25A/6.35V1.5A Electst shlded. Wt. 0.5 lbs. New.....$2.95
**PLATE & FIL.** 400/2600 cy Pri: 0/80/115V. Sec: #1=1200VDC at 1.5MA. Sec. #2=400 VDC at 130MA. Fil. Secs: 6.4V4.5A/6.35VO.8A (ins. 1500V)/5V2A/5V2A.....$4.95
**RETARD.** 400 cy. WECO KS9598. 4 Henry 100MA.....$2.75

## HIGH POT TRANSFORMERS

**High Voltage Trans.** Westinghouse Pri: 115. 60 cy. Sec: 15,000 C.T., 60 MA. Good for Hi-Pot test set up. C. T. ungrounded.....$39.50

## PULSE TRANSFORMERS

**PULSE WECO** KS-9563 Supplies voltage peaks of 3500 from 807 tube. Tested at 2000 Pulses/sec and 5000 peak. Wdg. 1-2=16 ohms. Wdg. 1.3=72 ohms. L of Wdg. 1.3=082H at 100 cps.....$7.50
**PULSE.** WECO KS-16131C. 50 KC to 4MC. 1⅝" Dia. x 1⅝" high, 120 to 2350 ohms. New.....$4.75
**High Reactance Trans.** G.E. type Y-3562A.....400 cy. Voltage 11200-135. Inductance H.V. Winding 135 Henries. Output: Peak Voltage 22.8KV. Cat. 8318065GI. New.....$89.50

## RAYTHEON VOLTAGE REGULATORS

Adj. input taps 95-130V., 60 cy. 1 Ph. Output: 115V. 60 Watts. ⅝ of 1% Reg. Wt. 30 lbs. 6¼" H x 8⅛" L x 4⅝" W. Overload protected. Sturdily constructed. Tropicalised. Special.....$16.75

## AMPLIFIERS

GE Servo type 2CV1C1 400 cycle
Constant Output Line RC-73C
Synchro Amplifiers for Radar
Intercommunication type BC-606

## ANTENNAS

MR-16C Coast Guard 23¼ ft. whips
AS-32 APT-2, AT-38A/APT, AS-62/APS-13
AS-125/APR for APR-5A
TDY RADAR JAMMER HORNS
PARABOLOIDS, MAGNESIUM DISHES 17⅛" dia.
SCR-623-A (part of RC-153-B Antenna)
CU 64/APT Antenna matching unit 50 ohm unbal. to 100 bal.

## POTENTIOMETERS

W.E. K8-15138 Linear Sawtooth
W.E. K8-8732 for SCR547 Radar
W.E. K8-8801 Motor Driven

## LINEAR SAWTOOTH POTENTIOMETER
**W.E. KS-15138**

Has continuous resistance winding to which 24 volts D.C. is fed to two fixed taps 180° apart. Two rotating brushes 180° apart take off linear sawtooth wave voltage at output. **Brand New...$8.50**

## MISCELLANEOUS

Cathode Ray Shields for 3" tube.....$2.75
Variac type Motor Controls 600 watt.....$13.50
10 CM Waveguide 90° elbow.....$20.00
Adel Clamps assorted types—write for samples
Shock Mounts Lord #20.....$3.40
Shock Mounts U. S. Rubber #5150C.....$.50
Commando Pole Jacks (Cook Elec. Co.).....$1.00
Switchboard Lamp Receptacles & Jewels.....$.40
SCR522 Transmitter Receivers. Brand New
Fire Detector Wilcolator
No. A-4342. Ord. No. B 257736.....$1.00
Dial Drive Assembly for Bendix, MN-26-Y.....$4.50
Instruction Manual for SCR-193A, B, C, D, E $1.50
Solenoid Cannon 24 V.D.C.—New.....$2.00
Attenuators Tech Lab 500/500 type 700.....$4.75
Volume control Dual for BC-453G.....$2.85
Switch 600V., 60A. Bendix CB19078.....$8.50
Switch Arkless 9 sec. Rotary.....$4.50
Switch Arkless 16 sec. Rotary.....$7.50
Switch Panels SA-2/FRC.....$12.50
Switch Micro R-RL2T.....$.65
Switch Navy Rotary #647491.....$17.50
Contactor CRP-22AGO for SG-1 radar.....$24.75
Band-Switch assembly for AR-88 receiver..$9.50
RIT-AN/APN-1 Receivers
BC-423H Modulators
BC-1366M Jack Boxes—Large quantity
Sweep Generator Capacitors 5/10 mfd.....$2.50

## INDICATORS

**ID-24/ARN-9** .....$12.50
**ID-14/APN-1**.....$7.95
**ID-60/APA-10** Panoramic Adapter converted for 60 cycle operation—complete with tubes and 80 page Tech. Manual.....$245.00

ELECTRONICRAFT
INC.
27 MILBURN ST. BRONXVILLE 8, N. Y.
PHONE: BRONXVILLE 2-0044

# NEW YORK'S RADIO TUBE EXCHANGE

| TYPE | PRICE |
|---|---|
| OA3 | $2.40 |
| OA3 | 1.75 |
| OB2 | 1.75 |
| OC2 | 1.75 |
| OD3 | 1.25 |
| C1B | 6.95 |
| 1B21A | 3.95 |
| 1B22 | 3.95 |
| 1B23 | 3.95 |
| 1B24 | 17.95 |
| 1B26 | 2.95 |
| 1B27 | 13.50 |
| 1B28 | 4.10 |
| 1B29 | 22.00 |
| 1N43 | 19.95 |
| 1N45 | 1.95 |
| 1N46 | 49.95 |
| 1N60 | 69.95 |
| 1N21 | 1.25 |
| 1N21A | 1.75 |
| 1N21D | 4.25 |
| 1N38 | 1.75 |
| 1N38A | 2.00 |
| 1N38 | 2.00 |
| 1N58 | 2.00 |
| 1N58A | 2.75 |
| 1N58B | 1.00 |
| 1N72 | 1.00 |
| 1N48 | 1.50 |
| 2B22 | 1.50 |
| 2B35 | 2.75 |
| 3C45 | .35 |
| 3C48 | 29.00 |
| 3C66 | 27.00 |
| 3C45 | .35 |
| 3D21 | 1.75 |
| 3B28 | 2.75 |
| 3B29 | 2.75 |
| 3J31 | 17.95 |
| 3J32 | 17.95 |
| 3J50 | 27.75 |
| 3J57 | 29.95 |
| 3J51 | 29.95 |

| TYPE | PRICE |
|---|---|
| 3J52 | 69.95 |
| 3J55 | 105.00 |
| 3J58 | 17.95 |
| 3J60 | 12.00 |
| 3J76 | 189.00 |
| 3J40 | 109.00 |
| 3J75 | 199.00 |
| 3J80 | 95.00 |
| 3J81 | 75.00 |
| 3J62 | 75.00 |
| 2K22 | 35.00 |
| 2K28 | 37.50 |
| 2K29 | 37.50 |
| 2K45 | 150.00 |
| 2K48 | 149.50 |
| 3VBQ | 2.10 |
| 3BP1 | 7.50 |
| 3BP2 | 7.50 |
| 3B24W | 7.50 |
| KL3C | 5.95 |
| 3C22 | 129.00 |
| 3C24 | 1.95 |
| 3C31 | 5.95 |
| 3DP1A | 10.95 |
| 3DP1Mod | 12.00 |
| 3E29 | 15.50 |
| 2GP1 | 5.50 |
| RN4 | 1.95 |
| 4A1 | 2.75 |
| 4A31 | 2.75 |
| 4B32 | 10.95 |
| 4C27 | 25.00 |
| 4C28 | 35.00 |
| 4E27 | 17.50 |
| 4J28 | 139.00 |
| 4J29 | 199.00 |
| 4J30 | 199.00 |
| 4J31 | 199.00 |
| 4J35 | 199.00 |
| 4J37 | 199.00 |
| 4J38 | 199.00 |
| 4J39 | 199.00 |

| TYPE | PRICE |
|---|---|
| 4J41 | 199.00 |
| C6B | 3.50 |
| 6BP1 | 6.95 |
| 6BP4 | 6.95 |
| 6CP1 | 6.95 |
| AD21 | 27.50 |
| 5JP1 | 27.50 |
| JP1 | 19.50 |
| JP4 | 27.50 |
| WE84X6 | 2.50 |
| 6C21 | 22.50 |
| C6A | 12.50 |
| C6J | 10.95 |
| 7BP7 | 7.95 |
| 7DP4 | 10.00 |
| 12AP4 | 55.00 |
| 16P1 | 1.95 |
| 16R | .95 |
| VE16 | .95 |
| FG17 | 6.95 |
| RX21 | 2.95 |
| F1152 | 12.95 |
| 96T | 4.95 |
| 6S Special | .35 |
| WX30 | 2.95 |
| HF50 | 1.75 |
| VT52 | .35 |
| RK72 | 1.50 |
| RK73 | 1.95 |
| 100TH | 9.95 |
| FG108 | 59.00 |
| 203A | 8.95 |
| 211 | .95 |
| 217C | 15.00 |
| 242C | 10.00 |
| 244A | 12.95 |
| 249C | 4.50 |
| 250TL | 19.95 |
| 274A | 3.00 |
| 274B | 3.00 |
| 304TH | 15.00 |
| 307TL | 14.50 |
| 307A | 14.95 |

| TYPE | PRICE |
|---|---|
| 310A | 7.95 |
| 311A | 7.95 |
| 313A | 5.95 |
| 323A | 25.00 |
| 327A | 2.95 |
| 328A | 9.95 |
| 350A | 7.95 |
| 350B | 8.95 |
| 357A | 20.00 |
| 368AB | 6.25 |
| 2C39 | 2.95 |
| 388A | 4.50 |
| 388A | 7.95 |
| 394A | 7.95 |
| 403A and B | .75 |
| 417A | 27.50 |
| 434A | 29.95 |
| 446A | 3.00 |
| 446B | 3.00 |
| 450TH | 45.00 |
| 450TL | 45.00 |
| 464A | 9.95 |
| 471A | 2.75 |
| 527 | 15.00 |
| WL 530 | 7.95 |
| WL 531 | 22.50 |
| WL 532 | 17.50 |
| 700A | 25.00 |
| 701A | 7.50 |
| 703A | 5.95 |
| 708A | 3.95 |
| 707A | 17.95 |
| 707B | 27.00 |
| 714A | 17.95 |
| 714A Y | 17.95 |
| 715A | 48.50 |
| 715B | 35.00 |
| 715C | 35.00 |
| 717A | 1.95 |
| 718A Y/BY | 48.50 |
| 719A | 29.50 |
| 721A | 3.95 |
| 725A/B | 17.95 |

| TYPE | PRICE |
|---|---|
| 724A | 4.95 |
| 725A | 5.95 |
| 726A | 18.00 |
| 726B | 24.50 |
| 726C | 69.00 |
| 781 Y | 27.00 |
| 811A | 1.00 |
| 813 | 7.95 |
| 832 | 7.95 |
| 845 | 32.50 |
| 849 | 32.50 |
| 865 | 25.00 |
| 866 | 1.50 |
| 866 | 1.50 |
| 811A | 3.15 |
| 812 | 9.95 |
| 813 | 7.95 |
| 815 | 3.50 |
| 816 | 3.45 |
| 829 | 12.95 |
| 829A | 12.95 |
| 829B | 35.95 |
| 832 | 7.95 |
| 832A | 9.95 |
| 833A | 24.95 |
| 836 | 7.95 |
| 837 | 6.95 |
| 842 | 2.95 |
| 845 | 6.95 |
| 849 | 32.50 |
| 851 | 32.50 |
| 860 | 4.95 |
| 860A | 6.75 |
| 860B | 8.95 |
| 860X | 10.00 |
| 872A | 1.95 |
| 872B | 1.95 |
| 884 | 1.95 |

| TYPE | PRICE |
|---|---|
| 885 | 1.10 |
| 885-R | 195.00 |
| 914 | 75.00 |
| 931A | 6.95 |
| 954 | .55 |
| 955 | .55 |
| 956 | .55 |
| 957 | .55 |
| 958A | .55 |
| 959 | .65 |
| 9001 | .25 |
| 9001B | .25 |
| 1B90 | 1.95 |
| 1N11 | 1.95 |
| 1N12 | 1.95 |
| 1N16 | 2.95 |
| 1N23 | .45 |
| 1N22 | 2.75 |
| 1N24 | 2.00 |
| 1N25 | .45 |
| 5AL | 1.95 |
| 2K50 | 1.95 |
| 9A01 | 1.95 |
| 9A02 | 1.75 |
| 9A03 | 1.75 |
| 9A04 | 1.75 |
| 9A05 | 1.75 |
| 9A06 | .35 |

Minimum Order $25.00

**ATTENTION OIL COMPANY ENGINEERS SHIP SUPPLIERS USERS OF SHORAN WE HAVE FOR IMMEDIATE DELIVERY TESTED AND GUARANTEED PERFECT, NEW**

## 4C28 SPECIAL PRICE $35.00

## MICROWAVE TEST EQUIPMENT TS148/UP SPECTRUM ANALYZER

**Field type X Band Spectrum Analyzer, Band 8430-9580 Megacycles.**

**Will check Frequency and Operation of various X Band equipment such as Radar Magnetrons, Klystrons, TR Boxes. It will also measure pulse width, c-w spectrum width and Q of resonant cavities. Will also check frequency of signal generators in the X band. Can also be used as frequency modulated Signal Generator etc. Available new complete with all accessories, in carrying case.**

**Also available of new production TS239A Synchroscope and TS147/UP X Band Signal Generator.**

## Other test equipment, used hecked out, surplus.

TSK1/SE K Band Spectrum Analyzer
TS3A/AP Frequency and power meter S Band
RF4A/AP Phantom Target S Band
TS10/APN Altimeter Test Set
TS12/AP VSWR Test Set for X Band
TS13/AP X Band Signal Generator
TS15/AP Flux Meter
TS16/AP Altimeter Test Set
TS33/AP X Band Power and Frequency Meter
TS34/AP Western El. Synchroscope
TS34A/AP Western El. Synchroscope
T35/AP X Band Signal Generator
TS36/AP X Band Power Meter
TS47/APR 40-400 MC Signal Generator
TS69/AP Frequency Meter 400-1000 MC
TS100 Scope
TS102A/AP Range Calibrator
TS108 Power Load
TS110/AP S Band Echo Box
TS125/AP X Band Power Meter
TS126/AP Synchroscope
TS174/AP Signal Generator
TS175 Signal Generator
TS226 Power Meter
TS251 Range Calibrator APN9
TS270 S Band Echo Box
TS147 X Band Signal Generator
TS239A Synchroscope

### SURPLUS EQUIPMENT

APA10 Oscilloscope and panoramic receiver
APA38 Panoramic Receiver
APS 3 and APS 4 Radar
APR5A Microwave Receiver
APT2 Radar Jamming Transmitter
APT5 Radar Jamming Transmitter

**MINIMUM ORDER 25 Dollars**

**YOU CAN REACH US ON TWX NY1-3235**

Cables: TELSERSUP

### SPECIAL

**Wide Band S Band Signal Generator 2700/3400MC Using 2K41 or PD 8365 Klystron, Internal Cavity Attenuator, Precision individually calibrated Frequency measuring Cavity. CW or Pulse Modulated, externally or internally.**

Large quantities of quartz crystals mounted and unmounted.
Crystal Holders: FT243, FT171B others.
Quartz Crystal Comparators.
North American Phillips Fluoroscopes Type 80.
Large quantity of Polystyrene beaded coaxial Cable.

**LIBERTY ELECTRONICS, INC.**
135 LIBERTY STREET NEW YORK 6, N. Y.
PHONE WORTH 4-8262

# INVERTERS

### PE 218 LELAND ELECTRIC
**Output:** 115 VAC; Single Phase; PF 90; 380/500 cycle 1500 VA. **Input:** 25-28 VDC; 92 amps; 8000 RPM; Exc. Volts 27.5. **BRAND NEW** .....**$39.95 ea.**

### MG 153 HOLTZER-CABOT
**Input:** 24 V, DC, 52 amps; **Output:** 115 volts—400 cycles, 3-phase, 750 VA, and 26 Volt—400 cycle, 250 VA. Voltage and frequency regulated .....**$95.00 ea.**

### PIONEER 12130-3-B
**Output:** 122.5 VAC; 1.15 amps, 400 cycle single phase, 141 VA. **Input:** 20-30 VDC, 18-12 amps. Voltage and frequency regulated .....**$89.50 ea.**



### 10563 LELAND ELECTRIC
**Output:** 115 VAC; 400 cycle; 3-phase; 115 VA; 75 PF. **Input:** 28.5 VDC; 12 amp. .....**$80.00 ea.**

### MG 165 HOLTZER-CABOT
2000 VA; 27.5 Volt; 100 amps. OUTPUT: 115 volt; 400 cycle; 3 phase, 80% PF .....**$249.50**

### 12116-2-A PIONEER
**Output:** 115 VAC; 400 cyc; single phase; 45 amp. **Input:** 24 VDC 5 amp. .**$90.00 ea.**

### 10285 LELAND ELECTRIC
**Output:** 115 Volts AC, 750 V.A., 3 phase, 400 cycle, .90 PF, and 26 volts, 50 amps, single phase, 400 cycle, .40 PF. **Input:** 27.5 VDC, 60 amps, cont. duty, 6000 RPM. Voltage and Frequency regulated.**$195.00**

### 94-32270-A LELAND ELECTRIC
**OUTPUT:** 115 Volts, 190 V.A., Single Phase; 400 cyc.; .90 PF, and 26 Volts, 60 V.A., 400 cyc., .40 PF. **INPUT:** 27.5 Volts DC, 18 amps; Cont. Duty, Voltage and frequency regulated .....**$95.00**

### 5 RPM GEAR HEAD MOTOR

Mfg. RAE., Type 7519, 115 Volts AD, DC, Fractional HP, Overall dimension: 5⅛" .....**$12.95 ea.** Lots of 10.....**$11.95 ea.**

### METERS
**AMMETER:** DC; 2" 100-100, complete with external shunt .....**$5.95 ea.**
**AC Volt,** Westinghouse, Type NA-25—3-inch round. F.S.-10 MA.....**$6.95 ea.**

**ELAPSED TIME METER,** Aero Instrument Co.—Model 1001. Records operating time of AC electrical and electronic equipment. Registers up to 9,999.9 hours in 1/10th hour increment . . . then automatically resets. Diameter 3⅛" with glass covered face. 120 VAC; 60 cycle. NEW.**$14.95**

### MICROPOSITIONER
**Barber Colman AYLZ 2133-I Polarized D.C. Relay:** Double Coil Differential sensitive; Alnico P. M. Polarized field. 24V contacts; .5 amps; 28 V. Used for remote positioning, synchronizing, control, etc.....**$12.50 ea.**

**BLACK & DECKER MOTOR** AN 94-32159-A; Volts 24; 1 amp; series wound; 12,000 RPM; 1/75 H.P.; Cont. duty; overall size 5-⅝" x 3" dia...**$9.95 ea.**

### SYNCHROS
**1F Special Repeater** (115V-400 Cycle) .....**$15.00 ea.**
**2JIF3 Generator** (115V-400 cyc.)..**$10.00 ea.**
**5CT Control Transformer;** 90-50 Volt; 60 Cyc. .....**$50.00 ea.**
**5F Motor** (115/90 volt—60 cyc.) .**$60.00 ea.**
**5G Generator** (115/90 volt—60 cyc.) .....**$50.00 ea.**
**5SDG Differential Generator** (90/90 volts—400 cyc.) .....**$30.00 ea.**
**TRANSMITTER, BENDIX C-78248;** 115 Volt, 60 Cycle .....**$25.00 ea.**
**REPEATER, BENDIX C-78410:** 115 Volt, 60 Cycle .....**$37.50 ea.**
**REPEATER,** AC synchronous 115 V, 60 cycle, C-78363 .....**$15.00 ea.**
**7G Synchro Generator** (115/90 volt; 60 cycle) .....**$75.00**
**6G Synchro Generator** (115/90 volt; 60 cycle) .....**$60.00**
**6DG Synchro Differential Generator** (90/90 volt; 60 cycle) .....**$60.00**
**1DG Synchro Differential Generator** (90/90 volt; 60 cycles).....**$50.00**
**1CT Control Transformer** (90/55 volt; 60 cycle) .....**$50.00**
**1F Synchro Motor** (115 volt; 60 cycle) **$50.00**

**SYNCHRONOUS SELSYNS**



110 volt, 60 cycle, brass cased, approx. 4" dia. x 6" long. Mfg. by Diehl and Bendix.
**Quantities Available.**
**REPEATERS** .....**$20.00**
**TRANSMITTERS** .....**$20.00**

### G. E. ALTERNATOR
**208 Volts, 400 Cycle, 3 Phase Mod. 2CM97B1**
**55.5 Amps., PF .75, Speed 8000 KW 15, Cont. Duty, Limited Quantity...$320.00**

**SERVO MOTOR 10047-2-A; 2 Phase; 400 Cycle; with 40-1 Reduction Gear $10.00 ea.**

### PIONEER TORQUE UNITS
**TYPE 12604-3-A:** Contain CK5 Motor coupled to output shaft through 125:1 gear reduction train. Output shaft coupled to autosyn, follow-up (AY42). Ratio of output shaft to follow-up Autosyn is 15:1 **$70.00 ea.**
**TYPE 12606-1-A:** Same as 12604-3-A except it has a 36:1 ratio between output shaft and follow-up Autosyn .....**$70.00 ea.**
**TYPE 12605-1-A:** Same as 12606-1-A except it has base mounting type cover for motor and gear train.....**$70.00 ea.**

### 400 CYCLE MOTORS
**AIRESEARCH:** 115V; 40 CPS; Single phase; 6500 RPM; 1.4 amp; Torque 4.6 in. oz.; HP .03 .....**$10.00 ea.**
**EASTERN AIR DEVICES TYPE JM6B:** 200 VAC; 1 amp; 3 phase; 400 cycles, 6000 RPM .....**$12.50 ea.**
**EASTERN AIR DEVICES, TYPE J31B:** 115 V, 400-1200 Cycle, Single Phase .....**$12.50 ea.**
**AIRESEARCH:** AC Induction, 200 V; 3 Phase, 400 Cycle, 2 H.P.; 11,000 RPM; 8 amps .....**$79.50 ea.**
**AIRESEARCH:** AC Induction, 200 V; 3 Phase, 400 Cycle, .12 H.P., 6500 RPM; 1.5 amps .....**$25.00**
**Electric Motor:** PNT—1400—A1—1A Serial No. 207. 208 V., 400 cycles, 3 phase. Kearfott Co., Inc. .....**$17.50 ea.**

### BLOWER ASSEMBLY
115 Volt, 400 Cycle. Westinghouse Type FL, 17CFM, complete with capacitor. New .....**$12.50 ea**

### BLOWER

Eastern Air Devices, Type J21B: 115 volt; 400-1200 cycle; single phase; variable frequency; continuous duty; L & R ⌀2 blower; approx. 22 cu. ft./min. .....**$15.00**

### PIONEER AUTOSYNS
AY-1.....26 Volt—400 Cycle..... **$6.95**
AY-5.....26 Volt—400 Cycle..... **$7.95**
AY27D ..... **$25.50**
AY6—26 Volt—400 cyc ..... **$4.95 ea.**
AY30D—26 Volt—400 cyc .....**$25.00 ea.**
AY14D .....**$14.00**
AY34 .....**$20.00**
AY20—26 Volt—400-cyc. .....**$12.50 ea.**

### MOTOR GENERATORS
**G.E. Model 5LY77AB1,** Input: 115 volts D.C.; 1⅛ H.P. motor; 13 amp; 3600 RPM; shunt contact regulated. Output: 115 Volts A.C. 60 cycles; KVA .06; shunt self excited .....**$129.00 ea.**
**MG-183,** Input: 70 Volts DC, 5.4 amps., 1/3 H.P., 3500 RPM. Output: 50 Volts AC, 2.6 amps., 175 cycles, 3 phase, .225 KVA. .....**$79.00 ea.**

### POWER RHEOSTATS

Standard Brands: 5 Ohms; 100 Watt; 4.48 amps 100 Ohms; 100 Watt; 1.0 amp.

**Boxed, Brand New with Knob $2.50 each — or — $25.00 per Doz.**

### SMALL DC MOTORS
(Approx. size....4" long x 1¼" dia.)
**General Electric** Type 5AB10AJ37; 27 volts, DC; .5 amps, 8 oz inches torque; 250 RPM; shunt wound; 4 leads; reversible .....**$12.50 ea.**
**General Electric,** Mod. 5BA10FJ33; 12 oz. inches torque, 12 V DC, 50 RPM, 1.02 amp. .....**$15.00 ea.**
**General Electric**-Type 5BA10AJ52K; 27 volts, DC; .5 amps, 8 oz. inches torque; 145 RPM; shunt wound; 4 leads; reversible .....**$12.50 ea.**
**General Electric** Type 5BA10AJ19D; (27 volts DC; 1 oz. foot 110 r.p.m.; 0.7 amp. .....**$19.95**

### ALNICO FIELD MOTORS

(Approx. size overall) . . . 3⅝" x 1¼" diameter)
**Delco-Type** 5069230: 27.5 volts; DC; 145RPM .....**$19.95 ea.**
**PM Motor, Delco Type** ⌀5069370: 27.5 volt; DC Alnico Field; 10,000 r.p.m.; dimensions 1" x 1" x 2" long; shaft extension ⅛"; diameter 0.125" .....**$12.50**
**PM Motor, Diehl Mfg. Co., FD6-21:** 27.5 volt; DC Alnico Field; 10,000 r.p.m.; dimensions 1" x 1" x 2" long; shaft extension ⅛", diameter 0.125" .....**$12.50**

### AC CONTROL MOTOR
**Diehl Mfg. Co., FPE-25-7,** 20 Volts, 2 ph 1600 RPM, .85 amps .....**$15.00**
**Diehl Mfg. Co., FPE-25-11:** 75 to 115 volts; 11 amps, 60 cycle, 2 phase 2 pole. Low inertia motor, 5 watts output.....**$25.00**

### SENSITIVE ALTIMETERS
Pioneer Sensitive altimeters, 0-35,000 ft. range . . . calibrated in 100's of feet. Barometric setting adjustment. No hook-up required . .**$12.95 ea.**

**PIONEER GYRO FLUX GATE AMPLIFIER**
**Type 12076-1-A,** complete with tubes .....**$27.50 ea.**

### SINE-COSINE GENERATORS
**(Resolvers)**
**Diehl Type FJE43-9** (Single Phase Rotor). Two stator windings 90° apart, provides two outputs equal to the sine and cosine of the angular rotor displacement. Input voltage 115 volts, 400 cycle .....**$25.00 ea.**
**Diehl Type FFE-43-1** same as FJE-43-9 except it supplies maximum stator voltage of 220 volts with 115 volts applied to rotor .....**$25.00 ea.**
**Arma Resolver Type 218044:** equal in size to size 5 synchro; 55-60 cycle; single phase primary, 2 phase secondary.....**$79.50**

### SYNCHRONOUS MOTOR
**Beuland Electric;** 3 phase; 220/440 volt; 1/3rd HP; 60 cycle; 1800 r.p.m.; frame ⌀203; cont. duty; 40° C rise. Star connected; ball bearing; mounted in 1 HP frame .....**$49.50**

***Immediate Delivery***

**ALL EQUIPMENT FULLY GUARANTEED**

**All prices net FOB Pasadena, Calif.**

**C and H Sales Company**
BOX 356-X EAST PASADENA STATION • PASADENA 8, CALIFORNIA

# A LEADING SUPPLIER OF ELECTRONIC & AIRCRAFT EQUIPMENT

IMMEDIATE DELIVERY -- FULLY GUARANTEED

## A. C. SYNCHRONOUS MOTORS

110 Vt. 60 Cycle

HAYDON TYPE 1600, 1/240 RPM
HAYDON TYPE 1600, 1/60 RPM
HAYDON TYPE 1600, 4/5 RPM
HAYDON TYPE 1600, 1 RPM
HAYDON TYPE 1600, 1 1/5 RPM
TELECHRON TYPE B3, 2 RPM
TELECHRON TYPE BC, 60 RPM
HOLTZER CABOT, TYPE RBC 2505, 2 RPM, 60 oz. 1 in. torque.

## SERVO MOTORS

PIONEER TYPE CK1, 2 $\phi$ 400 CYCLE
PIONEER TYPE 10047-2-A, 2 $\phi$, 400 CYCLE, with 40:1 reduction gear.

## D. C. MOTORS

BODINE NFHG-12, 27 VTS., governor controlled, constant speed 3600 RPM, 1/30 H.P.
DELCO TYP 5068750, 27 VTS., 160 RPM, built in brake.
DUMORE, TYPE EIY2PB, 24 VTS., 5 AMP., .05 H.P., 200 RPM.
GENERAL ELECTRIC, TYPE 5BA10AJ18D, 27 VTS., 110 RPM, 1 oz. 1 ft. torque.
GENERAL ELECTRIC, TYPE 5BA10AJ37C, 27 VTS., 250 RPM, 8 oz., 1 in. torque.
BARBER COLMAN ACTUATOR TYPE AYLC 5091, 27 VTS., .7 amp., 1 RPM, 500 in. lbs. torque.
WHITE ROGER ACTUATOR TYPE 6905, 12 VT., 1.3 amp., 1½ RPM, 75 in. lbs. torque.

## AMPLIDYNE AND MOTOR

AMPLIDYNE, GEN. ELEC. 5AM31NJ18A input 27 vts., at 44 amp. output 60 vts. at 8.8 amp., 530 watts.
MOTOR, GEN. ELEC. 5BA50LJ22, armature 60 vts. at 8.3 amp., field 27 vts. at 2.9 amp. ½ H.P., 4000 RPM.

## PIONEER AUTOSYNS 400 CYCLE

TYPE AY1, AY5, AY14G, AY14D, AY20, AY27D, AY38D, AY54D.
PIONEER AUTOSYN POSITION.
INDICATORS & TRANSMITTERS.
TYPE 5907-17, single, Ind. dial graduated 0 to 360°, 26 vts., 400 cycle.
TYPE 6007-39, dual Ind., dial graduated 0 to 360°, 26 vts., 400 cycle.
TYPE 4550-2-A, Transmitter, 2:1 gear ratio 26 vts., 400 cycle.

## INVERTERS

WINCHARGER CORP. PU 16/AP, MG750, input 24 vts. 60 amps. outputs 115 vts., 400 cycle, 6.5 amp., 1 phase.
HOLTZER CABOT, TYPE 149F, input 24 vts. at 36 amps., output 26 vts. at 250 V.A. and 115 vts. at 500 V.A., both 400 cycle, 1 phase.
PIONEER TYPE 12117, input 12 vts., output 26 vts. at 6 V.A., 400 cycle.
PIONEER TYPE 12117, input 24 vts., output 26 vts. at 6 V.A., 400 cycle.
WINCHARGER CORP., PU/7, MG2500 input 24 vts. at 160 amp., output 115 vts. at 21.6 amp., 400 cycle, 1 phase.
GENERAL ELECTRIC, TYPE 5D21NJ3A, input 24 vts. at 35 amps., output 115 vts. at 485 V.A., 400 cycle, 1 phase.
LELAND, PE 218, input 24 vts. at 90 amps. output 115 vts. at 1.5 K.V.A., 400 cycle, 1 phase.
LELAND, TYPE D.A. input 28 vts., at 12 amp. output 115 vts. at 115 V.A., 400 cycle, 3 phase.

## ENGINE HOUR METER

JOHN W. HOBBS, MODEL MI-277 records time up to 1000 hours, and repeats, operates from 20 to 30 volts.

## VOLTAGE REGULATOR

LELAND ELEC. CO. TYPE B, CARBON PILE. Input 21 to 30 volts D.C. regulated output 18.25 vts. at 5 amp.
WESTERN ELEC. TYPE BC937B, input 110 to 120 volts 400 cycle. Output variation 0 to 7.2 ohms at 5 to 2.75 amps.
WESTERN ELEC, TRANSTAT, input 115 vts., 400 cycle output adjustable from 92 to 115 vts., rating .5 K.V.A.
AMERICAN TRANS. CO., Transtat input 115 vts., 400 cycle output 75 to 120 vts. or 0 to 45 volts, rating .72 K.V.A.

## SYNCHROS

1 F SPECIAL REPEATER 115 vt. 400 cycle.
2J1F1 GENERATOR, 115 vt. 400 cycle.
2J1F3 GENERATOR, 115 vt. 400 cycle.
2J1G1 CONTROL TRANSFORMER 57.5 vt. 400 cycle.
2J1H1 DIFFERENTIAL GEN. 57.5/57.5 vt. 400 cycle.
5G GENERATOR, 115 vt. 60 cycle.
5DG DIFFERENTIAL GEN. 90/90 vts. 60 cycle.
5HCT CONTROL TRAN. 90/55 vts. 60 cycle.
5CT CONTROL TRAN. 90/55 vts. 60 cycle.
5SDG DIFFERENTIAL GEN. 90/90 vts. 400 cycle.

## TACHOMETER GENERATOR & INDICATOR

GENERAL ELECTRIC, GEN. TYPE AN5531-1, Pad mounting 3 phase variable frequency output.
GENERAL ELECTRIC, GEN. TYPE AN5531-2, Screw mounting 3 phase variable frequency output.
GENERAL ELECTRIC, IND. 8DJ13AAA, works in conjunction with above generators, range 0 to 3500 RPM.

## D. C. ALNICO FIELD MOTOR

DIEHL TYPE FD6-23, 27 vts. 10,000 RPM.
DELCO TYPE 5072400, 27 vts. 10,000 RPM.

## GENERAL ELECTRIC D. C. SELSYNS

8TJ9-PAB TRANSMITTER 24 VTS.
8TJ11- INDICATOR, dial 0 to 360°, 24 vts.

## RECTIFIER POWER SUPPLY

HAMMETT ELECTRIC MFG. CO. MODEL SPS-130. Input voltage 208 or 230 volts, 60 cycle, 3 phase, 21 amps. Output 28 volts at 130 amps. continuous duty, 8 point tap switch, voltmeter ammeter, thermo reset all on front panel.

## MISCELLANEOUS

PIONEER MAGNETIC AMPLIFIER ASSEMBLY Saturable reactor type, designed to supply variable voltage to a servo motor such as CK1, CK2, CK5 or 10047.
SPERRY A5 CONTROL UNIT, part No. 644836.
SPERRY A5 AZIMUTH FOLLOW-UP AMPLIFIER, part No. 656030.
SPERRY A5 DIRECTIONAL GYRO, part No. 656029, 115 vt. 400 cycle, 3 phase.
SPERRY A5 PILOT DIRECTION INDICATOR, part No. 645262 contains AY 20.
ALLEN CALCULATOR, TYPE C1, TURN & BANK IND., part No. 21500, 28 vts. D.C.
TYPE C1, AUTO-PILOT FORMATION STICK, part No. G1080A3.
PIONEER GYRO FLUX GATE AMPLIFIER, type 12076-1-A, 115 vt. 400 cycle.

ALL PRICES F. O. B. GREAT NECK N. Y.

INSTRUMENT ASSOCIATES

363 GREAT NECK ROAD, GREAT NECK, N. Y.
Telephone GReat Neck 4-1147

*Write for Catalog NE100*

U. S. Export License-2140

Western Union address: WUX Great Neck, N. Y.

# IMMEDIATE DELIVERY • LOW PRICES • FULLY GUARANTEED

**Aircraft Generator Eclipse NEA-3**

Output 115 VAC; 10.4 amps 800 cycles at 2400 rpm. Also 30 VDC at 6 amps. Stock #SA-306. **Price $39.50 each.**

**Radio Compass Indicator I-82F.** Compass Indicator, 0-360°-5 in. dial, 26 v. 400 cy. 8-12 v. 60 cy. Ideal position indicator. Stock #SA-284.

**Price $6.50 each**

**JA1 MOTOR (D-C)**

**Electric Specialty.** ¼ hp. 24 v. D-C. (Wing flap motor.) Stock #SA-325. **Price $19.50 ea.**

**OSTER PM MOTOR**

**Allnco Field**

27.5 v. d-c. Can also be used as rate generator. #SA-281. **$8.75 each**

**DIEHL PM MOTOR**

**Type FD6-31-1.** 27.5 V. D.C. 10,000 rpm. Dual Shaft. Shaft ext. ⅜" dia. end. Diam. 0.120, Motor 1" Sq. x 2" Lg. Stock #SA-355. **Price $13.25 each.**

**400 CYCLE 2 HP. ACTUATORS**

AIRESEARCH—Linear Actuator — Dwg. 29178. Frame 26-39. 200 volt 3 phase 400 cycle motor with thermal protection. 2 hp. 8 amps. 11,000 rpm. Duty 1-20, Stat. 3100; Tens. 1600; Comp. 1400. **Stock #SA-308.**

**Torque Actuator**

Dwg. 29180. Driven by same motor as above. Stock #SA-309.

**PRICES ON REQUEST**

**OSTER MOTOR**

John Oster Type B-9-1 motor with dual output shaft gear reduction. Cam operated linear motion translation. Motor 27.5 v. DC at 0.7 Amps. 5600 rpm. Stock #SA-335. **Price $9.75 each.**

**DELCO CONSTANT SPEED MOTOR A-7155**

1/30 hp. 27.5v d-c 3600 rpm. Cont. duty, 2¼" diam. x 5⅛" lg. ⅞" shaft extension. 5/32" diam. 4 hole base mounting. Stock #SA-34. **Price $19.50 each.**

**BLOWER ASSEMBLY**

Delco 27 v. DC motor, 5400 rpm. 3" Sirroco impeller. Shunt motor. 4 in./oz. torque. Base Mtg. Stock #SA-352. **Price $9.75 each.**

**PRECISION AUTOSYN**

**Pioneer Type AY-150** Control Autosyn. Precision type. 26 v. 400 cycle. Stock #SA-297. **Special low price $14.50 each.**

**HOLTZER CABOT MG SETS**

**TYPE MG-221.** Input 32 volts DC at 8.5 amps. 3430 rpm. Output 110 volts at 1.0 amps. 400 cy. Single phase. 100 watts. **Stock # SA-506. Price $99.50 each.**

**TYPE MG-218.** Input 115 volts DC at 2.3 amps. Output 110 volts 400 cy. Single phase. 100 watts. **Stock # SA-507. Price $119.50 ea.**

**BLOWER ASSEMBLY**



**WESTINGHOUSE FL BLOWER**

115 v. 400 cy. 17 c.f.m. Includes capacitor. Stock #SA-144. **Price $14.50 ea.**

**KOLLSMAN SERVO MOTOR**

Type 776-06. 115 v. 400 cy., 2 phase. 5600 rpm. Drag Cup type. 10 Tooth 96 P.D. shaft. Stall torque 0.5 in/oz. **Stock #SA-358. Price $29.50 each.**

**SELSYN SPECIALS**

**General Electric 2J1F1 & 2J1F3**

115 v. 400 cycle Selsyn Generator. Large quantity.

**Prices on request**

**INVERTERS**

**Wincharger PU-7/AP** Input 28 VDC at 160 amps. Output 115 v. 400 cy 1 ϕ at 2500 VA. Voltage and frequency regulated. Cont. duty. Stock #SA-164. **Price $119.50 each.**



**G.E. 5AS131NJ3 (PE-118)** Input 26 VDC at 100 amps. Output 115 v. 400 cy. 1 ϕ at 1500 VA. PF 0.8 W.E. Spec. Ks-5601L1 Stock #SA-286. **Price $39.50 each**

**PE-218E Inverters** Russell Electric and Leland. Input 28 VDC at 92 amps. Output 115 v. 400 cycles at 1500 VA. PF 0.9. Stock #SA-112A. **Price $69.50 each.**

**Pioneer 12130-4-B** Input 28 VDC at 14 amps. Output 120 v. 400 cy. single phase at 1.15 amps. (140 VA.) Voltage and frequency regulated. Made 1949. Stock #SA-304. **Price $99.50 each.**

**DC SERVO MOTORS**

**Elinco B-64 DC Servo Unit** — armature voltage, 80 v d-c max. 27.5 v. field 1/165 hp 3100 rpm. Field current 200 ma. Armature current 200 ma. at normal torque.

Stock #SA-211. **Price $16.50 each.**

**DIEHL DC MOTOR**



**Type FDE-83-2.** 24v @ 9.5 Amps. 1/6 hp. 6350 rpm. Cont. duty. Motor 4¾" diam. x 5" Lg. with 1" shaft ext. x ⅝" dia. front mtg. flange 4⅝" Sq. Stock #SA-354. **Price $19.50 ea.**

**Aircraft Turret Motor—G.E. 5BA56I J22.** ½ hp. Amplidyne controlled motor. Armature voltage 60 max. Field 27 v. Max. arm. current 8.3 amps. Field 2.9 amps. 10 minute rating. Stock #SA-345.

**Quantity prices on request.**

**AUTOSYN MOTOR**

**Bendix-Marine 851**

**33 v. 60 cycle excitation.** Use as either generator or repeater. Stock #SA-151.

**Price $24.50 each.**

**KOLLSMAN TELETORQUE**

Kollsman Type 403 self synchronous units. (Synchro) 115 Volt 60 cycle excitation. Use as either generator or repeater. Stock #SA-79.

**Prices on request.**

**115 VOLT D-C MOTOR**

**G.E. Type 5D.** 1/20 hp. 4 lead shunt. Reversible. Double shaft extensions. Speed 1725 rpm. **Large Quantity.**

**Special $19.50 each.**

**LEAR POSITIONING MOTOR**



Model 156A. 115 watt 24 v. DC motor. 10,000 rpm. Int. duty. Reversible. Dual rt. angle output shaft. Release clutch. 7:1 reduction to output. 250:1 reduction to limit switches. **Stock #SA-343.**

**Prices on request**

**AC Motor Special Eastern Air Devices J-33**

**115 V.** 400 cy. 3 phase synchronous. 8000 RPM. Stock #SA-59.

**Price $19.50 each**

**SYNCHROS AND SELSYNS**

**Navy Types**

A; M; 1SF; 5G; 5F; 5SDG; 6SG; 8SF; 5HSF; 4DG; 7G; etc.

**Army Types**

II; IV; V; VII; IX; XXI; XV; etc.

**G.E. Types**

2J6F2; 2JD5J2; 2J5A2; 2J5HA1; 2J1H1; 2J1F1; 2J1G1; 2J1F3; 2JD5HB1; 2J5LA1; 2JD5C2, etc.

**SERIES MOTOR**

**John Oster Type A-21D-7A**

24 v. DC. 0.005 hp. .6 Amps. 11,000 rpm. Cont. duty. 1-⅛" diam. x 2-½" lg. Front flange mtg. Shaft 3/16 dia. x ⅝" ext. Stock #SA-353. **Price $8.75 each.**

**WRITE FOR LISTING**
**Prices F.O.B. Paterson**
**Phone ARmory 4-3366**
**Teletype PAT. 199**

Servo-Tek products co.
4 Godwin Ave. Paterson, N. J.

SPECIALISTS IN FRACTIONAL HORSE POWER MOTOR SPEED CONTROL

# COMMUNICATIONS EQUIPMENT CO.

## 24 VOLT TRANSFORMERS

For operating surplus gear, toy trains, gadgets, etc. Operates from 115V, 60 cy., supplies 24 VAC at 1.2 Amps., herm. sealed and cased. A Great Buy at Only **$1.49**

## UNIVERSAL SUPPLY KIT

Delivers 230V @ 40MA DC. From 110/220VAC 60 Cy. Kit Consists of 1-PWR. Transformer, 5 HY @ 40MA Choke, 2-8MFD @ 450 Filter Cond. 1-6x5 Tube. A great buy at only **3.95**

## Interphone Transformer Set

Rig your own interphone. Kit consists of 1-Input Transformer (Matches 4 or 6 OHM SPKR to Grid) and 1-Output Transformer (Matches 50L6, 35L6, 25L6, etc. to 4 or 6 OHM Speaker Set of 2 XFMRS. ONLY **1.00**

## 12-14V SUPPLY KIT

Delivers 12-14VDC at 3.5A from 115V, 60 cy., Kit contains 1—Transformer Rated 18.5V, 1A, 1—Selenium Rectifier, F. W. Bridge. **$6.95**

## OSCILLOSCOPE SUPPLY KIT

Ideal for 3" Scope or Panadapter. Delivers 850V Negative, 300 VDC @ 65MA, 6.3V @ 1A, 6.3V @ 0.6A, 2.5V @ 1.75A. You get 1—Herm. Sealed Transformer 1—25H Choke, 1—2x2 Tube, 1—3x5 Rect. 3—Filter Cond., 1—Filter Resister, 1—Bleeder For Only **$12.95**

## POWER TRANSFORMERS

**Comb. Transformers—115V/50-60 cps Input**

| | | | | |
|---|---|---|---|---|
| CT75B | 600-0-600V/.6A, 2X5VCT/6.2A, 6.3VCT/3A, 6.3V/3A | | | $12.95 |
| CT35-2-600VCT | .2A, 5V/6A | | | 5.95 |
| CT-15A | 550VCT .085A 6.3V/.6A, 6.3V/1.8A | | | 2.85 |
| CT-164 | 4200V.002A/12KV Test, 5VCT/3A/12KV Test, 6.3V/8.6A/5400V Test | | | 12.95 |
| CT-341 | 7050-10 MA,—625V @ 5 MA, 26V @ 4.5A - 2x2.5V/3A, 6.3V @ 3A | | | 16.95 |
| CR-825 | 360VCT | .348A | 6.3VCT/3.6, 6.3VCT/5A | 3.95 |
| CT-626 | 1500V | .160A | 2.5/12, 30/.100 | 9.95 |
| CT-071 | 110V | .200A | 33/.200, 5V/10, 2.5/10 | 4.95 |
| CT-367 | 580VCT | .050 A | 5VCT/3A | 2.25 |
| CT-99A | 2x110VCT | .010 A | 6.3/1A, 2.5VCT/7A | 3.25 |
| CT-403 | 350VCT | .026 A | 5V/3A | 2.75 |
| CT-405 | 550VCT | .086 A | 5V/3A, 6.3V/6A | 4.25 |
| CT-610 | 125Ω | .002 A | 2.5V/2.1A, 2.5V/1.75A | 4.95 |
| CT-456 | 390VCT | 30 MA | 6.3V/1.1A, 5V/3A | 3.45 |
| CT-160 | 880VCT | 100 MA | 6.3V/1.2A, 5V/3A | 4.95 |
| CT-931 | 585VCT | 85 MA | 5V/3A, 6.3V/6A | 4.95 |
| CT-442 | 525VCT | 75 MA | 5V/2A, 10VCT/2A, 50V/200 MA | 3.85 |
| CT-720 | 550-0-550V/250 MA, 6.3V/1.8A | | | 8.95 |
| CT-43A | 600-0-600V/.08A, 2.5VCT/6A, 6.3VCT/1A | | | 6.49 |
| CT-501 | 650VCT/200 MA, 6.3V/5A, 6.3V/5A | | | 6.49 |
| CT-444 | 230-0-230V/.085A, 5V/3A, 6V/2.5A | | | 3.49 |

**Filament Transformers—115V/50-60 cps Input**

| Item | Rating | Each |
|---|---|---|
| FT-674 | 6.1V/1.5A | $1.10 |
| FT-157 | 4V/16A, 2.5V/1.75A | 2.95 |
| FT-101 | 6V/.25A | .75 |
| FT-924 | 5.25V/21A, 2x7.75V/6.5A | 14.95 |
| FT-824 | 2x26V/2.5A, 16V/1A, 7.2V/7A, 6.4V/10A, 6.4V/3A | 8.95 |
| FT-463 | 6.3VCT/1A, 5VCT/3A, 5VCT/3A | 5.49 |
| FT-55-2 | 7.2V/21.5A, 6.5V 6.85A, 5V/6A, 5V/3A | 8.95 |
| FT-986 | 16V @ 4.5A or 12V @ 4.5A | 3.75 |
| FT-38A | 6.3/2.5A, 2x2.5V/7A | 4.75 |
| FT-A27 | 2.5V/2.5A, 7V/7A, TAP 2.5V/2.5A, 16KV TEST | 18.95 |
| FT-688 | 6.3V/3A,750V Test | 2.79 |
| FT-873 | 4.5V/5A, 7V/7A | 2.19 |
| FT-899 | 2x5V @ 5A, 29KV Test | 24.50 |

**Plate Trans.—115V, 60 cps**

| Item | Rating | Price |
|---|---|---|
| PT-699 | 300/150V/.05A, 300/150V/.05A | $2.79 |
| PT-382 | 120-0-120V/150 MA | 4.69 |
| PT-108 | 17,600V/144 MA | 120.00 |
| PT-671 | 62V/1.5A | 7.95 |

**Special Fil. Transformers—60 cps**

| Item | Pri. Volts | Secondaries | Price |
|---|---|---|---|
| STF-370 | 220/440 | 3x2.5V/5A, 3KV Test 2.5V/15A | $6.95 |
| STF-11A | 220V | 2x40V/.05A, 2x5V/6A 12.6V/1A | 4.49 |
| STF-688 | 220V | 24V/0.5A, 5V/3A, 6.3V/1A, 6.3V/1A | 3.45 |
| STF-968 | 230V | 2.5V/6.5A | 3.50 |
| STF-631 | 230V | 2x5V/27A, 2x5V/9A | 17.50 |

**Special Plate Transformers—60 cps**

| Item | Pri. Volts | Secondaries | Price |
|---|---|---|---|
| STP-613 | 230V | 230/.05A, 230V/.05A | $1.79 |
| STP-409 | 220/440V | 136VCT/3.5A | 5.69 |
| STP-815 | 240/440, 3ph | 1316V/.67A, 6KV Test | 27.50 |
| STP-129 | 230V | 3850V/3.15KVA | 42.50 |
| STP-823 | 137V | 222VCT/.3A | 2.35 |
| STP-088 | 50V | 2x750V/.001A | 1.79 |
| STP-622 | 210/220/230 | 5000V/1A | 59.75 |
| STP-945 | 210/220/230 | 550-0-550V/.3A | 5.95 |

**Special Comb. Transformers—60 cps**

| Item | Pri. Volts | Secondaries | Price |
|---|---|---|---|
| STC-16A | 220V | 260V/.03A, 100V/1A, 6.3V/4.2A | $4.69 |
| STC-689 | 220V | 220V/3A | 6.95 |

## TWO-WAY COMMUNICATION EQUIPMENT

### SONAR MOBILE MB-26 Xmtr

Like SR-9 Rcvr, this crystal-controlled 6-tube Xmtr goes everywhere, fits anywhere, employs latest v.h.f. techniques! Lets you send clear signal, no matter how grueling the going. Output: 6 watts. Power consumption: equivalent to car bright lights. Just 6½" high, 7" wide, 5⅞" deep. Built-in antenna relay system, power filter network. Low maintenance — standard tubes. Power and antenna coax connectors on front panel.

FOR . . .
- 2 MTRS
- 6 MTRS
- 10-11 MTRS

**$72.45**

### SONAR MOBILE SR-9 Rcvr

**MODEL SR-9**
2 MTRS
- 6 MTRS
- 10-11 MTRS

**$72.45**

Indispensable when you must hear what's coming through, in mobile or fixed operation, CD, CAP or emergency activity. More than a monitor, more than a converter—it's a 9-tube superhet receiver with overall sensitivity better than 1.0 micro-volt. Tiny — only 4-9/16" high, 5-3/16" wide, and 5-11/16" deep. Yet SR-9 gives you built-in automatic noise limiter, voltage regulated oscillator, precision slide rule dial.

### Model MR-3 5 Bands • 8 Tubes

Ideally suited for mobile with its compact size, lightweight, the MR-3 is excellent for CD, CAP, or any emergency operations. The MR-3 is a COMPLETE 5 BAND RECEIVER—NOT a converter—for 80-75, 20, 10-11 mtr bands, with less than 1 micro-volt of sensitivity—comes complete with 8 tubes, one of the best automatic noise limiters yet designed, voltage regulated oscillator, accurate slide-rule, dial and mounting brackets. Net **$89.95**

FOR MORE DETAILED INFORMATION ON THE MODELS SHOWN, AND THE NEW MODEL AC-109 AIRCRAFT RECEIVER, SEND FOR BULLETIN "S".

## DYNAMOTORS

| Type | Input Volts | Input Amps | Output Volts | Output Amps | Radio Set |
|---|---|---|---|---|---|
| PE86 | 28 | 1.25 | 250 | .060 | RC 36 |
| DM81A | 14 | 6.2 | 300 | .170 | RU 19 |
| DM35A | 28 | 7 | 440 | .250 | RC 456 |
| PE101C | 13/26 | 12.6 | 400 | .135 | SCR 515 |
| | | 6.3 | 400 | .070 | |
| BD AR 93 | 28 | 3.25 | 375 | .150 | |
| 23350 | 27 | 1.75 | 265 | .075 | APN-1 |
| ZA6515 | 12/24 | 4/2 | 500 | .050 | |
| B-19 pack | 12 | 9.4 | 275 | .110 | MARK 11 |
| | | | 500 | .080 | |
| D-104 | 12 | | 225 | .100 | |
| | | | 440 | .090 | |
| DA-3A | 28 | 10 | 300 | .060 | SCR 522 |
| | | | 150 | .010 | |
| | | | 14.5 | .5 | |
| 5053 | 28 | 1.4 | 250 | .060 | APN-1 |
| PE73CM | 28 | 19 | 1000 | .350 | BC 375 |
| CW21AAX | 12 | 12.6 | 400 | .135 | |
| | 24 | 6.3 | 500 | .020 | |
| | | | 300 | 1.12 | |
| PE94 | 28 | 10 | 250 | .200 | SCR 522 |
| | | | 180 | .101 | |
| | | | 14.5 | .5 | |

### INVERTERS

PE-218-H: Input: 25 28 vdc, 92 amp. Output: 115 v, 350 800 cy 1500 volt-amperes. New $44.50
PE-206: Input: 28 vdc, 38 amps. Output: 80 v 800-cy, 500 volt-amps. Dim: 13"x5½"x10⅛". New $27.50
LELAND No. 19536: IN: 28 VT C 12A. OUT: 115V, 115V/2 400 CY 3 PHASE. EXC. COND $70.00

## THERMISTORS

| | |
|---|---|
| D167018 | $1.50 |
| D167332 | 1.50 |
| D167613 | 1.50 |
| D166228 | 1.50 |
| D166699 | 2.50 |
| D166792 | 2.15 |

## VARISTORS

| | |
|---|---|
| D171812 | $1.50 |
| D172155 | 1.50 |
| D167176 | 1.50 |
| D168687 | 1.50 |
| D167286E, D171858 | 1.50 |
| 308A, 3A, 27-B | 1.50 |
| D168803 | 2.15 |

## INTERPHONE AMPLIFIER

Easily converted to an ideal Inter-Communications set for office, home or factory. Original. New w/conversion diagram. **$4.75**

## SELENIUM RECTIFIERS

**F. W. BRIDGE**

| | |
|---|---|
| UP TO 18 VAC IN— UP TO 14 VDC OUT | |
| 2A | $2.50 |
| 4A | 4.00 |
| 6A | 6.00 |
| 10A | 7.50 |
| 12A | 9.00 |
| 24A | 18.00 |
| UP TO 36 VAC IN— UP TO 28 VDC OUT | |
| 1A | $3.00 |
| 2A | 4.00 |
| 5A | 10.00 |
| 10A | 14.50 |
| 12A | 15.00 |
| 24A | 36.00 |
| UP TO 54 VAC IN— UP TO 42 VDC OUT | |
| 2A | $6.50 |
| 4A | 8.50 |
| UP TO 120 VAC IN— UP TO 100 VDC OUT | |
| 2A | $11.00 |
| 10A | 48.00 |
| 12A | 60.00 |

## NON-POLAR CAPACITORS

**A.C. ELECTROLYTICS**

| CAP. | VAC. | PRICE |
|---|---|---|
| 13-15 | 220- | $1.20 |
| 20-24 | 110- | 1.00 |
| 26-30 | 220- | 1.35 |
| 43-45 | 110- | 1.25 |
| 43-48 | 110- | 1.25 |
| 59-75 | 110- | 1.25 |
| 51-60 | 220- | 1.50 |
| 61-69 | 320- | 1.60 |
| 64-72 | 110- | 1.25 |
| 72-87 | 110- | 1.25 |
| 75-84 | 110- | 1.25 |
| 88-106 | 110- | 1.50 |
| 107-129 | 110- | 1.65 |
| 130-157 | 110- | 1.75 |
| 130-150 | 70- | 1.50 |
| 130-180 | 110- | 1.85 |
| 158-191 | 110- | 1.85 |
| 161-180 | 110- | 1.75 |
| 185-210 | 110- | 1.95 |
| 200-220 | 110- | 1.95 |
| 270-300 | 110- | 2.15 |
| 324-360 | 110- | 2.40 |
| 378-429 | 175- | 3.00 |
| 432-480 | 110- | 2.75 |
| 485-540 | 110- | 2.95 |

## FILTER CHOKES

| Stock | Description | Price |
|---|---|---|
| CH-366 | 20H/.3A | 6.95 |
| CH-322 | .35H/350 MA—10 Ohms DCR | 2.75 |
| CH-141 | Dual 7H/75 MA, 11H/60 MA 5KV DC Test | 4.69 |
| CH-119 | 8.5H/125 MA | 2.79 |
| CH-69-1 | Dual: 120H/17 MA | 2.35 |
| CH-8-28 | 2 x .5H/380 MA/25 Ohms | 1.79 |
| CH-776 | 1.28H/130 MA/75 ohms | 2.25 |
| CH-344 | 1.5H/145MA/1200V Test | 2.35 |
| CH-43A | 10HY/15MA—650 ohms DCR | 1.75 |
| CH-917 | 10H, 450MA, 10KV TEST | 12.95 |
| CH-366 | 20H/300MA | 6.95S |
| CH-999 | 15HY 15MA—400 ohms DCR | 1.95 |
| CH-511 | 6H/80MA—310 ohms DCR | 2.45 |
| CH3-501 | 2x5H/400MA | 2.75 |
| CH-188M | 5HY 200MA | 1.79 |
| CH 383 | 30H/.02A, 2500V Test | 1.69 |
| CH 932 | SWING 5-60H/.4-.05A, 10KV | 7.95 |

## This Month's Special

**OSCILLOGRAPH RECORDING, PHOTO PAPER,** 35 MM, 250 FT. Roll $1.00

**SA4A/APA-1 Motor Driven Coaxial Ant. Switch DPDT, Continuous Operation from 24VDC. Completely Enclosed** $24.50

**MP-22 MAST BASE Mobile Antenna Mount.** 4.95

**SA1A/APN-1 Altitude Limit Switch for APN-1 Altimeter** 7.95

**ALTITUDE INDICATOR for APN-1** 12.50

**C-387-D Final P.A. Coil for BC610 2-3.5 MC, Variable Link** 4.89

**RA-74 Power Supply for Super Pro** $9.50

**J-17/ARC-5 Junction Box for ARC-5** 7.95

**J-22/ARC-5 Junction Box** 12.95

**SUPERSONIC CRYSTALS, Rochelle salt** 5.50 ea.

**MOTOR, 24 vdc, 3 HP 3800 rpm, New** $75.00

**TV LEAD-IN WIRE, 300 ohms, HI-Q, Lo-Loss** $17.50/M FT Roll

**BC 306 ANTENNA TUNING UNIT, NEW** 6.95

**RS/APN-4, New, With Tubes** 75.00

**IDE/APN-4, New, With Tubes and Crystal** 75.00

**A-62 Phantom Antenna** 8.50

**2 Meter Choke, 1000 MA, 20-144** 8/ 1.00

**Supersonic Crystal Head, M-1, 22-27KC MI-2** 27.45

**Underwater Microphone, Model JR. Z—50.** 24.50

**Dynamic Mike & Headset Combo, B-19, New** 3.75

**MS-38 Inserts, M-3000** per M 3.50

**AN/ARC-4 VHF Trans-Rcvr** 75.00

**PE 38 Test Set, New** 37.50

**SCR 274 Test Set, 1-104** 12.95

**ART-13 Driver Trans. 6V6 to P-P 833's** 1.29

**Klixon Breaker: Thermal, 35A** .69

**T-30 Carbon Mikes, New** .89

**Tel. Tape, ½"x8½" Rolls** 23/ ea. 5/ 1.00

**Tel. Tape, 4" Rolls** 12/ ea. 10/ 1.00

**BC366 Interphone Jack Box** .79 ea.

**AN/160-A Antenna** 1.50 ea.

**C-30/ARC-5 Control Box** 2.35 ea.

**EE-89A Telephone Repeater** 12.50 ea.

**EE-65A Telephone Test Set** 50.00 ea.

**ID24/ARN-9 Cross Point Indicator** 6.95 ea.

**TU-9 Tuning Unit 6.2-7.7mc** 4.95 ea.

**BC-696-A Dual Rcvr. Con't box, 3-6 & 6-9, 1mc** 1.75 ea.

**AN/104-A Antenna, 150mc** 1.49 ea.

**BC704 Indicator, 5" CR Tube, New** 22.50 ea.

**BC929 Indicator, 3BPI, all tubes, New** 29.50 ea.

**Noise Filters, 100 AMP, G.E.** 1.39 ea.

**MC211 Right Angle Driver** .19 ea.

**IF Transformers, 112 KC Double Slug Tune** .69 ea.

**IF Transformers, 1680 KC Double Slug** .79 ea.

MAIL ORDERS PROMPTLY FILLED. ALL PRICES F.O.B. NEW YORK CITY. SEND M.O. OR CHECK. ONLY SHIPPING SENT C.O.D. RATED CONCERNS SEND P.O. ALL MDSE. SUBJECT TO PRIOR SALE, AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE. PARCELS IN EXCESS OF 20 POUNDS WILL BE SHIPPED VIA CHEAPEST TRUCK & RAILEX.

**131 Liberty St., New York 7, N. Y. Dept E-11 Chas. Rosen Phone: Digby 9-4124**

# COMMUNICATIONS EQUIPMENT CO.

## MICROWAVE COMPONENTS

### S BAND—3" x 11½" W.G. 10 CM.

**DIRECTIONAL COUPLER**, Broadband. 20 db. Coupling, Type "N" Takeoff. Complete with all Hardware. Navy # CARV-47AAN-2. As shown.$37.50
**WAVEMETER**, 2700-3400 MC. Reaction Type with counter Dial—Mfg. W.E. .....$82.50
**REACTION WAVEMETER**, Mfg. G.E. 3000-3700 MC. Mic. Head.....$125.00
**LHTR LIGHTHOUSE ASSEMBLY**. Part of RT39 APG 5 & APG 15. Receiver and Trans. Cavities w/assoc. Tr. Cavity and Type N CPLG To Recvr. Uses 2C40, 2C45, 1B27. Tunable APX 2400-2700 MCS. Silver Plated .....$49.50
**BEACON LIGHTHOUSE** cavity 10 cm. Mfg. Bernard Rlew, each .....$47.50
**MAGNETRON TO WAVEGUIDE** Coupler with 721A Duplexer Cavity, gold plated.....$45.00
**RT-39/APG-5** 10 cm. lighthouse RF head c/o Xmtr.-Recvr.-Tr cavity, compl. recvr. & 30 MC IF strip using 6AK5 (2C40, 2C45, 1B27 lineup) w/Tubes.
**721A TR BOX** complete with tube and tuning plungers .....$12.50
**McNALLY KLYSTRON CAVITIES** for 707B or 2K28 .....$4.60
**F 29/SPR-2 FILTERS**, type "N" input and output Hi-Pass Over 1000 MC .....$12.50
**WAVEGUIDE TO ¾" RIGID COAX "DOORKNOB"** ADAPTER CHOKE FLANGE, SILVER PLATED BROAD BAND .....$32.50
**AS14A/AP-10** CM Pick up Dipole with "N" Cable .....$4.50
**OAJ ECHO BOX, 10 CM TUNABLE**.....$22.50
**HOMEDELL-TO-TYPE "N"** Male Adapters, # D167284 .....$2.75
**I. F. AMP STRIP**: 30 MC, 120 d.b. gain, 2 MC Band-with, uses 6AC7's—with video detector. Less tubes .....$24.50
**POLYROD ANTENNA**, AS31/APN-7 in Lucite Ball. Type "N" feed .....$22.50
**ANTENNA**, AT49A/APR; Broadband Conical, 300-3300 MC Type "N" Feed .....$12.50
**"E" or "H" PLANE BENDS**, 90 Deg. less flanges .....$7.50

### ⅞" RIGID COAX—⅜" I. C.

**RIGHT ANGLE BEND**, with flexible coax output pick-up loop .....$8.00
**SHORT RIGHT ANGLE BEND**, with pressurizing nipple .....$3.00
**RIGID COAX** to flex coax connector.....$3.50
**STUB-SUPPORTED RIGID COAX**, gold plated 5' lengths. Per length .....$5.00
**RT. ANGLES** for above .....$2.50
**RT. ANGLE BEND** 15" L. OA .....$3.50
**FLEXIBLE SECTION**, 15" L. Male to female...$4.25
**⅞" RIGID COAX, BULKHEAD FEED-THRU**.$14.00

### X BAND—1" x ½" W.G. 3 CM.

1" x ½" **waveguide** in 5' lengths, UG 39 flange to UG40 cover .....per length $7.50
**Rotating joints** supplied either with or without deck mounting. With UG40 flanges .....each, $17.50
**Bulkhead Feed-thru Assembly** .....$15.00
**Pressure Gauge Section** 15 lb. gauge and pressure nipple .....$10.00
**Pressure Gauge**, 15 lbs. .....$2.50
**Dual Oscillator, Mount**, (Back to back) with crystal mount, tunable termination attenuating slugs.$18.50
**Directional Coupler**, UG-40/U Take off 20 db...$17.50
**TR-ATR Duplexer** section for above.....$8.50
**723AB Mixer**—Beacon dual Osc. Mnt. w/xtal holder .....$12.00
**Waveguide Section** 12" long choke to cover 45 deg. twist & 2½" radius, 90 deg. bend.....$4.50
**Twist 90 deg.** 3" choke to cover, pressure nipple...$6.50
**Waveguide Sections** 2¼ ft. long silver plated with choke flange .....$5.75
**Rotary joint** choke to choke with deck mounting.$17.50
**3 cm. mitered elbow** "E" plane.....$12.00
**UG 39 Flanges** .....$ .55
**90 degree elbows**, "E" or "H" plane 2½" radius.$12.50
**45 degree twist** .....$8.00
**APS-4 Under Belly Assembly**, less tubes .....$375.00

### 1¼" x ⅝" WAVEGUIDE

**CG 98B/APQ 13** 12" Flex. Sect. 1¼" x ⅝" OD..$10.00
**X Band Wave GD.** 1¼" x ⅝" O.D. 1/16" wall aluminum .....per ft. 75¢
**Slug Tuner Attenuator** W.E. guide. Gold plated .$6.50
**BI-Directional Coupler**, Type "N" Takeoff 25 db. coupling .....$27.95
**BI-Directional Coupler**, UG-52. Takeoff 25 db. coupling .....$24.50
**Waveguide-to-Type "N" Adaptor**, Broadband .....$22.50

### K BAND—½"x¼" W.G. 1.25 CM.

**APS-34 Rotating joint** .....$49.50
**Right Angle Bend** E or H Plane, specify combination of coupings desired .....$12.00
**45° Bend** E or H Plane, choke to cover.....$12.00
**Mitered Elbow**, cover to cover.....$4.00
**TR-ATR Section**, Choke to cover.....$4.00
**Flexible Section** 1" choke to choke.....$5.00
**"S" Curve** Choke to cover.....$4.50
**Adapter**, round to square cover.....$5.00
**Feedback to Parabola Horn** with pressurized window .....$27.50
**90° Twist** .....$10.00

## WANTED

**RADAR SETS AND PARTS**
**. . . . ANY AND ALL TYPES.**
**Also SURPLUS ELECTRONIC PARTS**
**. . . . WHAT HAVE YOU TO SELL**

## 400 CYCLE TRANSFORMER

(All Primaries 115V, 400 Cycles)

| Stock # | Ratings | Price |
|---|---|---|
| 352-7039 | 640VCT @ 250MA, 6.3V/.9A, 6.3V/6A, 5V/6A | $5.49 |
| 782724 | 9800/8600V @ 328MA | 8.95 |
| 12033 | 4540V/250MA | 17.50 |
| K59584 | 5000V/250MA, 5V/10A | 22.50 |
| 52J652 | 13,500V/3.5MA | 14.65 |
| K59607 | 734VCT/.177A, 1710VCT/.177A | 6.79 |
| 352-7273 | 700VCT/350MA, 6.3V/6.9A, 6.3V/2.5A, 6.3V/.06A, 5V/6A | 6.95 |
| 352-7070 | 2X2.5V/2.5A/2KV TEST 6.3V/2.25A, 1200/1000/750V @ .005A | 7.45 |
| 352-7196 | 1140V/1.25MA, 2.5V/1.75A, 2.5V/1.75A—Test 1.5KV | 3.95 |
| 352-7170 | 320VCT/50MA, 4.5V/3A, 6.3VCT/20A, 2X6.3VCT/6A | 4.75 |
| RA6490-1 | 2.5V/1.75A, 6.3V/2A—5KV Test | 2.39 |
| 901692 | 13V/9A | 2.49 |
| 901699-501 | 2.77V @ 4.25A | 3.45 |
| 901698-501 | 900V/75MA, 100V/.04A | 4.29 |
| UX8855C | 900VCT/.067A, 5V/3A | 3.79 |
| RA6405-1 | 880VCT/65MA, 5VCT/3A | 3.69 |
| T-48852 | 700VCT/80MA, 5V3A, 6V/1.75A | 4.25 |
| 352-7098 | 2500V/5MA, 900VCT, 315MA | 5.95 |
| KS 9138 | 1100V/50MA TAPPED 625V 2.5V/5A | 3.95 |
| M-7474115 | 6.3V/2.7A, 6.3V/.66A, 6.3VCT/21A | 4.25 |
| KS 9184 | 27V/4.1A, 6.3V/2.9A, 1.25V/.02A | 2.95 |
| 52C090 | 525VCT/50MA, 2.5VCT/2A, 5VCT/2A | 3.75 |
| 22332 | 480VCT/35MA, 6.4V/2.5A, 6.4V/.15A | 3.85 |
| 1159-G31 | 1150-1150V/.035A | 2.75 |
| 80G198 | 6VCT .0005 KVA | 1.75 |
| 302433A | 6.3V 9.1A, 6.3VCT/6.5A, 2.5V/3.5A, 2.5V/3.5A | 4.85 |
| KS 9445 | 592VCT/118MA, 6.3V 8.1A, 5V/2A | 5.39 |
| KS 9685 | 6.4/7.5A, 6.4V/1.5A, 6.4V/2.5A ALL CT | 4.79 |
| 70G30G1 | 680VCT/34MA | 2.65 |
| M-7474318 | 2100V/.027A | 4.95 |
| 95-G-45 | 2000V .002A, 465V/.4A, 44V/10A, 6.3V/23.5A, 6.3V/1.5A, 5V/3A, 2X2.5V/1.75A | 17.95 |
| TRANSTAT IN; 115V, 400 CY. | | |
| " | OUT; 75-120V, 6.0 Amps | 12.95 |

**LHTR. LIGHTHOUSE ASSEMBLY.** Part of RT39 APG 5 & APG 15. Receiver and Trans. Cavities w/assoc. Tr. Cavity and Type N CPLG To Recvr. Uses 2C40, 2C45, 1B27. Tunable APX 2400-2700 MCS. Silver Plated. .....$49.50

## TS-13/AP TEST SET

**SIGNAL GENERATOR (PULSE AND CW) COMPLETE WITH BUILT-IN WAVEMETER AND POWER MONITOR. FOR CHECKING RECEIVER SENSITIVITY AND BANDWIDTH. ALSO POWER OUTPUT FROM RADAR TRANSMITTER. FREQ. RANGE: 9305-9445 MC/SEC. OUTPUT: 0-50 MICROWATT. POWER REQUIREMENTS: 105-120 VAC, 60-800 CY, 150W. COMPLETE WITH ALL PROBES AND ACCESSORIES. WRITE FOR PRICE.**

## TS 34/AP SYNCHROSCOPE

**PORTABLE UNIT FOR OBSERVING VIDEO PULSES AND TRIGGERS. MEASURES PULSES FROM 0.25 USEC. TO 50,000 USEC. FREQ. RESPONSE: 30 CPS-1,000,000 CPS. TRIGGER SWEEP: 5, 50, 250 USEC. SAWTOOTH: 10-50,000 CPS POWER INPUT: 105-125 VAC, 50-1200 CPS, 90W. INQUIRIES INVITED.**

| | | |
|---|---|---|
| ● Signal Gen. | RCA 710A, 370-540 MC | 350.00 |
| ● Signal Gen. | 20A Microvolter | 175.00 |
| ● TS 18A | Altim or Test Set | 32.50 |
| ● TS 16/AP | Altimeter Test Set | |
| ● TS 36 | Power Meter, 3 CM | |
| ● TS 47/APR | Test Osc. 50-3000 MC | 325.00 |
| ● TS 56/AP | Slotted Line, 500 MC | 325.00 |
| ● TS 127/UP | Wavemeter, 300-700 MC | 72.50 |
| ● TS 63/AP | Wavemeter, 340-1000 MC | 72.50 |
| ● TS-70/AP | Pwr. Meter, 200-800 MC | |
| ● TS 110/AP | Echo Box, 2400-2700 MC | |

## 1 PER CENT PRECISION W. W. RESISTORS

ALL VALUES IN OHMS

| | | | | | |
|---|---|---|---|---|---|
| 5 | 82 | 150 | 680 | 7,500 | 20,000 |
| 5.09 | 120 | 250 | 820 | 10,000 | 50,000 |
| 10.1 | 125 | 410 | 1200 | 12,000 | 75,000 |
| 10 | 128 | 468 | 4300 | 17,000 | 84,000 |
| 30c EACH | | | | | 10 FOR $2.50 |
| 100K | | 120K | | 150K | 220K |
| 60c EACH | | | | | 10 FOR $3.50 |
| 1 MEGOHM | | | | | EACH 75c |

## STEP-DOWN TRANSFORMERS

**210-250V PRI—110/120V SEC**

| Watts | Price |
|---|---|
| 300 | 7.49 |
| 500 | 10.95 |
| 1000 | 19.95 |
| 1500 | 24.95 |

## PULSE NETWORKS

**15A—(-400-50:** 15 KV, "A" CKT. 1 microsec. 400 PPS, 50 ohms imp.....$37.50
**G.E. #**6E3-5-2000-50PT2, 6KV "E" circuit, 3 sections .5 microsecond, 2000 PPS 50 ohms impedance (As shown) .....$6.50
**G.E. #**3E (3-84-810) (8-2.24-405) 50PT2; 3 KV "E" CKT Dual Unit; Unit 1, 83 sections, 0.84 Microsec, 810 PPS, 50 ohms imp; Unit 2, 8 sections, 2.24 microsec. 405 PPS, 50 ohms imp.....$6.50
**7.5E3-1-200-67P.** 7.5 KV, "E" Circuit, 1 microsec 200 PPS, 67 ohms impedance 3 sections.....$7.50
**7.5E4-16-60, 67P.** 7.5 KV, "E" Circuit, 4 sections 16 Microsec. 60 PPS, 67 ohms impedance.....$15.00
**7.5E3-3-200-6FT,** 7.5 KV, "E" Circuit, 3 microsec. 200 PPS, 6 ohms imp. 3 sections.....$12.50
**#755: 10KV,** 2.2usec., 375 PPS, 50 ohms imp. .$27.50
**#754: 10KV,** 0.85usec., 750 PPS, 50 ohms imp. .$27.50

## PULSE TRANSFORMERS

**U-10198** Prt: 4-5KV, 97A Pk Sec; 18KV, 26A. PRR-350-500 Cy. Duration 1.3 usec.....$42.50
**D-166173:** Video, Ratio = 50:900 Ohms 10KC-2MC .....$12.50
**G.E.K.-2745** .....$39.50
**G.E.K.-2744-A,** 11.5 KV High voltage, 3.2 KV Low voltage @ 200 PPS oper; 270 KW max.; 1 microsec. or 1 microsec @ 600 PPS. .....$39.50
**W.E. D169271 Hi Volt input pulse Transformer**..$27.50
**G.E. K2450A.** Will receive 13KV, 4 micro-second pulse on pri. secondary delivers 14KV. Peak power out 100 KW. G. E. .....$34.50
**G. E. K2748A.** Pulse Input line to magnetron...$36.00
**Ray UX 7896**—Pulse Output Prt. 5c, sec. 41v.....$7.50
**Ray UX 8442**—Pulse inversion—40v. to 40v.....$7.50
**Ray UX 7361** .....$5.00
**PHILCO 352-7250, 352-7251, 352-7287**
**UTAH 9332, 9278, 9341**
**RAYTHEON: UX6893, UX5986** .....$5 ea.
**W. E.: D-166310, D-16638, KS 9800, K89948**

## PULSE EQUIPMENT

**H/I-Volt Pulse Bulkhead.** Feed thru. Fits UG-36 Connector—as shown .....$15.00
**APQ-13 PULSE MODULATOR.** Pulse Width .5 to 1.1 Micro Sec. Rep. rate 624 to 1348 PPS. Pk. Pwr out 25 KW Energy 0 013 Joules.....$49.00
**TPS-3 PULSE MODULATOR.** Pk. power 50 amp. 24 KW (1200 KW pk); pulse rate 200 PPS, 1.5 microsec. pulse line impedance 50 ohms. Circuit series charging version of DC Resonance type. Uses four 705-A rectifiers. 115 v. 400 cycle input. New with all tubes .....$49.50

## DELAY LINES

**D-168184:** 5 microsec. up to 2000 PPS 1800 ohm term. .....$4.00
**D-170499:** .25/.50/.75 microsec. 8 KV 50 ohms imp. .....$100.00
**D-65997:** 1¼ microsec. .....$7.50
**RCA 2x5686-502,** 2.2u sec. 1400 ohms.....$2.00

## MAGNETRONS

| Tube | Tube | Tube |
|---|---|---|
| 2J27 | 2J61 | 720BY |
| 2J31 | 2J61 | 725-A |
| 2J21 | 700 | 730-A |
| 2J22 | 706 | QK 62 |
| 2J26 | 2J62 | QK 61 |
| 2J32 | 3J31 | QK 60 |
| 2J37 | 5J30 | 2J56 |
| 2J38 | 718DY | 2J32 |
| 2J39 | | |

## MICROWAVE ANTENNA EQUIPMENT

**AS-31/APN-7:** 10 cm Polyrod in Lucite Ball. Type N Fitting Coax Feed.....$22.50
**Relay System Parabolic** reflectors approx. range 2000 to 6000 Mc. Dimensions 4½" x 3'. New.....$100.00
**Dipole** for above.....$12.00
**TDY "JAM" Radar** rotating antenna, 10 cm. 30 deg. beam, 115 V AC drive. New.....$150.00
**Cone Antenna.** AS 125 APR. 1000-3200 mc. Stub supported with type "N" connector.....$14.50
**AT49A/APR**—Broadband Conical, 300-3300 MC. Type N Feed .....$12.50

## 10 CM GUN-SIGHT ANTENNA

**SPHERICAL RADOME HOUSES DRIVE MOTOR, DISH, FEED AND GUNMOUNT. TOTAL DIAMETER: APPROX. 15 INCHES. DISH: 12" DIAM. FEED: DIPOLE AND DISK VERTEX. SCAN: CONICAL AT 2400 RPM. BEAMWIDTH: 25°-30°. ENTIRE UNIT MAY BE PRESSURIZED UP TO 15 LBS/IN., AND ENERGY MAY BE FED BY ANY FLEXIBLE COAX CABLE. COMPLETE UNIT WITH DRIVE-MOTOR AND RADOME .....$325.00**

MAIL ORDERS PROMPTLY FILLED. ALL PRICES F.O.B. NEW YORK CITY. SEND M.O. OR CHECK. ONLY SHIPPING SENT C.O.D. RATED CONCERNS SEND P.O. ALL MDSE. SUBJECT TO PRIOR SALE, AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE. PARCELS IN EXCESS OF 20 POUNDS WILL BE SHIPPED VIA CHEAPEST TRUCK OR RAILEX.

**131 Liberty St., New York 7, N. Y. Dept E-11 Chas. Rosen Phone: Digby 9-4124**

# Buy TOP Radio-Electronic Values!

## RCA and KENRAD — Individually Boxed — JAN 826's

75¢ Each 100 Lots — 85¢ ea

## RAYTHEON — Individually Boxed — JAN VT-127's

25¢ Each 100 Lots — 35¢ each 3 for $1.00

## BUTTERFLY CONDENSERS

FIG. 1

FIG. 2

9-62 mmfd per section. 6-34 mmfd sections in series. Double ceramic end plates and bearings. ¼" diam. shaft, 5/16" long. .065 Plate spacing end plates 1-⅝" square.

Stock No. 5076-A — FIG. 1 — Price Each 90¢

4-22 mmfd per section. 3-12 mmfd sections in series. Single ceramic end plate 1-⅝" square, ¼" diam. x ¼" long shaft.

Stock No. 5077-A — FIG. 2 — Price Each 60¢

## AUDIO PASS FILTERS

Band pass 800 to 1200 cycles input 10000 ohms — Output 25000 ohms Level 10DB

Stock No. T48500 Price to: $5.50 ea.

## SMALL MOTORS

OSTER B9-2. 5600 RPM. 12 VDC @ 1.2 Amps. ..... $7.00 Ea.
OSTER C-2H-1A 7000 RPM. 27.5 VDC 1/100 HP. ..... $7.50 Ea.
KOLLSMAN Type 775-01 Mo-26. $2.50 Ea.
WESTINGHOUSE 115 volt 400 C. Blower. Type FI. 6700 RPM. ..... $6.95 Ea.

## OIL FILLED CONDENSERS

| Stock No. | Capacity MFD. | D. C. WKG. Voltage | Dimensions | Price Each |
|---|---|---|---|---|
| 6057A | 2 | 600 | 1" x 1-3/4" x 2-3/4" | $0.59 |
| 5994A | 4 | 600 | 1-1/4" x 2-1/2" x 3-1/4" | 1.75 |
| 5865A | 4 | 1000 | 1-1/4" x 2-1/2" x 4-3/4" | 1.95 |
| 6102A | 8 | 1000 | 1-1/4" x 3-3/4" x 4-3/4" | 2.50 |
| 6101A | 4 | 1500 | 1-1/4" x 3-3/4" x 4-1/2" | 2.75 |
| 6103A | 0.5 | 5000 | 2-1/4" x 4" x 4-1/8" | 2.95 |
| 6104A | 1 | 5000 | 3-5/8" x 4-1/2" x 4-1/8" | 4.25 |
| 5399A | 0.045 | 16000 | 1-3/4" x 3-1/2" x 4-3/4" | 4.95 |
| 6052A | 2 X .15 | 8000 | 1-3/4" x 3-1/2" x 4-3/4" | 4.95 |

All have ceramic insulated terminals except No. 5865A which has bakelite insulated terminals. All are NEW, standard name brands.

## SIGNAL CORPS TRANSFORMERS— CHOKES & FILTERS

| | | | |
|---|---|---|---|
| 2C6191/K1 | 2Z9619-99 | 2Z9638-44 | 3C217-43 |
| 2C6191/T3 | 2Z9621-41 | 2Z9643-42 | 3C217-44 |
| 2C6191A/T3 | 2Z9621-112 | 2Z9647-11 | 3C323-6C |
| 2C619F/T2 | 2Z9625-1 | 2Z9655 | 3C323-14A |
| 2C6230/123 | 2Z9625-8 | 2Z9668 | 3C323-54B |
| 2C6230.3/124 | 2Z9626 | 2Z9709-2 | 3C323-122B |
| 2C6307/AK1 | 2Z9627-35 | 2Z9760 | 3C323-145B |
| 2C6386A/T14 | 2Z9628-2 | 2Z9805 | 3C324-4 |
| 2C6494A/C11 | 2Z9631.7 | 2Z9808 | 3C324-40 |
| 2C6530-653A/C10 | 2Z9631.187 | 2Z9838 | 3C343-2 |
| 2C6530-653A/T5 | 2Z9631.8 | 2Z9851 | 3C344 |
| 2Z3625-66 | 2Z9632.14 | 2Z9853 | 3C344-9 |
| 2Z5731-337 | 2Z9632.39 | 2Z9854 | 3C369-8 |
| 2Z9600.3 | 2Z9632.170 | 2Z9855 | 3C375-15 |
| 2Z9604.16 | 2Z9632.171 | 2Z9876-2 | 3C549 |
| 2Z9608.36 | 2Z9632.348 | 2Z9878-11 | 3C572 |
| 2Z9611.115 | 2Z9632.368 | 2Z9878-13 | 3C573G-1 |
| 2Z9611-289 | 2Z9632.365 | 2Z9879 | 3C365-53 |
| 2Z9612.52 | 2Z9632.366 | 2Z9879-1 | 3C365-54 |
| 2Z9613.14 | 2Z9634.4 | 2Z9879-3 | 3C1987.20 |
| 2Z9613.304 | 2Z9634.35 | 2Z9900-5 | 3C1987-59 |
| 2Z9614-94 | 2Z9634.39 | 2Z9944 | 3C4073 |
| 2Z9617-22 | 2Z9634.46 | 2Z9984 | 3F4061B/C1 |
| 2Z9618-9 | 2Z9634.49 | 3C106B | 6C8/F1 |
| 2Z9618-42 | 2Z9636.16 | 3C307-1 | |
| 2Z9619.42 | 2Z9638.14 | 3C307-46 | |
| 2Z9619.63 | 2Z9638.16 | 3C317-33 | |

MORE INFORMATION AND PRICES UPON REQUEST

## 6.3 VOLT FILAMENT TRANSFORMERS

Primary 115 Volt 60 Cycle 1600 Insulation Three 6.4 Volt Secondaries

6.3 Volts @ 4.9 Amps.
6.3 Volts @ 4.5 Amps.
6.3 Volts @ 1.1 Amps.

Horizontal Half Shell Mounting. 2¼" x 2 13/16" Mounting Centers. 2 13/16" x 3⅝" Core Size. 2½" above Chassis. Solder Lug Terminals—All Terminals Marked.

Stock No. 5254A



Price EACH $2.65

## MICROPHONE CONNECTORS

Single Contact Female Cable Connector. Same as Amphenol 75-MCIF. ..... $15.00 per 100

Stock No. 6131 — Price Each 18¢

Single Contact Male Cable Connector. Same as Amphenol 75-MCIM. ..... $12.50 per 100

Stock No. 6132 — Price Each 15¢

## H & H ROTARY SWITCH

S.P.S.T. Rotary Switch. Screw Terminals. ¼" Shaft x ½" Long. 3 Amp. @ 250 Volts. Hardware included. $15.00 per 100

Stock No. 6105 — Price Each 18¢

## MISCELLANEOUS ITEMS

HEAVY DUTY 10 ft. SJ-7/16 Dia. BUNA CORD, 2 ins. #14 strd Conductors w/heavy duty plug ..... $.60 each
J-5 Flameproof keys ..... $.95
J-38 Keys ..... $.95
Fenwal #S1080 Therman Switches ..... $3.95
Guardian BK-17A Relay ..... $2.95
MS-52-53 Mast Sections ..... $.95
TS-13 Handset ..... $7.95
TS-9 Handset ..... $7.95
T-46 Chestset ..... $1.95

## 2 VOLT BATTERY

Signal Corps Type BB-54A 2 Volt 27 Ampere Hour Storage Battery. Non-Spillable Transparent Acid Proof Plastic Case has Built-in Ball Type Hydrometer. 3" x 4" x 9" High. Shipped Dry with Acid in Separate Container. Made by Willard.

Carton of 12 @ $1.60 Each

Stock No. 5458A — Price Each $1.95

## 10 MFD. — 600 VDC

Sprague No. R2-157. 10 Mfd. 220 VAC 600 VDC Capacitor with Universal Mounting Ring. 2-7/16" Diameter, 3¾" high. Bakelite insulated terminals.

Stock No. 5958A — Price Each 95¢

## TRANSMITTING MICAS

| Stock No. | Cap. | Test Volts | Type No. | Price Each |
|---|---|---|---|---|
| 5491A* | .01 | 1000 | 1445 | .35¢ |
| 5494A | .02 | 1000 | 1447 | .40¢ |
| 5495A | .006 | 1200 | A2 | .40¢ |
| 5496A | .0001 | 1500 | BE 15 | .20¢ |
| 5493A | .004 | 2500 | 4 | .38¢ |
| 5498A | .001 | 5000 | F | .60¢ |
| 5498A | .0036 | 5000 | A2 | $1.50 |
| 5681A | .15 | 1000V | X5 | 1.50 |
| 5682A | .00007 | 2500V | 3 | .90¢ |
| 5683A | .00005 | 3500V | 15L | 1.80 |
| 5684A | .0001 | 4000V | F2L | 1.90 |
| 5685A | .0005 | 5000V | F2L | 1.90 |
| 5686A | .000025 | 10,000 | PL-14L | 1.95 |
| 5687A** | .00015 | 10,000 | PL-15S | 7.95 |

*Supplied with Meter Bracket
**D.C. Working Voltage
OTHER TYPES AND SIZES AVAILABLE

## TERMS:

Open Account to rated or Acceptable reference accounts. Others Pre-payment of 25% deposit with order, balance C.O.D. Price F.O.B. Chicago and subject to change without notice. Merchandise subject to prior sale.

ORDER TODAY!

## Radio Surplus Corp.

732 South Sherman Street
Chicago 5, Illinois
Phone: HArrison 7-5923

# SEE OUR PREVIOUS ELECTRONICS ADS FOR LISTINGS OR WRITE FOR CIRCULARS

## SHORT TELEPHONE RELAYS

**A11996 CLARE** (HT7819-1) 24VDC, 3PST n.o. (3As), 2000 ohm, #R94 ..... $ 1.75

**6385 ARC** 12VDC, SPST n.o. (1A), 10A contact, 200 ohm, Part of **ARC5** or SCR 274N, #R13 ..... 1.50

**C58180 BENDIX**, 12VDC, DPDT & SPST n.c. (2C, 1B) 150 ohm, **Part of SCR522**, #R58 ..... 2.00

**A22268 CLARE**, 12VDC, SPST n.o. (1A), 200 ohm, #R411 ..... 1.50

**5586 W.E.**, 12-24VDC, SPST n.o. (1A), 425 ohm, #R414 ..... 1.25

**D170788 W.E.**, 4850 ohm, 8maDC, SPDT, #R92 ..... 2.50

**CLARE** 24V DC, SPDT(1C), 500 ohm #R278 ..... 2.75

**CLARE** K102, 6ma DC, 3500 ohm #R30 ..... 3.49

**CLARE** 110V, 50-60 cyc, 3PST n.c. (3Bs) Quick acting, Octal Plug Base, #R279 ..... 3.25

**AUTOMATIC**, 1.5V DC, DPST n.c. (2Bs), 5 ohm, #R280 ..... 3.00

## TELEPHONE TYPE RELAYS



These relays have been standardized so that coils and frames of most manufacturers can be interchanged without affecting adjustments. A wide variety of applicable combinations are thus possible from a comparatively small number of relays.

Listed below are frames and coils from our stock. They may be purchased separately. However, a complete relay consists of coil and frame.

Representative completed relays are also listed with voltage and current ratings. Values are indicative of sensitivity that may be expected from similar combinations.

**107 COOK**, 3-6VDC, 6 make, 1 break (5As, 1C), 12 ohm. Part of BC654, #R407 ..... $ 3.95

**CLARE**, 6500 ohm, 8maDC, 3 makes (3As), R276 ..... 4.25

**5033A7 AUTOMATIC**, 1300 ohm, 8maDC, SPST n.o., (1A), #R103 ..... 1.75

**A18258 BENDIX** (Cook 102) 8-12 VDC, Copper Slug, Slow Release, SPDT, 200 ohm, Part of SCR 522, #R365 ..... 2.49

**R5229A1 AUTOMATIC** 6VDC, 3PST n.o. (3As), 75 ohms, Slow Release, #R412 ..... 2.50

**R5021A1 AUTOMATIC** 1300 ohm, 20maDC, SPST n.c. (1B), #R413 ..... 2.95

## FRAMES

(For Cost of Relay Add Price of Frame to Price of Coil)

| Stock No. | Contacts | Price each |
|---|---|---|
| F101 | 1A | 1.25 |
| F102 | 2A | 1.50 |
| F103 | 3A | 1.75 |
| F104 | 4A | 2.00 |
| F105 | 5A | 2.25 |
| F106 | 1A, 1B | 1.50 |
| F107 | 1A, 2B | 1.75 |
| F108 | 1A, 1B, 1C | 2.00 |
| F109 | 1A, 1C | 1.75 |
| F110 | 1A, 2C | 2.25 |
| F111 | 2A, 1B | 1.75 |
| F112 | 2A, 2B, 2C | 3.00 |
| F113 | 2A, 5B | 2.75 |
| F114 | 3A, 1B | 2.00 |
| F115 | 3A, 2C | 2.75 |
| F116 | 4A, 1C | 2.50 |
| F117 | 4A, 2C | 2.75 |
| F118 | 5A, 2B, 1C | 3.25 |
| F119 | 7A, 1B | 3.00 |
| F120 | 1B | 1.25 |
| F106 | 1B, 1A | 1.50 |
| F111 | 1B, 2A | 1.75 |
| F114 | 1B, 3A | 2.00 |
| F108 | 1B, 1A, 1C | 2.00 |
| F112 | 1B, 7A | 3.00 |
| F107 | 2B, 1A | 1.75 |
| F112 | 2B, 2A, 2C | 3.00 |
| F118 | 2B, 5A, 1C | 3.25 |
| F113 | 5B, 2A | 2.75 |
| F121 | 5B, 1C | 2.75 |
| F122 | 1C | 1.50 |
| F123 | 2C | 2.00 |
| F124 | 4C | 3.00 |
| F109 | 1C, 1A | 1.75 |
| F116 | 1C, 4A | 2.50 |
| F117 | 1C, 5A | 2.75 |
| F121 | 1C, 5B | 2.75 |
| F110 | 2C, 1A | 2.25 |
| F115 | 2C, 3A | 2.75 |
| F108 | 1C, 1A, 1B | 2.00 |
| F118 | 1C, 5A, 2B | 3.25 |
| F112 | 2C, 2A, 2B | 3.00 |

## FRAMES WITH MICROSWITCH

| | | |
|---|---|---|
| F125 | 1A, 1C (Microsw.) | 1.75 |
| F126 | 1A, 1A (Microsw.) | 1.75 |

## COILS

(For Cost of Relay Add Price of Coil to Price of Frame)

| Stock No. | Ohms | Price each |
|---|---|---|
| K101 | 0.75 | 1.25 |
| K102 | 12 | 1.25 |
| K103 | 250 | 1.75 |
| K104 | 450 | 1.50 |
| K105 | 500 | 1.50 |
| K106 | 500/1100 Dual | 2.00 |
| K107 | 750 | 1.50 |
| K108 | 900 | 1.75 |
| K109 | 1000 | 1.75 |
| K110 | 1100 | 1.75 |
| K106 | 1100/500 Dual | 2.00 |
| K111 | 1300 | 1.75 |
| K112 | 2000 | 2.25 |
| K113 | 3000 | 2.50 |
| K114 | 3600 | 2.50 |
| K115 | 4600 | 2.75 |
| K116 | 6500 | 2.75 |
| K117 | 10,000 | 3.00 |
| K118 | 40,000 | 3.25 |

## A-C COILS

| Stock No. | Voltage | Price each |
|---|---|---|
| K119 | 6V AC | 1.75 |
| K120 | 24V AC | 1.75 |
| K121 | 110V AC | 2.50 |

## SLOW ACTION COILS

| Stock No. | Ohms | Slow Action | Price each |
|---|---|---|---|
| K122 | 33 | Make | 1.50 |
| K123 | 75 | Release | 1.50 |
| K124 | 200 | Release | 1.50 |
| K125 | 300 | Make | 1.75 |
| K126 | 2000 | Make | 2.00 |
| K127 | 2500 | Release | 2.00 |

No. D150734
S.C. stock No. 2C6996-1053A/C2

*Western Electric*

## PHASE SHIFT CAPACITOR

As Used in BC1053A, SCR545 and other Radar Equipment. New, in original boxes. 10 for 150.00, 100 for 1250.00.

**17.50 each**

## ULTRA SENSITIVE RELAY

Nominal Operating Characteristics, 11,000 ohms, 0.4 Ma, 4V DC
SPDT Kurman BK35 Adjustable Contacts & Armature, #R277. 10 for 55.00, 100 for 475.00.

**5.95 each**

## 110V 60 CYC TIMING MOTORS

**INGRAHAM** 8 RPM Fully Enclosed ..... $1.95
**TELECHRON** 3.6 RPM ..... 2.50
**GILBERT** With Gear Train for 6 RPDay ..... 1.95
**GILBERT** 60 RPM (1 RPS) ..... 1.75
**HAYDON** 1609A: 1 RPM ..... 2.25
**HAYDON**: 1 RPM, 24V AC ..... 1.95

## SHOCKMOUNTS

**Large Quantities of Lord, Barry, U. S. Rubber and Other Makes of Shockmounts in Stock. Most Sizes Available. Prices Below Manufacturer's Cost. Send Us Your Requirements.**

## APC TRIMMERS

**We Have Production Quantities of 13, 15, 25, 33, 50, 75, 100 and 140 Mmf Air Trimmers Available at Low Prices.**

## MU-METAL LAMINATIONS

**Es, Fs, Is, Ls. Ten Sizes. Quantities Available.**

**Sample Kit, 6 lbs, Sufficient Quantity of Each Size for One Unit—Postpaid in U. S. A. $19.75**

## H-F TIE POST

Low-Loss Melamine Insulation, pictured actual size (4-40 Thread) ..$7.50/C $67.50/M



## SEALED RELAYS

**Clare 5001:** 24vdc; DPDT; 300 ohm; Octal Plug Base; #R678 ..... $5.95
**Struthers-Dunn 181CXC100:** 12 vdc; 3As, 3Bs; #R679 ..... $7.95
**Sigma 73351:** 16vdc; SPDT; 2000 ohm; 8 ma; #R682 ..... $6.95
**Allied SKHX**, 24VDC; 3A, 3B; 425 ohm; #R913 ..... $5.95
**SIGMA Type 4AH:** 2000 ohm; SPDT, 4 ma. pull in, 2.5 ma. hold, 5 prong plug-in ..... $3.95
**SIGMA 71257:** 6 vdc, SPDT, 500 ohms ..... $4.95
**SIGMA 949:** 115V AC, SPST N.C. ..... $4.95

## KOVAR GLASS TO METAL SEALS HIGH-VOLTAGE FEED THRU

Many types and sizes. Send us your blueprint or sample for our quote. Our prices are a fraction of original factory costs.

SAMPLE KIT 96 Seals (8 ea. 12 types) **5.00** postpaid in USA
LAB KIT 300 Seals (20 types) **15.00** postpaid in USA

## STEPPING RELAYS GUARDIAN SERIES R

Three basic types for 24V AC operation:

1. Continuous rotation: In this type the contact finger advances one step each time the circuit is made and broken.
2. Electrical reset. Resets when a second coil is energized.
3. Add and subtract. Steps back one or more contacts at a time instead of resetting completely.

10 Pulses per second. Contacts are rated at 1 ampere at 110 volts, 60 cycles, non-inductive AC. The electrical reset type has up to 36 active contacts while the continuous rotation types each have 40 contacts. SEND US YOUR REQUIREMENTS.

* A=Normally Open; B=Normally Closed; C= Double Throw.

## WE ALSO HAVE PRODUCTION QUANTITIES IN STOCK OF

- APC Air Trimmers
- Binding Posts
- Cable
- Capacitors
- Ceramicons
- Ceramics
- Adel & Tinnerman Clamps
- Chokes
- Coils
- Controls
- Crystals
- Filters
- Fuses
- Kovar Glass Seals
- Rubber Grommets
- Hardware
- Iron Core Slugs
- Knobs
- Sine-Cosine Potentiometers
- Pulse Transformers
- Relays
- Resistors
- Servo Transformers
- Shockmounts
- Sockets
- Spaghetti
- Micro Switches
- Toggle Switches
- Transformers
- Tubes
- And Other Radio & Electronics Parts

TERMS:—All Prices F.O.B. Our Plant. Rated Firms Net 10 Days: All Others Remittance with Order. Orders Under $10 Remittance With Order, Plus Approximate Shipping Charges (overage will be returned.)

324 CANAL ST., N.Y.C., 13, N.Y. Walker 5-9642

Universal general corp.

# RELAYS

WE SPECIALIZE IN

# TREMENDOUS QUANTITIES IN STOCK!

# CONDENSERS

## MICRO & TOG. SWS. – RELAYS – "J" POTS

### GUARANTEED—OIL CONDENSER SPECIALS—GUARANTEED

**1 mfd.—1500 ..... $1.05**
GE #26F537-G2

**3.75 mfd.—1000 V ... $1.25**
C-D KGR 6037-1

**6 mfd.—330 VAC .... $1.15**
Dims. 4⅛"x3⅜"x1¾"

**2 mfd.—600 V ..... $.69**
C-D 2¾"x1¾"x1"

**.5 mfd.—400 V ..... $.21**
CP63 B1AE504 KK
Avox 416 MCT. Disc.
100 10%, 500 25%

**10 mfd.—600 V ..... $.98**
Three term. bal. mtg. channel type. Dims. 3¾" x 3½" x 2". Two 5 mfd. sections rated 400 V at 72 deg. "C". 1800 V test. Meets commercial specs. for 600 V. operation up to 40 degs. "C". Ideal for filter or power factor application. Repeat sales prove this rugged high quality condenser to be of outstanding value. Carton of 24, weight 42 lbs. Large qua. available... **$.89**

**4 mfd.—600 V ..... $1.15**
Tobe TR8-604

**5 mfd.—300 VAC .... $1.05**
3⅞"x2½"x1-3/16"

**8 mfd.—600 V ..... $1.69**
4½" H. x 2" Dia. Bkt.

**1—1 mfd.—600 V .... $.85**
3 SF. Bathtub. Lots of 100 10% Disc.
Same Type but with 2 Terms. Case common. $.70
Lots of 100 10% Disc.



**POWER SUPPLY**
#CJP-20AHX for ASB 7/TA/7B equip. 800 cy. 115V. imp. 2.5/56.5/890/2000V. out. Contains 6AC7, 5T4 & 2X2, plus oil conds; chokes, resistors, connectors & Switches. Brand new and individually boxed. Measures 7"H x 5⅝"W x 13"-L. Cover not shown..... $6.75
Lots of 10, 10% disc.; 25, 15%; 50 & over, 25%.

### JAN APPROVED

10mfd—1000V 4.55 8mfd—600V 2.25
8mfd—1500V 4.25 6mfd—600V 1.55
8mfd—1000V 3.25 4mfd—600V 1.75

| Mfd | Volts | Price | Mfd | Volts | Price |
|---|---|---|---|---|---|
| .005– | | | | 1500V | 1.65 |
| .005–.01 | 10KV | 3.75 | 2 | 2000V | 2.89 |
| .01 | 10KV | 4.25 | 2 | 2500V | 3.39 |
| .015 | 25KV | 15.50 | 2 | 3000V | 4.49 |
| .02 | 20KV | 15.90 | 2 | 4000V | 5.69 |
| .05 | 15KV | Quote | 2 | 5000V | 15.95 |
| .075– | | | 2 | 12,000V | Quote |
| .075 | 7.5KV | 3.95 | 2-3 | 600V | 1.25 |
| .08 | 12.5KV | 15.95 | 3 | 600V | .59 |
| .1 | 1500V | .49 | 3 | 4000V | 7.95 |
| .1 | 2000V | .49 | 3 | 12.5KV | Quote |
| .1 | 2500V | .49 | 3-3 | 600V | 1.25 |
| .1 | 3500V | 1.79 | 3-3 | 150V | .35 |
| .1 | 7500V | 1.75 | 3.75 | 1000V | 2.59 |
| .1 | 7500V | 4.24 | 4 | 600V | .89 |
| .1–.1 | 7500V | 6.25 | 4 | 800V | 1.25 |
| .1 | 10KV | 8.95 | 4 | 1000V | 1.49 |
| .1 | 15KV | 15.95 | 4 | 1500V | 2.79 |
| .1– | 20KV | 19.50 | 4 | 2000V | 4.25 |
| .15–.1 | 8000V | 3.95 | 4 | 3000V | 5.95 |
| .2 | 10KV | 10.95 | 4–4–4 | 600V | 2.49 |
| .25 | 2000V | 2.25 | 5 | 330VAC | 1.49 |
| .25 | 3000V | 2.35 | 5 | 600 | 1.35 |
| .25 | 8000V | 3.75 | 5 | 600V | 1.49 |
| .25 | 15KV | 15.95 | 5 | 1500V | 2.89 |
| .25 | 20KV | 19.95 | 5–5–1 | 400V | .89 |
| .4 | 10KV | 12.95 | 6 | 600V | 1.45 |
| .5 | 1500V | 1.02 | 6 | 330VAC | 2.49 |
| .5 | 2000V | 1.39 | 6 | 1000V | 2.49 |
| .5 | 3000V | 2.69 | 6 | 1500V | 3.25 |
| .5–.1 | 5000V | Quote | 6 | 3000V | 5.95 |
| .5–.1 | 2000V | .89 | 7 | 600V | 1.45 |
| .5–.5 | 400V | .69 | 8 | 800V | 1.99 |
| 1 | 400V | .45 | 7 | 1000V | 2.49 |
| 1 | 500V | .59 | 8 | 500V | 2.15 |
| 1 | 600V | .69 | 8 | 600V | 1.75–2.15 |
| 1 | 1500V | 1.35 | 8 | 660VAC | 4.25 |
| 1 | 2000V | 1.95 | 8 | 1000V | 3.29 |
| 1 | 2500V | 2.25 | 8 | 1500V | 4.25 |
| 1 | 3000V | 3.50 | 8 | 2000V | 4.95 |
| 1 | 6 h.V. | 7.50 | 8–8 | 600V | 2.75 |
| 1 | 5000V | 4.99 | 10 | 600V | 2.59 |
| 1 | 10 h.V | Quote | 10 | 1000V | 4.55 |
| 1 | 15 h.V | Quote | 10 | 6000V | Quote |
| 1 | 16 h.V | Quote | 12 | 600V | 2.49 |
| 1 | 25 h.V | Quote | 12 | 1000V | 4.95 |
| 1 1 | 2500V | Quote | 12 | 1000V | 5.25 |
| 2 | 600V | .59–.79 | 14 | 1000V | 5.25 |
| 2 TLAD | 600V | .89 | 15 | 1000V | 5.25 |
| 2 | 600V | .85 | 17 | 25V | .69 |
| 2 TLA | 1000V | 1.29 | 24 | 1500V | 3.50 |

### COAX. CONNECTORS

83-1R..... 5.45 83-1SPN ..... $.39
83-1AF..... .25 PL-177 ..... .50

### ELECTRONIC ALARM

Guaranteed new, functionally perfect and designed by a leading manufacturer. Uses balanced bridge principle. Intrusion operates any external alarm system (Bell, horn, light etc.) Automatic reset. Protects any underground object, room or bldg. Safe, cabinet window screen, screening under window or door. Protection against injury by high voltage, hazardous equip. and locations. Added feature includes built in fire detector. Operates alarm at 160 deg. F. Complete with instructions..... $59.50
2 10% Disc.

### TRANS. MICA CONDS.

| Mfd | Wvdc | Price | Mfd | Wvdc | Price |
|---|---|---|---|---|---|
| .000024 | 2500 | .19 | .0024 | 5000 | 2.35 |
| .000033 | 2000 | .75 | .0025 | 1250 | .42 |
| .000047 | 2500 | .21 | .003 | 6000 | 5.95 |
| .00005 | 2500 | .29 | .0035 | 2500 | .45 |
| .00008 | 1200 | .21 | .004 | 2500 | .65 |
| .00008 | 2000 | .75 | .0043 | 2500 | .79 |
| .0001 | 600 | .22 | .0045 | 600 | .24 |
| .0001 | 1200 | .32 | .005 | 1200 | .45 |
| .0001 | 2000 | .85 | .006 | 600 | .29 |
| .0001 | 5000 | 1.95 | .006 | 1200 | .45 |
| .00015 | 5000 | 1.95 | .01 | 600 | .49 |
| .0002 | 15 KV | Quote | .01 | 1200 | .65 |
| .00025 | 1200 | .35 | .01 – 15 KV Quoted | | |
| .00025 | 5000 | 2.95 | | | |
| .00027 | 2500 | .35 | .015 | 2500 | .95 |
| .001 | 600 | .23 | .0155 | 6000 | Quote |
| .001 | 1200 | .32 | | | |
| .001 | 2500 | .49 | .02 | 600 | .27 |
| .001 | 4500 | 1.45 | | | |
| .001 | 8000 | 3.95 | .02 | 600 | .35 |
| .0015 | 5000 | 2.29 | .02 | 1200 | .55 |
| .002 | 1200 | .40 | .02 | 2000 | 1.25 |
| .002 | 2500 | .50 | .022 | 600 | .49 |
| | | | .033 | 600 | .59 |

### MICA CONDENSERS

5, 6, 8, 10, 15, 25, 30, 34, 39, 50, 70, 75, 100-140, 150, 185, 200, 230, 240, 250, 300, 350, 390, 400, 470, 500, 510, 600, 650, 700, 750, 1000, 1200, 1250, 1400, 1500, 2000, 2200, 2400, 3000, 3300, 3700, 3900, 4000, 4700, 5000, 5100, 6000, 6200, 6500, 7900, 7950, 7960, 8000, 9100 & 10,000 MMfd.

### PRICE SCHEDULE

5 to 750 mmfd ..... 4¢
1000 to 1500 mmfd ..... 6¢
2000 to 5100 mmfd ..... 10¢
9100 to 10000 mmfd ..... 26¢

**Special Mica Kit 100 @ $3.50**

### SILVER MICA CONDENSERS

7, 24, 25, 33, 50, 60, 75, 95, 100, 120, 150-170, 200, 270, 300, 330, 390, 400, 450, 500-750, 800, 1000, 1400, 1450, 1700, & 2500 mmfd.

7 to 95 mmfd ..... 8¢
1000 to 1700 mmfd ..... 14¢
100 to 800 mmfd ..... 9¢
2500mmfd ..... 16¢

**Special S.Mica Kit—100 @ $6.50**

### CHOKES

5 Hen .2 amps
2 6 Hen .80 amps
7 Hen .57 amps
8 Hen .52 amps
12 Hen .10 amps
14 Hen .13 amps
15 Hen .50 amps
Thord'n T60650
Thord'n T19C45
Specially Priced

### CERAMICON CONDS.

10, 56 & 100 mmfd @ ..... .05
1000 to 5000 mmfd @ ..... .06
01 400 V

### AIRCRAFT TOG. SWS.

Aircraft type-20A @ 24VDC-10A @ 125VAC-O-H

| CH# | Govt. Spec. | Circuit |
|---|---|---|
| 8201K4 | B-5A | SPST On-Off |
| 8211K8 | B-8B | SPST Off-Mom. On |
| 8208K4 | B-7A | SPST On-Off-Mom. On |
| 8206K8 | B-1B | SPST On-Off |
| 8200K8 | AN3022-1B | SPDT On-Off-On |

Plush Mounted-Luminous Tip—Bat. Handle—
Price—$.22 ea.; 520/100. $170/1000.
To get 1000 qua. disc. you may combine types.

### OTHER AIRCRAFT TYPES

| CH# | Circuit | Cur. @ 125VAC | Price |
|---|---|---|---|
| 8271K-1 | SPST | 10A Push but.— Type A2 On-Mom. Off | $.89 P.T. |
| 8905K-514 | SP-4Pos. | 35A @ 24VDC On-Off-Mom. On-Mom. On | .79 L.T. |
| 8905K-526 | SPST | 5A S-5A-1¼" Bat. | .32 L.T. |
| 8905K-722 | SPST | 10A Off-Mom. On | .79 L.T. |
| 8911K-524 | DPST | 15A Push But-Off-Mom. On | .89 P.T. |
| 8209K-7 | SPST | 10A 2 Gang S-5A | .32 L.T. |

10% Dis. in quan. of 100 or more per Type.

### TOGGLE SWITCHES

| CH# | Circuit | Price | AH & H | Circuit | Price |
|---|---|---|---|---|---|
| 8800K4 | SPDT | $ 60 | 6A. 125V | DPST | 5.42 |
| 8824K4 | DPDT | .75 | 6A. 125V | DPDT | .98 |

### RELAYS & CONTACTORS

| Type | Volt | Ohms | Current | Action | Price |
|---|---|---|---|---|---|
| 1027 | 12 Leach | 67 | 5 | DPDT | 1.28 |
| 1077-RFW | 24 Leach | 160 | ¼ | Cont. DPDT | 1.50 |
| 1225-DE | 24 Leach | 95 | 20 | SPST-Double Break | 1.25 |
| 1222-RF | 24 Leach | 160 | 10 | SPST-Double Break | 1.25 |
| 1227-B2A | 24 Leach | 140 | 25 | SPST | 1.25 |
| 1254M | 24 Leach | 160 | 10 | 2-SPST N.O. | 1.25 |
| 7055 | 12 Leach | 100 | 50 | SPST N.O. | 1.50 |
| 2791-R100-C2 | 24 GE | 150 | | DPDT | .95 |
| 2791-R100-G3 | 24 GE | | | 3PST N.O. | 2.95 |
| 9350-87A | 24 Sq. D | 132 | 250 | SPST N.O. | 4.75 |
| 6041-H81A | 24 CH | 63 | 100 | SPST N.O. | 2.95 |
| 6046-H1A-C1 | 24 CH | 70 | 50 | DPDT | 9.95 |
| 6046-H1E-C2 | 24 CH | 70 | 50 | DPDT | 9.95 |
| 6046-H2B-C2 | 24 CH | 49 | 100 | DPDT | 11.95 |
| R-9 Time Delay Guard | | 500 | | SPDT | .98 |
| 106-612 | 115 WL | | 6 | DPST | 1.89 |
| 9340-975 | 24 Sq. D | 500 | | 4 Pole | 8.95 |
| Latching Relay | | | | | |

### TYPE "AB" POTS $.95

| OHMS | Shaft |
|---|---|
| 50 1/8 S | |
| 100 1/8 LS | |
| 150 1/4 S | |
| 200 3/8 S | |
| 500 3/8 & 1/8 S | |
| 1000 1/4 S | |
| 1500 1/4 S | |
| 2000 1/8 LS & 3/8 S | |
| 2500 1/8 S | |
| 3000 1/8 LS | |
| 5000 1/4 | |
| 5000 1/8 LS & 3/8 | |
| 10000 3/8 & 1 1/7 | |
| 10000 5/16 | |
| 15000 1/8 S | |

| OHMS | Shaft |
|---|---|
| 20000 1 1/4 & 1/8 LS | |
| 30000 3/8 & 1/8 S | |
| 3000 1/8 S | |
| 40000 1/8 LS | |
| 50000 1/4 & 1/8 S | |
| 100000 1/8 LS | |
| 100000 1/2 | |
| 150000 2 1/8 | |
| 200000 1/8 LS | |
| 250000 1/8 LS, 9/16 & 1/8 S | |
| 300000 1/8 S (2 terms.) | |
| 5 Meg. 1/8 LS | |
| 1 Meg. 1/8 S & 1/8 LS | |

### DUAL "AB" POTS $2.00

| OHMS | SHAFT |
|---|---|
| 1500 | 5/16 |
| 1–5 meg | 1/2" |
| 20K | 7/16 |
| 1 meg | 1/2" |
| 2 meg | 1/8 S |

**WANTED**
Condensers of all types in any quantity. Also other standard components. Top prices.

### — TRANSTAT —

115V, 1 phase, 100 amps., Kvs. 11.5. Range 0-115 V. Amertran #29145. Specially priced.

### CHANNEL CONDS.

| Mfd | Wvdc | Price | Mfd | Wvdc | Price |
|---|---|---|---|---|---|
| .025 | 600 | $.19 | .4 | 600 | .36 |
| .05 | 1000* | .22 | .5 | 400* | .23 |
| 2x.05 | 600 | .38 | | | |
| .1 | 500 | .28 | .5 | 800* | .33 |
| .1 | 600 | .29 | .5 | 600 | .29 |
| .1 | 2500 | 1.25 | 2x.5 | 600 | .49 |
| 2x.1 | 400 | .34 | .5–.1 | 600 | .39 |
| 2x.1 | 600 | .46 | 1 | 600 | .58 |
| 3x.1 | 400 | .42 | 1 | 500 | .58 |
| 2x.1 | 1000 | .52 | 1 | 1000* | .98 |
| .25 | 400V | .34 | 1 | 600 | .43 |
| .25 | 600 | .38 | | | |
| 2x.25 | 600 | .48 | * Top Terms. | | |

### KITS

Bathtub cond. ..... 15 @ $1.00
Potentiometer ..... 100 @ 1.00
Mica cond. ..... 100 @ 6.50
Mica cond. ..... 100 @ 3.50
Rotary Sws. ..... 10 @ 1.00
Filter, 2 4-600V conds.
2 SH. 165 Ma. Chokes ..... @ 3.30

### 25 W. POWER RHEOS.

| Ohms | Shaft | Price | Ohms | Shaft | Price |
|---|---|---|---|---|---|
| 1.5–1.3 | 1/2 | $.59 | 200 | 1/2 | .59 |
| 15 | 1/2 | .69 | 225 | 1/8LS | .69 |
| 20 | 1/2 | .69 | 225 | 1/4S | .69 |
| 25 | 1/2 | .69 | 300 | 1/2 | .69 |
| 37.5 | 1/2 | .69 | 350 | 1/2 | .69 |
| 50 | 1/2 | .69 | 375 | 1/2 | .69 |
| 50–50 | 1/2 | 1.25 | 500 | 1/4S | .69 |
| 75 | | .69 | 2400 | 1/2 | 1.95 |
| 100 | 1/2 | .69 | 5000 | 1/2A1/8S | 1.79 |
| 100 | 1/2 | .69 | | | |
| 150 | 1/2 | .69 | 100 ohm Lots of 100 | | $.54 |
| 175 | 1/2 | .69 | | | |
| 185 | 1/2 | .69 | | | |

### METAL TUBULAR OIL CONDS.

| Mfd | Wvdc | Price | Mfd | Volts | Price |
|---|---|---|---|---|---|
| .0025 | 400 | $.18 | .05 | 600V | .16 |
| .005 | 600 | .18 | .05 | 1000V | .19 |
| .01 | 600 | .09 | .1 | 400V | .17 |
| .01 | 600 | .15 | .1 | 600V | .20 |
| .01 | 2000 | .25 | .25 | 600V | .45 |
| .02 | 400 | .14 | .5 | 600V | .19 |
| .02 | 400V | .13 | Quns. of 100, 10% disc. | | |
| .05 | 200V | .07 | | | |

### BATHTUB CONDS.

| Mfd | Volts | Price | Mfd | Volts | Price |
|---|---|---|---|---|---|
| .01–.01 | 600 | $.25 | .25–.25 | 800 | .49 |
| .02–.02 | 600 | .25 | .25 | 1000 | .48 |
| .04–.04 | 600 | .25 | .3 | 400 | .15 |
| .05 | 600 | .20 | .5 | 400 | .37 |
| .05–.05 | 600 | .25 | .5 | 600 | .47 |
| .06–.06 | 600 | .25 | .5 | 1000 | .53 |
| .1 | 600 | .29 | 2x.5 | 600 | .55 |
| .1 | 1000 | .42 | 1 | 200 | .36 |
| .1 | 1200 | .45 | 1 | 300 | .36 |
| .1–.1 | 400 | .29 | 1 | 400 | .48 |
| .1–.1 | 600 | .39 | 1 | 600 | .59 |
| .1–.1 | 1000 | .52 | 1–1 | 600 | .82 |
| 3x.1 | 600 | .49 | 2 | 400 | .68 |
| .2 | 600 | .31 | 2 | 600 | .91 |
| .2 | 1000 | .71 | 4 | 100 | .48 |
| .25 | 800 | .39 | *To Bathtub Ki | | |
| .25 | 400 | .38 | 15 @ | | L .60 |
| .25 | 600 | .41 | | | |

*Write:* ART HANKINS, *Owner*

# MONMOUTH RADIO LABORATORIES

**Box 159 Long Branch 6-5192 OAKHURST, N. J.**

## DEPENDABILITY IN ELECTRONICS

**Attn: Industrial Purchasing Agents . . .**

Our new Radio Master Catalogue is available to you at no charge upon receipt of your request on your letterhead. We are National Distributors of General Electric, Sylvania, Ohmite, Amphenol, Sprague, Aerovox, Sangamo, Stancor, Merit A. H. & H., Simpson and many others. All telegrams, cablegrams, and inquiries acknowledged and promptly answered.

# NORMAN RADIO DISTRIBUTORS INC.

94-29 MERRICK BOULEVARD JAMAICA, N.Y.- REpublic 9-4651

## Portable Instruments

Molded Bakelite case 7" x 4½" x 3"

D.C. MICROAMMETERS
5..10..50 microamperes
THERMOCOUPLE MILLIAMMETERS
1, 5..5..10 milliamperes
THERMOCOUPLE VOLTMETERS
5 to 500 volts

*Available in multiple range combinations*

**Precision Electrical Instrument Co.**
146 Grand Street New York 13, N. Y.

# YOUR MOST COMPLETE SOURCE OF UHF • UG • AN CONNECTORS

| NO. | JAN NO. | DESCRIPTION | 1-99 | 100 TO 999 | 1000 AND OVER |
|---|---|---|---|---|---|
| 83-1R | SO 239 | RECEPTACLE | $ .50 | $ .45 | $ .40 |
| 83-1SP | PL 259 | PLUG | .55 | .55 | .50 |
| 83-168 | UG 176/U | ADAPTER | .15 | .12 | .11 |
| 83-185 | UG 175/U | ADAPTER | .15 | .12 | .11 |
| 83-1SPN | PL 259A | PLUG | .65 | .60 | .55 |
| 83-776 | UG 203/U | PLUG | .65 | .60 | .55 |
| 83-1RTY | ..... .. | RECEPTACLE | .75 | .65 | .65 |
| 83-1H | UG 106/U | HOOD | .15 | .14 | .12 |
| 83-1HP | ... ... . | HOOD | .27 | .24 | .22 |
| 83-765 | UG 177/U | HOOD | .24 | .24 | .24 |
| 83-1AC | . ... . | CAP & CHAIN | .35 | .30 | .45 |
| 83-1BC | ..... | CAP & CHAIN | .35 | .31 | .30 |
| 83-1T | M 358 | T CONNECTOR | 1.50 | 1.40 | 1.40 |
| 83-1AP | M 359 | ADAPTER | .35 | .30 | .28 |
| 83-1AP | M 359A | ADAPTER | .80 | .75 | .70 |
| 83-1J | PL 258 | JUNCTION | .75 | .70 | .65 |
| 83-1F | PL 274 | FEED THRU | 1.25 | 1.20 | 1.10 |
| 83-22SP | UG 102/U | TWIN PLUG | .90 | .80 | .75 |
| 83-22R | UG 103/U | RECEPTACLE | .90 | .80 | .75 |
| 83-22AP | UG 104/U | ADAPTER | 1.40 | 1.25 | 1.10 |
| 83-22J | UG 105/U | JUNCTION | 1.50 | 1.40 | 1.40 |
| 83-22T | UG 196/U | T CONNECTOR | 1.65 | 1.50 | 1.30 |
| 83-22F | PL 275 | FEED THRU | 2.00 | 1.90 | 1.75 |
| 83-22SP | PL 295 | PLUG | 2.25 | 2.15 | 2.00 |
| 83-2R | SO 265 | RECEPTACLE | 1.65 | 1.55 | 1.50 |

## From stock

| Type | Price | Type | Price | Type | Price | Type | Price | Type | Price |
|---|---|---|---|---|---|---|---|---|---|
| UG 9/U | $ 1.95 | UG 57/U | $ 2.30 | CW 155/U | $ .63 | UG 254 A/U | $ 3.50 | UG 496/U | $ 3.50 |
| UG 10/U | 2.75 | UG 57 B/U | 1.85 | UG 155/U | 9.50 | UG 255/U | 2.85 | UG 499/U | 1.50 |
| UG 11/U | 2.25 | UG 58/U | .80 | UG 156/U | 8.50 | UG 256/U | 15.50 | UG 503/U | 50.00 |
| UG 12/U | 1.55 | UG 58 A/U | 1.25 | UG 157/U | 8.50 | UG 257/U | 15.50 | MX 504 | .45 |
| UG 13/U | 2.25 | UG 59/U | 2.45 | UG 158/U | 47.50 | UG 259/U | 6.50 | UG 505/U | 50.00 |
| UG 14/U | 1.80 | UG 59 A/U | 2.15 | CW 159/U | 1.95 | UG 260/U | 1.20 | UG 506/U | 50.00 |
| UG 15/U | 1.25 | UG 59B/U | 2.75 | UG 159 A/U | 2.20 | UG 260 A/U | 1.40 | UG 507/U | 50.00 |
| UG 16/U | 2.75 | UG 60/U | 2.40 | UG 160 A/U | 2.20 | UG 261/U | 1.20 | UG 526/U | 3.75 |
| UG 17/U | 2.75 | UG 60 A/U | 2.25 | UG 160 B/U | 2.50 | UG 262/U | 1.20 | UG 530/U | 4.50 |
| UG 18/U | 1.75 | UG 61/U | 2.35 | UG 166/U | 47.50 | UG 266/U | 4.50 | UG 531/U | 5.15 |
| UG 18 A/U | 1.75 | UG 61 A/U | 2.40 | UG 167/U | 5.75 | UG 269/U | 3.75 | UG 532/U | 6.95 |
| UG 18 B/U | 1.75 | UG 83/U | 1.95 | UG 167 A/U | 5.75 | UG 270/U | 10.00 | UG 533/U | 10.00 |
| UG 19/U | 2.25 | UG 85/U | 2.00 | UG 173/U | .38 | UG 271/U | 10.00 | UG 535/U | 4.95 |
| UG 19 A/U | 2.25 | UG 86/U | 2.80 | UG 174/U | 20.00 | UG 272/U | 25.00 | UG 536/U | 2.45 |
| UG 19 B/U | 1.95 | UG 87/U | 1.60 | UG 180 A/U | 10.00 | UG 273/U | 2.55 | UG 541/U | 3.95 |
| UG 20/U | 1.95 | UG 88/U | 1.10 | UG 181 A/U | 10.00 | UG 274/U | 3.95 | MX 554/U | 2.25 |
| UG 20 A/U | 1.90 | UG 88 B/U | 1.95 | UG 182 A/U | 10.00 | UG 275/U | 7.50 | UG 557/U | 5.50 |
| UG 20 B/U | 1.90 | UG 89/U | 1.35 | UG 185/U | 1.35 | UG 276/U | 7.50 | MX 564/U | .55 |
| UG 21/U | 1.25 | UG 90/U | 1.60 | UG 188/U | 1.30 | UG 279/U | 3.95 | UG 564/U | 3.95 |
| UG 21 A/U | 1.95 | UG 91/U | 1.95 | MX 195/U | 1.00 | UG 286/U | 4.95 | UG 565/U | 3.95 |
| UG 21 B/U | 1.45 | UG 91 A/U | 1.70 | UG 197/U | 4.95 | UG 287/U | 7.75 | UG 566/U | 7.95 |
| UG 21 C/U | 1.75 | UG 92/U | 1.80 | UG 201/U | 2.75 | UG 290/U | 1.20 | UG 567/U | 6.95 |
| UG 21 D/U | 1.95 | UG 92 A/U | 2.25 | UG 202/U | 3.95 | UG 291/U | 1.25 | UG 568/U | 4.95 |
| UG 22/U | 1.65 | UG 93/U | 1.95 | UG 204 A/U | 3.50 | UG 294/U | 2.20 | UG 569/U | 2.95 |
| UG 22 A/U | 1.60 | UG 93 A/U | 2.25 | UG 206/U | 2.00 | UG 299/U | 7.75 | UG 570/U | 2.95 |
| UG 22 B/U | 1.50 | UG 94/U | 2.25 | UG 207/U | 25.00 | UG 306/U | 2.95 | UG 571/U | 6.95 |
| UG 22 C/U | 1.95 | UG 94 A/U | 1.60 | UG 208/U | 22.50 | UG 309/U | 3.75 | UG 572/U | 5.95 |
| UG 23/U | 1.65 | UG 95/U | 1.95 | UG 212 A/U | 3.50 | UG 332/U | 3.50 | UG 573/U | 7.25 |
| UG 23 A/U | 1.95 | UG 95 A/U | 2.00 | UG 213 A/U | 4.10 | UG 333/U | 5.50 | UG 602/U | 3.00 |
| UG 23 B/U | 1.75 | UG 96/U | 2.10 | UG 215/U | 5.50 | UG 334/U | 6.50 | UG 603/U | 3.00 |
| UG 23 C/U | 1.95 | UG 96 A/U | 1.95 | UG 216/U | 14.00 | UG 335/U | 3.75 | UG 625/U | 1.70 |
| UG 27 A/U | 3.75 | UG 97/U | 4.25 | UG 217/U | 7.50 | UG 347/U | 2.50 | UG 627/U | 7.25 |
| UG 27 B/U | 3.75 | UG 97 A/U | 3.95 | UG 218/U | 10.00 | UG 348/U | 1.50 | UG 628/U | 7.25 |
| UG 27C/U | 4.50 | UG 98/U | 2.50 | UG 219/U | 7.50 | UG 349/U | 3.50 | UG 634/U | 4.95 |
| UG 28/U | 3.95 | UG 98 A/U | 2.70 | UG 220/U | 10.00 | UG 352/U | 7.50 | MX 913/U | .65 |
| UG 28 A/U | 3.95 | UG 100/U | 2.95 | UG 222/U | 43.75 | UG 352A/U | 9.00 | UG 931/U | 3.00 |
| UG 28 B/U | 4.50 | UG 100 A/U | 3.75 | UG 223/U | 6.50 | MT 412 | .95 | UG 932/U | 3.00 |
| UG 29/U | 1.00 | UG 101/U | 4.45 | UG 224/U | 1.50 | UG 414/U | 2.95 | | |
| UG 29 A/U | 1.90 | UG 101 A/U | 4.55 | UG 231/U | 2.70 | UG 419/U | 1.95 | | |
| UG 29 B/U | 1.90 | UG 107 A/U | 4.50 | UG 233/U | 18.50 | UG 421/U | 3.25 | | |
| UG 30/U | 2.50 | UG 107 B/U | 4.50 | UG 234/U | 18.50 | UG 422/U | 3.25 | | |
| UG 32/U | 19.00 | UG 108/U | 2.90 | UG 235/U | 35.50 | UG 423/U | 5.85 | | |
| UG 33/U | 19.00 | UG 108 A/U | 3.25 | UG 236/U | 12.25 | UG 447/U | 1.50 | | |
| UG 34/U | 19.00 | UG 109/U | 2.30 | UG 237/U | 15.00 | UG 478/U | 50.00 | | |
| UG 35 A/U | 19.00 | UG 109 A/U | 2.90 | UG 241/U | 3.45 | UG 479/U | 33.80 | | |
| UG 36/U | 19.00 | UG 110/U | 15.00 | UG 242/U | 3.95 | UG 482/U | 33.80 | | |
| UG 37/U | 19.00 | UG 114/U | 2.15 | UG 243/U | 4.50 | UG 483/U | 4.65 | | |
| UG 37 A/U | 19.00 | UG 115/U | 2.25 | UG 244/U | 4.00 | UG 484/U | 5.80 | | |
| UG 38 A/U | 22.00 | UG 119 U/P | 7.50 | UG 245/U | 2.50 | UG 486/U | 2.30 | | |
| UG 39/U | 1.75 | CW 123 A/U | .55 | UG 246/U | 3.10 | UG 487/U | 6.50 | | |
| UG 40/U | 1.95 | UG 131/U | 10.00 | UG 249/U | 18.50 | UG 491/U | 2.25 | | |
| UG 45/U | 5.00 | UG 146/U | 2.95 | UG 250/U | 18.50 | UG 492/U | 5.00 | | |
| UG 46/U | 5.00 | UG 148 A/U | 7.85 | UG 251/U | 18.50 | UG 493/U | 7.25 | | |
| UG 49/U | 20.00 | UG 149 A/U | 5.25 | UG 252/U | 7.50 | UG 494/U | 4.75 | | |
| UG 50/U | 20.00 | UG 154/U | 9.50 | UG 253/U | 5.50 | UG 495/U | 7.50 | | |

**IPC** Miniature Connector

| | |
|---|---|
| MC 10 | .36 |
| MC 20 | .46 |
| MC 30 | .82 |
| MC 40 | .86 |
| MC 50 | .36 |
| MC 60 | .46 |
| MC 70 | .82 |
| MC 80 | .86 |
| MC 100 | 1.20 |
| MC 110 | 1.12 |
| MC 120 | .36 |
| MC 150 | .75 |
| MC 250 | 1.50 |

*It's Free!* *A request on your letterhead will bring you a copy of our new AN and Associated Hardware and Fittings Catalog just off the press. Request catalog No. AN 9.*

# LIFE ELECTRONIC SALES

345 Broadway, New York 13, N. Y.
Digby 9-4154

# COMPASS

## COMMUNICATIONS COMPANY

393 GREENWICH STREET
NEW YORK 13, N. Y.
CABLE ADDRESS: COMPRADIO, N. Y.
ALL PHONES: BEEKMAN 3-6509

***WE MAINTAIN OUR OWN FULLY EQUIPPED TESTING LABORATORY TO TEST AND GUARANTEE ANYTHING WE SELL***

***Suppliers of***

MARINE, GROUND & AIRBORNE

**TRANSMITTERS**

FROM 25 WATTS TO 5 KILOWATTS

**RADAR**

**SONAR**

**TEST SETS**

**TELEPHONE EQP'T.**

**CONVERSION EQP'T.**

—MOTOR GENERATORS
—CONVERTORS
—DYNAMOTORS
—INVERTERS
—POWER SUPPLIES
—RECTIFIERS

AND

**TUBES—** SPECIAL PURPOSE and TRANSMITTING TYPES

**TCS**—Collins mfd. Navy radiotelephones for shipboard and mobile use, compelte with all accessories for operation from 12, 24, 110, 230 volts d.c. and 110 or 220 volts a.c.

**TDE**—Navy or commercial marine transmitters, complete 110 & 220 volts d.c. and a.c.

**TBK**—Navy high frequency transmitter, 2-20 mcs; 500 watts output. Supplied complete with m/g and starter for d.c. or a.c. operation.

**TBM**—same transmitter but with speech input equipment to give 350 watts phone.

**TBL**—Navy all-wave transmitter; 350 watts output: CW and phone. Supplied complete with m/g and starter for d.c. or a.c. operation.

**TAJ**—Navy intermediate freq. transmitter, 175-550 kcs; 500 watts output. Supplied complete with m/g and starter for a.c. or d.c. operation.

**SCR-284**—the famous mobile and ground station for field use. Large quantity of complete sets available.

**MAG**—10 cm. portable link radar transmitter receivers, 6-volt operation.

**TBN**—200-500 kcs, complete with 220/440 volt, 3 ph. 50-60c. power supply—conservatively rated at 1 kw. output.

**SCR-510 and 610** in quantity

★

• **BEACONS**

AN/CPN-8 . . . . . 10 cm.
AN/CPN-6 . . . . . 3 cm.
YJ and YG . . . for shipboard use

## JAN TUBES

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| OA2 | .50 | 3B24 | 7.50 | 6J6W | 5.50 | 12SK7 | .75 | 707A | 7.50 | 2050 | 1.25 | FG57 | 17.50 |
| OB2 | 1.00 | 3B26 | 3.50 | 6K7 | .65 | 12SL7 | .75 | 708A | 4.50 | 2051 | 1.00 | FG97 | 22.50 |
| OC3 | 1.00 | 3B27 | 3.75 | 6L6 | 2.00 | 12SN7 | .75 | 715B | 8.50 | 5654 | 2.75 | FG105 | 17.50 |
| OD3 | .50 | 3B28 | 7.50 | 6L6G | 1.50 | 12SR7 | .75 | 717A | 1.25 | 5670 | 5.50 | HY312 | 2.50 |
| 1AC4 | 1.25 | 3E29 | 14.50 | 6L7 | 1.00 | 24G | 1.25 | 718CY | 35.00 | 5686 | 2.75 | HY114B | 1.50 |
| 1E1 | .50 | 3Q4 | .75 | 6N7 | 1.10 | 25Z6GT | .85 | 722AY-GY | 35.00 | 5687 | 5.25 | HY615 | .25 |
| 1B22 | 2.00 | 3S4 | .75 | 6SC7 | .85 | 28D7 | 1.25 | 801A | .35 | 5704 | 2.50 | KC4 | 47.50 |
| 1B24 | 9.50 | 4AS1 | 2.50 | 6SF5 | .75 | 35T I.G. | 3.00 | 807W | 1.50 | 5726 | 2.10 | KC4-5 | 37.50 |
| 1B42 | 8.50 | 4B24 | 5.75 | 6SG7W | 1.75 | 81 | .50 | 826 | .75 | 5763 | 1.50 | KY21A | 8.75 |
| 1P23 | 2.75 | 4B25 | 8.00 | 6SJ7 | .75 | 101L WE | 1.00 | 827R | 125.00 | 6101 | Write | LVR | 3.50 |
| 1Z2 | 3.75 | 4E27 | 15.00 | 6SJ7Y | .85 | 203Z | 4.50 | 832A | 8.50 | 6099 | Write | QK117 | 50.00 |
| 2C22 | .25 | 4X-150A | 35.00 | 6SL7 | .75 | 227A | 4.50 | 829B | 12.00 | 8013 | 2.50 | QK117A | 65.00 |
| 2C26 | .25 | 5J29 | 11.50 | 6SN7 | .75 | 252A | 5.50 | 835 | 17.50 | 8020 | 1.25 | RK34 | .75 |
| 2C26A | .40 | 5R4GY | 1.50 | 6V6GT | .75 | 286A | 7.50 | 837 | 1.25 | 8025 | 4.50 | RK47 | 4.50 |
| 2C34 | .60 | 6-4 | .50 | 6V6GTY | .85 | 294TH | 6.75 | 872AS | 3.00 | 9004 | .35 | RK60 | 5.75 |
| 2C40 | 12.50 | 6AG5 | .75 | 6X5GT | .75 | 304TL | 7.50 | 874 | 1.10 | 9006 | .35 | RK72 | 1.00 |
| 2C51 (W.E.) | 5.75 | 6AJ5 | 1.35 | 6Y6 | 1.25 | 307A | 4.50 | 954 | .25 | CE1C/868 | 3.00 | RK73 | 1.25 |
| 2D21 | 1.35 | 6AK5 | .65 | 7AG7 | 1.75 | 313C | 2.75 | 955 | .35 | 1.50 | RX212 | 15.00 | |
| 2E25 | 5.00 | 6AK5 WE | 1.50 | 7C24 | 110.00 | 316A | 1.25 | 956 | .35 | CE2 | 3.50 | SD823 | .75 |
| 2J21A | 6.50 | 6AK5W | 2.25 | 10Y | .35 | 329A | 4.50 | 957 | .45 | CE2A | 3.50 | VS1 | 12.50 |
| 2J26 | 15.00 | 6AK6 | 1.00 | 12A6 | .75 | 371A | .75 | 958A | .60 | CE2B | 3.50 | VT31 | 50.00 |
| 2J27 | 15.00 | 6AL5 | .60 | 12AT7 | 1.00 | 412A WE | 1.25 | 1616 | .65 | CE2C | 2.50 | VU508 | 1.50 |
| 2J31 | 22.50 | 6AQ5 | .50 | 12AU7 | 1.00 | 417A | 15.00 | 1625 | .35 | CE2T | 1.50 | WL481 | 1.00 |
| 2J48 | 35.00 | 6AR6 | 2.75 | 12AX7 | 1.00 | 450TL | 35.00 | 1626 | .35 | CE2S/927 | 1.25 | WL532A | 3.00 |
| 2J61 | 35.00 | 6AS6 | 2.50 | 12J5GT | .60 | 471A | 2.25 | 1630 | .85 | CE25C | 2.50 | WL673A | 7.50 |
| 2J61A | 45.00 | 6AS7 | 4.25 | 12K8Y | .60 | 700-A/B/C | 25.00 | 1632 | .70 | ELC1A | 8.75 | ZB120 | 10.00 |
| 2K22 | Write | 6B8 | .75 | 12SG7 | .75 | 702A | 3.00 | 1633 | .70 | ELC1B | 3.25 | 45X674 | 10.00 |
| 2K23 | Write | 6C4 | .50 | 12SG7Y | .85 | 704A | .75 | 1644 | .75 | ELC5B | 2.50 | SAP1 | 3.75 |
| 2K25 | 35.00 | 6H6G | .75 | | | | | | | ELC5A | 3.50 | SBP4 | 1.75 |
| 2K28 | 27.50 | 6J5 | .50 | | | | | | | ELC6J | 7.50 | SHP1 | 4.75 |
| 3A4 | .85 | 6J6 | 1.00 | | | | | | | ELC6C | 7.50 | SSP1 | Write |
| 3A5 | 1.50 | | | | | | | | | F123A | 6.75 | 7BP7 | 7.50 |
| 3B4 | 2.25 | | | | | | | | | | | 7HP4 | 7.50 |
| 3B24 | 4.75 | | | | | | | | | | | 9LP7 | 4.50 |

**ROSE PRODUCTS COMPANY**

**102 WARREN STREET** REctor 2-8078-9 **NEW YORK 7, N. Y.**

## 10 Seconds to 24 Minutes Timer

**A hand wound electric TIMING SWITCH Pointer moves back to ZERO and shuts off RADIO—TV—Electric Mixer—Photographic Devices—Time Delay etc. Furnished with Calibration Chart and Pointer Knob. Biggest bargain we ever had. $1.25**

### HAYDON SYNCHRONOUS TIMING MOTOR

110 v. 60 cycle 20RPM.... $2.60
110 v. 60 cycle 1/10 RPM.. $2.35
110 v. 60 cycle 1RPM..... $2.85

### ISOLATION TRANSFORMER

| | |
|---|---|
| Step-Up or Step-Down | 230 volts to 115 volts<br>115 volts to 230 volts |
| 4½ lbs..... $2.85 | 115 volts to 57 volts |

**ALNICO LUCKY** 7% COBALT
PURCHASED OR BLED US TO OBTAIN THESE
**MAGNETS!**
39¢ EACH 3 FOR $1.00

**REDMOND Powerful 5" Blower or Ventilator** 115 volts AC 60 cycles 18 watts. For Kitchen — Laboratory. Heat or Cold or Chemicals...$7.50

### Genuine TELECHRON Motors



| | |
|---|---|
| 2 RPM..... | $2.90 |
| 3 RPM..... | 3.90 |
| 3.6 RPM.... | 3.15 |
| 1 RPM..... | 3.95 |
| 60 RPM.... | 4.30 |

One of each $15.00

**Westinghouse** ELAPSED TIME METERS $15.50

**General Electric** Round Case Smaller Numerals $15.50

ALL BRAND NEW

1800 RPM SYNCHRONOUS Motor: 115 volts AC, 18 watts 1¼ lbs.: 2"x3"x3" ..... $4.50
Assorted Micro Switches, Acro Switches, MU-Switches .....5 for $1.00

**DID YOU EVER WISH FOR A 3rd HAND?**

A FOOT SWITCH MADE FROM SURPLUS MATERIAL
$4.95 KIT $5.75 COMPLETE
USING A 15 AMP. MICRO SWITCH

ALL PRICES F.O.B. N. Y.

EST. 1923 **BLAN** EST. 1923

64 Dey St. New York 7, N. Y

### GLASS TUBING

PYREX - NONEX - URANIUM BULBS & CYLINDERS

WRITE FOR FREE MONTHLY LIST

**HOUDE SUPPLY COMPANY**

PHONE KEYPORT 7-1286

M. R. # 1 Box 86X Keyport, N. J.

### SHEET METAL MACHINERY

NEW & USED — COMPLETE LINE OF Box Brakes, Press Brakes, Notchers, Shears, Punches, Rolls, Spot Welders — Di-Acro, Pexto, Whitney Equipment, etc.

**B. D. BROOKS, INC.** 310 Atlantic Ave. Boston, Mass. Tel. HAncock 6-5200

## DIRECTRON SELENIUM RECTIFIERS

**Buy Direct From M'facturer**



**In Stock for Immed. Delivery:**

**Full-Wave Bridge Types**

| Current (Continuous) | 18/14 Volts | 36/28 Volts | 54/42 Volts | 130/100 Volts |
|---|---|---|---|---|
| 1 Amp. | $1.25 | $2.10 | $3.60 | $7.50 |
| 2 Amps. | 2.20 | 3.60 | 6.50 | 10.50 |
| 2½ Amps. | | | | 13.00 |
| 4 Amps. | 3.75 | 6.75 | 8.75 | |
| 5 Amps. | 4.95 | 7.95 | 12.95 | 27.00 |
| 6 Amps. | 5.50 | 9.00 | 14.00 | 33.90 |
| 10 Amps. | 6.75 | 12.00 | 20.00 | 48.00 |
| 12 Amps. | 8.50 | 16.00 | 25.50 | 56.00 |
| 20 Amps. | 13.25 | 24.00 | 36.00 | 96.00 |
| 24 Amps. | 16.00 | 31.00 | 39.50 | 98.00 |
| 30 Amps. | 18.50 | 36.00 | | |
| 36 Amps. | 25.50 | 45.00 | | |

We manufacture standard as well as special types of selenium rectifiers, rect. supplies and XFMRS. Low prices . . . Write. You will like our quick service, low prices, and good workmanship.

**Selenium Plates—Quantities For Sale**

- **New, Selenium Rectifier Transformers**

PRI: 115 V., 60 cycles in. SEC: 9, 12, 18, 24, and 36 volts } 4 Amps.....$ 8.75 / 12 Amps..... 16.75 / 24 Amps..... 35.75

Made to our specs. for continuous, heavy duty use

- **New Selenium Rectifier Chokes**

4 Amps.—.07 hy.—.6 ohm ..... $7.95
12 Amps.—.01 hy.—.1 ohm ..... $14.95
24 Amps.—.004 hy.—.025 ohm ..... $29.95

### TRANSFORMER SPECIALS:

- 115V. PRI—36V. 50 amp second XFMR....$39.95
- 115V. PRI—6V. @ 190 Amp. SEC..... $59.95
- 115/230 V. 60 cy. PRI. SEC.: 1.5, 30.5, 33.5, and 36.5V @ 4 AMPS. Herm. Sealed...@ $6.50
- 115V. PRI—20V. @ 2 Amps..... $2.40

**AR-11—Complete Station for 20, 40, 80. Superhet Rcvr—50 Watts CW w/built in AC Pwr Supply. New—in compact suitcase (orig. cost over $500). Special.....Only $69.50**

### Selenium Power Supply

0 to 12VDC/2 Amp. Variable DC supply, uncased and completely built—Input, 115v/60 cy. Usable LAB supply, filament D.C. plating, battery charging, model railroad, includes voltage or speed control and center off reversing sw. Ideal for two "HO" locomotives .....$10.95
2 for $20.00

32 KV. VACUUM CAPACITORS. EIMAC BOXED 6MMF....$8.50 — 12 MMF — $10.95
50 MMF ....$13.50

- **Bliley-Type SMC100— Crystal Standards. New—100 KC and 1,000 KC BAR..... $8.50**
- **LM FREQUENCY METER—INT. MODULATION —Orig. Book. Excellent condition.....$115.00**
- **MARK II TRANSMITTER—Receiver with Spares. New .....$75.00**

**BARRY ELECTRONICS CORP**

136 LIBERTY STREET • NEW YORK 6, N. Y.

## TUBES

**We guarantee all tubes. We endeavor to give you low, low prices, consistent with quality merchandise and service. Here is a partial listing only. You may order other popular types not listed at similar savings. Stock up NOW.**

| | | | | | |
|---|---|---|---|---|---|
| OA2 | .98 | 6AG7 | 1.25 | 50L6GT | .55 |
| OB2 | 1.10 | 6AH6 | 1.00 | RK-72 | .75 |
| OC3/VR105 | 1.19 | 6AJ5 | 1.75 | RK-73 | .75 |
| OD3/VR105 | .95 | 6AK5 | .70 | 117Z6 | 1.00 |
| OZ4 | .50 | 6AN8 | 2.25 | PG-105 | 19.50 |
| 1A7GT | .89 | 6AT6 | .68 | P-123-A | 6.95 |
| 1AE4 | .90 | 6AU6 | .65 | 211 | .75 |
| 1B3GT | .85 | 6AV6 | .55 | 250-TH | 18.75 |
| 1B22 | 2.00 | 6BA6 | .65 | 274-A | 2.95 |
| 1B23 | 8.00 | 6BD6 | .86 | 274-B | 2.95 |
| 1B27 | 14.98 | 6BE6 | .45 | 275-a (WE) | 3.00 |
| 1B3GT | .69 | 6CL6 | .45 | 276F & G | 15.00 |
| 1L4 | .60 | 6CB6 | .45 | HF-300 | 27.50 |
| 1L21 (GE) | 4.00 | 6F6-M | .69 | 304-TH | 7.00 |
| 1LA6 | .90 | 6F8-G | .89 | 304-TL | 8.75 |
| 1N21-B | 2.95 | 6G6-G | .95 | 310A (WE) | 5.95 |
| 1N23-A | 2.25 | 6J4 | 6.75 | 311A (WE) | 6.50 |
| 1N23-B | 3.49 | 6J5 | .49 | 328-A (WE) | 5.00 |
| 1N34 | .64 | 6J6 | .59 | 337A (WE) | 3.00 |
| 1N34-A | .75 | 6J7 | .75 | 349A (WE) | 1.35 |
| 1N44/400B | 1.21 | 6K6GT | .59 | 350-B (WE) | 3.95 |
| 1N45/400C | 1.39 | 6K7-M | .70 | 350-A (WE) | 4.00 |
| 1N48 | .55 | 6L5-G | .69 | 371-B | .95 |
| 1N51 | .51 | 6L6-G | 1.19 | 373-A (WE) | 4.00 |
| 1N52 | 1.71 | 6L7 | .93 | 374-A (WE) | 3.50 |
| 1N54 | .89 | 6N7-M | .95 | 387-A (WE) | 2.50 |
| 1N63 | 3.81 | 6Q7GT | .80 | 400-A (WE) | 2.50 |
| 1N64 | .72 | 6S7-M | .98 | 401-A (WE) | 3.50 |
| 1N65 | .84 | 6SD7 | .79 | 403-B (WE) | 7.50 |
| 1N69 | 1.23 | 6SG7 | .88 | 407-A (WE) | 5.00 |
| 1N70 | 3.15 | 6SH7 | .64 | 408-A (WE) | 2.75 |
| 1N72 | 1.20 | 6SJ7 | .69 | 421-A (WE) | 3.50 |
| 1N73 | 28.53 | 6SK7GT | .62 | GL-559 | 1.00 |
| 1N74 | 21.90 | 6SL7GT | .60 | KU-676 | 25.00 |
| 1N75 | 3.33 | 6SN7GT | .70 | 700-D | 55.00 |
| 1N81 | 2.58 | 6T8 | .75 | 715-C | 20.00 |
| 1U4 | .49 | 6U4-GT | .65 | 717-A | .93 |
| 2AP1 | 8.50 | 6V6GT | .60 | 723A/B | 17.50 |
| 2B7 | .75 | 6X5GT | .52 | 803 | 3.35 |
| 2C39 | 27.50 | 6Y6-G | .95 | 805 | 3.50 |
| 2C43 (GE) | 15.95 | 7A6 | .65 | 807 | 1.59 |
| 2C52 | 5.50 | 7A8 | .75 | 811 | 2.75 |
| 2D21 | 1.35 | 7C6 | .80 | 811-A | 3.50 |
| 2E24 | 2.75 | 7C30 | 85.00 | 812 | 2.75 |
| 2E30 | 2.10 | 7F7 | .74 | 812-A | 3.50 |
| 2J22 | 6.50 | 7H7 | .80 | 829 | 9.95 |
| 2J34 | 27.25 | 12A6 | .65 | 832 | 7.25 |
| 2J48 | 54.25 | 12AT7 | .75 | 832-A | 8.50 |
| 2J49 | 54.00 | 12AU7 | .69 | 857 | 1.45 |
| 2K25 | 27.50 | 12AV6 | .55 | 860 | 3.95 |
| 3A4 | .59 | 12AX7 | .99 | 861 | 22.50 |
| 3AP1 | 9.00 | 12BA6 | .69 | 866-A | 1.55 |
| 3B28 | 7.50 | 12BA7 | .90 | 872-A (GE) | 3.50 |
| 3B29 | 12.00 | 12BD6 | 1.25 | CK-1005 | .48 |
| 3BP1 | 5.75 | 12BE6 | .45 | 1280 | .80 |
| 3BP11 | 9.50 | 12C8 | .79 | 1613 | .75 |
| 3C22 | 85.00 | 12H6 | .75 | 1614 | 2.25 |
| 3C23 (GE) | 16.50 | 12SA7 | .75 | 1616 | .74 |
| 3C27 | 7.50 | 12SF5 | .70 | 1622 ($1.65M) | 1.95 |
| 3C33 | 9.95 | 12SG7 | .87 | 1625 | .40 |
| 3D6/1299 | .50 | 12SH7 | .95 | 1629 | .30 |
| 3Q4 | .49 | 12SJ7 | .99 | 1631 | 1.50 |
| 3Q5GT/G | .99 | 12SK7 | .75 | 1632 | .70 |
| 3S4 | .80 | 12SL7 | .75 | 2050 | 1.48 |
| 4C35 | 26.50 | 12SN7GT | .84 | 2051 | 1.19 |
| 4E27 | 12.95 | 12SR7-M | .75 | 5516 | 6.95 |
| 4X-150A | 33.50 | 14F7 | .80 | 5528/C6L | 15.00 |
| 5CP1 | 3.00 | 25AV5 | 1.25 | 5608-A | 3.95 |
| 5FP7 | 1.95 | 25BQ6GT | .79 | 5634 | 2.00 |
| 5R4GY | 1.29 | 25L6GT | .64 | 5814 | 4.50 |
| 5U4G | .55 | 25Z6 | .67 | 5910 | .75 |
| 5X4G | .45 | 35B5 | .40 | 8020 | .98 |
| 5Y3GT | .45 | 35C5 | .40 | 9001 | 1.35 |
| 6AB4 | .75 | 35L6 | .69 | 9003 | 1.10 |
| 6AB7 | .98 | 35Z5GT | .49 | 9004 | .39 |
| 6AC7 | .94 | 45 | .65 | 9006 | .39 |
| 6AG5 | .65 | 50C5 | .50 | | |

**WRITE ON TYPES NOT LISTED**

**Top Dollar Paid for SURPLUS TUBES & EQUIPMENT — Send List With Details**

### FILTER CAPACITORS

| Capacity | W. Voltage | Ea. |
|---|---|---|
| 500 MFD. | 50 V. | 90¢ |
| 500 MFD. | 200 V. | 2.50 |
| 3000 MFD. | 20 V. | 2.25 |

- **Weston Meters. 0-100 micro amps. 2½" Diam. (Blank Scale) New Boxed. Very Special. $8.95**

### Sola Heavy-Duty Plate Transformers

PRI: 200, 220, 240 Volts @ 50-60 cy.
SEC: 700-0-700 Volts @ Conservative 200 Ma.
6" x 6" x 6½"—New—Special ..... $17.50

- **CARTER DYNAMOTORS**—6V. D.C. Input—500 VDC. Output @ 150-MA. Only 7" x 6" x 8". In Orig. Mfr's Cartons. Only.....$28.00

Terms: FOB-NYC—25% Deposit with order—or send full remittance to save COD charges—Rated Firms (D.&B.) Net 10 days — All merchandise guaranteed.

Phone: REctor 2-2562
Cable: Barrylect, N. Y.

*Headquarters for Microwave Test Equipment*

*TO AMERICAN INDUSTRY:*

## WESTERN LABORATORIES

*announces*

### A New and Unique Electronic Service

Because of the unusual demand for military electronic test equipment, we will re-create pieces with military nomenclature of acknowledged superior design in small or moderate quantities.

Moreover, we will do this at a speed unheard of in electronic circles. Our vast library of technical information, together with unexcelled laboratory facilities under the control of the finest technicians, frequently permit procurement of critically needed test gear otherwise unavailable.

We often are able to produce and deliver before similar material can be supplied as *GFE* or government bailment.

Complete satisfaction assured, and best of all, our prices reflect a considerable savings to you. Write, wire, or telephone.

**TEST EQUIPMENT HEADQUARTERS**

*Weston Laboratories*

*Weston 93, Mass.*



## IMMEDIATE DELIVERY

| | |
|---|---|
| PL-112 | U-16-U |
| PL-118 | UG-34/U |
| PL-147-A | UG-88/U |
| PL-151-A | UG-260/U |
| PL-259-A | UG-306/U |

*NOW IN STOCK*

**P. J. SALES - WO - 4-2490**

99 Murray St. New York City 7, N. Y.



## POWER RHEOSTATS

| r | W | Ea. | r | W | Ea. | r | W | Ea. |
|---|---|---|---|---|---|---|---|---|
| .5 | 25 | 1.98 | 75 | 25 | 1.98 | 500 | 300 | 9.49 |
| .5 | 50 | 2.81 | 75 | 75 | 3.98 | 585 | 150 | 6.59 |
| .5 | 150 | 5.93 | 80 | 50 | 2.53 | 750 | 25 | 2.23 |
| 1 | 50 | 2.81 | 80 | 500 | 12.46 | 750 | 150 | 5.46 |
| 2 | 50 | 2.81 | 100 | 25 | 1.98 | 1000 | 25 | 2.53 |
| 2 | 100 | 4.68 | 100 | 50 | 2.53 | 1000 | 50 | 2.66 |
| 2 | 300 | 8.42 | 100 | 100 | 4.39 | 1200 | 225 | 7.20 |
| 3 | 100 | 4.67 | 125 | 25 | 2.23 | 1200 | 300 | 8.40 |
| 3 | 225 | 6.58 | 150 | 50 | 2.53 | 1250 | 50 | 2.66 |
| 4 | 225 | 6.60 | 175 | 25 | 2.23 | 1250 | 150 | 6.10 |
| 5 | 25 | 1.97 | 185 | 25 | 2.23 | 1500 | 25 | 2.53 |
| 5 | 50 | 2.53 | 200 | 25 | 2.23 | 1500 | 50 | 2.66 |
| 5 | 100 | 4.68 | 200 | 100 | 4.40 | 1600 | 50 | 2.66 |
| 6 | 25 | 2.23 | 200 | 150 | 5.04 | 1800 | 150 | 6.19 |
| 6 | 50 | 2.53 | 225 | 50 | 2.53 | 2000 | 25 | 2.53 |
| 6 | 75 | 3.90 | 250 | 25 | 2.23 | 2000 | 50 | 2.66 |
| 7 | 25 | 1.98 | 250 | 50 | 2.53 | 2250 | 150 | 6.24 |
| 7.5 | 75 | 3.95 | 300 | 50 | 2.53 | 2500 | 50 | 2.66 |
| 8 | 50 | 2.53 | 300 | 75 | 3.90 | 2500 | 100 | 4.68 |
| 10 | 25 | 2.23 | 300 | 100 | 4.40 | 2500 | 150 | 6.24 |
| 10 | 50 | 2.53 | 300 | 150 | 5.04 | 3000 | 25 | 2.66 |
| 10 | 100 | 4.37 | 350 | 25 | 2.25 | 3000 | 100 | 4.95 |
| 12 | 25 | 2.23 | 350 | 100 | 4.40 | 5000 | 25 | 2.66 |
| 12 | 50 | 2.53 | 370 | 25 | 2.23 | 5000 | 50 | 2.90 |
| 15 | 25 | 1.98 | 378 | 150 | 6.59 | 7500 | 50 | 2.90 |
| 15 | 75 | 3.90 | 400 | 25 | 2.23 | 7500 | 100 | 5.32 |
| 15 | 100 | 4.38 | 400 | 75 | 3.90 | 10000 | 50 | 2.99 |
| 20 | 50 | 2.53 | 500 | 25 | 2.23 | 10000 | 100 | 5.32 |
| 22 | 50 | 2.53 | 500 | 50 | 2.53 | 10000 | 100 | 5.51 |
| 25 | 25 | 2.23 | 500 | 75 | 3.95 | 15000 | 25 | 3.25 |
| 50 | 25 | 1.98 | 500 | 100 | 4.56 | 20000 | 150 | 8.75 |
| 50 | 50 | 2.53 | 500 | 150 | 5.15 | | | |

Specify Type Shaft Required "S" or "Knob"
Special Prices to Quantity Users.

*LARGEST VARIETIES OF NEW SURPLUS AT LOWEST PRICES*

- **OIL CAPACITORS** — LARGE RECTANGULARS, SMALL RECTANGULARS, BATHTUBS; TUBULAR
- **MICA** — SILVER TRANSM G-1-2-3-4
- **ELECTROLYTIC FP CANS**
- **AMPHENOL-CANNON**
- **AN-UG-UHF** CONNECTORS
- **LORD SHOCK MOUNTS**
- **BIRTCHER Tube CLAMPS**
- **JONES** PLUGS—SOCKETS BARRIER STRIPS
- **POWER RHEOSTATS**
- **SWITCHES** TOGGLE, ROTARY MICRO, PUSH-MOM.
- **POTENTIOMETERS** I. II. III.
- **OTHER** CARBON WIRE-WOUND POTS
- **MOSSMAN** LEVER SWITCHES
- **AIRCRAFT** NOISE FILTERS
- **RESISTORS** GLASS FERRULE PRECISION
- **FUSEHOLDERS-MOUNTS**
- **INSTRUMENT KNOBS**
- **MANY OTHER ITEMS**

HIGH POWER TRANS. MICA

| G-1 Type | | G-2 Type | | G-3 Type | | G-4 Type | |
|---|---|---|---|---|---|---|---|
| .0001 | 6kv | .0001 | 10kv | .001 | 20kv | .00025 | 30kv |
| .00015 | 5kv | .00015 | 10kv | .00015 | 20kv | .0006 | 35kv |
| .0002 | 6kv | .0002 | 10kv | .0004 | 20kv | .0025 | 25kv |
| .0008 | 6kv | .00025 | 12kv | .00045 | 15kv | .003 | 20kv |
| .01 | 4kv | .0003 | 10kv | .00047 | 20kv | .0039 | 20kv |
| .032 | 2kv | .000375 | 10kv | .0005 | 20kv | .0075 | 15kv |
| .04 | 1kv | .0004 | 5kv | .00095 | 5kv | .01 | 12kv |
| .051 | 1.5kv | .0005 | 10kv | .001 | 20kv | .03 | 8kv |
| .08 | 1.5kv | .00057 | 10kv | .0011 | 20kv | .056 | 5kv |
| .09 | 1.5kv | .00065 | 10kv | .00124 | 15kv | | |
| | | .001 | 10kv | .01 | 5kv | | |
| | | | | .015 | 5kv | | |
| | | | | .25 | 1.6kv | | |

C-D Type #56

| | | | |
|---|---|---|---|
| .000155 | 30kv | .001 | 30kv |
| .0004 | 30kv | .03356 | 2.5kv |
| .000533 | 30kv | .007/15kv—70A/300kc | |

*Full ratings and prices upon request. Specify your needs.*

**A. MOGULL CO.**

50 West Broadway N. Y. 7, N. Y.

Phone: WORTH 4-0865

Arrow SALES INC.

## ATR-13 TRANSCEIVER

Dynamotor powered, either 14 or 28 V. Shock mounted, remotely controlled transceiver. Tunable receiver, range: 108-160 M.C. 4-channel crystal controlled VHF transmitter, built-in provisions for omni. Weight, complete with plugs, less cable, 19 lbs. Less crystal, new ..... **$245.00**

### PORTABLE RADAR

Model SQ. 12 cm. Used on small ships. Has PPI indicator. Maximum range 20 miles. 1 Kw. output. Operates from 110 VAC, 60 cps. Price On Request.

### NEW HEADSETS & HANDSETS

| | | | |
|---|---|---|---|
| HS-23 | HS-33 | T-26 | HS-18 |
| HS-33 | TS-10-G | TS-13-C | EE-8 |

### RADAR

| | | |
|---|---|---|
| APS-4 | Mark 16 | RC-214 |
| APS-6 | MD4/APS2 | RC-224 |
| APT-1 | MD5/APS3 | RC-266 |
| APT-2 | MD22/UPN2 | RT34/APS13 |
| APT-3 | MD38/APQ13 | SCR-517 |
| APT-4 | RC-1841FF | T-85/APT-5 |

### TEST EQUIPMENT Complete Line!

| | | |
|---|---|---|
| DuMont 224-A Oscilloscope | | TS-118/AP |
| 1-77 Hickok Tube Checker | | TS126 |
| 1-208 FM Signal Generator | | TS127/U |
| RPC Model 644 Multimeter | | TS131 |
| Ferris Microvolter Mod. 18-C | | TS159 |
| Hewlett Packard 200-C | | TS170/ARN |
| I-198 | TS19/APQ | TS-173/UR |
| BC-638 | TS-23/APN | TS175/UP |
| BC-1255 | TS24A/ARR-2 | TS182/UP |
| IE-58 | TS27/TSM | TS184A/AP |
| I-951 | TS-35 | TS204/AP |
| I-961 | TS34/AP | TS251 |
| I-122 | TS-35/AP | TS311A/UP |
| I-130A | TS36/AP | TS323/UP |
| I-139 | TS-45A/APM-3 | I-146 |
| I-145 | TS61/AP | TS-268/U |
| I-212 | TS62/AP | Boonton Mod. |
| I-221 | TS80 | 75B Sig. Gen. |
| TS-3A/AP | TS82 | Boonton Type |
| TS10A/APN | TS100/AP | 102F Sig. Gen. |
| TS12/AP | TS-102 | |
| TS16/APN | TS111/CP | |

### TS-159/TPX

**COMBINATION SIGNAL GENERATOR AND FREQUENCY METER.** Freq. range: 150-200 MC., crystal calibrated. Has separate 30 MC signal output, crystal cal; 2-stage, AF amplifier. Power measurements by built-in VTVM circuit. 0-1 MA. meter as 2-range voltmeter. Built-in 400 cps. voltage regulated power supply. New.....$69.95

### POWER SUPPLY

110 V. 60 cps., 4 tubes voltage regulated. Power output 200 VDC @ 50 MA. and 6.3 VAC @ 7 amps. Used to supply necessary power for radar transmitter G-23200. New.....$39.95

### RADAR TRANSMITTER

**Model G-23200.** 15 tubes. Has 4 independent oscillators, each adjustable in frequency between 500-531MC, by means of knobs on front panel. Has 4 independent variable pulse shaping modulators, complete with tubes. Requires above separate POWER SUPPLY. New .....$89.95

### AN/ART-13 PARTS

| Part # | Item |
|---|---|
| 564016 | Barometric Switch |
| 565027 | 4-Pile Ceramic, Variable Cap. |
| K7800443 | 6-Pile Ceramic, Variable Cap. |
| 564605 | 4 Centralab-Type 843-003 Cap Assembly |

### GAS ENGINE POWER SUPPLY

1½ Kw. 110 V. 60 cps. Complete gas engine power supply .....P. U. R.

### FLUX METER

For measuring flux density between magnet poles. Has two meters in series with a potentiometer and battery for power supply. Range: 500-4000 Gauss in 3 scales. Requires 1 battery which mounts in case. NEW .....$37.50

### RECEIVERS—TRANSMITTERS

| | | |
|---|---|---|
| APR-4 | MP-1062 | RTA/1B |
| APR-5 | PE-125AX | SCR-522 |
| ARC-1 | R-9/APN-4 | TA2J-24 |
| ARC-3 | BC-733-D | R-89/ARN |
| R-4/ARR-2 | R-57/ARN | R-1/ARR-1 |
| ID-6/APN-4 | | |

### RA-52 RECTIFIER

Transtat controlled to produce high voltage DC from 110 VAC 60 cycle source. Up to 11,500 VDC @ 50 W. Metered high voltage (0-15 KV) and current (0-20 MA). NEW .....$74.50

### MISCELLANEOUS

**MINE DETECTOR:** SCR-625 for prospecting, mining, etc. NEW .....$59.50
**LP-21 LOOPS:** Mod. LM, AM, A. Excel. cond.

- *NOTE:* WE HAVE ONE OF THE LARGEST,
- MOST COMPLETE INVENTORIES OF MILI-
- TARY ELECTRONICS IN THE U. S. CALL,
- OR WRITE TODAY. SEND FOR FREE
- CATALOGUE.

**ARROW SALES, INC.**
7460 VARNA AVE. Dept. E.
N. HOLLYWOOD, CALIF.
POplar 5-1810 STanley 7-6005
Cable address: ARROWSALES
(See Arrow Sales Inc. ad Page 476)

## Headquarters for Microwave Test Equipment

**THE WIDEST ASSORTMENT, THE STRONGEST DEPTH AND THE MOST IMMEDIATE AVAILABILITY OF ANY SOURCE ON TEST EQUIPMENT.**

We are currently producing and delivering the TS-117, TS-125, TS-108, TS-102A, TS-89, TS-268, TAA-16EA and the TSX-4SE. A more complete list follows:

| | | | | | |
|---|---|---|---|---|---|
| TS-1ARR | TS-62/AP | TS-175/U | TS-323 | I-187A | BC-1255/A |
| TS-3A/AP | TS-63/AP | TS-184/AP | TS-324/U | I-377 | BC-1287/A |
| TS-8A/U | TS-76/APM-3 | TS-189/U | TS-328 | I-378 | BC-1277 |
| TS-10A/APN-1 | TS-87/AP | TS-192/CPM-4 | TS-338 | I-396A | BE-67 |
| TS-11/AP | TS-89/AP | TS-194/CPM-4 | TS-339A/U | I-398A | LAD |
| *TS-12 | TS-96/TPS-1 | TS-197/CPM-4 | TS-363/U | I-398/A | LAF |
| *TS-13 | TS-98/AP | TS-198/CPM-4 | TS-376 | I-212 | LAE-2 |
| TS-14 | TS-100/AP | TS-202/AP | TS-377/U | I-222/A | LM-(*) |
| TS-15B/AP | TS-101/AP | TS-204/AP | TS-389/U | I-223A | LU-2 |
| TS-16/APN | TS-102/AP | TS-205/AP | TS-421/U | I-225 | LU-3 |
| TS-18 | TS-108/AP | TS-210/MPM | TS-437 | I-233 | LZ |
| TS-19 | TS-110/AP | TS-211/UP | I-66 | IE-21/A | ME-11 |
| TS-23/AP | TS-111/CP | TS-220/TSM | I-81B | IE-30 | OAA-2 |
| TS-24/APM-3 | *TS-117/GP | TS-226A | I-81A | IF-12/C | OAW |
| TS-26/TSM | TS-118/AP | TS-230/B | I-95/A | I-185 | PME |
| TS-27/TSM | *TS-125/AP | TS-233/TPN-2 | I-98/A | I-189 | SG/8U |
| TS-32A/TRC-1 | TS-127/U | TS-239A | I-106/A | AN-PMS-1 | TAA-16EA |
| TS-33/AP | TS-133/AP | TS-251 | I-114 | BC-221-(*) | TSS-4SE |
| TS-34AP | TS-142/APG | TS-263] | I-115 | BC-376 | TSX-3SE |
| TS-34A/AP | TS-143/CPM-1 | TS-268 | I-122 | BC-438 | TSX-4SE |
| TS-35/AP | TS-144/TRC-6 | TS-270A/UP | I-122-B | BC-439 | TTX-40RN |
| TS-36/AP | TS-146 | TS-281/TRC-7 | I-126 | BC-838 | TTX-10RN |
| TS-46/AP | *TS-147/UP | TS-285/GP | I-130A | BC-906/D | TUN-9NU |
| TS-47/APR | *TS-148/UP | TS-293 | I-134B | BC-945/A | UPM-13 |
| TS-48 | TS-153 | TS-294/U | I-137A | BC-1060/A | |
| TS-51/APG-4 | *TS-155 | TS-297/U | I-139A | BC-1066/A | |
| TS-55/AP | TS-170/APN-5 | TS-301/U | I-145 | BC-1261/A | |
| TS-60/U | TS-173/UR | TS-303A/G | I-147 | BC-1293 | |
| TS-61/AP | TS-174/U | TS-312/FSM-1 | I-153A | BC-1236/A | |

*Of new manufacture.

**Before selling your idle test equipment, please get our offer**

**Cable: WESLAB** **Tel: Boston: WE 5-4500**

## Weston Laboratories
Weston 93, Mass.

## PULSE TRANSFORMERS

### Tube base plug in type



TYPE UX 7350
EACH COIL = 50-T-# 36¢
MAX. DC RES. OHMS
1 & 8 = 4.020
2 & 7 = 4.542 A
3 & 6 = 2.357 A
5 & 9 = 2.199 A

Here are precision made, high quality compact pulse transformers wound on hypersil cores. They are built in octal bakelite tube bases and can be adapted to many uses. They are completely impregnated and sealed.

SUGGESTED USES

- ★—Blocking Oscillator, Multivibrator and Scope Circuits.
- ★—Wherever Accurate Timing and Triggering are necessary.
- ★—Unexcelled in circuit applications for generating low power and low voltage pulses.
- ★—Can be used in circuits utilising repetition rates from 0 to well over 1 MC and pulse widths ranging from .05 Microsecond up.

*PRICE $4.50 EACH* *IMMEDIATE DELIVERY*







**HATRY and YOUNG**
THE *Elect* IN ELECTRONICS
811 Boyston St., Boston 16, Mass. CO 7-4700

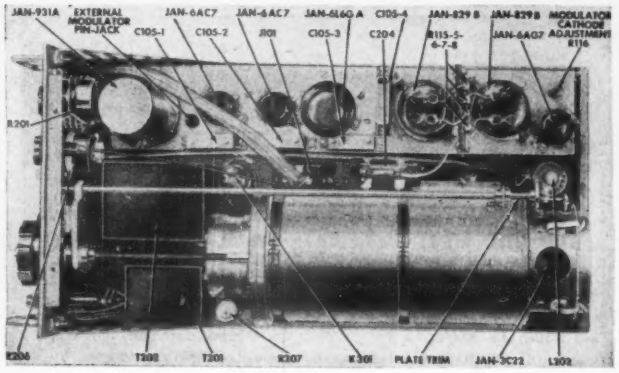


**300-1600 MC Noise Modulated Transmitter T-85/APT-5, 40 watts C.W. Complete with 3C22 light house tube operates on 110 volts, 60 cycles supplied, requires external supply 1000 volts 100 milliamps, new in original crate.....$300.00**

## TUNING UNITS FOR APR-4 RECEIVER

**These tuning units are incomplete, new, in operating condition but lack the front panel, tuning motor and tuning shaft and side panels.....$100.00**

**TN 18 300-1000 MC** **TN 19 1000-2200 MC** **TN 54 2200-4000 MC**

## BUTTERFLY TUNERS

**110-330 megacycles oscillator butterfly $25.00**

**80-300 megacycles mixer butterfly with socket for 955 (used as diode mixer) $25.00**

**400-800 megacycles oscillator butterfly with 703 tube mounted on it..... $30.00**

**X Band Spectrum Analyzer 8500-9600 MC. Calibrated frequency meter, tuned mixer, 4 i.f. stages. 3 Video stages over-all gain 125 db., reg. Power Supply.**

**S Band Spectrum Analyzer 2700-3900 megacycles—Similar to above.**

## HIGH POWER DUMMY LOADS

**DC-2000 MC, 100 watts dissipation, VSWR less than 1.1, no cooling necessary.**

**X Band, 1¼" x ⅝" guide, choke or plain flange, dissipates 350 watts average power continuously in still air, VSWR less than 1.15 between 7 and 10 KFC, weight 5¼ pounds.**

**X Band, ¼" x 1" guide, choke flange, dissipates 250 Watts average power continuously in still air, VSWR less than 1.15 between 8.2 x 12.4 KMC, weight 3¼ pounds.**

**X Band, 1¼" x ⅜" guide, plain flange, dissipates 200 watts average power continuously in still air, VSWR less than 1.15 between 7-10 KMC, weight 3¼ pounds.**

**X Band, 1¼" x ⅜" guide, plain flange, dissipates 150 watts average power continuously in still air, weight 2 pounds 4 ounces.**

**S Band 1½" x 3" guide dissipates 1000 watts average power in still air, VSWR less than 1.15 between 2.5 to 3.7 KMC, choke flange, weight 13 pounds.**

**S Band Mixer, tunable by means of slider; type N connector for the R.F. and local oscillator input, U.H.F. connector for the I.F. output, variable oscillator injection $30.00**

**33 MC I.F. STRIP, VIDEO, and AUDIO AMPLIFIER and 110 Volt 60-2600 cps POWER SUPPLY. Bandwidth 10 mc new, part of SPR-2 Receiver. AMPLIFIER STRIP AM-55A/SPR-2 contains I.F. amplifier, detector, video amplifier, pulse stretcher and audio amplifier and Rectifier Power Unit PP-155A/SPR-2 bandwidth 10 mc, center frequency 30 mc. sensitivity 50 microvolts for 10 milliwatts output. Power supply 80/115 V ac 50-2600 cps 1.3 amps. Send for schematic.....$65.00 less tubes**

**S Band Signal Generator Cavity With Cut-Off Attenuator, 2300-2950 mc., 2C40 tube, with modulator chassis.....$30.00**

**High Pass Filter F-29/SPR-2, cuts off at 1000 mc and below; used for receivers above 1000 mc.....$12.00**

**TS-89 Voltage Divider for measuring high video pulses, ratios 1:10 and 1:100 transmission flat within 2 db 150 c.p.s. to 5 mc., with cable for attaching to syndroscope $30.00**

**Variable Waveguide Below Cut-Off Attenuator L 101-A U.H.F. Connectors at each end calibration 30-100 db.....$15.00**

**S Band Standard Frequency Cavity, adjustable, with crystal holder and 1N27 crystal $50.00**

**S Band Test Load TPS-55P/BT. 50 ohms $12.00**

# NIBUR SALES CORP

**62-A WHITE ST.** **RED BANK, N. J.**

## AN/APR-4 LABORATORY RECEIVERS

**Complete with all five Tuning Units, covering the range 38 to 4,000 Mc.; wideband discone and other antennas, wavetraps, mobile accessories, 100 page technical manual, etc. Versatile, accurate, compact—the aristocrat of lab receivers in this range. Write for data sheet and quotations.**

**We have a large variety of other hard-to-get equipment, including microwave, aircraft, communications, radar; and laboratory electronics of all kinds. Quality standards maintained. Get our quotations!**

***We will buy any Electronic Material at top prices. SCHOOLS—unload your dusty surplus for cash or credit.***

## ENGINEERING ASSOCIATES

**434 PATTERSON ROAD** **DAYTON 9, OHIO**

## RELAYS . . . WORLD'S LARGEST STOCK!

Your requirements of large or small quantities of relays can be quickly supplied from our huge stock.

Wide variety of types, all made by leading manufacturers. Each relay is brand new, inspected and fully guaranteed by Relay Sales.

**✓STANDARD TELEPHONE RELAYS ✓SHORT TELEPHONE RELAYS ✓DUAL TELEPHONE RELAYS ✓SLOW ACTING RELAYS ✓SEALED RELAYS ✓ROTARY RELAYS ✓MIDGET RELAYS ✓KEYING RELAYS ✓DIFFERENTIAL RELAYS ✓PLATE CURRENT RELAYS ✓ANTENNA SWITCHING RELAYS ✓"BK" SERIES ✓STEPPERS & RATCHET RELAYS ✓LATCHING & INTERLOCKING RELAYS ✓MECHANICAL ACTION RELAYS ✓VOLTAGE REGULATORS ✓OVERLOAD & CIRCUIT BREAKERS ✓REVERSE CURRENT RELAYS ✓AIRCRAFT CONTACTORS ✓MOTOR & CONTROL DEVICES ✓TIMERS ✓SOLENOIDS ✓RELAY ASSEMBLIES**

*New*
**RELAY SALES CATALOG NOW READY**

*WRITE FOR YOUR COPY TODAY*

Relay Sales

**833 W. CHICAGO AVE.**
**DEPT. 4, CHICAGO 22, ILL.**

# WAREHOUSE CLEARANCE TUBE SALE

## NEW, STANDARD MANUFACTURERS, IMMEDIATE DELIVERY

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 0B3/VR90 | $1.20 | 5JP2 | $19.50 | 464A | $ 9.50 | 8020 | $ 2.50 |
| 0C3/VR105 | 1.20 | 5T4 | 1.50 | 531 | 14.50 | 9001 | 1.75 |
| 0D3/VR150 | .85 | 6AC7 | .95 | 532A/1B32 | 3.95 | 9002 | 1.50 |
| 1A3 | .85 | 6AG7 | 1.20 | 705A | 3.75 | 9003 | 1.75 |
| 1A5GT | .75 | 6AJ5 | 2.25 | 706AB | 22.50 | 9004 | 1.75 |
| 1B22 | 3.75 | 6AJ6 | 2.10 | 706AY-GY | 32.50 | 9006 | .75 |
| 1B24 | 14.95 | 6B6G | .75 | 707A | 14.50 | CE22/918 | 1.50 |
| 1B27 | 17.50 | 6C6 | .79 | 721A | 2.45 | CK501LX | 1.50 |
| 1B32/532A | 3.95 | 6C8G | .79 | 723AB | 22.50 | CK1089 | 1.50 |
| 1N21 | 1.25 | 6H6 | .69 | 724A | 2.95 | EL5B/4B22 | 9.75 |
| 1N22 | 1.25 | 6K7 | .75 | 724B | 5.95 | ELC5B | 9.75 |
| 1N23 | 1.50 | 6SA7 | .74 | 726A | 14.95 | ELC6A | 7.50 |
| 1N27 | 2.95 | 6SC7 | .97 | 750TL | 79.50 | EL6CF | 8.95 |
| 1P23/CE-1 | 3.50 | 6SH7GT | .79 | 801 | .85 | EL302.5/3B21 | 4.50 |
| 1R4/1294 | .85 | 6SM7 | .79 | 803 | 5.95 | FG27A | $ 8.95 |
| 1T4 | .59 | 7C4/1203A | .75 | 804 | 10.50 | FG-90 | 6.50 |
| 2A3 | .95 | 7E5/1201 | .95 | 805 | 4.95 | GL-316A | 3.40 |
| 2AP1 | 8.95 | 7E6 | .55 | 807 | 1.79 | GL-434A | 22.50 |
| 2B22 | 4.25 | 10Y | 1.50 | 810 | 10.95 | GL446A | 2.50 |
| 2C33/RK233A | 3.45 | 12A6 | .85 | 811 | 2.85 | GL60S | 49.95 |
| 2C40 | 17.50 | 12C8 | .85 | 813 | 8.95 | ML-531 | 14.50 |
| 2E22 | 3.49 | 12H6 | .69 | 814 | 3.35 | QK-59 | 85.00 |
| 2J21 | 9.95 | 12J5GT | .57 | 815 | 3.40 | QK-60 | 85.00 |
| 2J21A | 12.95 | 12SF7 | .75 | 816 | 1.45 | QK-61 | 85.00 |
| 2J22 | 14.95 | 12SJ7GT | .65 | 826 | 1.39 | QK-72 | 85.00 |
| 2J27 | 22.50 | 14H7 | .97 | 830B | 2.95 | RK-25 | 3.69 |
| 2J34 | 38.45 | 14J7 | 1.10 | 832 | 7.95 | RK-65 | 26.50 |
| 2J50 | 69.50 | 15R | 1.00 | 832A | 9.50 | RK-72/CRP72 | 1.95 |
| 2J55 | 98.00 | 23D4 | .65 | 836 | 4.50 | RX21 | 3.85 |
| 2X2 | .89 | 30 | .48 | 838 | 3.50 | QK233A/2C33 | 3.45 |
| 2X2A | 2.15 | 45 | .35 | 838W | 6.50 | VR-90 | 1.20 |
| 3A4 | .85 | 53A | 3.95 | 845 | 3.95 | VR-105 | 1.20 |
| 3B7/1291 | .62 | 71A | .89 | 845W | 6.95 | VR-150 | .65 |
| 3B24 | 5.50 | 76 | .58 | 866A | 1.25 | VT-127A | 2.95 |
| 3C23 | 10.50 | 77 | .65 | 872A | 3.45 | WL-417A | 22.50 |
| 3C24/24G | 1.95 | 78 | .80 | 884 | 1.79 | WL-653B | 75.00 |
| 3DP1 | 3.95 | 100TH | 10.50 | 902P1 | 7.50 | ZP-653 | 69.00 |
| 3D6/1299 | .62 | 112A | .49 | 957 | .45 | | |
| 3EP1 | 4.95 | 211 | 1.25 | 958 | .60 | | |
| 3FP7 | 4.50 | 227A | 4.50 | 959 | 1.50 | | |
| 3GP1 | 4.75 | 274B | 2.95 | 991/NE16 | .25 | | |
| 3JP12 | 14.50 | 304TH | 13.95 | 1616 | 2.95 | | |
| 4B22/EL5B | 9.75 | 304TL | 19.50 | 1619 | .89 | | |
| 4B25/EL6CF | 8.95 | 350A | 6.95 | 1624 | 1.95 | | |
| 4J36 | 175.00 | 359A | 2.50 | 1625 | 2.00 | | |
| 4J37 | 175.00 | 371B | 2.95 | 1629 | 2.00 | | |
| 5BP1 | 5.95 | 388A | 2.95 | 1655/6SC7 | .97 | | |
| 5D21 | 23.95 | 394A | 4.25 | 1846 | 115.00 | | |
| 5FP7 | 2.50 | 450TH | 44.50 | 2051 | .95 | | |
| 5JP1 | 23.50 | 450TL | 44.50 | 8005 | 5.85 | | |

## SPECIAL PURCHASE SALE!

1 mfd @ 15,000
OIL CONDENSER
REG. $195

**$38.75**

Type 14F63. Originally p/o RA-38 rectifier. Size 16x12x4". Brand NEW! ORIGINAL CARTONS!
Order No. RE-370 $38.75

### THIRTEEN "HOT" RADIO SHACK SPECIALS!

Amertran Transtat 103-126/1/60 to 115/1/60 @ 2.17a (BN) ..... $ 9.95
BC-221 Frequency Meter (LN) ..... 89.50
Delco Dual Blower 120 CFM 115/1/60 (BN) 14.85
Elinco B-68 Tach. Gen. 120 V AC 60 cy. (BN) 27.50
Haydon #1000 115/1/60; 1/3 or ½ rpm (BN) 1.95
Heineman Circuit Breaker #AM1515 115 V AC, SP, 10a (BN) ..... 2.95
Heineman Circuit Breaker #0322 220 V AC, 2P, 9-25a (BN) ..... 3.95
HS-33 Headphone, 5' cord w/PL55, HB-7 headband (BN) ..... 4.95
Sola 30864 Constant V Reg. 190-260 V; 115/1/60 @ 1.7a (BN) ..... 19.95
TS-11 Handset; same as H-23/U but w/PL-106 plug (BN) ..... 6.95
TS-51/APG-4 Tachometer Speed Indicator (BN) ..... 95.00
TS-100AP Test Scope (BN) ..... 295.00
Westinghouse FL Blower 115/1/400; 17CFM (BN) ..... 6.95

(BN) Brand New. (LN) Like New

# RADIO SHACK
CORPORATION
167 Washington St., Boston 8, Mass.

WRITE TODAY FOR FREE 8-PAGE FLYER. HUGE LISTING OF OFF-PRICE VALUES!

SAVE ON **TUBES** BRAND NEW **TUBES** GUARANTEED **TUBES**

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| OA2 | $1.00 | 2J22 | 6.95 | 4J28 | 129.50 | 450TH | 35.00 | 809 | 2.95 | 1629 | .39 |
| OA3/VR75 | 1.00 | 2J26 | 14.95 | 4J29 | 129.50 | 451 | 3.50 | 810 | 10.50 | 1630 | .49 |
| OB2 | 1.40 | 2J27 | 14.95 | 4J30 | 129.50 | 464A | 10.95 | 811 | 2.50 | 1631 | 2.50 |
| OB3/VR90 | .90 | 2J32 | 39.50 | 4J31 | 245.00 | 469 | 13.95 | 812 | 2.75 | 1632 | .49 |
| OC3/VR105 | 1.00 | 2J33 | 39.50 | 4J38 | 245.00 | 477 | 2.25 | 813 | 11.95 | 1633 | .49 |
| OD3/VR150 | .90 | 2J34 | 39.50 | 4J35 | 95.00 | 527 | 12.95 | 814 | 2.95 | 1634 | 2.75 |
| 1A3 | 1.00 | 2J35 | 39.50 | 4J36 | 129.50 | 531 | 14.50 | 826 | 1.95 | 1644 | .49 |
| 1B22 | 2.25 | 2J36 | 110.00 | 4J41 | 95.00 | 532 | 3.75 | 830 | 1.95 | 1647 | .49 |
| 1B23 | 8.95 | 2J37 | 12.00 | 4J42 | WRITE | 538 | 2.95 | 829 | 2.95 | 2050 | 1.25 |
| 1B24 | 16.50 | 2J40 | 27.50 | 4J52 | 200.00 | 538 | Write | 829 | 9.95 | 2050 | 1.25 |
| 1B26 | 2.25 | 2J41 | 27.50 | 4J160A | 37.50 | 575 | Write | 829B | 11.95 | 5514 | Write |
| 1B27 | 17.50 | 2J48 | Write | 4X150A | 100.00 | 575 | 13.95 | 832 | 2.75 | 5516 | Write |
| 1B32 | $5.00 | 2J49 | 149.50 | C18 | 4.50 | 575 | 13.95 | 832A | 9.95 | 5560/FG85 | 22.50 |
| 1B37 | 14.95 | 2J50 | 149.50 | 5BP1 | 4.95 | 646 | Write | 836 | 3.45 | 5612 | 249.00 |
| 1B40 | 4.95 | 2J61 | 39.50 | 5BP2 | 4.95 | 646CX | Write | 836 | 3.45 | 5613 | 119.00 |
| 1B41 | 47.50 | 2J62 | 39.50 | 5BP4 | 4.95 | 669 | Write | 837 | .49 | 5614 | 6.95 |
| 1B42 | 12.50 | 2K22 | 49.50 | 5CP1 | 4.50 | 615 | Write | 841 | .49 | 5637 | Write |
| 1B43 | 12.50 | 2K25 | 49.50 | 5CP2 | 35.00 | 615 | Write | 845 | .49 | 5638 | Write |
| 1N21B | 2.75 | 2K26 | 29.50 | 5D21 | 15.95 | 646CX | 15.50 | 845 | 8.50 | 5639 | 9.95 |
| 1N21C | 14.50 | 2K27 | 12.00 | 5FP7 | 2.50 | KU676 | 15.50 | 845 | 8.50 | 5640 | 9.95 |
| 1N22 | 1.25 | 2K29 | 23.95 | 5FP14 | 16.50 | 700A | 16.50 | 852 | 19.95 | 5645 | 9.95 |
| 1N23 | 1.25 | 2K33 | Write | 5GP1 | 4.50 | 700B | 16.50 | 860 | 1.75 | 5646 | 9.95 |
| 1N23A | 2.25 | 2K34 | 110.00 | 5HP1 | 4.95 | 700C | 16.50 | 861 | 19.95 | 5654 | Write |
| 1N23B | 1.50 | 2K45 | 110.00 | 5HP4 | 4.95 | 700D | 16.50 | 861A | 24.95 | 5654A | Write |
| 1N26 | 7.50 | Write | 5JP1 | 15.95 | 703A | 4.50 | 864 | .39 | 5672 | 2.60 |
| 1N28 | Write | 2K54 | Write | 5JP2 | 19.95 | 703A | 2.75 | 865 | .49 | 5675 | 2.60 |
| 1N34 | .49 | 2K55 | Write | 5JP4 | 19.95 | 703A | 4.95 | 866A | .49 | 5676 | 2.60 |
| 1N38 | 1.50 | 2X2 | .69 | 5JP5 | 19.95 | 703A | Write | 866AR | 1.25 | 5685 | 2.25 |
| 1N39 | 1.50 | 3A4 | .68 | 5JP7 | 19.95 | 704A | 1.50 | 868 | 2.25 | 5686 | 2.25 |
| 1N47 | 4.50 | 3A5 | .69 | 5JP11 | 29.50 | 705A | 4.95 | 866A | 1.25 | 5687 | 2.25 |
| 1N54 | .89 | 3AP1 | 8.95 | 5JP19 | 19.95 | 705AY | 29.50 | 872A | 2.75 | 5694 | 2.60 |
| 1N55 | 2.75 | 3B7/1291 | 1.15 | 5JP20 | 39.50 | 705BY | 29.50 | 874 | 1.10 | 5702 | 2.60 |
| 1N56 | .89 | 3B22 | 4.95 | 5R4GY | 1.50 | 705CY | 29.50 | 876 | .49 | 5704 | 4.50 |
| 1N56A | 1.25 | 3B24 | 4.95 | 5Y4 | 1.50 | 705GY | 29.50 | 884 | 1.40 | 5721 | Write |
| 1N60 | .60 | 3B24W | 7.50 | 6/OL/5528 | 12.50 | 707A | 29.50 | 884 | 2.60 | 5725 | 6.95 |
| 1N62 | 2.25 | 3B25 | 5.50 | 6AC7W | 1.25 | 707B | 17.50 | 885 | Write | 5744/619CX | 3.95 |
| 1N64 | .50 | 3B28 | 6.50 | 6AJ5 | 1.25 | 708A | 3.95 | 905 | 1.25 | 5750 | 3.95 |
| 1T1GT | 1.95 | 3BP1 | 6.95 | 6AK5 | 1.10 | 711A | .95 | 906 | 1.25 | 5763 | 2.25 |
| 1Z2 | 2.95 | 3C22 | 80.00 | 6AL3WE | 1.50 | 713A | 5.50 | 927 | 1.25 | 5781 | 2.25 |
| VS-2 | 9.50 | 3C23 | 9.95 | 6AL5W | 2.00 | 714AY | 6.50 | 931A | 1.25 | 5783 | 2.00 |
| 2AP1 | 8.95 | 3C24/24G | 5.50 | 6AN5 | 2.75 | 715A | 9.95 | 953 | 6.50 | 5784 | 6.50 |
| 2C22/1642 | .69 | 3C27 | 2.75 | 6AN8 | 2.75 | 715B | 9.95 | 953B | Write | 5787 | 6.50 |
| 2C22/7193 | .69 | 3C28 | 5.15 | 6AQ5 | 1.25 | 715C | 22.50 | 955 | Write | 5814 | 1.25 |
| 2C26 | .39 | 3C33 | 9.50 | 6AS6 | 2.50 | 717A | 22.50 | 955E | Write | 5814A | 1.25 |
| 2C34 | 25.00 | 3C45 | 16.95 | 6B4G | Write | 717A | 26.50 | 954 | .13 | 5840 | 1.25 |
| 2C39A | 29.50 | 3D6 | 1.50 | 6BN6 | Write | 718AY | 29.50 | 954 | .13 | 5844 | 1.50 |
| 2C40 | 5.95 | 3DP1 | 3.95 | 6C21 | 19.50 | 720AY | Write | 955 | .49 | 5845 | 1.75 |
| 2C43 | 15.95 | 3EP1 | 4.95 | 6F4 | 4.50 | 720BY | Write | 956 | .49 | 5851 | 1.75 |
| 2C44 | 3.50 | 3FP7 | 3.95 | 6G6G | 2.10 | 721A | 1.95 | 958 | .49 | 5863 | Write |
| 2C45 | 5.95 | 4B24 | 5.95 | 6J4 | 29.50 | 722A | 3.95 | 958 | .49 | 5865 | Write |
| 2C52 | 4.95 | 4CP1 | 3.95 | 6K4 | 3.50 | 723A/B | 16.50 | 959 | .49 | 5867 | 4.95 |
| 2D21/W | 1.95 | 4HP7 | 3.95 | 6SN7WGT | 1.25 | 724B | 2.75 | 977CX | Write | 5868 | 4.95 |
| 2E22 | 7.95 | 4J1A | 17.50 | 6T7 | 1.10 | 725A | 6.95 | 978 | Write | 5869 | 4.95 |
| 2E24 | 4.65 | 4-125A | 25.00 | 6SUTGTV | Write | 726A | 99.50 | 978D | Write | 6012 | 4.95 |
| 2E26A | 4.40 | 4C27/CV92 | 17.50 | 7C23 | 69.50 | 726B | 39.50 | 991 | .39 | 6020 | Write |
| 2E26 | 2.95 | 4C28 | 25.00 | 7V7 | 1.15 | 726C | 39.50 | 991 | .39 | 6029 | 1.25 |
| 2E30 | 5.95 | 4C35 | 25.00 | 9LP7 | 4.95 | 730A | 99.50 | 1005 | .60 | 6030 | 4.95 |
| 2E32 | 3.10 | 4E27 | 14.95 | 10Y | .49 | 750TL | 99.50 | 1005 | 2.75 | 6031 | 1.25 |
| 2E35 | 3.10 | 4J22 | 129.50 | 12AY7 | 1.00 | 801 | 3.75 | 1611 | .49 | 6082 | 1.50 |
| 2J21 | 7.50 | 4J23 | 129.50 | 12GP7 | 14.50 | 803 | 3.75 | 1612 | Write | 9001 | .50 |
| 2J21A | 7.95 | 4J25 | 129.50 | 12GP7 | 25.00 | 804 | 10.50 | 1616 | .50 | 9002 | .45 |
| | | | | | | 805 | 4.95 | 1616 | .50 | 9003 | .45 |
| | | | | | | 807 | 1.50 | 1624 | 1.45 | 9004 | .45 |
| | | | | | | 807W | 9.50 | 1625 | .39 | 9006 | .69 |
| | | | | | | 808 | 2.95 | 1628 | .39 | | |

**5 FIGURE** adds or subtracts 10 for each revolution of shaft — only **95¢**
Veeder-Root Counters Model S-1
Size ¾" wide x 1-5/16" long. Dovetail mounting—removable lever.

**YOUR SURPLUS WANTED**
**We Pay Highest Prices!**

| | | | | | |
|---|---|---|---|---|---|
| 12HP7 | 13.50 | 304A | 49.50 | | |
| 15E | .69 | 304TH | Write | | |
| 15R | .69 | 311/VT4C | .75 | | |
| FG-17/5557 | Write | 317C | 4.95 | | |
| T-20 | 3.75 | 323A | 1.50 | | |
| RK-25 | 3.69 | WX323A | 1.50 | | |
| 24G/3C24 | 1.50 | FG-235A | Write | | |
| FG-27A | 4.95 | 250W | 6.95 | | |
| FG-32 | 12.95 | 250TH | 29.00 | | |
| 45 Spec. | .32 | 250TL | 12.50 | | |
| RK45 | 4.95 | FG-253A | Write | | |
| FG-57 | 12.50 | FG-258A | Write | | |
| RK60/5545 | 12.95 | 274B | 1.75 | | |
| HY69 | 4.50 | 275A | Write | | |
| CRP-72 | .75 | 281A | Write | | |
| RKR-72 | .75 | 303A | Write | | |
| CRP-73 | .75 | 304TH | 8.95 | | |
| RKR-73 | .75 | 304TL | 8.95 | | |
| 75T | 6.50 | 307A/RK75 | 4.95 | | |
| 75TL | 5.95 | 308A | Write | | |
| 81V | 2.10 | 310B | 12.95 | | |
| FG-85/5560 | 22.50 | 313A | 1.95 | | |
| VT98-Br. | 19.95 | 323A | 19.95 | | |
| 98R | 5.95 | 326A | 4.50 | | |
| J-100 | Write | 331A | 10.95 | | |
| 100-TL | 4.50 | 338A | 6.50 | | |
| 100TH | 8.50 | 368A | 5.95 | | |
| FG-104 | 29.50 | 388A | 3.95 | | |
| FG-105 | 19.00 | 394A | Write | | |
| VU-111 | .95 | 371B | .75 | | |
| 154B | Write | 388A | 3.95 | | |
| HF120 | 9.95 | 388A | 1.49 | | |
| F-123A | 3.75 | 394A | 3.95 | | |
| VT-127A | 3.75 | 394A | 3.95 | | |
| HF-140 | Write | 417A | 8.50 | | |
| FG-172 | 29.50 | 423A | Write | | |
| HF200 | 14.50 | 434A | 19.95 | | |
| 203A | 98.00 | 446A | 1.50 | | |
| 203C | 98.00 | 446B | 1.50 | | |

Special: VACUUM CAPACITORS
12 mmfd., 20,000 v. $ 7.50
12 mmfd., 32,000 v. $10.00

# J. S. H. SALES CO.
Dept. E-18, 7552 Melrose Ave.
Los Angeles 46, California

Special: VACUUM CAPACITORS
50 mmfd., 20,000 v. $10.00
50 mmfd., 32,000 v. $12.50
100 mmfd., 20,000 v. $14.50

All Prices F.O.B. Los Angeles, subject to change without notice. Minimum order $3.00.

1000's of other types in stock. Send us your requirements.

# QUARTZ CRYSTALS

## NEW LISTING

**Made from the finest Brazilian Quartz. Will provide a high degree of activity and frequency stability. All tested and marked by the manufacturer to a very close tolerance. In the frequencies outlined below the crystals itemized under the heading "From & To" are mostly in progressive frequencies between the limits shown (as for example: "From 3300 to 3377," are as follows: 3300KC, 3301KC, 3302KC—, 3377KC.) are of limited quantities in each frequency. Those listed singly are in quantities of 50 or more.**

### FT243

Prong centers ½", Prong dia. 3/32"

**Price $1.15 ea. (25 for $25.00)**

| FROM | TO | FROM | TO | FROM | TO |
|---|---|---|---|---|---|
| 1515 | 1995 | 6100 | 6173.3 | 7900 | 7968 |
| 2030 | 2855 | 6225 | | 8000 | |
| 2125 | 2255 | 6260 | | 8025 | |
| 2300 | | 6275 | | 8050 | |
| 2320 | 2398 | | 6292 | 8100 | 8175 |
| 2420 | 2490 | 6300 | 6375 | 8200 | 8275 |
| 2604 | | 6400 | 6498 | 8300 | 8375 |
| 2680 | | 6450 | | 8345 | |
| 3165 | KC | 6500.6 | 6675 | 8400 | 8475 |
| 3652 | 3689 | 6700 | 6775 | 8500 | 8575 |
| 3729 | 3799 | 6800 | 6875 | 8600 | 8650 |
| 3883 | 3973 | 6825 | | 8786.25 | |
| | 4100 | 6838 | | 8805.75 | |
| 4104 | 4156 | 6906 | 6975 | 8876.25 | |
| 4344 | 4390 | 6925.75 | | 8925.25 | |
| 4385 | 4397 | 7228 | 7281 | 9135.0 | |
| 4400 | 4480 | 7325 | 7375 | 9342 | 9399 |
| 4600 | 4650 | 7458.75 | | 9405 | 9459 |
| 4800 | 4848 | 7440 | 7475 | 9500 | |
| 4913 | 4941 | 7500 | 7597 | 9516 | 9589 |
| 5100 | 5198 | 7604 | 7673.3 | 9602 | 9638 |
| 5300 | | 7625 | | 10075 | |
| 5320 | 5897.5 | 7650 | | 12600 | 12698 |
| 5506 | | 7675 | | 12700 | 12753 |
| 5630 | | 7700 | | 12800 | 12950 |
| 5633.3 | | 7725 | | 12952 | 12998 |
| 5655.5 | | 7728.8 | | 13004 | 13009 |
| 5677.7 | | 7750 | | 13010 | 13099 |
| 5700 | | 7751.25 | | 13100 | 13196 |
| 5706.6 | 5775 | 7771.75 | | 13213 | 13299 |
| 5723.2 | | 7775 | 7790 | 13302 | 13351 |
| 5744.4 | | 7800 | | 13400 | 13496 |
| 5800 | 5892 | 7825 | | 13500 | 13556 |
| 5900 | 5975 | 7850 | | 13537 | 13597 |
| 6000 | | 7875 | | 13603 | 13906 |
| 6006 | 6075 | 7900 | | 14038 | 14092 |
| 6006.6 | | 7925 | | 14150 | 14198 |
| 6150 | | 7950 | | | |
| 6175 | | 7975 | | | |

### CR 1A/AR or FT241

Prong spacing ½", Prong dia. ⅛"

**Price 79¢ ea. 12 for $9.00**

| FROM (Frequencies in KC) | TO | FROM (Frequencies in KC) | TO |
|---|---|---|---|
| 2853 | | 7620 | |
| 3988 | | 7625 | |
| 4188 | | 7630 | |
| 4285 | | 7735 | |
| 4300 | 4374 | 7740 | |
| 4788 | | 7750 | |
| 5020 | 5090 | 7760 | |
| 5100 | | 7770 | |
| 5120 | 5188 | 7773 | |
| 5200 | 5295 | 7775 | |
| 5250 | | 7780 | |
| 5300 | 5396 | 7800 | |
| 5410 | | 7810 | |
| 5470 | | 7825 | |
| 5500 | | 7830 | |
| 5468 | | 7850 | 7888 |
| 5670 | 5780 | 7851 | |
| 5818 | | 7900 | |
| 5851 | | 7910 | |
| 5910 | | 7925 | |
| 5923 | 5968 | 7930 | |
| 6011 | 6088 | 7940 | |
| 6130 | 6195 | 7950 | |
| 6203 | 6275 | 7960 | |
| 6270 | | 7975 | |
| 6300 | 6375 | 8000 | |
| 6370 | | 8002 | |
| 6400 | 6499 | | 8010 |
| 6490 | | 8007 | |
| 6500 | 6598 | 8052 | |
| 6606 | 6685 | | 8092 |
| 6744 | | 8205 | 8298 |
| 6815 | 6877 | 8250 | |
| 6905 | 6988 | 8300 | 8370 |
| 7270 | | 8400 | |
| 7330 | | 8412 | |
| 7460 | | 8468 | 8498 |
| 7500 | | 8500 | 8561 |
| 7540 | | 8645 | |
| 7541.6 | | 8700 | 8850 |
| 7568 | | 8985 | |
| 7600 | | 11677 | |

### XL5 Dual

3 prongs ½" x 1 19/32" prong dia.

**Price $1.95 ea.**

2320 & 2698
2711 & 2991
2436 & 2276
3128 & 3153
2685 & 3153

### XL5 Single

3 prongs ½" x 1 19/32" prong dia.

**Price $1.35 ea.**

| FROM | TO |
|---|---|
| 2200 | 2216 |
| 2300 | 2384 |
| 2410 | 2450 |
| 2561 | |
| 2600 | 2698 |
| 2704 | 2787 |
| 2802 | 2891 |
| 2916 | |
| 3117 | 3171 |
| 3154 | |
| 3325 | 3371 |
| 3435 | |
| 3857 | |

### FT241A

SPECIAL TYPE WE.
Prong spacing 1" CTS.
Prong Size 3/32" dia.

These are in successive steps of .1 MC variation from 20.0 MC to 27.9 MC

Suitable for low frequency purposes (1/54 of Stated Values)

**Price $1.15 ea.**

### UNASSEMBLED CRYSTALS

consists of quartz crystal plates made for FT243 holders. Furnished complete with holders, electrodes, springs and all hardware.

**Price .29 ea.**

Crystal plates available in the following frequencies:—

| | | | |
|---|---|---|---|
| 7533 | 7750 | 7873 | 8475 |
| 7541 | | 7950 | 8750 |
| 7550 | 7775 | 8275 | |
| 7648 | 7888 | 8325 | |
| 7650 | 7925 | 8450 | |
| 7700 | 7950 | | |

# EDLIE ELECTRONICS, Inc.

154 Greenwich Street,
New York, N. Y.
Telephone DIgby 9-3143



# AVIATION ELECTRONIC EQUIPMENT

New or used, all equipment tested and guaranteed ready for installation in aircraft. Equipment, if used, completely reconditioned.

*"Specializing in Installations of the Highest Quality"*

| Transmitters | Receivers | Dynamotors |
|---|---|---|
| ART-13 | BC-348 | DY-17 |
| BC-640 | AKB | DY-21 |
| T67/ARC-3 | R77/ARC-3 | DY-9 |
| TA2J | BC-342 | PE-94 |
| **Transceivers** | **Mounts** | **Control Boxes** |
| ARC-1 | MT/230 | C45/ARC-1 |
| SCR-522 | FT-488 | C87/ART-13 |
| RTA1B | FT-498 | BC-602B |

*Inquiries given prompt attention—Early deliveries*

## SPECIALS!!

| | |
|---|---|
| 2500—MC215 Tuning Shafts, Used Good | 25¢ ea. |
| Large Quantity 274N and ARC-5 Mounts, Used | 50¢ ea. |
| 300—DM32 Dynamotors—Some New—All Good | 1.95 ea. |
| 350—SA1A Altitude Limit Switch, Used | 1.00 ea. |
| 120—C115/ARC1 Control Boxes, New | 6.00 ea. |

# JAMES S. SPIVEY COMPANY

1406 G. ST. N.W. - *Tel. STerling 2215* - WASHINGTON, D. C.

*"Buyers of Surplus Aviation Electronic Materials"*



## Triplett Meters
## All Brand New In Boxes

| Model | Description | Price |
|---|---|---|
| 341 | 0-500 ma. RF 3" rd. | $6.50 |
| 337A | 0-1 amp. A.C. 3" sq. | 6.50 |
| 232 | 0-10 volts A.C. 2" rd. | 6.50 |
| 334 | 0-15 volts A.C. 3" rd. | 6.50 |
| 221 | 400 micro amp. volt-ohm scale 3" rd. | 5.00 |
| 327A | 0-1 ma. D.C.-0-100 bad-good scale 3" sq. | 6.50 |
| 321T | 1-0-1 ma. D.C. zero center scale 3" rd. | 8.50 |
| 327A | 0-60 micro amp. D.C. 0-1000 ohm scale 3" sq. | 6.50 |
| 327A | 0-400 micro amp. D.C. 0-25-50-100 A.C.V. scale 3" sq. | 6.50 |
| 671 | 0-5 ma. A.C.-0-5-10-25 A.C. ma. scale 3" sq. | 6.50 |
| 327A | 0-35 ma. D.C. 3" sq. | 6.50 |
| 327A | 0.5 ma. (100 M.V.) 0-5-10-25 D.C. amp. scale 3" sq. | 6.50 |
| 327A | 0-1 ma. 0-10 volts D.C. good-bad scale 3" sq. | 6.50 |
| 327A | 150-0-150 volts D.C. 125 ohms/volt 3" sq. | 6.50 |
| 327A | 0-1 ma. D.C.-0-25-50-100 D.C. volt scale 3" sq. | 6.50 |
| 242T | 0-1 ma. D.C.-0-100 scale 2" rd. | 5.00 |
| 221 | 0-8 ma. D.C. 0-100 scale 2" rd. | 4.50 |
| 242T | 1.2 ma. D.C. 0-100 scale 2" rd. | 4.50 |
| 421A | 20 ma. D.C. (50 MV.) 0-1 scale 4" sq. | 5.00 |
| 431 | 0-300-500 A.C. volts 4" sq. | 6.50 |
| 1280 | Dual 3" meter—50 MV. D.C. 0-100 D.C. amps. and surpressed 3 to 9 volts D.C. | 10.50 |

Our warehouses contain large quantities of Aircraft Instruments, Dynamotors, Capacitors, Switches, Relays, Hydraulic Parts, Potentiometers, etc.

*SEND FOR A FREE CATALOGUE OR CALL ARMORY 4-5857*

**Electro Devices**
INCORPORATED
247 BROADWAY PATERSON, N.J.

# WIRE-CABLE TUBES PARTS

### CORDAGE

CO-122 3 conductor each #22 AWG neoprene jacket 550' lengths
CO-127 single #14 AWG braided and tinned copper braid shield

### MULTI-CONDUCTOR

2 conductor AWG 12 — 7 conductor AWG 16
7 conductor AWG 14 — 19 conductor AWG 16
14 conductor AWG 16 — 6 conductor AWG 20
11 conductor shielded AWG 70 — 10 conductor AWG 16
2 conductor AWG 18 — 22 conductor AWG 16
2 conductor shielded AWG 10

### AMOUR

DRIA-23 DHFA-100 FRIA-4

### SINGLE CONDUCTOR AWG 10

shielded cable with terminal lug each end 100' and 150' lengths

### WIRE

AWG 18 copperweld
AWG 29 tinned copper
Resistance wire AWG 32
AWG 22 with nylon core plastic insulation

### OIL FILLED CONDENSERS

| MFD | VDC | Each | Ten | MFD | VDC | Each | Ten |
|---|---|---|---|---|---|---|---|
| 1 | 600 | .85 | .50 | .5 | 2000 | 2.00 | 1.50 |
| 2 | 600 | .95 | .95 | .25 | 3000 | 2.85 | 2.80 |
| 4 | 600 | 1.40 | 1.40 | .5 | 3000 | 2.95 | 2.90 |
| 5 | 600 | 1.65 | 1.60 | .2 | 5000 | 4.50 | 4.25 |
| 1-8 | 600 | 2.50 | 2.35 | .1 | 7500 | 7.95 | 7.95 |
| .01 | 1000 | .85 | .80 | 1 | 7500 | 12.50 | 12.00 |
| .5 | 1000 | .35 | .30 | .1 | 12000 | 7.95 | 7.95 |
| .2 | 1000 | 1.65 | 1.60 | .0008 | 15000 | 12.50 | 11.75 |
| 1 | 1200 | 1.65 | 1.60 | .2 | 15000 | 14.95 | 14.90 |
| 1 | 1500 | 1.75 | 1.65 | .045 | 16000 | 12.95 | 12.50 |

### SPECIALS

80-88 Crystal in Holder $2.50
Balloon with Hydrogen Generator $2.50
300 Feet Aerial Wire $2.00

### MICROWAVE TEST EQUIPMENT

10 CM echo box CABV 14ABA-1 of OBU-3, frequency range 2890 MC — 3170 MCS. Direct reading micrometer head. Ring prediction scale plus 9% to minus 9% Type "N" input. Resonance indicator meter. With accessories, spares and 10 CM directional coupler. Brand New.

### TUBES

| | | | | | |
|---|---|---|---|---|---|
| 2C34 | 5.45 | 803 | 3.50 | CEQ 72 | .85 |
| 2K2 879 | .35 | 826 | .65 | CK 76 | 4.15 |
| 3BZ6 | 4.95 | 864 | .25 | CRP 72 | .85 |
| 3C24 | 1.50 | 931A | 6.45 | E 1161 | .30 |
| 7C4 1203A | .70 | 955 | .30 | HY 615 | .28 |
| 10Y | .35 | 957 | .35 | RKR 72 | .95 |
| 15R | .65 | CK 1005 | .45 | RK 73 | .45 |
| 38 Spec. | .40 | CK 1007 | .90 | SBP4 | 4.25 |
| 39/44 | .25 | 1625 | .35 | SP 97 | 1.75 |
| 45 Spec. | .35 | 1629 | .25 | 115 G | .70 |
| WE 203A | 6.75 | 2051 | 1.10 | 183 GT | .89 |
| 310A | .60 | 7193 | .59 | 3A4 | .69 |
| WL 531 | 4.95 | 9001 | 1.50 | 5134G | .47 |
| 717A | .99 | 9006 | .30 | 6K6GT | .60 |
| 861A | .25 | C5 | 8.00 | | |

### HI VOLTAGE FILTER CHOKES

.4 HY 4.5 Amp DC 3 ohms 1230 RMS to ground. New.
1 HY 3.2 Amp DC 3.5 ohm GE89G459. New.
1.7-3 HY 2 AMP DC 34,000 VDC GE Y348A. New.

### NAVY ENTERING TYPE INSULATOR

Porcelain flanged bowl with brass rod, fittings and aluminum shield. Dimensions 4⅜" high, 6-5/16" OD at base. Brand new $4.50.

### 10 CM ROTATING ANTENNA

24" Parabola in turret 360° span at 12 RPM DC, motor control and reversing switch New.

### TIME DELAY SWITCHES

1 Minute 115 VAC 60 cycle Enc. in Waterproof Metal Case New $5.25
3 Micro Switches Contact at 40-41-42 Second Time Delay 110 VAC Motor New $4.50
Thermo Switch 50° to 300° F 115 VAC @ 6A 230 VAC @ 5A
Breaks Contact with increase in Temperature New $1.35

### CONTACTORS

DPST 115 VAC 60 cycle 15 Amp De-Ion Line Starter Westinghouse $6.95
DPST 115 VAC "AB" #700 $5.95

### RELAYS

12 VDC DPST Allied Control Box 32.....$1.25
24 VDC DPDT Allied Control BJD36.....$1.45
24 VDC 3PDT 8 Amp.....$1.50
110 VAC DPST 1 Amp Contacts Struthers Dunn CKA 1970.....$3.65
115 VAC DPST Struthers Dunn CXA 2997 $3.65
220 VDC DPDT Struthers Dunn CK 2122..$4.50
230 V 50 cycle DPDT G.E. 12HGA11A2..$4.00

### ROLLER INDUCTANCE COIL 0-15 MH WITH VERNIER ADJUSTMENT

Coil is wound on ceramic form 3⅛" long. Right angle drive gear with ⅜" shaft. Three position switch for vernier operation New—Meissner—C-825

### METERS

Portable 0-25 Amps AC Weston #433 Brand New $37.50
Switch Board Panel 0-100 Amps DC Weston #269 with 100 Amp Shunt Brand New $24.95

### EQUIPMENT

Walkie-Talkies 2.3-4.6 MC
MN-26Y Bendix Compass Receiver
BC-733 Glide Path Receiver
DAB-3—Direction Finder
RDF Receiver Equipment 200-550 KC Fixed Tuned

SWITCHES—BATHTUB—OIL FILLED—MICA CONDENSERS—POTENTIOMETERS. SEND FOR CATALOG

## COMET ELECTRONIC SALES CO.

22 Washington St. Tel. BEacon 2-7863 Brighton 35, Mass.

TERMS: Minimum order $5.00 — Mail orders promptly filled—All prices F.O.B. Boston, Mass. Send M.O. or check. Shipping charges sent C.O.D. 25% deposit required with all C.O.D. orders.



# FOR THE EXACTING . . . THE PRECISE!

. . . the discriminating . . .! For men who measure the invisible, listen to silence; who mark on paper—on glass—the passage of stars and atoms, who tap and cut and feel and clutch—at the very heart of nature; for men who count—on whom we count—these test instruments are humbly offered:

106-M IH. Indicator
616A UHF. Signal Generator
300A Harmonic Wave Analyzer (Hewlett-Packard)
B-41451 Shield SC# P/OTS-34/APS
I-82-F Indicator, P/O SCR-269F
EE-65-F Test Set
188X Signal Generator (Hickok)
A-27 Antenna Phantom P/O SCR-506
BC-1016 Recorder
BC-1255-A Delco Het. Monitor
BC-906-D Frequency Meter
CW-60-ABM Wavemeter
CZH-50152 Audio Amplifier
EE-65-E Test Set
EE-85 Time Interval Apparatus
EE-99-T3 Telephone Repeater Equipment
Type 1 Officers' Intercept Kit
Type 7 Oscilloscope
TVFM Electronic Sweep Generator
TS-16/APN Test Set
TG-10-B Automatic Keyer Vidio Sweep Oscillator
US-253 G.E. Square Wave Generator
155 R.C.A. Scopes
620A G.R. Test Set
720A G.R. Het. Freq. Meter
BC-221-J Frequency Meter (Mercury)
E-400 Sweep Signal Generator (Precision)
I-56-E Test Set, Weston Model 714, Type 4
I-95-A Field Strength Meter
I-102-A Indicator
I-135-E Galvin Test Set
I-198-A Signal Generator
I-222A Signal Generator
ID-6A/APN-4 Oscilloscope Indicator
ME-21A Maintenance Equipment
OAN (Fada) Test Oscillator
PRC Analyzer Test Set Recorder, by Leeds & Northrup
S-6 Browning Lab. Freq. Meter
SR-90A Het. Freq. Meter
TS-59/APN-1 Test Set
TS-323UR Freq. Meter
TG-10 Keyer
VM-27 Vac. Tube Voltmeter, (Barber)
19X Hickok Microvolt Generator
546B G.R. Microvolter
715 RCA Scope Console
726A G.R. Vac. Tube Voltmeter
BC-221J Freq. Meter (Howard)

*(Details and Prices on application)*

### WANTED

RADCOM pays top prices for surplus equipment, parts & tubes. Always needed:—TCS-7 and up; SCR-274-N; SCR-399 Equipment; SCR-508 Equipment; BC-312, 342 and 348 Receivers; SCR-522 Equipment; SCR-211 Frequency meters and RA-34 Rectifiers.

## RADCOM ENG. CO.

8 LIVINGSTON ST., NEWARK 3, N. J.
Bigelow 2-6666 Telegraph: WUX Newark, N. J.

# PREMIER

## Special Purpose and Transmitting TUBES

| | | | |
|---|---|---|---|
| 3E29 | 12.95 | 8020 | 2.95 |
| 5BP1 | 3.95 | 813 | 7.75 |
| 5BP4 | 3.95 | 211 | .59 |
| 5CP1 | 3.95 | 6C21 | 21.95 |
| 7BP7 | 5.95 | 3DP1 | 3.95 |
| 878 | 2.75 | 807 | 1.55 |
| 9006 | .25 | 304TL | 9.95 |
| 826 | .60 | 2E22 | 2.95 |
| 10BP4 | 10.95 | 2J31 | 25.00 |
| 12LP4 | 12.95 | 2J32 | 25.00 |
| 100TH | 6.95 | 2J33 | 25.00 |
| 250TH | 19.95 | 2J34 | 25.00 |
| 250TL | 16.95 | 17BP4A | 16.95 |
| 450TH | 37.50 | 20CP4A | 19.95 |
| 450TL | 62.00 | | |

866 A, Standard gas rectifier.....$1.49
866 A, Special noise-free vacuum type —6000V @ 800 MA.....$1.75
DIRECTLY INTERCHANGEABLE, IMPROVED PERFORMANCE

### SPECIAL TUBE BUYS!

| | | | |
|---|---|---|---|
| 1B3GT | .57 | 6S4 | .41 |
| 1L4 | .50 | 6S8GT | .63 |
| 1R5 | .48 | 6SD7GT | .77 |
| 1S5 | .39 | 6SL7GT | .53 |
| 1T4 | .49 | 6SN7GT | .47 |
| 1U4 | .48 | 6T8 | .70 |
| 1U5 | .39 | 6V6GT | .40 |
| 3A4 | .54 | 6W4GT | .40 |
| 3Q4 | .54 | 6X4 | .29 |
| 3S4 | .51 | 12AT6 | .32 |
| 3V4 | .52 | 12AT7 | .61 |
| 5U4G | .36 | 12AU6 | .37 |
| 5Y3GT | .25 | 12AU7 | .47 |
| 6AG5 | .46 | 12AV7 | .47 |
| 6AK5 | .66 | 12AX4GT | .54 |
| 6AL5 | .36 | 12AX7 | .53 |
| 6AQ5 | .41 | 12BA6 | .38 |
| 6AT6 | .32 | 12BE6 | .40 |
| 6AU6 | .37 | 12SN7GT | .47 |
| 6AV6 | .37 | 19T8 | .70 |
| 6AX4GT | .54 | 25B06GT | .77 |
| 6BA6 | .38 | 25L6GT | .43 |
| 6BC5 | .46 | 35B5 | .41 |
| 6BD6 | .41 | 35C5 | .41 |
| 6BE6 | .40 | 35L6GT | .45 |
| 6BG6G | 1.21 | 35W4 | .26 |
| 6BH6 | .50 | 35Z5GT | .31 |
| 6BJ6 | .41 | 50B5 | .41 |
| 6BQ6GT | .77 | 50C5 | .41 |
| 6C4 | .32 | 50L6GT | .43 |
| 6CB6 | .46 | 117Z3 | .34 |
| 6CD6G | 1.58 | | |

Critical tubes are always on hand and at the right prices ... in quantity

*We Will Be Pleased to Quote Special Prices for Large Quantity Purchases.*

OVER 1,000,000 TUBES IN STOCK

**Since 1926 Prime Source for TUBES** Receiving, Special Purpose and Picture Tubes

**PARTS** All Types - All Brands - Special Lots

- Manufacturers
- Jobbers and
- Exporters

*We invite your inquiries on electronic components of all descriptions!*

Write—Wire—Phone TODAY!

**PREMIER** Radio Tube Division
CONTINENTAL CORPORATION
547 W. Randolph St. Chicago 6, Ill.
ANdover 3-1590



## FOREIGN BUYERS AND AIRLINES

*Check Our Complete Stock— Prompt Replies to All Inquiries.*

**NOW AVAILABLE!**
SCR-718C
AS-27-A/ARN-5
RA-20 Power Supplies
RA-51 RECT. Radio Compass, 12V Installation
R-89-B/ARN-5
HI ALTITUDE SWITCH P/O DY-17
Circuit Breakers P/O DY-17
MG-149F Inverters
IE-17 Test Sets for SCR-536
SA-22/ART-13
TS-251 Loran Test Set, complete
1D-6B/APN-4

### TEST EQUIPMENT

| | | | |
|---|---|---|---|
| A-58 | I-218 | Espey 105 Tube Tester | TS-56 |
| APA-6 | I-224 | Aircraft Thermometer] Tester | TS-67 |
| APA-11 | I-138 | | TS-69 |
| AN/UPM-1] | I-283 | | TS-143 |
| APA-23 | I-186 | | TS-170 |
| BC-1016 | I-155 | | TS-226 |
| BC-1236 | LM | TS-3 | TS-323 |
| Microvolter | LS-1 | TS-10 | TS-413 |
| BC-391-TI | GR-583A output meter | TS-11 | TN-1, 2, 3 |
| BC-906] | | TS-12 | |
| BC-221 | Ferris 20A-1 Microvolter | TS-13] | TN-16 |
| BC-438 | | TS-16 | TN-17 |
| I-95 | Lavoie LB55M | TS-19 | TN-18 |
| I-83 | | TS-45 | TN-19 |
| I-148 | | TS-83 | TN-54 |

| NAVIGATION EQUIPMENT | TRAINING EQUIPMENT |
|---|---|
| AN/APN-4 | O-6/APN-T1 |
| AN/APN-9 | IE-52 LORAN |
| SCR-718-A, B, C | |
| AN/ARN-7 | RADAR EQUIPMENT |
| ILS System (ARN-5, RC-103) | APS-2 |
| AN/APN-1 | APS-4 |
| SCR-969 | APS-6 (Parts) |
| | APS-15 |
| RACKS | APS-13A |
| MT-14A/APN-1 | AN/APN-2 |
| MT-283/ART-13 | SCR-729 |
| MT-284/ART-13 | SCR-717 and Spares |
| MT-163/ART-13 | AN/APS-13 |
| MT-164/ART-13 | ABK |
| MT-161/ART-13 | |
| FT-446/APN-4 | JAMMING EQUIPT. |
| FT-447/APN-4 | APT-1 |
| | APQ-2 |
| | APT-4 |
| | SCR-596 |

**EXPORT INQUIRIES INVITED**
We carry an unusually large stock of Airline Equipment, Test Equipment, Radar Sets, etc. Write for our low prices and complete information. We furnish immediate answers to all inquiries. Write today!

| RECEIVERS | | MG SETS | |
|---|---|---|---|
| APR-1 | BC-314 | MG-153 | PE-218 |
| APR-4 | BC-348 | MG-149F | PE-115 |
| APR-5 | RA-18 | MG SET CONVERTED DC to AC, 230 V. DC input 7.5A 110 V. AC, 6A, 60-cycle output | |
| ARR-5 | MN-26 | | |
| BC-312 | BC-342 | | |

**25 KW DIESEL PLANT**
3-phase, 110 v., 60 cy. with spares

### COMMUNICATIONS EQUIPMENT

| | | |
|---|---|---|
| ARC-1 | 34 Meg. FM Set 6 V. | BC-721A Handie Talkie |
| ARC-3 | 25 Watt FM SET 30-40 Megs. 6V. | CU-92/APN |
| ARC-4 | | ART-13 LFO |
| ARC-5 | | Relay K-104 |
| SCR-274N | BC-648 | ART-13 |
| SCR-522 AM | BC-659 | Keying Relay K-182 |
| ID-6B/APN-4 | AN/TRC-1 | IS-21 Vacuum Switch for ART-13 |
| T-47/ART-13 or T-47A/ART-13 | O-16/ART-13 | |
| TCS | CU-25/ART-13 | DY-17 Hi-Altitude Switch |
| GO-9 | SA-22/ART-13 | |
| SCR-587 | RTA-1B | |
| BC-684FM | TA2J-24 | |
| BC-524FM | TBS-4,5 | |

**V & H ELECTRONIC INDUSTRIES INC.**
2033 West Venice Blvd.—Dept. E-17
Los Angeles 6, California
*Phone: REpublic 3-1127*



## R.C.A. Model MI-8167 TRANSMITTERS

*Point-to-point communcations*

Freq. Range: 2000 to 20,000 Kcs.
Output: 350 Watts C.W. 250 Watts Radio telephone
Input: 190 to 250 Volts AC 50/60 cps.
Size: 60" high, 17" wide, 27" deep.
Tubes: 807s, 813s, 805s, 866s.
Crystal Oscillator unit built-in, fully shielded and stable. All self contained including antenna network. Master Oscillator unit (available) fits in place of Xtal unit. Speech amplifier is only external unit and has 110/220 v. AC input, four stages, high gain. Total net weight, 625 lbs.

Complete! New! From Stock! Quantities! Prices on Request.

**COMMUNICATION DEVICES CO.**
INCORPORATED
2331 Twelfth Ave. N. Y. 27, N. Y.



## CARRIER EQUIPMENT

Western Electric CF-1A 4-channel carrier telephone terminals.
EE-101-A 2-channel 1000/20 cycle carrier ringers.
CFD-B 4-channel carrier pilot regulated telephone terminals complete with four channels 1600/20 cycle ringing.
CFD-B 4-channel pilot regulated telephone repeaters.
C-42-A V. F. telegraph in from 2- to 12-channel terminals.
FMC 1 or 2 channels carrier telephone terminals, automatic regulation, duplex signaling each channel. Carrier frequencies above 35 KC. Ideal for adding channels above type "C".
Complete engineering and installation services offered.

**RAILWAY COMMUNICATIONS, INC.**
Raytown, Missouri
Telephone: FLeming 2121



"Opportunity" Advertising: Think *"SEARCHLIGHT"* First

# TRY WELLS First!

**FOR ELECTRONIC COMPONENTS**

We offer immediate delivery from our vast stock of more than 25,000 items—all standard make, carefully inspected and fully guaranteed. Our prices are below market.

***Always Check Wells' Stock First!***

Quotations and quantities available will be given immediately upon request.

ADEL CLAMPS
ANTENNAS
*Insulators, Mast Sections*
BINDING POSTS
BLOWERS
CABLE ASSEMBLIES
CHOKES
COILS
CONDENSERS
*Oil Filled, Bathtub, Hearing Aid, Transmitting Micas, Silver Micas, Ceramic, Variable, Trimmer*
CRYSTALS
DYNAMOTORS & BRUSHES
FILTERS
FUSES & MOUNTINGS
GENERATORS
GROUND RODS
HEADSETS
IF COILS
JACKS
JACK BOXES
KEYS, *Telegraph*
KNOBS
LAMPS
LORD MOUNTS
LUGS
MOTORS & BRUSHES
PLUGS
RECTIFIERS
*Selenium, Copper Oxide, Meter, Diode*
RESISTORS—*All Types*
SELSYNS
SOCKETS
SWITCHES
*Aircraft, Micro, Switchettes, Toggle*
TIMERS
TUBING—*Flexible*
TUNING SHAFTS
TRANSFORMERS—*All Types*
VIBRATORS
WALKIE TALKIES

***Available Now!***

A complete signal corps stock number listing of items in our stock. Write for listing No. SG-200. (For government agencies and contractors only.)

Manufacturers and distributors—write for Radio-Electronics Catalog No. H 501.

***Write, Wire, Phone Your Requirements***

***all phones:* SEeley 8-4143**

**WELLS SALES, INC.**

833 W. CHICAGO AVE., DEPT. SL, CHICAGO 22, ILL.



## BLOWERS:

115 Volt 60 cycle BLOWER (pictured), approx. 100 CFM Dia. 2¼" Intake; 2" outlet. Quiet running. Motor size: 2¼"x3¼". NEW — not Gov't surplus. Order No. E-520 **$7.99**

**DUAL BLOWER**—Same as BN-520 above, except has blower assembly on each side of motor. Order No. E-800 ..... $12.95

**COMPACT TYPE**—166 CFM, motor built inside squirrel cage, 4-½" Intake; 3-⅝" x 2" Dia. Complete size: 4-¼" W x 9-⅝" H x 8-½" D. Order No. E-860 ..... $13.50

**FLANGE TYPE**—140 CFM, 3-½" Intake; 2-½" Dia. Complete size: 7-½" W x 7-½" H x 6-¾" D. Order No. E-865 ..... $12.95

**FLANGE TWIN**—275 CFM, 4-½" Intake; 3-¼" x 2" Dia. Complete size: 11-⅝" W x 8-⅝" H x 8-1/16" D. No. E-134 ..... $20.95

## CORDS—CABLES

C-501 Cord—f/GN-45 Generator ..... $2.50
CD-318 Cord w/PL-68 & SW-141 & JK-48F ..... .80
CD-307 Cord—6.5 Ft. w/PL-55 & JK-26 ..... .89
CD-604 Cord w/C-410 Trans. & PL-54 Plug ..... .80
CD-365 Cord for LP-21-Loop ..... 1.75
MC-215 Tuning Shaft for 274N ..... 2.00

## JUST WHAT YOU NEED . . .

Standard Test Leads, 4" x 1-⅛" Prods. ..... Pair: 39¢ — 3 for $1.00
Phone Plug—Nickel Plated, Screw Terminals. ..... Ea.: 39¢ — 3 for $1.00
Instrument Knobs—Bar, Octagon, Set Screw, Skirts, Asst. ..... 10 for $1.00
Line Cord—Bro. Rubber 7 ft., Molded Rubber Plug ..... Ea.: 29¢ — 4 for $1.00
Line Cord—Black Rubber 6 ft., Angle Molded Plug ..... Ea.: 39¢ — 3 for $1.00

## PLUGS AND CONNECTORS

PL-112 Plug for LP-21 Loop ..... $1.25
PL-P-103 Plug for BC-348 ..... 1.50
MC-211 Rightangle Adapter for Comm. Sets ..... .50
M-859 Rightangle Coaxial Connector ..... .25

## CONTROL BOXES:

| | NEW: | USED: |
|---|---|---|
| C-87/ART-13—f/ART-13 Trans | $ 6.95 | $4.95 |
| BC-434 for ADF | 5.95 | 3.95 |
| BC-732 for Localizer | 2.95 | 1.95 |

## MOUNTINGS AND CLAMPS:

FT-156 for BC-348 Receiver ..... $2.50
FT-470 Mounting & Clamp ..... 1.00
MC-476 Maple Ball for above—f/Fairlead ..... 1.00
MC-396 Wood Clamp for Fairlead ..... .75
M-235 Bobbin & 250 Ft. W-106 Antenna Wire ..... 3.50
WT-7 Weight for Trailing Antenna ..... 1.50

**AIRCRAFT CONTROL CABLE**—3/32" 7 x 14 Strand, Weatherproofed, Galvanized, 920 lb. Test. Ideal for Television Guying and many other uses. **Price: 3-½¢ per Ft. 1000 Ft. or more @ 3¢ per Ft.**

## DYNAMOTORS:

**DYNAMOTOR and BLOWER:** 9 Volts DC input: output 450 Volts 60 MA. 4500 RPM. At 6 Volts DC input: output 260 Volts 65 MA. 3000 RPM. ..... $4.95

| Input | Output | Stock No. | Price |
|---|---|---|---|
| 14 V. DC | 600 V. 300 MA. | BD-86 | 39.95 |
| 12 V. DC | 220 V. 70 MA. | DM-24 | 6.95 |
| 12 V. DC | 220 V. 100 MA. | DM-10 | 4.95 |
| 12 or 24 V. DC | 440 V. 200 MA. & 220 V. 100 MA. | D-104 | 24.50 |
| 14 V. DC | 375 V. 150 MA. | DM-375 | 8.95 |
| 14 V. DC | 330 V. 135 MA. | DM-330 | 7.95 |
| 14 V. DC | 500 V. 500 MA. | PE-59 | 14.95 |
| 12 or 24 V. DC | 275 V. 110 MA. | USA/0516 | 3.95 |
| 12 or 24 V. DC | 500 V. 50 MA. | USA/0515 | 3.95 |

ALSO—PE-73; PE-86; DM-53; DM-33; 25055; DM-416; PE-101, etc.

## ANTENNA EQUIPMENT

### MAST BASES—INSULATED:

**MP-132 BASE**—(As illustrated at left) 1" heavy coil spring, 2" insulator. Overall length: 11-½". Weight: 2-¾ lbs. Price ..... $3.95

**MP-48 BASE**—Insulated type with heavy coil spring. Requires 1-¾" mounting hole. Weight: 11 lbs. ..... $4.95

**MP-57 BASE**—Insulated type with heavy coil spring and 5" dia. insulator. Requires 1-⅝" hole for mtg. Weight: 9 lbs. ..... $6.95

### MAST SECTIONS For ABOVE BASES:

Tubular steel, copper coated, painted, in 3 ft. sections, screw-in type. MS-53 can be used to make any length with MS-52-51-50-49 for taper. Any section ..... 50¢ Each

Larger Diameter Sections: MS-55-54 ..... $1.25 Each.

AN-104B Antenna—100-156 MC.—Copper ..... $5.95
AN-104B Antenna—100-156 MC.—Steel ..... 3.95
AN-104A Antenna—100-156 MC.—Copper ..... 3.00
AN-104A—Antenna—100-156 MC.—Steel ..... 2.00
AN-117 Whip Steel—6 Ft. length ..... 1.50
AN-109A Whip Steel, 5 Ft. w-Base ..... 1.50
AS-27/ARN-5 Ram's Horn, 10 MC.—USED. ..... 5.95
LP-20A Loop for ADF equip.—Used, tested. ..... 9.95
AT-37/APT Stub—113-150 MC. ..... 6.95
AT-42/APT-3 or APT-1 Stub—113-150 MC. ..... 6.95
AS-97/ARQ-8 Spike with coaxial load in base. ..... 4.95
AS-61/ARN-5-Half-Wave Dipole—335 MC. ..... 3.95
AT-2/APN-2 ..... 4.95

## SELENIUM RECTIFIER UNITS

### HEAVY DUTY—30 VOLT DC OUTPUT:

115/200 V. Three Phase 400 Cycle Input:
**TYPE 143** w/Transformer & VR 100 Amp. ..... $69.95
**TYPE 3FS-5** w/Trans., VR, & Blower—200 Amp. ..... $69.50
**TYPE 52A-11** Rectifier Only, Cased, 200 Amp. ..... $39.50
**TYPE A-1** Rectifier Only, Cased, 300 Amp. ..... $49.50

**AERIAL WIRE**—Phosphorus Bronze #16 Stranded, 200 lb. test. Weatherproof. 150 ft. on Reel. RL-3 with Clips ..... $1.50
**TELEPHONE WIRE**—3 Cond. copper & steel, 525 ft. ..... $4.75

## TRANSFORMERS—110 V. 60 Cycle Pri.

Sec. Two 12 V. 4 A. windings—gives 12 V. 8 A. or 24 V. 4 A. ..... $6.95
Sec. 24 Volt ½ Amp. ..... 1.50
Sec. 24 Volt 1 Amp. ..... 1.95
Sec. 24 Volt 6 Amp. ..... 5.95
Sec. 6-24 or 30 Volts 8 Amp. ..... 5.95

Address Dept. E • All Prices Are F.O.B., Lima, Ohio • 25% Deposit on C.O.D. Orders

# FAIR RADIO SALES

132 S. MAIN ST. LIMA, OHIO



## • CORRECTION •



Due to Typographical error in Sept. ELECTRONICS the **TELECHRON 2 RPM MOTOR** was priced at $2.00. The Correct price is $2.90. For our other Listings see pg. 465

# BLAN

64 Dey St. New York 7, N. Y.



## *LARGE INVENTORY*

OIL FILLED CAPACITORS — CONNECTORS
BATHTUB CONDENSERS — SWITCHES
TYPE "J" AND "JJ" POTENTIOMETERS
*IMMEDIATE DELIVERY*

**LEMAR ELECTRONICS CO.**
136 LIBERTY ST. N. Y. 6, N. Y.
PHONE: BARCLAY 7-9075



# ERIE CERAMICONS

Large quantities in stock; immediate delivery.
All values and tolerances.

N.P.O. & TEMPERATURE COEFFICIENT
FEED-THRU, STANDOFF, DISC, CERAMICONS.
LITTLEFUSE FUSE—ALL VALUES.

**BELOW FACTORY PRICE.**

## CAP ELECTRONICS INC.

102 Warren Street
New York 7, N Y
WOrth 2 4363



SAVE! SAVE! SAVE!

# SURPLUS RADIO CRYSTALS

*PRICED TO SELL . . .* AT A FRACTION OF THEIR ORIGINAL COST
MFG. BY WESTERN ELECTRIC AND FEDERAL TEL. & RADIO

ALL FT-241-A HOLDERS

Available As Follows For:

SCR 608-A and SCR 628-A — BC 684 . . . . . 120 per set
SCR 528 and SCR 538 — BC 604 . . . . . 80 per set

200 KC Crystals . . . . . $2.95 ea.
500 KC Crystals . . . . . $1.95 ea.
1000 KC Crystals . . . . . $3.95 ea.

*QUANTITIES AVAILABLE*

Write For Price Quotation On Your Requirements.

**C and H Sales Company**

BOX 356-2 EAST PASADENA STATION • PASADENA 8, CALIFORNIA



# State Labs Inc.

Nation's Largest Wholesale Supplier Specializing *ONLY* in Buying and Selling

ELECTRONIC **TUBES** AND CRYSTALS

OVER 4000 TYPES AVAILABLE
TOP STANDARD BRANDS
IMMEDIATE QUOTATIONS

*WRITE FOR* FREE *WEEKLY MARKET GUIDE* →

**State Labs Inc.**

37 EAST 28 STREET, NEW YORK 16, N. Y.
PHONE: MURRAY HILL 3-9802
WIRE: STATE LABS, WUX, N. Y.
TELETYPE: N. Y. 1-1807 CABLE: STATELABS

# ELECTRONIC EXPEDITERS

SUPPLYING

THE NEEDS OF INDUSTRY — GOVERNMENT — FOREIGN PURCHASING COMMISSIONS

WITH

COMMUNICATIONS EQUIPMENT, RECEIVING AND TRANSMITTING TUBES, ELECTRIC WIRE AND CABLE . . . . .
AIRCRAFT ELECTRONICS— INSTRUMENTS— HYDRAULICS

*PROMPT ATTENTION GIVEN TO ALL INQUIRIES*

Rated—Dun & Bradstreet

*Electronic Expediters*

Dept. WW, 225 N. Wabash Avenue
Chicago 1, Illinois • ANdover 3-0841
Cable Address: "ELEXPEDITE" • TWXCG1510



# TELEPHONE RELAYS



Large Stock of
CLARE, TYPES C D & E
COOKE, AUTOMATIC—ELECTRIC
ALL TYPES of COILS and PILE-UPS
*Send Us Your Specs for Our Quote*

**Clare Type G Half Size Sensitive Telephone Relays**

| | Coil | Contacts | Will Close at | Price |
|---|---|---|---|---|
| 1) | 6500 ohms | 2A | 5 MA | $2.50 ea. |
| 2) | 5800 ohms | 3A | 4 MA | 2.50 ea. |
| 3) | 5800 ohms | 2B-1C | 5 MA | 2.50 ea. |
| 4) | 4800 ohms | 1C | 4 MA | 2.50 ea. |
| 5) | 3600 ohms | 1C | 5 MA | 2.00 ea. |
| 6) | 1850 ohms | 1A | 5 MA | 2.00 ea. |
| 7) | 3300 ohms | (None) | ACTUATOR | 1.50 ea. |

All above Relays may be used for continuous duty operation on 110V D.C.

**Other Type G Telephone Relays**

| | | | | |
|---|---|---|---|---|
| 1) | 1300 ohms | 1A-1C | 24 or 48V. | 2.50 ea. |
| 2) | 700 ohms | 2A-1C | 24V. | 2.50 ea. |
| 3) | 400 ohms | 1A | 12 or 24V | 1.65 ea. |

**Clare Type C Standard Size Telephone Relays**

| | Coil | Contacts | Voltage | Price |
|---|---|---|---|---|
| 1) | 2500 ohms | 1A | 24 or 48V | $2.25 ea. |
| 2) | 2500 ohms | 1B-1C | 24 or 48V | 2.50 ea. |
| 3) | 2500 ohms | 2A-1B | 24 or 48V | 2.50 ea. |
| 4) | 2500 ohms | 3A-1B | 24 or 48V | 2.75 ea. |
| 5) | 2500 ohms | 5A | 48V | 3.00 ea. |
| 6) | 2500 ohms | 5A-1C | 48V | 3.00 ea. |

**CONTACT SYMBOLS**
A=Norm. Open B=Norm. Closed C=S.P.D.T.

**G.E. Relays** #CR 2791-B109P36 Coil—10,000 ohms Contacts 1A, 1B Operates on 8 MA. . **Price $1.65**

**Signal Wheelock** Relays #KS9665 Coil—2,000 ohms Contacts-1A, 1B, 1C Operates at 9 MA. . **Price—$2.75 ea.**

**Leach Relays** Type 1025-SN-BF. Coil—24V. 425 ohms. Contacts—D.P.S.T. Norm. closed. Rated at 10 Amps . . . . . **Price—$1.50 ea.**

**Five Prong CR-2791 G.E. Plug In Relays.**
1) C-103G25 2200 ohms SPDT 4.5 MA. . $4.00 ea.
2) C-1041128 700 ohms SPDT 6 MA. . $3.00 ea.
Slow Release (For SCR-522-A) Telephone Relays. Part No. A18258 . . . . . **Price—$2.00 ea.**

**Patch Cords**—2½ Ft. long with a Phone Plug (Like PL-55) on each end. . . . . **Price—95¢**

**Chase** Electronic Supply Co.
222 Fulton St.
New York 7, N. Y.
Digby 4-3088
HOllis 4-5033



# Telephone Equipment & Parts

| | |
|---|---|
| TS 15 handsets with cord & PL68 and PL55 plug . . . . . Each | $ 8.50 |
| TS 13 handsets with cord & PL68 and PL55 plugs . . . . . Each | 8.50 |
| New W.E. F1W handsets with cord & PL47 plug . . . . . Each | 6.95 |
| New TS9 handsets with butterfly flip switch in handle . . . . . Each | 6.50 |
| EE8 field telephones reconditioned Each | 18.50 |
| Like new Magneto Wall telephones (Like EE8) . . . . . Each | 13.00 |
| Reconditioned like new W.E. solid handsets . . . . . Each | 4.95 |
| Reconditioned like new TS9 handsets . . . . . Each | 4.95 |
| Upright desk telephones reconditioned (for extensions, etc.). Each | 2.95 |
| Operators head & Chest sets HS19 reconditioned Double receiver Each | 6.50 |
| Single receiver . . . . . Each | 5.75 |
| EE2C units less cord used. For BD7k & BD72 switchboards Each | 1.00 |
| New 4 ½ foot rubber cords with PL47 plug . . . . . Each | 0.75 |
| Sound power field telephones like new . . . . . Each | 25.00 |

**Terms:**
**Check with Order—F.O.B. Brooklyn, N. Y.**

**EASTERN TELEPHONE CO.**
Dept. E 323 Vanderbilt Ave.
Brooklyn 5, N. Y. MA 2-3753



VOLUME DISCOUNTS — FREE MONTHLY FLYER!

# PORTER SALES FEATURE

*Famous 2" Sq. Weston Sangamo*

## PANEL METERS

0-20v DC
0-40v DC
0-5 R.F. MA
0-5 MA
0-100 MA (0-300 SCALE)

LARGE QUANTITIES AVAILABLE

$2.69 Any Type were $3.95

WRITE TUBE REQUIREMENTS — MONEY BACK GUARANTEE!

**PORTER RADIO SALES CO.**
132 Nassau Street, New York 38, N. Y.

# Columbia
GEM OF THE SURPLUS

**RA-38 RECTIFIER**
Hi voltage, heavy duty power supply. Many uses such as radar, and commercial heat induction. Like new ..... $595.00

**BC-625 MINE DETECTOR**
New Special ..... $39.95

**DYNAMOTORS AND INVERTERS**
PE-103: Brand new..SPECIAL ..... $35.00
PE-73: 28 V. supply for BC-375. Used excel. ..... $5.95
BD-77: 12 V. power supply for BC-191. Excel. cond. ..... $14.95
PU-7 PE-218 PE-206

**110 V. VARIACS**
18 amp ..... $42.50
22.5 amp ..... $69.50
30 amp. Dual ..... $75.00

**METERS**
2" rd. Westinghouse 0-9 amp. RF ..... $2.95
3" rd. Westinghouse 0-15 VAC 400-800 cycles ..... $3.25
3" rd. Weston 0-25 MA ..... $2.95
3" rd. 0-1 MA ..... $3.95

**TEST EQUIPMENT Price On Request**
BC-221 TS-170 TS-47 TS-34
TS-10 TS-16 TS-127 LM

**CONDENSERS—All New! Guaranteed!**
2 mfd. @ 4000 V .... $7.95 .045 mfd. @ 16,000 VDC ..... $9.95
2 mfd. @ 5000 V .... 9.95 .5 mfd. @ 25,000 VDC ..... 39.50
Standard Brand: .05 MUF @ 25,000 V ..... P.U.N.
RESISTOR PROTECTED CAP: 120 mfd. @ 2000 VDC. Res. 0.5 ohm ..... P.U.N.

**TUBES! BIG VARIETY! BOXED!**
250TL ..... $14.95 813 ..... $30.95 CRT-TUBES
304TL ..... 9.95 816 ..... 2.95 2-CAP1 ..... P.U.N.
1B24 ..... 8.95 810 ..... 7.95 3DP1 ..... P.U.N.
VR Tubes, Ea. .99 812A ..... 5.95 3DP1 ..... P.U.N.
723A/B ..... 15.95 MANY OTHERS 5DP4 ..... P.U.N.

**RADAR EQUIPMENT**
RT-59/APQ-5 TRANSMITTER-RECEIVER ..... P.U.N.
APR-1 APR-4 APR-5 ..... P.U.N.
APR-4, BC-184 IFF, Complete ..... P.U.N.

**HEADSETS & HANDSETS—Checked Out**
HS-30. Used ..... $2.95 T-13. New ..... $9.95
HS-23. New ..... 4.95 HS-30. New ..... 3.50
HS-33. Used ..... 3.95 HS-33. New ..... 5.95
T-17. Used ..... 5.00 T-9. New ..... 9.95
T-8. Used ..... 7.95 T-17D. New ..... 7.50
T-17D. New ..... 9.95

**AIRCRAFT EQUIPMENT**
ARN-7 RADIO COMPASS. Complete ..... $200.00
MN-26C RADIO COMPASS. Complete ..... $5.50
SCR-522 VHF TRANSMITTER-RECEIVER. 24 V. Complete ..... $50.00
SCR-274N or ACR-5 (Medium or VHF frequency) Complete installation available ..... P.U.R.
LORAN APN-4B Complete ..... $50.00
APN-1 ALTIMETER. Complete ..... $9.50
ARC-4 VHF TRANSCEIVER. 12 or 24 V. ..... P.U.R.
ARC-1 SCR-269-G TA-1224
ARC-3 BC-348 TA-4
RTA-1B BC-733-D TA-12
ANT-13 R-5/ARN-5 ARR-5
SCR-284 BC-375 ARR-7

**IF YOU NEED IT—WE GOT IT!**
Write for Quantity Discounts.

REMEMBER: WE ALSO BUY NEW AND USED RADIO GEAR. WE PAY TOP DOLLAR AND WILL BEAT ANY COMPETITIVE PRICE! WRITE US TO SELL ANYTHING IN ELECTRONICS. SWIFT REPLY GUARANTEED!

**COLUMBIA ELECTRONICS SALES**
522 South San Pedro St., Los Angeles 13, Calif.

# "AN" connectors PL-UG
## Discounts 30 to 70%
immediate delivery

TEFLON — MELAMINE — BLUE

**"AN" CONNECTORS, Partial Listing**

| | | | | | |
|---|---|---|---|---|---|
| 8S1P | 16-15P | 20-19P | 22-25S | 24-28P | 36-1S |
| 8S1S | 16-15S | 20-19S | 22-27P | 24-28S | 36-2P |
| 10S-2P | 16-16P | 20-20P | 22-27S | 28-1P | 36-2S |
| 10S-2S | 16-16S | 20-20S | 22-28P | 28-1S | 36-3P |
| 10SL-3P | 16S-17P | 20-21P | 22-28S | 28-6P | 36-3S |
| 10SL-3S | 16S-17S | 20-21S | 22-35P | 28-6S | 36-12P |
| 10SL-4P | 18-1P | 20-22P | 22-35S | 28-7P | 36-12S |
| 10SL-4S | 18-1S | 20-22S | 22 36P | 28-7S | 36-13P |
| 12S-1P | 18-5P | 20 23P | 22 36S | 28-13P | 36-13S |
| 12S-1S | 18-5S | 20-23S | 22-37P | 28-13S | 36-14P |
| 12S-6P | 18-6P | 20-24P | 22-37S | 28-14P | 36-14S |
| 12S-6S | 18-6S | 20-31P | 24-1S | 28-14S | 36-21P |
| 14S-1P | 18-7P | 20-31S | 24-2P | 28-15P | 36-21S |
| 14S-1S | 18-7S | 20-32P | 24-2S | 28-15S | 40-1P |
| 14S-2P | 18-8P | 20-32S | 24-3P | 28-21P | 40-1S |
| 14S-2S | 18-8S | 20-33P | 24-3S | 28-21S | 40-8P |
| 14-3P | 18-9P | 20-33S | 24-4P | 28-22P | 40-8S |
| 14-3S | 18-9S | 22-1P | 24-4S | 28-22S | 40-11P |
| 14S-4P | 18-10P | 22-1S | 24-5P | 32-1P | 40-11S |
| 14S-4S | 18-10S | 22-2P | 24-5S | 32-1S | 40-14P |
| 14S-14P | 18-29P | 22-2S | 24-6P | 32-2P | 40-14S |
| 14S-14S | 18-29S | 22-6P | 24-6S | 32-2S | 44-1P |
| 16S-1P | 18-30P | 22-6S | 24-15P | 32-9P | 44-1S |
| 16S-1S | 18-30S | 22-8P | 24-15S | 32-9S | 44-2P |
| 16-2P | 18-31P | 22-8S | 24-16P | 32-10P | 44-2S |
| 16-2S | 18-31S | 22-15P | 24-16S | 32-10S | 48-4P |
| 16S-3P | 20-1P | 22-15S | 24-17P | 32-14S | 48-4S |
| 16S-3S | 20-1S | 22-16P | 24-17S | 32-15P | 48-5P |
| 16S-4P | 20-8P | 22-16S | 24-25P | 32-15S | 48-5S |
| 16S-4S | 20-8S | 22-17P | 24-25S | 32-19P | |
| 16S-5P | 20-9P | 22-17S | 24-26P | 32-19S | |
| 16S-5S | 20-9S | 22-24P | 24-26S | 32-20P | |
| 16S-6P | 20-10P | 22-24S | 24-27P | 32-20S | |
| 16S-6S | 20-10S | 22-25P | 24-27S | 36-1P | |

Complete stock of all sizes, from 8 to 48, in all combinations and shell types. Also complete stock of "UG" and "PL" Connectors.

WRITE, WIRE, PHONE YOUR REQUIREMENTS TODAY!

# ROSE Electronics Co.
100 Park Place, New York 7, N.Y. COrtlandt 7-6196



**OIL CONDENSERS**



6 MFD 600VDC CP70BIFF605K with brackets $1.37 each.
12 MFD 6000V DC inverted Type FP $12.75
1 Mfd. 600 V DC Type TJ 8 c ea.
4 mfd. 600VDC Type TQ 6040 with brackets $1.67 ea.
1 Mfd. 600 VDC round cann 1 Lug size 23/4H 50c each.
3.75 mfd. 330 V A C Pyranol Type 21F403 $1.05 ea.

**BATHTUB CONDENSERS**
.5 MFD CP53 BIFF 504K, 600 VDC $.64 each; (5.52 each by lot of 100).
.05 MFD Side terminal, 600 VDC $.35 each.

**RHEOSTAT**
TYPE J150 ohm 50 Watt =5381 ..... $1.89 each
TYPE K 100 Watt 25 Ohm ..... $2.25
TYPE H 25 Watt 15 Ohm ..... $1.67

**SPRAGUE PULSE NETWORKS**
1. 7E-3-.5-1000-50P ..... $10.25
2. 15-E3-.5-935-32P ..... 22.70
3.10. 5-E6-4, 5-200-16P ..... 32.50
Khxon Circuit breakers

**Clare Telephone RELAYS**
1. Plug in, Type C 3000 Ohm 48 VDC SPDT (INC-2NO) ..... $4.37
2. Plug in, Type A 24 V AC SPST ..... $3.26
3. Type C 1.00 Ohm 24V DC 4PST (INC-3NO) ..... $2.78
4. Type C 30 Ohm 1. 5 VDC DPST ..... $1.95
5. Automatic Electric 14v DC 1000 Ohm N.O. DPST ..... $2.34
Struthers Dunn Type 8BXX110VDC DPST. 4 amp. ..... $7.59
Struthers Dunn Type 8BXX32VDC DPST 4 amp. ..... $7.51
Struthers Dunn Type 1BXX 110V AC 6 amp. DPST N.O. ..... $2.97
Struthers Dunn Type 1XBX105 V AC DPDT $3.73
Guardian Type 100 AC 12 V SPST ..... $1.12
Porter Blumfeld Type PR3 SPST. 115V A.C. ..... $1.68
Porter Blumfeld Type PR5 D SPDT. 48V DC ..... $1.90
Sigma 12 VDC SPDT size 2¼" x 1⅝" ..... $ .27
GE type CR 2791—B109P36 SPDT. 10,000 ohm Coil ..... $1.43
GE type CR2791—B109V39 150 ohm Coil. $1.15

ALL the material in STOCK

**LEONARD GREENE**
381 Tremont St.—HA 6-4794 BOSTON, MASS.

**HAYDON MOTOR SYNCHRONOUS**
110 V.A.C.
½ R.P.M.
3.6 Watts
$2.75 each

Haydun 2.2 watt 1-120 RPM ..... $2.75 complete with coin arrangement for 25¢ pc.. $2.95 minimum order 5 pcs. on synchronous motor.
Haydon, 3-5 watt, 1.5 RPM #5901-4, adjustable reset timer ..... $7.70
MICA TRANSMITTING CAPACITORS Type G3 .0001 Mfd 25 KV ..... $55.00 ea.
Type G2-50. .0001 mfd. .0002 mfd. .0003 mfd. 10 KV ..... $10.00
Type H. .01 mtd. 2500 V test, #CM50A103M $66.00/hundred
Type 1445.01, 1200 V test, #CM45B103K $30.00/hundred
ATTENUATOH DAVEN TYPE H-994-2 7500/3000-2DBSteo ..... $4.25
Type TA-1000-2 7500/3000 Ohm ..... $5.25 ea.

# Manufacturers! Attention!

## WE OWN & OFFER, QUANTITY LOTS OF BRAND NEW PANEL METERS!

**Wholesale quantities only at special reduced lot prices. Some of these lots can be modified to your requirements. Write for complete details and special low prices.**

| Quan. | Type | Range | Make | Model |
|---|---|---|---|---|
| 57 | DC Milliammeter | 0-30 | Weston | 301 |
| 59 | DC Milliammeter | 0-50 | Gruen | 522 |
| 130 | DC Ammeter | 0-100 | Hoyt | |
| 49 | AC Ammeter | 0-35 | Roller Smith | |
| 28 | Microammeter | special | Weston 356 | |
| 77 | DC Milliammeter | 0-3 | Gruen | 5-87 |
| 124 | DC Milliammeter | 0-15 | Simpson | 25 |
| 22 | DC Milliammeter | 0-150 | Gen. Elec. | DO-53 |
| 50 | DC Milliammeter | 0-200 | Marion | |
| 32 | DC Milliammeter | 0-200 | Simpson | 25 |
| 281 | DC Milliammeter | 0-400 | Triplett | 221-T |
| 147 | DC Milliammeter | 0-500 | Dejur | 312 |
| 77 | DC Voltmeter | 0-5/125 | Weston | 506 |
| 67 | DC Voltmeter | 0-150 | Hoyt | 17-L |
| 61 | DC Voltmeter | 0-300 | Sun | 2AU346 |
| 33 | DC Voltmeter | 0-300 | Sun | 3AP380 |
| 50 | AC Ammeter | 0-150(5) | Westinghouse | NA-25 |
| 210 | RF Ammeter | 0-2.5 | Weston | 425 |
| 40 | RF Ammeter | 0-2.5 | Simpson | 25 |
| 198 | RF Ammeter | 0-2.5 | Westinghouse | NT-38 |
| 740 | RF Ammeter | 0-2.5 | McClintock | |
| 24 | RF Ammeter | 0-3 | Weston | 425 |
| 220 | RF Ammeter | 0-3 | Westinghouse | NT-35 |
| 98 | RF Ammeter | 0-5 | Gen. Elec. | DO-44 |
| 122 | RF Ammeter | 0-5 | Gen. Elec. | DO-44 |
| 1300 | RF Ammeter | 0-5 | Gen. Elec. | DW-44 |
| 1350 | AC Voltmeter | 0-15 | Gen. Elec. | AW-41 |
| 288 | AC Voltmeter | 0-15 | Westinghouse | NA-35 |
| 37 | AC Voltmeter | 0-40 | Westinghouse | NA-33 |
| 88 | AC Voltmeter | 0-75 | Weston | 517 |
| 24 | DC Ammeter | 0-1 | Gen. Elec. | DO-41 |
| 350 | AC Milliammeter | 0-1.2 | Weston 545 | |

The following items are NAF type 1091 series and miscellaneous aircraft style instruments. All are made by Weston, Westinghouse, or General Electric. External shunts are available where required.

| Quan. | Type | Range | |
|---|---|---|---|
| 330 | DC Amp | 0-30 | self contained |
| 560 | DC Amp | 20-0-30 | self-contained |
| 2500 | DC Amp | 0-50 | 50 M.V. |
| 490 | DC Amp | 50-0-50 | 50 M.V. |
| 340 | DC Amp | 0-120 | 50 M.V. |
| 270 | DC Amp | 120-0-120 | 50 M.V. |
| 1340 | DC Amp | 0-240 | 50 M.V. |
| 280 | DC Amp | 240-0-240 | 50 M.V. |
| 2800 | DC Volt-Amp | 0-30v/30a | 50 M.V. |
| 230 | DC Volt-Amp | 0-60v/60a | 50 M.V. |
| 80 | DC Amp | 0-50 | 50 M.V. |
| 60 | DC Amp | 50-0-50 | self-contained |
| 140 | DC Amp | 20-0-100 | 50 M.V. |
| 300 | DC Amp | 0-150 | 50 M.V. |
| 250 | DC Amp | 0-300 | 50 M.V. |
| 160 | DC Volt | 0-30 | 50 M.V. |
| 280 | AC Volt | 0-300 | 50 M.V. |

**NOTE!**
**ONLY A PARTIAL LISTING!!**

We have in stock a large variety of panel, switchboard, laboratory and recording instruments, too numerous to itemize.

We also stock a full line of shunts, current transformers and multipliers, as well as miscellaneous items, such as voltage regulators, meggers, voltage relays, tachometers, etc.

Let us know your requirements!
Send for our latest listing!

**MARITIME SWITCHBOARD**
**INSTRUMENTS—ACCESSORIES**

336 Canal Street — WO 4-8217 — New York 13, New York

# PHOTOCON SALES

*417 N. Foothill Blvd. SY camore 2-4131*
*Pasadena 8, Calif. RY an 1-6751*

**FREE 24 PAGE SURPLUS SALES CATALOG**

**WANTED new or clean used electronic surplus. Please state exact description of the condition and details of modification. Include lowest price in first letter.**

| | |
|---|---|
| APS-2 ..... Exc. | PUR* |
| SCR-284 Field Sets ..... Exc. | PUR* |
| APN4A or B ..... Exc. | PUR* |
| APR-5A ..... Exc. | PUR* |
| SCR-545 Radar Trailer ..... | PUR* |
| Type 120A Test Set 130-210mc. Boonton Radio Corp. ..... | PUR* |
| Antenna AT-104/APN9 ..... New | 20.00 |
| Automatic Pilot Inverter Type DA Input 28VDC. @ 12 amps Output 115V., 3 phase, 400 cps ..... Exc. | 80.00 |
| Audio Oscillator Hewlett-Packard 200 BR 20-20,000 c.p.s. ..... Exc. | $110.00 |
| LM & BC-221 Frequency Meter with cal. book, crystal, and tubes ..... Exc. | 99.50 |
| TS-352/U Weston Test Set ..... Exc. | 150.00 |
| TS-173/UR Frequency Meter 90-450 mc. complete with crystal, cal. book, & 115 VAC. Power Supply .. Like New | 600.00 |
| TS-148/UP X-Band Signal Generator ..... Exc. | PUR* |
| TS-12/AP X-Band Signal Generator | PUR* |
| TS-34/AP Portable Oscilloscope .... Exc. | 350.00 |
| TS-12 Test Set for X-Band Box 1 & 2 complete ..... Exc. | PUR* |
| Measurements Corp. Model 82 Standard Signal-Generator 20cy.-50mc. Exc. | PUR* |
| Hewlett-Packard Model 410A High Frequency V.T.V.M. ..... Like New | PUR* |
| APR-4 Search Receiver ..... | PUR* |
| Tuning Units for APR-4 Receiver ... | PUR* |
| BC-348, BC-312, BC-342 Receivers .. | PUR* |
| T-17 Hand Microphone with cord and PL-68 ..... Exc. | 4.50 |
| TS-148/UP New Mfg. ..... | PUR* |
| Impedance Bridge 650A General Radio ..... Like New | 225.00 |
| Signal Generator 190A ..... Like New | PUR* |
| Million Signalyzer Radio & TV .. Like New | PUR* |
| Dumont 208 Scope ..... Exc. | PUR* |
| HS-23 8000 ohm. Used 2.95 ..... New | 5.95 |
| HS-18 8000 ohm. Used 1.75 ..... New | 2.25 |
| HS-33 600 ohm. Used 3.50 ..... New | 6.95 |
| HS-38 600 ohm. Used 1.75 ..... New | 2.25 |
| RG-58/U Coaxial Cable ..... | .06 ft. |

*PUR—PRICE upon request.

**NOTE:** One of the largest and most complete electronic surplus stocks in the country. We have thousands of tubes, capacitors, plugs, accessories, transmitters-receivers, test equipment, etc. Send us your requirements.

**TERMS:** Prices F.O.B. Pasadena, California. ±25% on all O.D.F. orders. California add 3% Sales Tax. Prices subject to change without notice.

# SEARCH RECEIVER — ARD-2

**Frequency range 80 to 3000 Mcs.**

Measures RF signals from 80 to 3000 Mcs and pulse rates from 50 to 8000 cycles.

The ARD-2 can be used as a Direction Finder to locate signals, or as a frequency meter, by VISUAL and AURAL indicators, provide Originally designed and used by USN aircraft. Ideally suited for military, laboratory and general purpose use.

Equipment consists of the following:

Antenna Detector-CMD-66AFH—Has variable length antennas, diode detector and silver plated tuning stub with calibrated scale.

AMPLIFIER CMD-50ADC—has three stage pulse amplifier, a trigger circuit, a pulse rate counter circuit, and audio amplifier, visual signal indicator, rectifier power supply which is operative on 115 Volts AC 60 to 2400 cycles current, regulated.

Test OSCILLATOR-CMD-60ABG—Has cavity frequency of 400 cycles with selection of four pulse repetition rates.

ALL CABLES AND FITTINGS, ACCESSORIES AND SHOCK MOUNTED RACK for immediate installation, plus two Technical Manuals.

SPARE PARTS—Steel chest includes spares for components and two extra sets spare tubes.

**Guaranteed NEW**

All the above in original export packed cases. Wt.: 113-lbs

* * *

**Price each .... $275.00**

* * *

*Other selected equipment for Radio Communications in our stocks*

**COMMUNICATION DEVICES CO.**
2331 Twelfth Ave. NYC 27, N. Y.
Cable: Communidev Tel: Ad 4-6174

# Switchboard BD-72 and BD-71

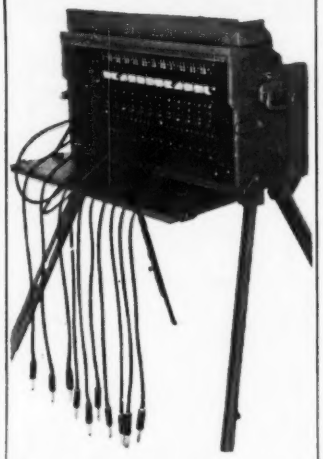

These Switchboards are portable, monocord, magneto-telephone switchboards for use primarily in field wire systems.

The capacity of the Switchboard BD-72 is 12 lines and of the BD-71 is 6 lines. Each switchboard contains all the equipment necessary for terminating and switching field telephone circuits, including a line terminal strip to which incoming lines may be connected directly.

These units are reconditioned and ready to set-up and operate. They are tested and in excellent operating condition.

***Write for Literature and Price***

**DEALERS IN ELECTRONIC AND RADAR EQUIPMENT**

**FRENCH-VAN BREEMS, INC.**
**375 Fairfield Avenue**
**Stamford, Connecticut**
**Tel: 48-9231**

# BUY AND OR SELL

We do both!—Electronic Equipment of every description. No lot too large. TOP PRICES. Ask us to help you. RAPID ACTION ALWAYS.

**ELECTRONIC SURPLUS BROKERS**
148 CHAMBERS ST., NEW YORK — RECTOR 2-1591

**WE BUY AND SELL GOVERNMENT SURPLUS**
**electronic components, units, wire, etc.**
***Your Inquiries Invited***
**LAPIROW BROS.**
1649 Hoffner St. Cincinnati 23, Ohio
Kirby 1285

# TIME DELAY

RELAY 115v 60cy adjustable 6 sec. to 2 minutes Cramer T02-1202 ..... Also TD603 6 to 60 sec. ..$12.95
RELAY 3PDT 24vdc 250 ohm Clare Type K ..$1.95
RELAY 4 PDT 12 vdc 70 ohm Mini tel type ..$1.75
SELSYN—1F Special 115/90 v 400 cy. ..$11.95
FIL XFRMR 6.3 @ 1.3A (other sizes avail.) ..$.99
CHOKE 4H 70ma .40c; 2H 70ma 110 ohm ..$.49
BLOWER MOTOR 400-1800cy 115v FAD J31C..$9.95
BIRTCHER CLAMPS 926A, 926B, 926C ..$.25
3-15MMF variable No. RF ..49c; MC-100S ..$.99
ISOLATION XFORMER 35 watts prim 115v sec. 115 or 135v & 6.3 tap 2¼x2½x3" ..$2.49
SUBMINIATURE tube socket 5 pin, 100 for ..$10.00
POWER XFRMR 780VCT @ 170ma5 @ 6.3 @ 4 ..$4.29
SILV TRNR TS2A, 1.5-7, 7-45 @ 35c; MICA 3-30..$.04
AN3106-10S-2S, PL-68, PL-259A, 83-1H, 8H, JK35A
CONDENSERS: BATHTUB, MICA, AIR, OIL, HV, CRY.
POTS, RELAYS, MIKES, 3AG&MDL fuses, SWITCHES
SPARES for: BC-1206A, SCR13 Radar, AN/TPN-2
2% .002 Silver Mica CM30; many other items.

**EMPIRE ELECTRONICS COMPANY**
409 Avenue L Brooklyn 30, N. Y.
CLoverdale 2-2411 ESmont 9-1220

FOR THE BEST IN ELECTRONIC SURPLUS!

SEE NEW LOCATION OF

# *TELEMARINE COMMUNICATIONS CO.*

3040 WEST 21st STREET, BROOKLYN 24, N. Y.

(½ BLOCK FROM FAMOUS BOARDWALK OF CONEY ISLAND)

**TREMENDOUS STOCKS OF: RADIOTELEPHONES, X'MTRS, BROADCAST EQPT., RECEIVERS, RADAR, AMPLIFIERS and MISCELLANEOUS ELECTRONICS.**

---

# MOVED

TO A BIGGER & BETTER WAREHOUSE PILED HIGH WITH

## HARD-TO-FIND PARTS & EQUIPT.

Just a partial list of our present stock:

- BC-348 • BC-342 • ART-13
- ARC-3 • APN-9 • LM
- BC-221 • BC-611
- VARIOUS TEST EQUIPMENT

NEW EXPORT DIVISION FOR ALL FOREIGN ORDERS

Prompt attention to all inquiries—all languages!

Attn: Schools, Labs, Hams!

**WE PAY MORE**

FOR RADIO PARTS & EQUIPMENT

Cash in on your surplus equipment—or we'll trade for something you really need. Write today!

*NEW ADDRESS:*

**CANDEE-AIRCO**

Dept. E-7

P. O. Box 1187

Magnolia Park Station

BURBANK, CALIFORNIA

CHarleston 0-1486 • ROckwell 9-1070

---

# CAPACITOR HEADQUARTERS

BATHTUB COND. CHANNEL TYPES

| MFD | 400V | 600V | 1000V | 400V | 600V | 1000V |
|---|---|---|---|---|---|---|
| .05 | $.30 | $.35 | $.40 | $.35 | $.40 | $.50 |
| .10 | .35 | .40 | .45 | .40 | .45 | .50 |
| .25 | .40 | .45 | .50 | .50 | .60 | .65 |
| .50 | .45 | .50 | .60 | .60 | .65 | .70 |
| 1.0 | .50 | .65 | .75 | .75 | .85 | — |
| 2.0 | .85 | 1.15 | — | — | — | — |
| 2 x .05 | .35 | .40 | .45 | .40 | .45 | .60 |
| 2 x .10 | .40 | .45 | .50 | .45 | .50 | .65 |
| 2 x .25 | .45 | .55 | .65 | .50 | .65 | .75 |
| 2 x .50 | .55 | .65 | .85 | .60 | .75 | — |
| 2 x 1.0 | .85 | .95 | — | — | — | — |
| 3 x .05 | .40 | .45 | .50 | .45 | .50 | .65 |
| 3 x .10 | .40 | .45 | .60 | .45 | .50 | — |
| 3 x .25 | .50 | .65 | — | .60 | .75 | — |
| 3 x .50 | .60 | .85 | — | YAB/T | WAB/T | — |

SPECIFY TERMINAL LAYOUT WHEN ORDERING
OTHER VALUES—VOLTAGES AVAILABLE
JAN-C-25 TYPES AVAILABLE IN QUANTITY

*ATTENTION*

New Manufacture Hi-Capacity Oil Cond.
For Servo-Control-Network Applications
20-30-40-50-60 MFD/600 VDC, also AC rated

FOR FAST INTELLIGENT FRIENDLY SERVICE "CALL ON ESSCO"

## OILS-MICAS-MOLDED PAPER TYPES

*QUALITY—SERVICE*

## SENSIBLE PRICES

400 CYCLE TRANSFORMERS

| | | | |
|---|---|---|---|
| 352-7003 | 352-7095 | 352-7106 | 352-7245 |
| 352-7004 | 352-7096 | 352-7167 | 352-7295 |
| 352-7068 | 352-7098 | 352-7194 | 352-1482 |
| 352-7070 | 352-7099 | 352-7198 | |
| 352-7086 | 352-7102 | 352-7222 | |

*YOUR INQUIRIES INVITED*

G.E. THYRITE, a non-linear resistance material in which L varies as En. Excellent HV regulator 1 7/8 dia. x 1/2 thk. W/1/2" hole. Current 5-40 ma at 21 to 33 volts. Pkg of 5 $2.85 ..... ea. $.65

HAYDON SYNCHRONOUS MOTOR, operates 115 Vac 60 cy w/capacitor, high torque geared shaft, 5RPHR ..... $1.25

COMPACT UNITS

10-20-40-80-100 MFD/100 VDC (Oils)

*Fast Delivery—Let Us Quote on Your Needs*

WHIP ANT. SECTIONS. MS-48 to MS-56 ... ea. $.45

A.E. type 413 STEPPER RELAY, 8-12 VDC, 3 deck 25 position, 360 degree rotation ..... $8.95

MU-METAL & #4750 GRADE LAMINATIONS EE-26-27, F-11, F-12, large quantities, available.

**ELECTRONIC SPECIALTY SUPPLY CO.**

58 Walker St. WA 5-8187 NYC 13 N.Y.

---

## TUBE REBUILDING

Large Transmitting and Power types

*Economical • Guaranteed*

FREELAND PRODUCTS CO.

700 DRYADES ST., N. O., LA.

---

## STANDARD BRAND TUBES

Jan Types Fully Guaranteed

| | | | |
|---|---|---|---|
| 1B29 | $2.75 | 715A | 5.95 |
| 2C40 | 9.75 | 813 | 9.75 |
| 2C46 | 27.50 | 814 | 2.50 |
| 2C51 | 6.75 | 815 | 1.50 |
| 2K22 | 37.50 | 872A | 3.25 |
| 2K23 | 37.50 | 931A | 3.95 |
| 3K25 | 22.50 | 954 | .29 |
| 3C31/C1B | 2.51 | 955 | .39 |
| 4C27 | 22.50 | 957 | .45 |
| 6AK5 | .85 | 958A | .59 |
| 6A56 | 2.75 | 1805 | .59 |
| 9GP7 | 12.50 | 1807 | .95 |
| 15E | 2.15 | HY1269 | 2.25 |
| T75 | 1.50 | 1613 | 1.15 |
| 120A | 7.50 | 1616 | .65 |
| 175A | 2.95 | 1619 | .35 |
| F127A | 17.90 | 1632 | .59 |
| 304TH | 6.75 | 1644 | .95 |
| 307AX | 1.45 | 2050/1665 | 1.49 |
| 705A | 1.75 | 2051 | 1.00 |

CRYSTAL DIODES

| | | | |
|---|---|---|---|
| 1N21 | .75 | 1N23B | 3.50 |
| 1N21A | 1.50 | 1N26 | 7.75 |
| 1N21B | 3.25 | 1N34 | .65 |
| 1N23A | 2.25 | 1N34A | .89 |

Relay Coaxial 24v DC5 K-101 $3.95

Please note our new address and telephone number:

**ALLIED ELECTRONIC SALES**

74 CORTLANDT STREET, NEW YORK 7, N. Y.

*Barclay 7-5839*

---

## DYNAMOTORS

From our inventory. New, original containers, BD-77; DM-21; DM-32; DM-36; DY-22; PE-86 and others. Substantial quantities. Also John Oster Co. fractional horsepower motors.

LINE HARDWARE CO.

1515 N. 26th St. Phila. 21, Pa.

---

IF there is anything you want that other readers can supply—

OR . . . something you don't want—that other readers can use—

Advertise it in the SEARCHLIGHT SECTION

---

## RELAY SPECIALISTS

AUTHORIZED FACTORY DISTRIBUTORS

STRUTHERS-DUNN POTTER & BRUMFIELD

**100,000 RELAYS** *ALL TYPES*



SIX-POLE DOUBLE THROW ALLIED #BN-18D-39 has 10 AMPERE CONTACTS 2800 ohm coil operates on 30 Mills DC OR 110 V. DC..... **$6.95**

RADIO DEVELOPMENT & SALES CO.

323 Atlantic Ave. Brooklyn 2, N. Y. ULster 5-0488

### Radar

SCR-545A Search and Track. Complete trailer, power supply and spare parts. Nearly New. Write for description and price.

### Transformers & Chokes

* New 10 K.W. Amertran oil cooled plate transformers 115v./230v. 60 cy. single phase primary, 17,500 volts, .5 amp. secondary. Can be furnished center tapped or two wire 8800 volts, 1.0 amp. State primary and secondary voltage desired. Priced $75.00 each f.o.b. Los Angeles.
* Filament, American Transformer Co. Spec. 29106, Type WS, .050 KVA, 50/60 cy. S.P., 35 KVA test. 12 KV d-c operating. Pri. 115 v., Sec. 5 v., 10 amps w/integral stand-off insulator and socket for #571,872, etc., rectifier tubes. $15.00 each. Transtat, line voltage regulator, 115 v. 60 cy. Range 103-126 v. 2.17 amp. Amertran Spec. #29144. $9.50 each.
* Battery Charger, G.E. Cat. #WS-99316. Pri. 105-115-125 V. 60 C. Sec. 105-90-75-60-45-30 v. @ 6 amps. each side of center tap. Voltage reduced 10% and 20% thru tapped primary; two x 5 v. 18 amp. C.T. (Tungar filaments) and two x 7 v. 10 amp. 7½" h. x 8-¾" w. x 5½" d. Wt. 56 lbs. New, orig. packing. G. E. Price $52.00. $17.50. 2 for $30.00.
* Choke, swinging 15,000 v. d-c line, ripple frequency 120, 149 ohms. .02 amp. @ 900 henrys; .32 amp. @ 25 henrys; 48% ripple. Amertran Spec. #29107. $42.00.

### *Capacitors

9.12 mfd., 1265 v. 60 c. a-c or 4000 v. d-c power factor correction 5.0 K.V.A.R. Cat. #2528908. $17.50

.25-.25, 6000 v. d-c or .125 @ 12,000 v. d-c., Fast Cat. #A7548 oil. $3.75.

1.25/1.25 mfd., 7500 v. Pyranol Cat. #26F360. $17.50

### *Resistors

Fixed w.w. 160,000 ohm, 200 w. ferrule ends..$1.00
Fixed, w.w. 5,000 ohm, 200 w. ferrule ends.. 1.00

### *Meters & Multipliers

Westinghouse Type R-5, 1 meg. precision meter multiplier resistors, wire wound, non inductive, ½% tolerance. Can be screwed together for any desired total. New. $4.00 each.

Ammeter, a-c, 3" Westinghouse NA-35 or Weston Model 476, 3 amps, f.s. deflection; scale calibrated 0-120, includes doughnut type current transformer w/200-5 ratio at 25-133 cy. $8.50.

### *Relays

Allen-Bradley overload relay, 110 v. 60 cy. Cat. #810. Adjustable 6.3 to 10.1 amps. $7.95 each.

Westinghouse, 110 v. 60 cy. D.P.S.T. 15 amp. contacts with interlock. $4.95 each.

### *Rectifiers, Dry Disc

Cu. S. FWB 1.8 v. d-c @ 1 amp....$.75 4 for 2.50
Selenium, FWCT, 2.2 v. d-c @ 3 amp .75 4 for 2.50
Selenium, HW, 36 v. d-c @ .2 amp. .75 4 for 2.50
Selenium, FWB, 54 v. a-c @ 1.6 amp..... 3.60
Selenium, FWB, 154 v. a-c .6 amp..... 5.50
Selenium, FWB, 180 v. a-c .4 amp..... 5.80

### *Stand Off Insulators, Ceramic

1¼" dia. x 5".....$ .90 ea.
1¼" dia. x 6"..... 1.00 ea.
1¼" dia. x 8"..... 1.25 ea.
All sizes with metal caps and bases.

### High Voltage Rectifier Power Supply

Variable output 0-15,000 v. d-c @ 500 mills. Input 115 v. 60 cy. single phase. Army type RA-38. Size 63½" x 53-¾" x 56-⅞". Wt. 2040 lbs. Units are new, complete with spare tubes and remote control. Write for detailed information.

*Quantities available—subject to special discounts.

**EPCO**

**1527 E. Seventh Street** — **Los Angeles 21, Calif.**

---

## WESTINGHOUSE HIPERSIL CORES

| Quantity | Gauge | Strip Width | Build Up | Window Width | Window Height |
|---|---|---|---|---|---|
| 11,365 | .003 | 1⅛ | ½ | 7/16 | 3 |
| 3,741 | .003 | ⅜ | ⅜ | 7/16 | 3 |

*Available for immediate delivery*

**RAYTHEON MFG. CO.**

Surplus Sales Dept. Waltham, Mass.
*Tel. Waltham 5-5860—Ext. 2*

---

## WHOLESALE ONLY

ELECTRONIC COMPONENTS
AIRCRAFT EQUIPMENT
HYDRAULICS

RADIO & ELECTRONIC SURPLUS
13933-9 Brush St. Detroit 3, Mich.
Phone Townsend 9-3403

---

## WANTED

---

# WANTED

---

## WANTED

TDE TBS TCS RBG Radio parts
SA, SF, SG, SL, SO RADAR parts
Submit lists

W-5431, ELECTRONICS
330 W. 42 St., New York 36, N. Y.

---

# ELECTRONIC EQUIPMENT WANTED!

**Sell to** → → → Arrow SALES INC

*We want to buy all types of new and used surplus electronics equipment. Highest prices paid. We are the largest purchasers of such equipment.*

**ARROW SALES, INC.** — **7460 VARNA AVE., N. HOLLYWOOD, CALIF.**

---

## WE BUY

All kinds of surplus electronic equipment and components.

ELECTRONICRAFT, Inc.
27 Milburn St. Bronxville 8, N.Y.
BRonxville 2-0044

---

We Pay Highest $$$$ Prices for
**RADIO & AIRCRAFT ELECTRONICS EQUIPMENT**

You'll be pleasantly and profitably surprised at the prices we pay for needed parts and equipment. Simply send us a description of what you have—tell us your too dollar asking price—and we'll shoot back a prompt reply! Convert that equipment to ready cash now! Write:

**ALVARADIO SUPPLY CO.—Division E-1**
4665 Melrose Av. Los Angeles 29, Cal. OLympia 2155

---

## WANTED

- AN/TRC-1 Equipments.
- T14 Transmitters.
- R19 Receivers.
- TS32 Test Oscillators.

***Any condition or quantity***

W-3858, Electronics
330 W. 42nd St. New York 36, N. Y.

---

## WANTED

**RADIOSONDE**

Number AMQ-1C, or 1D, or the later 208 MC. Type. Must be new in original sealed waterproof overseas export packaging. Any quantity accepted. Please write

**K & L RADIO PARTS CO.**
1406 Venice Blvd. Los Angeles 6, Calif.

---

## WANTED

BD110 Telephone Switchboards, BD100 Telegraph Switchboards, BD90 Power Boards, EE101 V-F Ringers, BE72 Cabinets, FM19 Frames, RA43, REC39, KS5988, RA87, RA37, RA91 Rectifiers, BD101 Test Boards, SB6 Switchboards. Type CF1A, CF3A, CF2B Carrier Equipments. Any condition and quantity.

W-4212, Electronics
330 W. 42 St., New York 36, N. Y.

---

## WANTED

**Federal type**
**101B Voice-frequency Ringers**
**Signal Corps type TA-3/FT.**

W-4814, Electronics
330 W. 42 St., New York 36, N. Y.

---

## WANTED

**Western Electric gray-finished EQUIPMENT CABINETS**

For 19" panels. Heights of 2' 6", 3' 6", 7' 0" and 7' 6".

W-4852, Electronics
330 W. 42 St., New York 36, N. Y.

---

# An Investment!

Productive advertising is an INVESTMENT rather than an EXPENDITURE.

"Searchlight" advertisers almost invariably report prompt and satisfactory results.

BE CONVINCED — send us your advertisement TODAY.

*Address*
*Classified Advertising Division*
**ELECTRONICS**
**330 W. 42nd St., N.Y. 18, N.Y.**

*Standard Brands*

# *Electronics*, INCORPORATED

*All Items Fully Guaranteed*

## NOW AVAILABLE — a brand new stock of tubes — transformers — condensers

### TUBES

0A4-G
0B3/VR-90
0C3/VR-105
0D3/VR-150
0Y4
1A3
1A5GT-G/VT-124
1A7GT-G
C1B/3C23
1B22
1B23
1B24
1B26
1B27
1B32/532A-GL
1B35
1B36
EL1C/3B22
1C5
1C7A
1E1
1N5-G
1J6-GT
1L4-GL
1N5-GT
1P21
1P28
1P48
1P42
1R4/1294/VT-103
1S5/VT/1T2
1-V-AB
B2A 2050
2AP1
2AP1-A
2B22
2C22
2C26
2C34/RX-34-VT-224
2C40
2C46
2C48
2C51/396-A
2D21
2E22
2J22
2J26
2J31
2J32
2J33
2J34
2J35
2J36
2J42
2J44-B
2J51
2J52
2J53
2K22
CRF-2K22
2K25
2K28
2K29
2K30
2K31A
2K33
2K34
2K35
2K36
2K40
2K41
2K43
2K44
2Y4-G
2V3-G
2K2/870/VT-110
2K2A-M2-10
3A4
3AP1
3AP1A
WEL3B/210-A
3B7
3B22
3B24
3B25
3B26
3B28
3C21
3C22
3C23
3C24/25TQ
3C27
3C45
3DP1/1806-P1
3D6/1298/VT-105
3D21-A
3DP1
3DP1-A
3DP1-S2
3E29-S29-A
3EP1/1608P1/VT-226
3F7
3FP7
3FP7-A
3GP1
3JP1
3Q4
3QP1
3Q5
3R-4
3A5
4B22
4B28/EL5CF
4D22
4E27/HR257-B
4J35
4J37
4J52/QK-72
5AP1
5BP4/VT-111
5C21 C6J
5CP1
5C27/327-A
5D21
5J1
5QP1
GL-5229
5J30
5JP1
5JP2
5LP3
5LP5
5W4-GY
5Y4/VT-114
5UP1
5Y3-GT/VT-197A
5Y4-G
6F3
6A3
6AB5
6AB7/1853/VT-275
6AC7/1852/VT-112
6AD7-G
6AF6-G
6AG5
6AG7/VT-247
6AJ6
6AJ7
6AN5
6AQ5
6AR5
6AS6
6B8/VT-91
6BE6-GT
6BQ7
EL5CF/4B25
6C3/5C22
6C4
6C5/VT-45
6C6
6C21-G/VT-163
6C21
6C24
6F2
6F4/VT-66
6F5-G
6G5-G/VT-100A
6G12/7912
6H6/VT-90
6J4
6J5/VT-94
6J6
6J7/VT-91
6JA-GT/VT-112
6K7-G/VT-96
6K8/VT-167
6L6-GA/VT-115A
6L6-M
6L7/VT-97
6N7/VT-96
6P7-G
6Q7/VT-52
6Q7-GT/VT-52
6SA7
6SC7/VT-101
6SQ7/VT-111
6SH7
6SL7-GT/VT-139
6SN7-GT/VT-231
6SQ7-GT/VT-107
6SU7-GT-Y
6SX6-GT
6V6-M/VT-107A
6V6-GT-G
6V6-G
6W6-GT
6X5-GT-G/VT-126-B
6Y6-G
7BP7
7BP7
7C4
7C5/VT-155
7H7/VT-98
7M12/6G12
7JP4
7L7
7N7
7V4
9JP1/1809-P1
10 special/VT-25A
10/VT-25
10E-92/VR-91
10T1
12A
12A6-M/VT-207
12AL6-GT
12AH7/VT-207
12AV7
12C8/VT-169
12GP7
12J5-GT/VT-135
12J7-GT
12K8
12K8-Y
12LE-GT
RK-12
12SA7/VT-161
12SC7
12SF7
12SQ7/VT-209
12SH7-M/VT-288
12SJ7-M/VT-152
12SK7-M/VT-121
12SQ7-GT/VT-104
12SR7/VT-133
13-4
14H7
14J7
14E
15R/2-15A
FG-17
T1UF-20
RK-20
RK-20A
RK-21
REL-21
RK-23
22/VT-26
23D4
25L6-GT/VT-201
25-T
25-TG/3C24
25
CV-26/813
FG-27A
RK-28A/803
28D7
50/800
REL-30
31/VT-13
RK-34/2C34/VT-224
35T
35-TG
36/VT-36
RK-38/836
39
39-44/VT-49
42
44-QA
RK/VT-52 special
40 KILOWATT TRANSFORMER AND CHOKE KIT FOR THE PRESS — WIRELESS PW-40. NEW
83-47/816
UX-60/860
83A
VR-84
T-85
RK-87/808
86/VT-116
VR-89/985
RK-93
RK-60/1641
RK-60
GK-61
RK-62/200-TH
VR-65
HY-69
75-A
CEQ-72
CMP-72
RKR-72/72
QK-72
CV-73
RK-73
76-T
76-V
RK-VT-76
77T-77/V
GT1-77
FG-81A
82
83-V
89/VT-89
VR-90/OB3
VR-91/10E-92
C-100B
100-TH
HF-100
FG-104
FG-105
VR-105/OC3
VU-111
111-A
X-111
HY-114B
117N7-GT
C-120
121-A
VR-150/OD3
CV-172
Z11/VT-4C
Z12-E
WX-215
227
RX-232A
233-A
249-B
249-C
250-W
250-TH/RK-63
HR-257-B/4E27
267-B
271-A
271-B
300-B
HY-302
304-TH/VT-254
306-TL
307-A/VT-225
310-A/REL3B
311-A
311-C
312
316-A/VT-191
317-A/5C27
332-A
350-A/VT-230
350-B
355-A
360-A
368-AS
371-B
388-A
392-A
394-A
417-A/VT-277
GL-434A
446
446-A
446-B
GA-501-LX
GL-502
509
GL-562
575-A/VT-187
HY-615/VT-235
615
635-P1
652
653
ZP652
653-B/8004
WL-672
700-A
700-D
702-A
703-A
704-A/VT-255
706AY
708-B
708-EY
708-GY
708-EX
707-A
707-B
707-EY
707-A
713-A
713-AY
715-A
715-B
715-C
715-A/VT-269
715-A
720-CY
721-A
721A-B
724-A
724-B
724-C
725-A
726-A
726-B
726-C
728-EY
L-860-E
801-A/VT-62
803/RK-28A
803/RK-57
807/VT-60A
808
808-30Z
811/VT-217
CV-26
813/RK-47
815/VT-207
816/VT-216
822
820
GL-826-A
826
827
827/VT-250
829-A/3E29
829-B
830-B
832
832-A/VT-118
833
833-A
836
837/VT-102
838/RK-38
840/VT-151
843/VT-75
845/UX-49
850/VT-60
851/VT-151
860-A
CG-863/861/VT-19
864/VT-24
865/VT-55
866A/VT-46A
865-RX
872-A/VT-42A
874
884/VT-222
884
886
GL-887
888
1641/RK-60
1644
1655
1806-P1/3EP1/VT-226
1808-P1/3CP1
1809-P1/3JP1
1852/6AC7/VT-112
1853/6AB7/VT-176
1854
2050/B2-A
2051/VT-169
SC-5340-A
866-A
991/RE-45
1005/VT-195
CL-1005
CK-1060
CK-1090
M-1130-B
1201
1203-A
1232
1272
1294/1R4/VT-103
1299/1D6/VT-105
1295-A
1603
1612
1613/VT-175
1615/VT-200
1618/VT-164
1624
1625/VT-126
1626/VT-127
1629/VT-128
1630/VT-129
1631
1632
1633
1634
1635
1636
1638
1641/RK-60
1644
1655
1806-P1/3EP1/VT-226
1808-P1/3CP1
1809-P1/3JP1
1852-M/6AC7/VT-112
1853/6AB7/VT-176
1854
2050/B2-A
2051/VT-169
SC-5340-A
5558
5560
5651
5654
5692
5693
6050
7193
8000
8001
8011/VT-99
8012/VT-238
8013
8013-A
8013-A
8014-A
8016
8020
8025
9002/VT-202
9004/6S3-B
9005
9006
CRC-20022
18005-X
18222
D-75512
VT-24/864
VT-25/10
VT-25A/10 special
VT-25C
VT-33/33
VT-52/44-44
VT-52/45 special
VT-60/850
VT-62/801-801A
VT-62/801
VT-127A
VT-137/1625
VT-139/1626
VT-198-A/5Q5G
VT-225/307-A
VT-250/HY-615

### PULSE TRANSFORMERS

**WESTINGHOUSE:**

| | | |
|---|---|---|
| 1P1 | 132 BW2 | 145 EW |
| 1P8 | 132 DW | 145 EWP |
| 1P26 | 133 AW | 166 AW |
| 1P29 | 134 BW | 176 AW |
| 132 AW | 134 BW2 | 3014445-1 |

**UTAH:**

| | | |
|---|---|---|
| X124 T-2 | X154 T-1 | 9318 |
| X124 T-3 | 9280 | 9340 |
| X143 T-3 | 9287-D | 9350 |
| X146 T-1 | | |

**GENERAL ELECTRIC:**

| | | | |
|---|---|---|---|
| 68GB13 | 80G13 | K2435D | K2478 |
| 68GB84 | 80G58 | K2449 | K2728 |
| 68G979 | 80G59 | K2460 | K2746-A2 |

**RAYTHEON:**

| | | |
|---|---|---|
| UX 7307 | UX 7350 | UX 7361-A |

### SPRAGUE—PULSE NETWORKS

6—A5—½—2000—50M
6—E3—.25—2000—50P
9—E3—.25—2000—50P
9—E3—.5—2000—50P
9—E5—2—1000—50P
10—E3—.5—2000—50P
10—E5—1—400—50P
15—E3—½—400—50P (Vitamin Q)
15—E3—.4—800—50P
15—E4—1—400—50P
15—E3—.5—2000—50P
15—A—1—800—50
25—E5—4—120—50P

• *OUR PRICES ARE COMPETITIVE WITH THE LOWEST EXISTING MARKET* •

(For partial Condenser listing see our ad in October Electronics, pg. 470)

*Write - Phone - Telegraph*

*Electronics*, INCORPORATED

92 Broad Street, Babson Park, Mass.
Wellesley 5-5210-1

# ELECTRONIC TUBES

**Electro is rapidly becoming the prime source for manufacturers, jobbers and exporters. Your requirements of large or small quantities of tube, all types, can be quickly supplied from our huge stock. Each and every tube is brand new, inspected and fully guaranteed by Electro. We carry Standard Brands Only. Critical tubes are almost always on hand at the right price. Write, Phone or Wire your needs at once.**

**RECEIVING**

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0Y4 | .45 | 6K8GT | .75 | 12AV6 | .59 | 1N21A | 1.95 | 6AL5 | .49 | 6J6 | .85 |
| 0Z4 | .75 | 6K8GT | .45 | 12AW6 | 1.20 | 1N21B | 1.95 | 6AQ5 | .59 | 6J6A | 1.25 |
| 01A | .45 | 6K7GT | .75 | 12AX4 | 1.25 | 1N21C | 1.95 | 6AT6 | .49 | 6J7 | .65 |
| 1A3 | .75 | 6K8 | .85 | 12BA6 | .59 | 1N22 | 17.50 | 6AU6 | .59 | 6J7GT | .75 |
| 1A5GT | .85 | 6L6GT | .85 | 12BE6 | .59 | 1N23 | 5A | 6AV6 | .49 | 6K6GT | .75 |
| 1A7GT | .85 | 6L6G | 1.45 | 12BH7 | .72 | 1N23A | 14.75 | 6AX4 | .59 | 6K7 | .65 |
| 1B3GT | .85 | 6L6GA | 1.45 | 12BY7 | 1.20 | 1N23B | 15.00 | 6B4G | .75 | 6K7GT | .75 |
| 1B4P | .75 | 6L7 | .85 | 12C8 | .72 | 1N23C | 17.50 | 6B6G | 1.20 | 6K8 | .85 |
| 1B4T | .85 | 6L7G | .85 | 12CA5 | .75 | 1N24A | 2.50 | 6B8 | .90 | 6K8G | .75 |
| 1B5/25S | .85 | 6L7GT | .85 | 12CG7 | .59 | 1N25 | 4.50 | 6B8G | .75 | 6K8GT | .75 |
| 1B7GT | .85 | 6N7 | .75 | 12CR6 | .59 | 1N26 | 6.95 | 6BA6 | .59 | 6L6G | .85 |
| 1C5GT | .75 | 6N7GT | .75 | 12DE8 | .59 | 1N27 | .65 | 6BA7 | 1.25 | 6L6GA | 1.45 |
| 1C6 | .69 | 6P7G | .75 | 12DF7 | .59 | 1N34A | .95 | 6BC5 | .59 | 6L6GT | .85 |
| 1C7G | 1.25 | 6P9 | .75 | 12DQ6 | .59 | 1N35 | .95 | 6BC7 | .75 | 6L7 | .85 |
| 1D5GP | .85 | 6Q7 | .79 | 12DT7 | .59 | 1N38A | .95 | 6BD6 | .59 | 6L7G | .85 |
| 1D7G | .75 | 6Q7GT | .75 | 12DZ6 | .59 | 1N41 | 1.45 | 6BE6 | .59 | 6L7GT | .85 |
| 1D8GT | .85 | 6R7 | .85 | 12E1 | 17.50 | 1N42 | 1.45 | 6BF6 | .59 | 6N7 | .75 |
| 1E5GT | .75 | 6R7G | .85 | 12E5 | 17.50 | 1N43 | 1.45 | 6BG6G | 1.50 | 6N7GT | .75 |
| 1F4 | .65 | 6R7GT | .85 | 12E6 | 17.50 | 1N48 | 1.45 | 6BH6 | .90 | 6P5GT | .62 |
| 1F5GT | .75 | 6S4 | .65 | 12F5GT | .75 | 1N54 | 1.45 | 6BJ6 | .85 | 6P9 | .72 |
| 1F6 | .65 | 6S7 | .75 | 12F8GT | .75 | 1N55A | 1.45 | 6BL7GT | 1.25 | 6Q7 | .75 |
| 1G4GT | .65 | 6S8GT | .75 | 12G7GT | .75 | 1N56 | 1.45 | 6BQ6GT | 1.25 | 6Q7GT | .75 |
| 1G5 | .65 | 6SA7 | .75 | 12H6 | .59 | 1N56A | 1.45 | 6BQ7 | .75 | 6R7 | .75 |
| 1G6GT | .75 | 6SA7GT | .75 | 12J5GT | .59 | 1N57 | 1.45 | 6BQ7A | .75 | 6R7G | .75 |
| 1H4G | .65 | 6SC7 | .75 | 12J7GT | .75 | 1N58 | 1.45 | 6BQ7GT | .75 | 6R7GT | .75 |
| 1H5GT | .75 | 6SC7GT | .75 | 12K5 | .75 | 1N58A | 1.45 | 6BR7 | .75 | 6S4 | .65 |
| 1H6GT | .75 | 6SD7GT | .75 | 12K7GT | .75 | 1N60 | 1.45 | 6BS7 | .75 | 6S7 | .75 |
| 1J3 | .75 | 6SH7GT | .75 | 12K8GT | .75 | 1N63 | 1.45 | 6BT7A | .75 | 6S8GT | .75 |
| 1J4 | .75 | 6SK7 | .75 | 12L6GT | .75 | 1N64 | 1.45 | 6BU7 | .75 | 6SA7 | .75 |
| 1J5GT | .75 | 6SK7GT | .75 | 12Q7GT | .75 | 1N65 | 1.45 | 6BW6 | .75 | 6SA7GT | .75 |
| 1J6 | .75 | 6SL7GT | .75 | 12R5 | .75 | 1N66 | 1.45 | 6BW7 | .75 | 6SC7 | .75 |
| 1K4 | .75 | 6SN7GT | .75 | 12SA7 | .75 | 1N67 | 1.45 | 6BX6 | .75 | 6SC7GT | .75 |
| 1K5GT | .75 | 6SQ7 | .75 | 12SA7GT | .75 | 1N68 | 1.45 | 6BY7 | .75 | 6SD7GT | .75 |
| 1K7G | .75 | 6SQ7GT | .75 | 12SC7 | .75 | 1N69 | 1.45 | 6C4 | .75 | 6SH7 | .75 |
| 1L4 | .65 | 6SR7 | .75 | 12SF7 | .75 | 1N70 | 1.45 | 6C5 | .65 | 6SH7GT | .75 |
| 1L6 | .75 | 6SR7GT | .75 | 12SF7GT | .75 | 1N71 | 1.45 | 6C5GT | .75 | 6SK7 | .75 |
| 1LA4 | .75 | 6SS7 | .75 | 12SG7 | .75 | 1N72 | 1.45 | 6C6 | .75 | 6SK7GT | .75 |
| 1LB4 | .75 | 6SS7GT | .75 | 12SG7GT | .75 | 1N73 | 1.45 | 6C8G | .75 | 6SL7GT | .75 |
| 1LC6 | .75 | 6SU7GT | .75 | 12SH7 | .75 | 1N74 | 1.45 | 6CB6 | .75 | 6SN7GT | .75 |
| 1LD5 | .75 | 6SZ7 | .75 | 12SH7GT | .75 | 1N75 | 1.45 | 6CD6G | 1.95 | 6SQ7 | .75 |
| 1LE3 | .75 | 6T7G | .75 | 12SJ7 | .75 | 1N76 | 1.45 | 6CG7 | .75 | 6SQ7GT | .75 |
| 1LH4 | .75 | 6T8 | 1.00 | 12SJ7GT | .75 | 1N77 | 1.45 | 6CG8 | .75 | 6SR7 | .75 |
| 1LN5 | .75 | 6U5 | .75 | 12SK7 | .75 | 1N78 | 1.45 | 6CL6 | .75 | 6SR7GT | .75 |
| 1N5GT | .75 | 6U5GT | .75 | 12SK7GT | .75 | 1N79 | 1.45 | 6CM7 | .75 | 6SS7 | .75 |
| 1P5GT | .75 | 6U7G | .75 | 12SL7GT | .75 | 1N80 | 1.45 | 6CS6 | .75 | 6SS7GT | .75 |
| 1Q5GT | .75 | 6V3 | .75 | 12SN7GT | .75 | 1N81 | 1.45 | 6D6 | .75 | 6SU7GT | .75 |
| 1R4 | .75 | 6V6 | .75 | 12SQ7 | .75 | 1N82 | 1.45 | 6D8G | .75 | 6SZ7 | .75 |
| 1R5 | .75 | 6V6G | .75 | 12SQ7GT | .75 | 1N83 | 1.45 | 6E5 | .75 | 6T7G | .75 |
| 1S4 | .75 | 6V6GT | .75 | 12SR7 | .75 | 1N84 | 1.45 | 6E5GT | .75 | 6T8 | 1.00 |
| 1S5 | .75 | 6W4GT | .75 | 12SR7GT | .75 | 1N85 | 1.45 | 6E6 | .75 | 6U5GT | .75 |
| 1T4 | .75 | 6W6GT | .75 | 12V6GT | .75 | 1N86 | 1.45 | 6F4 | .75 | 6U7G | .75 |
| 1U4 | .75 | 6X4 | .75 | 12X4 | .75 | 1N87 | 1.45 | 6F5 | .75 | 6V3 | .75 |
| 1U5 | .75 | 6X5 | .75 | 12Y4 | .75 | 1N88 | 1.45 | 6F5GT | .75 | 6V6 | .75 |
| 1V2 | .75 | 6X5GT | .75 | 14A4 | .75 | 1N89 | 1.45 | 6F6 | .75 | 6V6G | .75 |
| 1X2A | .75 | 6X8 | .75 | 14A5 | .75 | 1N90 | 1.45 | 6F6G | .75 | 6V6GT | .75 |
| 1Z2 | .75 | 6Y6G | .75 | 14A7 | .75 | 1N91 | 1.45 | 6F6GT | .75 | 6W4GT | .75 |
| 2A3 | 2.50 | 6Y7G | .75 | 14B6 | .75 | 1N92 | 1.45 | 6F7 | .75 | 6W6GT | .75 |
| 2A5 | .75 | 6Z4 | .65 | 14B8 | .75 | 1N93 | 1.45 | 6F8G | .75 | 6X4 | .75 |
| 2A6 | .75 | 6Z4GT | .75 | 14C5 | .75 | 1N94 | 1.45 | 6G6G | .75 | 6X5 | .75 |
| 2A7 | .75 | 7A4 | .75 | 14C7 | .75 | 1N95 | 1.45 | 6G8G | .75 | 6X5GT | .75 |
| 2A7GT | .75 | 7A5 | .75 | 14E6 | .75 | 1N96 | 1.45 | 6H4GT | .75 | 6Y6G | .75 |
| 2A8 | .75 | 7A6 | .75 | 14E7 | .75 | 1N97 | 1.45 | 6H6 | .75 | 6Y7G | .75 |
| 2A8GT | .75 | 7A7 | .75 | 14F7 | .75 | 1N98 | 1.45 | 6H6GT | .75 | 6Z4 | .65 |
| 2A8P | .75 | 7A8 | .75 | 14F8 | .75 | 1N99 | 1.45 | 6J4 | .75 | 6Z4GT | .75 |
| 2A8S | .75 | 7A8GT | .75 | 14H7 | .75 | 1N100 | 1.45 | 6J5 | .75 | 7A4 | .75 |
| 2A8T | .75 | 7A8P | .75 | 14J7 | .75 | 1N101 | 1.45 | 6J5GT | .75 | 7A5 | .75 |
| 2A8U | .75 | 7A8S | .75 | 14N7 | .75 | 1N102 | 1.45 | 6J6 | .75 | 7A6 | .75 |
| 2A8V | .75 | 7A8T | .75 | 14Q7 | .75 | 1N103 | 1.45 | 6J6A | 1.25 | 7A7 | .75 |
| 2A8W | .75 | 7A8U | .75 | 14R7 | .75 | 1N104 | 1.45 | 6J7 | .65 | 7A8 | .75 |
| 2A8X | .75 | 7A8V | .75 | 14S7 | .75 | 1N105 | 1.45 | 6J7GT | .75 | 7A8GT | .75 |
| 2A8Y | .75 | 7A8W | .75 | 14W7 | .75 | 1N106 | 1.45 | 6K6GT | .75 | 7A8P | .75 |
| 2A8Z | .75 | 7A8X | .75 | 14X7 | .75 | 1N107 | 1.45 | 6K7 | .65 | 7A8S | .75 |
| 2A8AA | .75 | 7A8Y | .75 | 14Y7 | .75 | 1N108 | 1.45 | 6K7GT | .75 | 7A8T | .75 |
| 2A8AB | .75 | 7A8Z | .75 | 17A8 | .75 | 1N109 | 1.45 | 6K8 | .85 | 7A8U | .75 |
| 2A8AC | .75 | 7A8AA | .75 | 17AV4 | .75 | 1N110 | 1.45 | 6K8G | .75 | 7A8V | .75 |
| 2A8AD | .75 | 7A8AB | .75 | 17B4 | .75 | 1N111 | 1.45 | 6K8GT | .75 | 7A8W | .75 |
| 2A8AE | .75 | 7A8AC | .75 | 17BE3 | .75 | 1N112 | 1.45 | 6L6G | .85 | 7A8X | .75 |
| 2A8AF | .75 | 7A8AD | .75 | 17C8 | .75 | 1N113 | 1.45 | 6L6GA | 1.45 | 7A8Y | .75 |
| 2A8AG | .75 | 7A8AE | .75 | 17D4 | .75 | 1N114 | 1.45 | 6L6GT | .85 | 7A8Z | .75 |
| 2A8AH | .75 | 7A8AF | .75 | 17E5 | .75 | 1N115 | 1.45 | 6L7 | .85 | 7A8AA | .75 |
| 2A8AI | .75 | 7A8AG | .75 | 17F8 | .75 | 1N116 | 1.45 | 6L7G | .85 | 7A8AB | .75 |
| 2A8AJ | .75 | 7A8AH | .75 | 17G8 | .75 | 1N117 | 1.45 | 6L7GT | .85 | 7A8AC | .75 |
| 2A8AK | .75 | 7A8AI | .75 | 17H8 | .75 | 1N118 | 1.45 | 6N7 | .75 | 7A8AD | .75 |
| 2A8AL | .75 | 7A8AJ | .75 | 17J8 | .75 | 1N119 | 1.45 | 6N7GT | .75 | 7A8AE | .75 |
| 2A8AM | .75 | 7A8AK | .75 | 17L8 | .75 | 1N120 | 1.45 | 6P5GT | .62 | 7A8AF | .75 |
| 2A8AN | .75 | 7A8AL | .75 | 17Q4 | .75 | 1N121 | 1.45 | 6P9 | .72 | 7A8AG | .75 |
| 2A8AO | .75 | 7A8AM | .75 | 17Z3 | .75 | 1N122 | 1.45 | 6Q7 | .75 | 7A8AH | .75 |
| 2A8AP | .75 | 7A8AN | .75 | 19A6 | .75 | 1N123 | 1.45 | 6Q7GT | .75 | 7A8AI | .75 |
| 2A8AQ | .75 | 7A8AO | .75 | 19AU4 | .75 | 1N124 | 1.45 | 6R7 | .75 | 7A8AJ | .75 |
| 2A8AR | .75 | 7A8AP | .75 | 19B8 | .75 | 1N125 | 1.45 | 6R7G | .75 | 7A8AK | .75 |
| 2A8AS | .75 | 7A8AQ | .75 | 19BG6G | 1.81 | 2C42 | 20.00 | RX233A | 1.95 | 935 | 7.45 |
| 2A8AT | .75 | 7A8AR | .75 | 19T8 | 1.05 | 2C50 | 15.50 | 5Y3GT | .45 | 955 | .49 |
| 2A8AU | .75 | 7A8AS | .75 | 20A | .85 | 2C51 | 7.50 | 6AL5 | .49 | 956 | .49 |
| 2A8AV | .75 | 7A8AT | .75 | 20A5 | .85 | 2C53 | 6.75 | 6AL7GT | .85 | 957 | .59 |
| 2A8AW | .75 | 7A8AU | .75 | 20A6 | .85 | 2C54 | 1.75 | 6AQ5 | .59 | 958 | .49 |
| 2A8AX | .75 | 7A8AV | .75 | 20A7 | .85 | 2C55 | 1.75 | 6AQ5A | .59 | 959 | .49 |
| 2A8AY | .75 | 7A8AW | .75 | 20A8 | .85 | 2C56 | 1.75 | 6AQ5GT | .59 | 9001 | .49 |
| 2A8AZ | .75 | 7A8AX | .75 | 20A9 | .85 | 2C57 | 1.75 | 6AT6 | .49 | 9002 | .49 |
| 2A8BA | .75 | 7A8AY | .75 | 20A10 | .85 | 2C58 | 1.75 | 6AU6 | .59 | 9003 | .49 |
| 2A8BB | .75 | 7A8AZ | .75 | 20A11 | .85 | 2C59 | 1.75 | 6AV6 | .49 | 9004 | .49 |
| 2A8BC | .75 | 7A8BA | .75 | 20A12 | .85 | 2C60 | 1.75 | 6AX4 | .59 | 9005 | .49 |
| 2A8BD | .75 | 7A8BB | .75 | 20A13 | .85 | 2C61 | 1.75 | 6B4G | .75 | 9006 | .49 |
| 2A8BE | .75 | 7A8BC | .75 | 20A14 | .85 | 2C62 | 1.75 | 6B6G | 1.20 | | |
| 2A8BF | .75 | 7A8BD | .75 | 20A15 | .85 | 2C63 | 1.75 | 6B8 | .90 | | |
| 2A8BG | .75 | 7A8BE | .75 | 20A16 | .85 | 2C64 | 1.75 | 6B8G | .75 | | |
| 2A8BH | .75 | 7A8BF | .75 | 20A17 | .85 | 2C65 | 1.75 | 6B8GT | .75 | | |
| 2A8BI | .75 | 7A8BG | .75 | 20A18 | .85 | 2C66 | 1.75 | 6BA6 | .59 | | |
| 2A8BJ | .75 | 7A8BH | .75 | 20A19 | .85 | 2C67 | 1.75 | 6BA7 | 1.25 | | |
| 2A8BK | .75 | 7A8BI | .75 | 20A20 | .85 | 2C68 | 1.75 | 6BC5 | .59 | | |
| 2A8BL | .75 | 7A8BJ | .75 | 20A21 | .85 | 2C69 | 1.75 | 6BC7 | .75 | | |
| 2A8BM | .75 | 7A8BK | .75 | 20A22 | .85 | 2C70 | 1.75 | 6BD6 | .59 | | |
| 2A8BN | .75 | 7A8BL | .75 | 20A23 | .85 | 2C71 | 1.75 | 6BE6 | .59 | | |
| 2A8BO | .75 | 7A8BM | .75 | 20A24 | .85 | 2C72 | 1.75 | 6BF6 | .59 | | |
| 2A8BP | .75 | 7A8BN | .75 | 20A25 | .85 | 2C73 | 1.75 | 6BG6G | 1.50 | | |
| 2A8BQ | .75 | 7A8BO | .75 | 20A26 | .85 | 2C74 | 1.75 | 6BH6 | .90 | | |
| 2A8BR | .75 | 7A8BP | .75 | 20A27 | .85 | 2C75 | 1.75 | 6BJ6 | .85 | | |
| 2A8BS | .75 | 7A8BQ | .75 | 20A28 | .85 | 2C76 | 1.75 | 6BL7GT | 1.25 | | |
| 2A8BT | .75 | 7A8BR | .75 | 20A29 | .85 | 2C77 | 1.75 | 6BQ6GT | 1.25 | | |
| 2A8BU | .75 | 7A8BS | .75 | 20A30 | .85 | 2C78 | 1.75 | 6BQ7 | .75 | | |
| 2A8BV | .75 | 7A8BT | .75 | 20A31 | .85 | 2C79 | 1.75 | 6BQ7A | .75 | | |
| 2A8BW | .75 | 7A8BU | .75 | 20A32 | .85 | 2C80 | 1.75 | 6BQ7GT | .75 | | |
| 2A8BX | .75 | 7A8BV | .75 | 20A33 | .85 | 2C81 | 1.75 | 6BR7 | .75 | | |
| 2A8BY | .75 | 7A8BW | .75 | 20A34 | .85 | 2C82 | 1.75 | 6BS7 | .75 | | |
| 2A8BZ | .75 | 7A8BX | .75 | 20A35 | .85 | 2C83 | 1.75 | 6BT7A | .75 | | |
| 2A8CA | .75 | 7A8BY | .75 | 20A36 | .85 | 2C84 | 1.75 | 6BU7 | .75 | | |
| 2A8CB | .75 | 7A8BZ | .75 | 20A37 | .85 | 2C85 | 1.75 | 6BW6 | .75 | | |
| 2A8CC | .75 | 7A8CA | .75 | 20A38 | .85 | 2C86 | 1.75 | 6BW7 | .75 | | |
| 2A8CD | .75 | 7A8CB | .75 | 20A39 | .85 | 2C87 | 1.75 | 6BX6 | .75 | | |
| 2A8CE | .75 | 7A8CC | .75 | 20A40 | .85 | 2C88 | 1.75 | 6BY7 | .75 | | |
| 2A8CF | .75 | 7A8CD | .75 | 20A41 | .85 | 2C89 | 1.75 | 6C4 | .75 | | |
| 2A8CG | .75 | 7A8CE | .75 | 20A42 | .85 | 2C90 | 1.75 | 6C5 | .65 | | |
| 2A8CH | .75 | 7A8CF | .75 | 20A43 | .85 | 2C91 | 1.75 | 6C5GT | .75 | | |
| 2A8CI | .75 | 7A8CG | .75 | 20A44 | .85 | 2C92 | 1.75 | 6C6 | .75 | | |
| 2A8CJ | .75 | 7A8CH | .75 | 20A45 | .85 | 2C93 | 1.75 | 6C8G | .75 | | |
| 2A8CK | .75 | 7A8CI | .75 | 20A46 | .85 | 2C94 | 1.75 | 6CB6 | .75 | | |
| 2A8CL | .75 | 7A8CJ | .75 | 20A47 | .85 | 2C95 | 1.75 | 6CD6G | 1.95 | | |
| 2A8CM | .75 | 7A8CK | .75 | 20A48 | .85 | 2C96 | 1.75 | 6CG7 | .75 | | |
| 2A8CN | .75 | 7A8CL | .75 | 20A49 | .85 | 2C97 | 1.75 | 6CG8 | .75 | | |
| 2A8CO | .75 | 7A8CM | .75 | 20A50 | .85 | 2C98 | 1.75 | 6CL6 | .75 | | |
| 2A8CP | .75 | 7A8CN | .75 | 20A51 | .85 | 2C99 | 1.75 | 6CM7 | .75 | | |
| 2A8CQ | .75 | 7A8CO | .75 | 20A52 | .85 | 2C100 | 1.75 | 6CS6 | .75 | | |
| 2A8CR | .75 | 7A8CP | .75 | 20A53 | .85 | 2C101 | 1.75 | 6D6 | .75 | | |
| 2A8CS | .75 | 7A8CQ | .75 | 20A54 | .85 | 2C102 | 1.75 | 6D8G | .75 | | |
| 2A8CT | .75 | 7A8CR | .75 | 20A55 | .85 | 2C103 | 1.75 | 6E5 | .75 | | |
| 2A8CU | .75 | 7A8CS | .75 | 20A56 | .85 | 2C104 | 1.75 | 6E5GT | .75 | | |
| 2A8CV | .75 | 7A8CT | .75 | 20A57 | .85 | 2C105 | 1.75 | 6E6 | .75 | | |
| 2A8CW | .75 | 7A8CU | .75 | 20A58 | .85 | 2C106 | 1.75 | 6F4 | .75 | | |
| 2A8CX | .75 | 7A8CV | .75 | 20A59 | .85 | 2C107 | 1.75 | 6F5 | .75 | | |
| 2A8CY | .75 | 7A8CW | .75 | 20A60 | .85 | 2C108 | 1.75 | 6F5GT | .75 | | |
| 2A8CZ | .75 | 7A8CX | .75 | 20A61 | .85 | 2C109 | 1.75 | 6F6 | .75 | | |
| 2A8DA | .75 | 7A8CY | .75 | 20A62 | .85 | 2C110 | 1.75 | 6F6G | .75 | | |
| 2A8DB | .75 | 7A8CZ | .75 | 20A63 | .85 | 2C111 | 1.75 | 6F6GT | .75 | | |
| 2A8DC | .75 | 7A8DA | .75 | 20A64 | .85 | 2C112 | 1.75 | 6F7 | .75 | | |
| 2A8DD | .75 | 7A8DB | .75 | 20A65 | .85 | 2C113 | 1.75 | 6F8G | .75 | | |
| 2A8DE | .75 | 7A8DC | .75 | 20A66 | .85 | 2C114 | 1.75 | 6G6G | .75 | | |
| 2A8DF | .75 | 7A8DD | .75 | 20A67 | .85 | 2C115 | 1.75 | 6G8G | .75 | | |
| 2A8DG | .75 | 7A8DE | .75 | 20A68 | .85 | 2C116 | 1.75 | 6H4GT | .75 | | |
| 2A8DH | .75 | 7A8DF | .75 | 20A69 | .85 | 2C117 | 1.75 | 6H6 | .75 | | |
| 2A8DI | .75 | 7A8DG | .75 | 20A70 | .85 | 2C118 | 1.75 | 6H6GT | .75 | | |
| 2A8DJ | .75 | 7A8DH | .75 | 20A71 | .85 | 2C119 | 1.75 | 6J4 | .75 | | |
| 2A8DK | .75 | 7A8DI | .75 | 20A72 | .85 | 2C120 | 1.75 | 6J5 | .75 | | |
| 2A8DL | .75 | 7A8DJ | .75 | 20A73 | .85 | 2C121 | 1.75 | 6J5GT | .75 | | |
| 2A8DM | .75 | 7A8DK | .75 | 20A74 | .85 | 2C122 | 1.75 | 6J6 | .75 | | |
| 2A8DN | .75 | 7A8DL | .75 | 20A75 | .85 | 2C123 | 1.75 | 6J6A | 1.25 | | |
| 2A8DO | .75 | 7A8DM | .75 | 20A76 | .85 | 2C124 | 1.75 | 6J7 | .65 | | |
| 2A8DP | .75 | 7A8DN | .75 | 20A77 | .85 | 2C125 | 1.75 | 6J7GT | .75 | | |
| 2A8DQ | .75 | 7A8DO | .75 | 20A78 | .85 | 2C126 | 1.75 | 6K6GT | .75 | | |
| 2A8DR | .75 | 7A8DP | .75 | 20A79 | .85 | 2C127 | 1.75 | 6K7 | .65 | | |
| 2A8DS | .75 | 7A8DQ | .75 | 20A80 | .85 | 2C128 | 1.75 | 6K7GT | .75 | | |
| 2A8DT | .75 | 7A8DR | .75 | 20A81 | .85 | 2C129 | 1.75 | 6K8 | .85 | | |
| 2A8DU | .75 | 7A8DS | .75 | 20A82 | .85 | 2C130 | 1.75 | 6K8G | .75 | | |
| 2A8DV | .75 | 7A8DT | .75 | 20A83 | .85 | 2C131 | 1.75 | 6K8GT | .75 | | |
| 2A8DW | .75 | 7A8DU | .75 | 20A84 | .85 | 2C132 | 1.75 | 6L6G | .85 | | |
| 2A8DX | .75 | 7A8DV | .75 | 20A85 | .85 | 2C133 | 1.75 | 6L6GA | 1.45 | | |
| 2A8DY | .75 | 7A8DW | .75 | 20A86 | .85 | 2C134 | 1.75 | 6L6GT | .85 | | |
| 2A8DZ | .75 | 7A8DX | .75 | 20A87 | .85 | 2C135 | 1.75 | 6L7 | .85 | | |
| 2A8EA | .75 | 7A8DY | .75 | 20A88 | .85 | 2C136 | 1.75 | 6L7G | .85 | | |
| 2A8EB | .75 | 7A8DZ | .75 | 20A89 | .85 | 2C137 | 1.75 | 6L7GT | .85 | | |
| 2A8EC | .75 | 7A8EA | .75 | 20A90 | .85 | 2C138 | 1.75 | 6N7 | .75 | | |
| 2A8ED | .75 | 7A8EB | .75 | 20A91 | .85 | 2C139 | 1.75 | 6N7GT | .75 | | |
| 2A8EE | .75 | 7A8EC | .75 | 20A92 | .85 | 2C140 | 1.75 | 6P5GT | .62 | | |
| 2A8EF | .75 | 7A8ED | .75 | 20A93 | .85 | 2C141 | 1.75 | 6P9 | .72 | | |
| 2A8EG | .75 | 7A8EE | .75 | 20A94 | .85 | 2C142 | 1.75 | 6Q7 | .75 | | |
| 2A8EH | .75 | 7A8EF | .75 | 20A95 | .85 | 2C143 | 1.75 | 6Q7GT | .75 | | |
| 2A8EI | .75 | 7A8EG | .75 | 20A96 | .85 | 2C144 | 1.75 | 6R7 | .75 | | |
| 2A8EJ | .75 | 7A8EH | .75 | 20A97 | .85 | 2C145 | 1.75 | 6R7G | .75 | | |
| 2A8EK | .75 | 7A8EI | .75 | 20A98 | .85 | 2C146 | 1.75 | 6R7GT | .75 | | |
| 2A8EL | .75 | 7A8EJ | .75 | 20A99 | .85 | 2C147 | 1.75 | 6S4 | .65 | | |
| 2A8EM | .75 | 7A8EK | .75 | 20A100 | .85 | 2C148 | 1.75 | 6S7 | .75 | | |
| 2A8EN | .75 | 7A8EL | .75 | 20A101 | .85 | 2C149 | 1.75 | 6S8GT | .75 | | |
| 2A8EO | .75 | 7A8EM | .75 | 20A102 | .85 | 2C150 | 1.75 | 6SA7 | .75 | | |
| 2A8EP | .75 | 7A8EN | .75 | 20A103 | .85 | 2C151 | 1.75 | 6SA7GT | .75 | | |
| 2A8EQ | .75 | 7A8EO | .75 | 20A104 | .85 | 2C152 | 1.75 | 6SC7 | .75 | | |
| 2A8ER | .75 | 7A8EP | .75 | 20A105 | .85 | 2C153 | 1.75 | 6SC7GT | .75 | | |
| 2A8ES | .75 | 7A8EQ | .75 | 20A106 | .85 | 2C154 | 1.75 | 6SD7GT | .75 | | |
| 2A8ET | .75 | 7A8ER | .75 | 20A107 | .85 | 2C155 | 1.75 | 6SH7 | .75 | | |
| 2A8EU | .75 | 7A8ES | .75 | 20A108 | .85 | 2C156 | 1.75 | 6SH7GT | .75 | | |
| 2A8EV | .75 | 7A8ET | .75 | 20A109 | .85 | 2C157 | 1.75 | 6SK7 | .75 | | |
| 2A8EW | .75 | 7A8EU | .75 | 20A110 | .85 | 2C158 | 1.75 | 6SK7GT | .75 | | |
| 2A8EX | .75 | 7A8EV | .75 | 20A111 | .85 | 2C159 | 1.75 | 6SL7GT | .75 | | |
| 2A8EY | .75 | 7A8EW | .75 | 20A112 | .85 | 2C160 | 1.75 | 6SN7GT | .75 | | |
| 2A8EZ | .75 | 7A8EX | .75 | 20A113 | .85 | 2C161 | 1.75 | 6SQ7 | .75 | | |
| 2A8FA | .75 | 7A8EY | .75 | 20A114 | .85 | 2C162 | 1.75 | 6SQ7GT | .75 | | |
| 2A8FB | .75 | 7A8EZ | .75 | 20A115 | .85 | 2C163 | 1.75 | 6SR7 | .75 | | |
| 2A8FC | .75 | 7A8FA | .75 | 20A116 | .85 | 2C164 | 1.75 | 6SR7GT | .75 | | |
| 2A8FD | .75 | 7A8FB | .75 | 20A117 | .85 | 2C165 | 1.75 | 6SS7 | .75 | | |
| 2A8FE | .75 | 7A8FC | .75 | 20A118 | .85 | 2C166 | 1.75 | 6SS7GT | .75 | | |
| 2A8FF | .75 | 7A8FD | .75 | 20A119 | .85 | 2C167 | 1.75 | 6SU7GT | .75 | | |
| 2A8FG | .75 | 7A8FE | .75 | 20A120 | .85 | 2C168 | 1.75 | 6SZ7 | .75 | | |
| 2A8FH | .75 | 7A8FF | .75 | 20A121 | .85 | 2C169 | 1.75 | 6T7G | .75 | | |
| 2A8FI | .75 | 7A8FG | .75 | 20A122 | .85 | 2C170 | 1.75 | 6T8 | 1.00 | | |
| 2A8FJ | .75 | 7A8FH | .75 | 20A123 | .85 | 2C171 | 1.75 | 6U5GT | .75 | | |
| 2A8FK | .75 | 7A8FI | .75 | 20A124 | .85 | 2C172 | 1.75 | 6U7G | .75 | | |
| 2A8FL | .75 | 7A8FJ | .75 | 20A125 | .85 | 2C173 | 1.75 | 6V3 | .75 | | |
| 2A8FM | .75 | 7A8FK | .75 | 20A126 | .85 | 2C174 | 1.75 | 6V6 | .75 | | |
| 2A8FN | .75 | 7A8FL | .75 | 20A127 | .85 | 2C175 | 1.75 | 6V6G | .75 | | |
| 2A8FO | .75 | 7A8FM | .75 | 20A128 | .85 | 2C176 | 1.75 | 6V6GT | .75 | | |
| 2A8FP | .75 | 7A8FN | .75 | 20A129 | .85 | 2C177 | 1.75 | 6W4GT | .75 | | |
| 2A8FQ | .75 | 7A8FO | .75 | 20A130 | .85 | 2C178 | 1.75 | 6W6GT | .75 | | |
| 2A8FR | .75 | 7A8FP | .75 | 20A131 | .85 | 2C179 | 1.75 | 6X4 | .75 | | |
| 2A8FS | .75 | 7A8FQ | .75 | 20A132 | .85 | 2C180 | 1.75 | 6X5 | .75 | | |
| 2A8FT | .75 | 7A8FR | .75 | 20A133 | .85 | 2C181 | 1.75 | 6X5GT | .75 | | |
| 2A8FU | .75 | 7A8FS | .75 | 20A134 | .85 | 2C182 | 1.75 | 6Y6G | .75 | | |
| 2A8FV | .75 | 7A8FT | .75 | 20A135 | .85 | 2C183 | 1.75 | 6Y7G | .75 | | |
| 2A8FW | .75 | 7A8FU | .75 | 20A136 | .85 | 2C184 | 1.75 | 6Z4 | .65 | | |
| 2A8FX | .75 | 7A8FV | .75 | 20A137 | .85 | 2C185 | 1.75 | 6Z4GT | .75 | | |
| 2A8FY | .75 | 7A8FW | .75 | 20A138 | .85 | 2C186 | 1.75 | 7A4 | .75 | | |
| 2A8FZ | .75 | 7A8FX | .75 | 20A139 | .85 | 2C187 | 1.75 | 7A5 | .75 | | |
| 2A8GA | .75 | 7A8FY | .75 | 20A140 | .85 | 2C188 | 1.75 | 7A6 | .75 | | |
| 2A8GB | .75 | 7A8FZ | .75 | 20A141 | .85 | 2C189 | 1.75 | 7A7 | .75 | | |
| 2A8GC | .75 | 7A8GA | .75 | 20A142 | .85 | 2C190 | 1.75 | 7A8 | .75 | | |
| 2A8GD | .75 | 7A8GB | .75 | 20A143 | .85 | 2C191 | 1.75 | 7A8GT | .75 | | |
| 2A8GE | .75 | 7A8GC | .75 | 20A144 | .85 | 2C192 | 1.75 | 7A8P | .75 | | |
| 2A8GF | .75 | 7A8GD | .75 | 20A145 | .85 | 2C193 | 1.75 | 7A8S | .75 | | |
| 2A8GG | .75 | 7A8GE | .75 | 20A146 | .85 | 2C194 | 1.75 | 7A8T | .75 | | |
| 2A8GH | .75 | 7A8GF | .75 | 20A147 | .85 | 2C195 | 1.75 | 7A8U | .75 | | |
| 2A8GI | .75 | 7A8GG | .75 | 20A148 | .85 | 2C196 | 1.75 | 7A8V | .75 | | |
| 2A8GJ | .75 | 7A8GH | .75 | 20A149 | .85 | 2C197 | 1.75 | 7A8W | .75 | | |
| 2A8GK | .75 | 7A8GI | .75 | 20A150 | .85 | 2C198 | 1.75 | 7A8X | .75 | | |
| 2A8GL | .75 | 7A8GJ | .75 | 20A151 | .85 | 2C199 | 1.75 | 7A8Y | .75 | | |
| 2A8GM | .75 | 7A8GK | .75 | 20A152 | .85 | 2C200 | 1.75 | 7A8Z | .75 | | |
| 2A8GN | .75 | 7A8GL | .75 | 20A153 | .85 | 2C201 | 1.75 | 7A8AA | .75 | | |
| 2A8GO | .75 | 7A8GM | .75 | 20A154 | .85 | 2C202 | 1.75 | 7A8AB | .75 | | |
| 2A8GP | .75 | 7A8GN | .75 | 20A155 | .85 | 2C203 | 1.75 | 7A8AC | .75 | | |
| 2A8GQ | .75 | 7A8GO | .75 | 20A156 | .85 | 2C204 | 1.75 | 7A8AD | .75 | | |
| 2A8GR | .75 | 7A8GP | .75 | 20A157 | .85 | 2C205 | 1.75 | 7A8AE | .75 | | |
| 2A8GS | .75 | 7A8GQ | .75 | 20A158 | .85 | 2C206 | 1.75 | 7A8AF | .75 | | |
| 2A8GT | .75 | 7A8GR | .75 | 20A159 | .85 | 2C207 | 1.75 | 7A8AG | .75 | | |
| 2A8GU | .75 | 7A8GS | .75 | 20A160 | .85 | 2C208 | 1.75 | 7A8AH | .75 | | |
| 2A8GV | .75 | 7A8GT | .75 | 20A161 | .85 | 2C209 | 1.75 | 7A8AI | .75 | | |
| 2A8GW | .75 | 7A8GU | .75 | 20A162 | .85 | 2C210 | 1.75 | 7A8AJ | .

# TO THE ADVERTISERS

November, 1952

SEARCHLIGHT SECTION
*(Classified Advertising)*
H. E. Hilty, Mgr.


Goodyear Aircraft Corp. ..... 443
Green, Leonard ..... 475

Hatry & Young ..... 467
Hoffman Laboratories, Inc. ..... 444
Houde Supply Co. ..... 465

Instrument Associates ..... 456
International Projecter ..... 449

J. S. H. Sales Co. ..... 469

K & L Radio Parts Co. ..... 478
Kollsman Instrument Corp. ..... 440

Lapirow Bros. ..... 476
Lectronic Research Laboratories ..... 450, 451
Lemar Electronics Co. ..... 473
Liberty Electronics Inc. ..... 454
Life Electronic Sales ..... 463
Line Hardware Co. ..... 477

Maritime Switchboard ..... 476
Maxson, W. L. ..... 439
Melpar, Inc. ..... 445
Mogull Co., Inc., Alexander ..... 466
Monmouth Radio Laboratories ..... 462

National Cash Register Co. ..... 444
Nibur Sales Corp. ..... 468
Norman Radio Distributors Inc. ..... 462

P & J Sales ..... 466
Phillips Petroleum Co. ..... 440
Photocon Sales ..... 476
Porter Radio Sales Co. ..... 474
Precision Electrical Instrument Corp. ..... 462
Premier Continental Corp. ..... 472

Radcom Engineering ..... 471
Radio Corp of America ..... 441
Radio Development & Sales Co. ..... 477
Radio & Electronic Surplus ..... 478
Radio Ham Shack, Inc. ..... 482
Radio Shack Corp. ..... 469
Radio Surplus Corp. ..... 460
Railway Communications, Inc. ..... 472
Raytheon Manufacturing Co. ..... 478
Reeves Instrument Corp. ..... 442
Relay Sales ..... 468
Reliance Merchandizing Co. ..... 452
Rose Electronics Co. ..... 475
Rose Products Co. ..... 464

Sandia Corp. ..... 445
Servo-Tek Products, Inc. ..... 457
Spivey Co., James S. ..... 470
Stavid Engineering Inc. ..... 449
State Labs ..... 474
Stewart-Warner Electric ..... 444

"TAB" ..... 483, 484
Telegraph Condenser Co., Ltd. ..... 442
Telemarine Communications Co. ..... 477
Telerex, Inc. ..... 447
Tracerlab, Inc. ..... 447
Tung-Sol Electric Inc. ..... 448
Turner Co. ..... 442
Universal General Corp. ..... 461

V & H Electronic Industries Inc. ..... 472

Wells Sales Inc. ..... 473
Weston Laboratories ..... 466, 467
Wilcox Electric Co. ..... 448



# ELECTRO—FOR ELECTRONIC SURPLUS

## OIL FILLED CONDENSERS

| MFD. | VOLT. | TYPE | PRICE |
|---|---|---|---|
| .01 | 1000 DC | 24F174 | .49 |
| .01 | 2500 AC | 24F176 | 2.95 |
| .02 | 1000 DC | 23F238 | 1.25 |
| .02 | 1000 DC | 24F174 | .49 |
| .02 | 10 KVDC | 24714 | 9.50 |
| .025 | 15 KVDC | D-4455 | 9.95 |
| .05 | 600 DC | S. T. | .49 |
| .05 | 1000 DC | 23F220 | .49 |
| .05-.05 | 600 DC | S. T. | .49 |
| .05-.05 | 600 DC | 23F707 | .69 |
| .06 | 15 KVDC | 26F585 | 17.50 |
| .1 | 400 DC | 451375 | .49 |
| .1 | 400 DC | M787645A3 | .49 |
| .1 | 600 DC | 23F415 | .49 |
| .1 | 600 DC | 23F574 | .49 |
| .1 | 1000 DC | P7081EH184K | |
| .1 | 2000 DC | K1204813 | .49 |
| .1 | 7500 DC | 26F408 | 3.95 |
| .1 | 10 KVDC | 23F422 | 3.95 |
| .1 | 12 KVDC | 26F48 | 9.95 |
| .1-.1 | 238 AC | 26F407 | .49 |
| .1-.1 | 400 DC | 23F585 | .49 |
| .1-.1 | 400 DC | 23F586 | .49 |
| .1-.1 | 400 DC | 23F295 | .49 |
| .1-.1-.1 | 400 DC | 6C2183 | .79 |
| .1-.1-.1 | 400 DC | CA-259 | .79 |
| .1-.1-.1 | 400 DC | 6111G | .79 |
| .1-.1-.1 | 600 DC | 373425 | .89 |
| .15 | 600 DC | 5215586 | .49 |
| .15 | 6000 DC | 6000S15 | 2.95 |
| .15-.15 | 6000 DC | 26F431 | 5.25 |
| .2 | 1000 DC | Lg. Mfgr. | 1.25 |
| .2 | 2500 DC | 26F201 | 2.25 |
| .2 | 2500 DC | Lg. Mfg. | 2.25 |
| .2 | 3000 DC | 23F316 | .72 |
| .2 | 15 KVDC | 26F433 | 10.50 |
| .2-.2-.2 | 4000 DC | 16345 | 6.95 |
| .25 | 250 AC | 26F422 | .69 |
| .25 | 400 DC | CA-1447 | .79 |
| .25 | 400 DC | DA4025 | .49 |
| .25 | 400 DC | 26F48 | .49 |
| .25 | 600 DC | 23F417 | .69 |
| .25 | 2000 DC | 6281FQ254K | |
| .25 | 1000 DC | 23F255 | .49 |
| .25 | 1000 DC | 26F467 | .49 |
| .25 | 1000 AC | 451375 | 1.45 |
| .25 | 1000 AC | P7D390025 | 1.95 |
| .25 | 3000 DC | 5511P | 3.45 |
| .25 | 3000 DC | 26F437 | 4.95 |
| .25 | 4000 DC | 26F767 | 5.95 |
| .25 | 4000 DC | 26F437 | 7.95 |
| .25-.25 | 400 DC | 23F540 | .79 |
| .25-.25 | 600 DC | 6022G | .79 |
| .25-.25 | 600 DC | 23F72541 | |
| .25-.25 | 600 DC | K7102015P1 | .99 |
| .3 | 2000 DC | 26F532 | 1.45 |
| .3 | 3000 DC | 26F532 | 1.45 |
| .35 | 2000 AC | 23F488 | 2.50 |
| .35-.127 | 600 AC | 23F488 | 1.65 |
| .499 | 330 AC | 26F657 | .95 |
| .375 | 330 AC | 26F337 | .95 |
| .35-.35 | 400 DC | 23F787 | 1.65 |
| .4 | 400 DC | 23F787 | 1.65 |
| .4-.4 | 400 DC | 23F588 | 1.79 |
| .4 | 1400 AC | 26F514 | 1.79 |
| .42 | 400 DC | 23F514 | 1.79 |
| .44-.44 | 600 AC | 23F484 | 1.79 |
| .45 | 600 DC | Lg. Mfg. | 1.65 |
| .45-.45 | 600 AC | 23F565 | 1.95 |
| .45 | 1750 DC | 26F573 | 2.95 |
| .5 | 200 DC | Lg. Mfg. | .49 |
| .5 | 400 DC | 23F582 | .49 |
| .5 | 400 DC | 26F583 | .49 |
| .5 | 400 DC | Lg. Mfg. | .49 |
| .5 | 400 DC | 23F584 | .49 |
| .5 | 400 DC | Lg. Mfg. | .79 |
| .5 | 600 DC | Lg. Mfg. | .79 |
| .5 | 600 DC | 23F585 | .49 |
| .5 | 600 DC | 23F586 | .49 |
| .5 | 600 DC | 23F587 | .49 |
| .5 | 600 DC | 23F588 | .49 |
| .5 | 600 DC |

## WANTED! WANTED!

Needed for Government Defense Projects—all types of military electronic gear with the prefix TS, BC, SCR, APR, APS, etc. Highest prices paid or will exchange for your needs. No offer too small or too large.

**WRITE! WIRE! CALL!**

# R·H·S

**RELIABILITY! HONESTY! SERVICE!**

## TEST EQUIPMENT

**TS-34/AP SYNCROSCOPE AND OSCILLOSCOPE.**

Used to test and service airborne and ground radars. Complete in portable carrying case with all probes, cables and accessories. Input 110v 60-2600 cyc.

**TS-3/AP**—S-Band Power Frequency Meter
**TS-10/AP**—APN-1 Test Set
**TS-12/AP**—X-Band V.S.W.R. Test Set
**TS-13/AP**—X-Band Signal Generator
**TS-14/AP**—S-Band Signal Generator
**TS-15/AP**—Flux Meter
**TS-16/AP**—APN-1 Test Set
**TS-18/AP**—Capacity Divider
**TS-23/APN**—SCR-718 Test Set
**TS-33/AP**—X-Band Frequency Meter
**TS-35/AP**—X-Band Test Set
**TS-36/AP**—X-Band Power Meter
**TS-45/APM-3**—X-Band Signal Generator
**TS-59/APN**—APN-1 Test Set
**TS-61/AP**—S-Band Echo Box
**TS-62/AP**—X-Band Echo Box
**TS-69/AP**—300-1000 MC Frequency Meter
**TS-89/AP**—Pulse Voltage Divider
**TS-90/AP**—Pulse Voltage Divider
**TS-102/AP**—Range Calibrator
**TS-111/AP**—S-Band Wavemeter
**TS-118/AP**—Power Meter
**TS-125/AP**—S-Band Power Meter
**TS-155/UP**—S-Band Signal Generator
**TS-164/AP**—Frequency Meter
**TS-170/ARN-5**—I.L.S. Test Set
**TS-184/AP**—Test Set
**2S-226/AP**—300-1000 MC Power Meter
**TS-268/UP**—Crystal Test Set
**TS-278/AP**—APR-13 Test Set
**IE-19**—SCR-522 Test Set
**IE-36**—SCR-522 Test Set
**BC-221**—Frequency Meter
**BC-1277**—S-Band Signal Generator
**TBN/3EV**—Thermistor Bridge
**CW/60/ABM**—S-Band Frequency Meter

## FLUXMETER

Portable Gauss Meter with range of 500-4000 Gauss. Used to test Magnatron and other magnets. Probe has a gap of 1¼". Complete. Brand New ..... $32.50

## RECEIVING TUBES

| | | | | | |
|---|---|---|---|---|---|
| 0A2 | $0.95 | 6AK5 | $0.88 | 6ST7 | $0.99 |
| 0A4G | 1.05 | 6AK6 | 1.09 | 6SU7GTY | 2.75 |
| 0B2 | 1.09 | 6AL5 | .52 | 6SV7 | .95 |
| 0Z4 | .95 | 6AQ5 | .57 | 6V6 | 1.59 |
| 1A3 | .70 | 6AQ6 | .85 | 6V6GT | .65 |
| 1A7GT | .88 | 6AR5 | 1.25 | 6W4 | .65 |
| 1B3/8016 | .82 | 6AT6 | .65 | 6X4 | .65 |
| 1C5GT | .75 | 6AU5 | 1.19 | 6X5GT | .65 |
| 1D8GT | .65 | 6AU6 | .55 | 6Y6G | .95 |
| 1G6GT | .65 | 6AV6 | .55 | 6Y7G | .75 |
| 1L4 | .67 | 6B4G | 1.25 | 7A6 | .75 |
| 1L4A | .85 | 6B7 | .95 | 7B7 | .75 |
| 1L6 | .98 | 6B8G | .75 | 7C5 | .75 |
| 1LB4 | .98 | 6BA6 | .75 | 7E5 | .75 |
| 1LC5 | .75 | 6BC5 | .75 | 7F7 | .75 |
| 1LC6 | .93 | 6BE6 | .65 | 7F8 | .75 |
| 1LN5 | .75 | 6BF6 | .72 | 7Y4 | .95 |
| 1M5GT | .75 | 6BG6G | 1.49 | 12A6 | .65 |
| 1P5GT | .69 | 6CH6 | .95 | 12A7 | .90 |
| 1R4 | .65 | 6CL6 | .75 | 12AH7GT | 1.19 |
| 1R5 | .65 | 6BQ6 | 1.25 | 12AT6 | .55 |
| 1S4 | .69 | 6C4 | .55 | 12AT7 | 1.10 |
| 1S5 | .65 | 6C5 | .60 | 12AU6 | .75 |
| 1T4 | .65 | 6C6 | .59 | 12AU7 | .85 |
| 1U4 | .67 | 6CB6G | .85 | 12BA6 | .65 |
| 1V | .65 | 6D6 | .72 | 12C8 | .69 |
| 1X2 | .98 | 6D8 | .79 | 12H6 | .69 |
| 2A3 | 1.10 | 6E5 | .79 | 12K8 | .72 |
| 2X2 | .50 | 6F6 | .85 | 12SA7GT | .75 |
| 2X2A | 1.55 | 6F7 | .85 | 12SC7 | .85 |
| 3A4 | .65 | 6H6 | .65 | 12SG7 | .85 |
| 3A5 | .65 | 6H6GT | .65 | 12SJ7GT | .65 |
| 3B7/1291 | .42 | 6J5 | .75 | 12SK7GT | .80 |
| 3D6/1299 | .45 | 6J5GT | .65 | 12SL7GT | .75 |
| 3Q4 | .63 | 6J6 | .98 | 12SN7GT | .85 |
| 3Q5GT | .79 | 6J7 | .95 | 12SQ7GT | .72 |
| 3S4 | .74 | 6J7G | .60 | 12SR7 | .77 |
| 3V4 | .74 | 6K6GT | .65 | 14B6 | .75 |
| 5AT4Y | 1.49 | 6K7 | .75 | 14E7 | .85 |
| 5T4 | 1.32 | 6K8GT | 1.15 | 25L6GT | .68 |
| 5U4G | .69 | 6L6 | 2.25 | 25Z5 | .65 |
| 5V4G | .98 | 6L6G | 1.50 | 25Z6GT | .68 |
| 5Y3 | .79 | 6L6GA | 1.50 | 41 | .65 |
| 5Y3GT | .65 | 6L7 | .85 | 43 | .75 |
| 5Y4G | .67 | 6N7GT | .85 | 45 | .75 |
| 5Z3 | .85 | 6P3 | .79 | 50A5 | .75 |
| 5Z4G | .95 | 6SA7GT | .65 | 50B5 | .75 |
| 6A3 | .95 | 6SC7 | .75 | 50C5 | .67 |
| 6A6 | .82 | 6SF7 | .75 | 50L6GT | .65 |
| 6A7 | .89 | 6SH7 | .75 | 50Y6 | .72 |
| 6A8GT | .95 | 6SH7 | .65 | 51 | .68 |
| 6AB7 | .98 | 6SJ7 | .75 | 75 | .82 |
| 6AC5GT | 1.05 | 6SK7GT | .72 | 80 | .65 |
| 6AC7 | .95 | 6SL7GT | .75 | 81 | .95 |
| 6AG5 | .75 | 6SN7GT | .75 | 83V | .92 |
| 6AG7 | 1.45 | 6SQ7 | .65 | 84/6Z4 | .75 |
| 6AH6 | 1.49 | 6SR7GT | .68 | | |
| 6AJ5 | 1.95 | 6SS7 | .80 | | |

## RADAR

**APA-10**—Panoramic Adaptor
**APA-17**—Automatic Direction Finder 250-1000 MC
**APQ-5**—Low Altitude Tracking & Bombing Equip.
**APR-1**—Radar Search Receiver 40-5400 MC
**APR-2**—Radar Search Receiver 85-1000 MC
**APR-4**—Radar Search Receiver 38-4000 MC
**APR-5**—Radar Search Receiver 1000-2100 MC
**APR-6**—Radar Search Receiver 2000-6000 MC
**APS-2**—S-Band Search Radar
**APS-3**—X-Band Search Radar
**APS-4**—X-Band Search & Homing Radar
**APS-6**—X-Band Search & Gun Laying Radar
**APS-15A**—X-Band Blind Bombing Radar
**APR-4**—Radar Jamming Xmitter 165-780 MC
**APT-5**—Radar Jamming Xmitter 350-1400 MC
**SO-13**—S-Band Marine Radar, Lightweight
**SQ-10** CM Portable Radar
**TPS-1**—Portable Search Radar
**TPS-3**—L-Band Search Radar
**UPN-1 & 2**—S-Band Portable Beacon Battery or 110v AC

## SQ 10 CM PORTABLE RADAR

This set is a very compact search radar. Complete installation available. New in carrying cases. Tech. data as follows: power input: 90-130v cy cyc.; pulse rate: 800 cyc.; range: 3, 15, 45 miles; pulse width: 1 microsec.; 300 yds. min. range, all ranges; I.F.F. synch. output available; accuracy ± 5°; power output 1 KW; beam width: 8° horiz. 15° vert.; presentation: A, B, P.P.I.

## MOBILE POWER PLANT

**(GAS DRIVEN)**

**Output: 220v — 3KW — 60 cyc. One phase. Excellent condition, checked out.**

**RA-34**—Power Supply for BC-375E
**RA-62**—Power Supply for SCR-522
**BC-1016**—Ink Tape Recorder
**PE-103**—Dynamotor Power Supply
**PE-104**—Vibrator Power Supply
**GN-58**—Hand Cranked Generator W/Legs & Seat
**SCR-578**—Gibson Girl (Emergency Xmitter)
**CRT-3**—Victory Girl Dual Freq. Emergency Xmitter Sound Powered Chest & Headsets MI-2454-B; Type O, Mfg. BCA.
**AS-32/APX-1**—Antenna
**ANICRC-7**—V.H.F. Handi-Talkies 112MC Xtal Controlled.
**MN/26-Y**—Compass Receiver
**BC-733D**—Receiver with Tubes
**C-3**—Navy Snooperscope in Carrying Case
**BC-1284**—Lighthouse Tube Preamplifier
**BC-1996**—Intercom Amplifier
**RL-42**—Motor Antenna Reel
**30 MC**—I.F. Strips Using 6AK5
**RD-7/APA-23**—Recorder for APR
**AS-27/ARN-5**—Antenna
**ARA**—Receiver—500-1500 KC
**ID/80-APA-17**—Indicator
**R-28/ARC-5**—Receiver 100-156 MC
**RM-29**—Remote Control
**BC-455**—Receiver—6-9 MC
**BC-453**—Receiver—3-6 MC
**BC-800**—Transmitter/Receiver
**BC-939**—Transmitter—100-156 MC
**RA-300**—FM Exciter (Mfg. Tempeo)
**FL-8**—Filter
**FL-5**—Filter, Less Cables
**3C-16-D GSAP**—Gun Camera Computers with All Accessories in Carrying Case
**AT-2A/APN-2**—Antenna

**SPARE PARTS AND COMPONENTS AVAILABLE FOR MANY EQUIPMENTS**

**ALL EQUIPMENT SOLD IS CAREFULLY RECONDITIONED AND CHECKED OUT TO ORIGINAL SPECIFICATIONS IN OUR OWN SHOPS USING FINEST LAB TYPE TEST EQUIPMENT.**

**THESE COMPLETELY EQUIPPED SHOPS AND OUR EXPERIENCED TECHNICAL STAFF ARE AVAILABLE FOR GOVERNMENT PRIME OR SUBCONTRACT WORK OR PRIVATE COMMERCIAL ORDERS ON ANY TYPE OF COMMUNICATIONS OR RADAR APPARATUS.**

## PANEL METERS

**2" SQUARE WESTON—SANGAMO**

| | | | |
|---|---|---|---|
| 0-20 Volts D.C. | $2.95 | 0-5 Ma | $2.95 |
| 0-40 Volts D.C. | 2.95 | 0-500 Microamp. | 4.95 |
| 0-5 Amp. R.F. | 2.95 | 0-100 Ma (0-300 scale) | 2.95 |

## COMMUNICATIONS

### AN/ARC-1 TRANS/REC.

Provides Radio-Telephone Communication between Aircraft or Aircraft and Ground. Complete with Shock Mount and Control Box. Input: 28V DC. Excellent condition. Available in either 10 or 20 Crystal Controlled Channels 100-156 MCS.

**APA-11**—Pulse Analyzer
**APN-1**—Airborne Radio Altimeter
**ARC-4**—VHF Transceiver 140-150 MC
**ARN-5**—Glide Path Receiver
**ARN-7**—Airborne Directional Finder
**ARR-2**—Homing & Receiving Equipment
**ART-13**—Collins Autotune Transmitter
**BC-223**—30-Watt Transmitter 2-5.2 MC
**BC-342**—Receiver—1.5 to 18 MC 110v AC
**BC-348**—Receiver—1.5 to 18 MC 28v DC
**BC-375E**—Radio Transmitter
**BC-639**—VHF Receiver 100-156 MC
**BC-640**—VHF Transmitter 100-156 MC
**BC-1206**—Beacon Receiver 200-400 KC
**RC-103**—Airborne Localizer Receiver
**SCR-269**—Radio Compass
**SCR-274N**—Command Equipment
**SCR-284**—Field Radio Station
**SCR-291**—Semi-Portable Direction Finder
**SCR-300**—Field Transmitter and Receiver
**SCR-522**—VHF Transmitter and Receiver
**SCR-536**—Handi-Talkie
**SCR-555**—Semi-Portable Direction Finder
**SCR-694**—Portable Field Transceiver
**SCR-625**—Mine Detector
**SCR-718A-AM-C**—High Altitude Altimeter
**T-50**—Radio Telegraph Transmitter
**TCS**—Marine Telephone Transceiver

## XMITTING TUBES

| | | | | | |
|---|---|---|---|---|---|
| OA2/VR75 | $1.84 | 15R | $0.69 | 866A | $1.35 |
| OB2/VR90 | 1.19 | 28D7 | 13.95 | 866JR | 1.29 |
| OC2/VR105 | 1.19 | 30 Spec | .49 | 869B | 65.00 |
| OD2/VR150 | .95 | 35T | 3.25 | 872A | 2.95 |
| 1B22 | 9.75 | 45 Spec | .22 | 874 | 1.15 |
| 1B24 | 9.75 | 100TH | 7.95 | 878 | 1.59 |
| 1B27 | 14.95 | 211 | .65 | 885 | 1.39 |
| 1B29 | 2.45 | 250TH | 19.95 | 892A | 1.95 |
| 1N21B | 3.25 | 250TL | 17.95 | 910 | 1.10 |
| 1N23 | 1.25 | 262B | 2.95 | 922 | .95 |
| 1N23A | 2.39 | 274B | 2.95 | 923 | .95 |
| 1N23B | 3.69 | 304TH | 8.95 | 927 | 1.05 |
| 1N34 | .75 | 304TL | 8.95 | 930 | .95 |
| 1N34A | .97 | 307A/RK75 | 3.95 | 931A | 4.49 |
| 2AP1 | 10.95 | 315A | .65 | 934 | .25 |
| 2C40 | 7.50 | 328A | 8.95 | 955 | .35 |
| 2C43 | 14.95 | 350A | 5.45 | 956 | .35 |
| 2C44 | 3.19 | 350B | 3.95 | 957 | .39 |
| 2C46 | 7.95 | 368AS | 7.50 | 958 | .49 |
| 2C51 | 4.25 | 371A | .95 | 959 | 1.98 |
| 2D21 | 1.35 | 371B | .69 | 991/NE16 | .59 |
| 2F22 | 1.75 | 393A | 7.95 | 1603 | 7.95 |
| 2E24 | 4.65 | 394A | 3.95 | 1613 | .59 |
| 2E26 | 2.15 | 417A | 8.75 | 1614 | .69 |
| 2K25/723AB | | 434A | 27.50 | 1619 | .24 |
| | 28.75 | 446A | 1.15 | 1622 | 2.45 |
| 2K28 | 32.50 | 446B | 3.75 | 1624 | 1.45 |
| 2K33A | 310.00 | 575A | 15.75 | 1625 | .25 |
| 2AP1 | 3.95 | 701A | 5.75 | 1626 | .25 |
| 3B24 | 5.25 | 703A | 5.25 | 1629 | .25 |
| 3B24W | 7.95 | 704A | 5.25 | 1630 | .25 |
| 3B26 | 3.59 | 707B | 13.95 | 1632 | .72 |
| 3BP1 | 4.95 | 714AY | 7.95 | 1634 | .65 |
| 3C22 | 135.00 | 715A | 6.39 | 1651 | 1.58 |
| 3C24/24G | 3.25 | 715B | 12.95 | 1658 | 1.10 |
| 3C45 | 15.95 | 715C | 19.95 | 1670 | 6.95 |
| 3CP1 | 1.95 | 717A | .98 | 8008 | 5.95 |
| 3DP1 | 4.45 | 721A | 2.45 | 8011 | .90 |
| 3DP1A | 4.45 | 721A/B | 9.50 | 8012 | 2.65 |
| 3DP1-S2A | 8.95 | 724B | 3.25 | 8020 | 1.69 |
| 3DZ1A | 3.25 | 725A | 6.75 | 8021 | 1.50 |
| 3F22 | 13.95 | 726A | 18.95 | 8002 | .98 |
| 3FP7 | 1.65 | 730A | 29.50 | 9004 | 3.65 |
| 3GP1 | 4.39 | 800 | 1.75 | 9005 | .95 |
| 4-125A | 27.50 | 802 | 3.95 | 9005 | 3.45 |
| 4-250A | 37.50 | 803 | 1.25 | 9006 | .97 |
| 4AP10 | 4.45 | 804 | 13.75 | C12A | 9.95 |
| 4C35 | 27.50 | 805 | 3.75 | C4A | 7.95 |
| 4E27 | 14.95 | 806 | 24.95 | C6J | 6.39 |
| 5AP1 | 3.45 | 807 | 1.19 | CK1005 | .88 |
| 5BP4 | 2.69 | 808 | 2.69 | F123A | 7.75 |
| 5BP1 | 4.45 | 810 | 9.50 | F127A | 27.50 |
| 5CP1 | 4.45 | 811 | 3.95 | F170A | 89.50 |
| 5CP1 | 4.59 | 812 | 2.75 | FG17 | 4.85 |
| 5DP7 | 11.75 | 813 | 15.75 | FG27A | 4.95 |
| 5DZ1 | 19.95 | 814 | 2.69 | FG32 | 8.95 |
| 5FP7 | 2.45 | 815 | 2.69 | FG57 | 14.95 |
| 5GP1 | 4.85 | 816 | 1.65 | FG81A | 3.45 |
| 5JP1 | 24.45 | 826 | .69 | FG105 | 9.95 |
| 5JP7 | 22.50 | 828 | 9.95 | FG117 | 11.50 |
| 5LP1 | 22.50 | 829 | 10.95 | GL434A | 29.95 |
| 5NP1 | 6.50 | 829B | 12.95 | GL446A | 7.95 |
| 6AN5 | 3.30 | 830B | 2.75 | HF100 | 8.95 |
| 6BG6G | 2.50 | 832 | 12.95 | HF300 | 22.45 |
| 6AS7 | 4.45 | 832A | 8.50 | HY114B | 6.45 |
| 6CJ1 | 21.00 | 836A | 1.49 | ML110 | .69 |
| 6J4 | 6.75 | 837 | 1.45 | ML181 | 47.50 |
| 7BP7 | 6.95 | 838 | 2.25 | REL23 | 1.35 |
| 7DP4 | 14.95 | 845W | 2.25 | RK60/1641 | 2.45 |
| 9LP7 | 4.95 | 849C | 27.50 | RK65 | 26.50 |
| 10BPP4 | 17.45 | 851 | 24.50 | RK72 | 2.45 |
| 10Y | .39 | 860 | 3.95 | VT127A | 2.45 |
| 12DP7 | 14.75 | 861 | 22.50 | WL636 | 34.50 |
| 15E | 3.35 | 865 | .98 | | |

**PHONE: DIGBY 9-0347** **WRITE FOR CATALOG** **CABLE: HAMSHACK, N. Y.**

**WRITE FOR QUANTITY PRICES**

**Prices subject to change without notice F.O.B., N Y C minimum order $10.00 20% deposit required. All merchandise guaranteed.**

# RADIO HAM SHACK Inc.

## 191 GREENWICH STREET . NEW YORK, N. Y.

## TRANSFORMERS

All 115 V 60 Cyc Input TV & CR Pwr Xfmr up to 20" Tubes. HI VOLTS to 20 KV (w/quadrupler ckt.) ALL Tubes, Fils., PIX wndgs & 300 VDC/275Ma. Full-Wave. 6.4V/10.5A, 6.4V/3A, 2.5V/5A Hypersil Core, Oil Impreg. $6.49; 1 wt. lbs. $12.49

2500V for CRT, 6.3V/3A, 2.5V/1.75A CSD Kenyon Hvins. 6/HC414A ..... $7.50

1230V & 375VCT/110MA, 5V/3A, 2.5V/2.25A, 6.3V/2.75A HSLD HVINS ..... $6.98

1800VCT 200MA, 185V/55A, 6.3V/5A, 5V/6A, 5V/3A. Two for ..... $12.98

1800VCT/45MA, 2500VCT/80MA ..... 360VCT/55MA, 2X5V/3A, 6.3VCT/1A, 6.3VCT/2A CSD HVINS CAN BE USED 2X RATING FOR THEON HIPERSIL CORE ..... $4.98

550VCT/100MA, 6.3V/3A, 5V/3A, 6.5V/1A, 10V/1.5A WESTERN ELECT ..... $6.98

900V/150MA, 2X2.5V/3A, 6.3V/3A, 5V/3A ACCLENT 700V DBLR TWO 2X2 FIL. WNDGS ..... $3.49

900V/3MA, 6.3V/3A, 2.5V/2A ..... $2.98

640VCT/110MA, 2 @ 580VCT/21MA, 2X5V/3A, 6.3VCT/1A, 6.3VCT/3A ..... $4.98

770VCT/85MA, 5V/2A, 6.3V/2.5A ..... $4.98

770V/2.5MA, 2.5V/2A HVINS HMSLD includes FILTER PARTS ..... $3.69

760VCT/120MA, 6.3VCT/2A, 6.3VCT/2A, 6V/3A, 10V/1.5A ..... $6.98

750VCT/200MA, 6.3V/3A, 6V/4A ..... $5.98

720V/85MA, 5V/2A, 6.3V/3A ..... $2.98

700VCT/120MA, 2X6.3V/3A, 6.3V/1A Price ..... $3.98; Two for ..... $7.25

700VCT/85MA, 6.3V/3A, 5V/2A, 6.3V/2A ..... $3.25

650VCT/150MA, 5V/3A, 6.3V/2.1A ..... $2.98

590V/150MA, 5V/3A, 12V/4A HSLD ..... $4.49

580VCT/100MA, 6.3V/3A HSLD ..... $3.98

540VCT/80MA, 6.3VCT/4A, 5V/3A ..... $2.49

480VCT/150MA, 115V/50-60 INPUTS @ 24, 11A/DC & 115 230VAC @ ..... $3.98

475VCT/100MA, 5V/3A, 6.3V/3A ..... $3.98

230V/80MA, 6.3V/2A, 6.3V/1A, 5V/0.5A ..... $3.49

**JEFFERSON HSLD** ..... $1.89

## FILTER CHOKES

Dual 30 Hy/60ma Cod ..... $ .98
15Hy/40ma AC/DC sects. 3 for ..... .98
12Hy/85ma/1KVins. ..... 2.25
10Hy/70ma ..... 1.25
10Hy/250ma/UTC/CoG/H'Mtd/1KVins. ..... 3.49
80Hy/125ma/Cod/H'Std. ..... 2.89
12Hy/300ma/8KVins. ..... 4.95
20Hy/300ma or 15Hy/400ma/ ..... 8.95
15.5Hy 1A/17KVins/Raytheon ..... 45.00
5Hy 500ma Mobile/Jefferson ..... 3.98
6 HY 225ma Thordason ..... 3.98
Dual 2Hy/300ma USN ..... $1.25; 2 for ..... 1.98
8Hy/400ma 12KVins. ..... 3.49

## FILAMENT TRANS.

2.5V/2A @ 7Sc, 2 for $2.49, 10 for ..... $ .98
2.5VCT/10A 5KVINS ..... 3.59
2.5VCT/10A/12KV INSUL CSD HSLD ..... 3.95
5VCT/10A, 4KV INSUL CSD HSLD ..... 5.95
5VCT/10A/12KV INSUL CSD ..... 5.98
5V/60AMP CSD KENYON HVINS ..... 12.98
5V/110A CSD KENYON HVINS ..... 16.50
6.3VCT/.6A 1KV INS CSD HVINS ..... 1.98
6.3VCT/.7A NAVY HSLD HVINS ..... 1.98
6.3VCT/2A HVINS CSD ..... 1.98
6.3VCT/4A USN USABLE 6.8A CSD ..... 2.49
6.3VCT/5A, 6V/8A, 2VCT/1A ..... 3.25
7.5VCT/12A CSD KENYON 15 KVINS ..... 10.98
12.6VCT/1.25A CSD HMSLD ..... 1.98
24V/1.25A CSD @ $1.98 Two for ..... 3.45
2X12V/2A or 24V/1A @ $2.89 Two for ..... 5.00
2X12V/2A PRI 110V or 220V ..... 3.98
24V/6A CSD @ $4.98 Two for ..... 9.45
24.5V/3A SEL. SEC. HVINS ..... 3.98
(INPT 110 & 220 V., OUTPT 12.6 VCT/2A) ..... 3.98
5.1A, 16.6V/1.75A ..... 6.98
6.1V, 6A 2X2.5V/1.75A HSLD ..... 3.49
2X2.5VCT/6A, 2.5VCT/12A/12KVINS HSLDG RECT UTC CSD ..... 8.49
2X6.1V/.3A, 5V/3A, 5V/6A, 7V/14A GE CSD ..... $3.98; Two for ..... $11.49

## PLATE TRANSFORMER

2X310VCT/251MA or 600VCT CSD ..... 5.98
1100VCT/212MA; PRI 115 CASED ..... 6.98
2000V/150MA CSD WW 115/230 ..... 9.98
5500VCT/650MA USN WSTGHS CSD ..... 69.95
1500DV 5A VDBLR WE. SIG 31H5629/ 7200V/35MA ..... 19.95

## 400 CYCLE XFMRS

G-E M7472405P1 3140, 3030, 2920, 2810/115 5A ..... $4.98
WE K59505 1233vct/350Ma, 1140vct/70Ma ..... 4.98
G-E M7472443P1 788V/200Ma, 210V/15Ma, 5V/2A ..... 4.95
G-E M7472469 6.3V/7A, 6.7V/9A, 6.3V/3A ..... 3.98
WE K59604 6.3V/4.65A, 6.3V/3A ..... 3.49
WE K59603 6.3V/3A, 5V/2A ..... 2.98
WE D165412 6.3V/4A ..... 3.49
LANGEVIN 702556 6.3V/6A ..... 1.49
FREED 11686 5V/10A ..... 4.98
WE K59602 5V/4A ..... 2.98
FREED 11685 5 Swct/10A CSD ..... 2.98
LANGEVIN 702720 5V/6A, 12 KVINS ..... 4.98
WED164533 6.3V/1.25A, 6.3V/1.25A ..... 1.98

## RHEOSTATS

2 ohm 50W Model J ..... $2.59
6 ohm 25W Model L.H ..... 1.98
15 ohm 25W w/knob ..... 1.98
15 ohm 75W Model Q ..... 2.98
20 ohm 50W Model J ..... 2.25
40 ohm 50W w/knob ..... 1.98
100 ohm 50W Model K ..... 2.25
200 ohm 25W Model P ..... 1.98
250 ohm 25W ..... ea. 1.39; 4 for 5.00
300 ohm 100W Model F ..... 3.49
350, 500, 5000 ohm Slotted shaft, 25 watt ..... 79c; 3 for 2.00
1000 ohm 25W Model J ..... 2.19
7500 ohm 50W Model J ..... 2.59
Write For Special Price on (5) or More

## ALIGNMENT TOOLS

Ideal NO-LOSS Alignment Screwdriver TYL15K. Long Insulated Shaft. Knurled Knob. Only ..... 49c
RELAY Spring Adjuster & Switch-Bd Tool. Slot takes up to .022". WEC No. 293. ..... 98c
Foster Gauge for Relay, Telephone & Teletype contact. 8 Detachable sizes ..... 98c

## MODEL HF-1 OSCILLOSCOPE

Laboratory Features. 5 M C Sensitivity, 10 kW Sens. P-P Horiz. & Vert. Amp. Cathode Coupled Multi Vib. Swp. Int Retrace Cathode Fllwr Input Vert & Horiz Amp. Non-Freq Discrim. Gain Contl. Cal Compensated Attenuators. Sync Pos or Neg. Intrnl. Int-built Cathode Fllwr for Sig Tracing with Phones. Tech. Manual. 13 Tubes. Line vp. 2—6C4, 4—6AG5, 2—6AG7, 2—6X5, 1—6J6, 1—3BP1 C/Ray Tube. All Data Diagrams.

**A "TAB" SPECIAL only $99.50**

# "TAB"

## THAT'S A Buy

### UHF ANTENNA

UHF ANTENNA 32"/30CM ATS/ARR1 Usable Ciizn & Ham Band Ins. Cosx Term Silv Pl Cost Cloth & Hdwre Mobile Mtg. ..38c; 6 for $2.00
PL259 for above ..... .45
TV CONICAL ANTENNA All Channel Sturdy Prefab Const. Inclds 8 elements & 100 ft Copper Twinex Cross Bar & Hdware. Brand New ..... $6.28
MICROWAVE ANT AS125/APR. 1000 to 2400Mc w/UG94U Term Inclsit HiFreq Phz Flange Mtg Incl H'ware. ..... $9.98

### SECTIONAL ANTENNAS

MS45-52, 12½ ft. ..... $1.49
MS45-53, 10 ft. ..... 1.29
GASES: MP22 ..3.98; MP48 ..3.98; MP47 ..3.75

### Test Equipment Buys

EE65 Telephone Test Set Good Cond. ..... $24.98
I-198 Sig Gen Good Cond. Less Tube Range 7-165MC ..... 14.95
BC906 Freq. Mtr. Less Tubes ..... 29.95
BC221 Sig Gen. Exc. Cond. ..... 179.50
I-222A Sig Gen. 115V/60cy ..... 129.50
I-222A Sig Gen As Is ..... 79.95
General Electric Television Test Equip. Nothing Finer to Open Your Service Clinic with. 3 Units Like New, Marker Generator 87-5A. Sweep Generator 87-4A. 5" Oscilloscope 87-2A. One Complete Set. First Order Takes This Unit ..... $895.00
GE Sig. Generator, 9 to 11 Cm, Direct Reading Pulse/CW ..... Write

### PULSE TRANSFORMERS

7.5 KV Pulse, Pri 4KV, 50-1000 ohm Imped. Permalloy Core, W'Eng. ..... $14.98
Pulse Blocking Osc. 2 wndgs, Video Interstg, L1 ratio, 32 uh wndgs, H'Std, HiVins, GE. $1.98
Pulse Blocking Osc. 2 wndgs, 11:1 ratio, 1 uh wndgs GE M'Std. HiVins ..... $2.98
Pulse Blocking Osc. Video Interstage, 3 windes, 11:1 ratio, 4.3 uh windgs, GE, H'Std, HiVins, Micro Second rise time. ..... $2.98
PULSE SHAPING Xfmr Raytheon UX2B15, 1 SU Sec 2000 CY. ..... $6.95
UTAH 5340 P/O CP-SA/APR16 ..... $9.00
Write for Details on Pulse Units

### MICROWAVE

Klystron Mtr Assy (723 AB) & Coupling to Type "N" Co-Ax & Fittings ..... $9.98; Two for $18.00
1 Microsecond Delay Line ..... $2.98
Microwave Lighthouse Assy—P/O ET-3W Assy & 15 one end Cavities, Type N Coupling. Uses 2C43, 2C40, 1B27. Tunes 24-2700 MC. Less Tubes $22.00; 2 for $40.
Icm Y-Sect. Waveguide & Atten. Output. Thermal Comp. & Perm. Meas Thermistors Xtal Diode Detector Mtg. & Clips ..... $18.98; 2 for $35.00
Less Xtal Mtg. & Thermistor ..... $12.98
3MC X-Band Wave Meter 9285-9465MC $29.95

### SELSYNS

2J1/H1 GE Selsyns ..... 2 for $6.98
2J1F1 GE Brand New 115V/400 cy ea. ..... 3.75
CT814B Synx. Trans. 115/60 cy $19.98; 2 for 75.00
CT824F Sync. Diff. 115V/60 cy $12.98 ..... 2 for 25.00
Sync Trans. 26-90400-2 Type 1-J ..... 2 for 90.00
Type Resolver 115/60 cy Type 11-4 ..... 9.98
New $52.00 ..... 2 for 99.00
Bendix Assembly AY1 & AY5 ..... 2 for 4.98
Bendix AY20 New Orig Crtns. ..... 12.98

### DYNAMOTORS

INPT 6VDC. Output 200V/100ma, or 12/24V Output 400V/80ma. Perm Magnt. As Illustrated ..... 6.95
Inpt 28VDC/1.4A out 250V/60ma ..... 3.69
DM412A/24V out 225V/100ma, 440V/200ma ..... $1.98
DM52A 28V/1.45A out 220V/80ma ..... 4.25
DA3A 28V/10.5A out 300VDC/260ma ..... 6.75
150VDC/70ma, 14.5vdc/5A ..... 6.75
PE94 Plate Supp. Unit DA3A (SCR522) ..... 6.98
PE97 Plate Supp., Less Tubes ..... 9.98
INPT 12VDC/7.2A Outpt 500VDC/150MA Carter Mag Motor ..... 29.95

### OIL CAPACITORS

| Mfd. | Each | Mfd. | Each | Mfd. | Each |
|---|---|---|---|---|---|
| 50 wvdc | | 1000wvdc | | 12500wvdc | |
| 4 | .49 | 1 | .29 | 2 | 95.00 |
| 150 wvdc | | 2 | 1.09 | 3 | 15000wvdc |
| 1-1-2-5 | .98 | 2 | 1.69 | .0015 | 9.98 |
| 250 wvdc | | 6 | 2.98 | .0025 | 25000wvdc |
| 2x.25 | .35 | 15 | 4.98 | .00025 | 7.49 |
| .1 | .39 | 2400wvdc | | 1 | 25.00 |
| 1.2 | .59 | .25 | 1.29 | AC RATED | |
| 400wvdc | | .5 | 1.39 | 220vac/ | |
| .1 | .45 | 1500wvdc | | 600dc | |
| .5 | .59 | .5 | 1.49 | 2 | .69 |
| 1 | .69 | 1 | 1.69 | 4 | .98 |
| 4 | 1.69 | 1 | 1.79 | 5 | 1.29 |
| 6 | 2.29 | 5 | 3.49 | 225vac/ | |
| 8 | 2.49 | 6 | 3.98 | 630dc | |
| 10 | 2.89 | 2000wvdc | | 3.3 | .79 |
| 2x.1 | .75 | 1 | 1.49 | 230vac/ | |
| 2x.5 | .94 | 2x.1 | 1.75 | 630dc | |
| 2x.25 | .99 | 1 | 1.89 | 5 | 1.29 |
| 3x.25 | .99 | 2 | 2.98 | 330vac/ | |
| 600wvdc | | 3 | 3.49 | 1000dc | |
| .034 | 3.69 | 4 | 3.98 | 1.25 | .79 |
| .1 | .52 | 2500wvdc | | 1.5 | .89 |
| .25 | .61 | .25 | 2.29 | 1.75 | .98 |
| .5 | .65 | 3000wvdc | | 2 | 1.09 |
| .75 | .75 | 1 | 2.49 | 2.5 | 1.25 |
| .92 | .5 | 2.98 | 2.8 | 1.15 |
| 1.00 | 1 | 4.49 | 3 | 1.29 |
| 1.98 | 2 | 6.98 | 4 | 1.49 |
| 2.69 | 4 | 7.98 | 6 | 1.49 |
| 3.98 | 4000wvdc | | 15 | 3.98 |
| 3.29 | 2 | 8.98 | 25 | 6.49 |
| .79 | 5000wvdc | | 405vac | |
| .85 | 2 | 4.49 | 1200dc | |
| .98 | 4 | 10.98 | 15 | 1.29 |
| 1.49 | 4 | 19.98 | 600vac | |
| 1.39 | 7000wvdc | | 1000dc | |
| .052 | 1 | 3.69 | 16 | 6.98 |
| .0075 | 1.98 | | 660vac | |
| .58 | 2 | 5.98 | 2000dc | |
| 1.05 | 7500wvdc | | 5 | 4.49 |
| .03 | 2.98 | | 6 | 4.98 |
| .05 | 3.49 | | 10 | 6.98 |
| 10000wvdc | | | 16 | 7.98 |
| .03 | 3.49 | | | |

2MFD/330VAC/1000VDC CD' Rd ..... $1.98
Any 5 for $3; 12 for $5.50; 100 for $20.
9MFD/220VAC/600VDC Each $1.00 12 for $10.
QUANTITY USERS,
WRITE FOR SPECIAL PRICES

### PRECISION RESISTORS



Over 2½ Million in Stock

"TAB"—Specialists in Precision Resistors
No Mfrs Choice—We Ship Types in Stock

| | | | | | |
|---|---|---|---|---|---|
| 0.116 | 271 | 1225 | 3333 | 16500 | 110000 |
| 0.42 | 275 | 1250 | 3384 | 16500 | 115000 |
| 0.625 | 290 | 1260 | 3500 | 17000 | 116667 |
| 0.667 | 294 | 1300 | 3600 | 17500 | 120000 |
| 0.7 | 295 | 1350 | 3600 | 17977 | 130000 |
| 0.83 | 297 | 1360 | 3750 | 18000 | 140000 |
| 1.3 | 300 | 1400 | 3750 | 18300 | 140000 |
| 2.83 | 310 | 1440 | 3900 | 18500 | 141000 |
| 3 | 315.5 | 1450 | 4000 | 18500 | 145000 |
| 3 | 320 | 1500 | 4000 | 18800 | 147000 |
| 5 | 330 | 1500 | 4000 | 19000 | 150000 |
| 5 | 350 | 1640 | 4250 | 20441 | 165000 |
| 5.625 | 350 | 1650 | 4250 | 20500 | 165000 |
| 6.25 | 366.6 | 1650 | 4314 | 21000 | 170000 |
| 6.5 | 370 | 1670 | 4440 | 21500 | 175200 |
| 7 | 371 | 1680 | 4442 | 21500 | 175000 |
| 7.8 | 380 | 1710 | 4500 | 21500 | 180000 |
| 7.9 | 390 | 1720 | 4500 | 21500 | 180000 |
| 8 | 390 | 1740 | 4720 | 23000 | 185000 |
| 10.38 | 400 | 1750 | 4800 | 23125 | 190000 |
| 11.25 | 410 | 1800 | 4840 | 23125 | 190000 |
| 12 | 414.3 | 1818 | 4885 | 23400 | 190000 |
| 13.92 | 420 | 1820 | 4885 | 23500 | 190000 |
| 14.2 | 425 | 1850 | 4900 | 24000 | 201000 |
| 14.28 | 430 | 1875 | 5000 | 24000 | 201000 |
| 16.5 | 437 | 1892 | 5250 | 24000 | 201000 |
| 16 | 440 | 1898 | 5270 | 24500 | 210000 |
| 16 | 440 | 1898 | 5270 | 24500 | 210000 |
| 17 | 450 | 1898 | 5270 | 24500 | 210000 |
| 17 | 450 | 1900 | 5400 | 25000 | 210000 |
| 18 | 450 | 1900 | 5500 | 25000 | 210000 |
| 19.2 | 460 | 1900 | 5500 | 25000 | 210000 |
| 20 | 464 | 1900 | 5500 | 25000 | 210000 |
| 22 | 475 | 1900 | 5770 | 27500 | 220000 |
| 23 | 475 | 1900 | 5800 | 27500 | 220000 |
| 24 | 480 | 1902 | 5900 | 28000 | 225000 |
| 24 | 480 | 1902 | 5900 | 28000 | 225000 |
| 24 | 480 | 1960 | 6125 | 29000 | 230000 |
| 28 | 510 | 1960 | 6125 | 29000 | 230000 |
| 28 | 510 | 1960 | 6250 | 29000 | 230000 |
| 31.5 | 525 | 1967 | 6300 | 29000 | 230000 |
| 33 | 550 | 1967 | 6300 | 29000 | 230000 |
| 48 | 550 | 1967 | 6300 | 29000 | 230000 |
| 48 | 560 | 1967 | 6300 | 29000 | 230000 |
| 48 | 575 | 1967 | 6300 | 29000 | 230000 |
| 48 | 575 | 1975 | 6400 | 29000 | 230000 |
| 51.78 | 580 | 1980 | 6400 | 29000 | 230000 |
| 60 | 600 | 1980 | 6500 | 29000 | 230000 |
| 66.7 | 600 | 1916 | 7130 | 36000 | 230000 |
| 70 | 600 | 1916 | 7130 | 36000 | 230000 |
| 75 | 633 | 1918 | 7500 | 36000 | 230000 |
| 75 | 640 | 1919 | 7500 | 36000 | 230000 |
| 75 | 640 | 1919 | 7500 | 36000 | 230000 |
| 80 | 640 | 1919 | 7500 | 36000 | 230000 |
| 81.4 | 645 | 1934 | 8000 | 41400 | 230000 |
| 82 | 645 | 1934 | 8000 | 41400 | 230000 |
| 82 | 645 | 1934 | 8000 | 41400 | 230000 |
| 82 | 645 | 1934 | 8000 | 41400 | 230000 |
| 100 | 665 | 1980 | 8000 | 42000 | 230000 |
| 100 | 665 | 1980 | 8000 | 42000 | 230000 |
| 100 | 665 | 1980 | 8000 | 42000 | 230000 |
| 102.5 | 675 | 2000 | 8000 | 42000 | 230000 |
| 105 | 675 | 2095 | 9000 | 48000 | 230000 |
| 105.7 | 675 | 2142 | 9000 | 48000 | 230000 |
| 107 | 681 | 2142 | 9445 | 48000 | 230000 |
| 110 | 682 | 2142 | 9445 | 48000 | 230000 |
| 120 | 689 | 2160 | 9710 | 52000 | 230000 |
| 121.2 | 690 | 2160 | 9710 | 52000 | 230000 |
| 122 | 699 | 2160 | 9710 | 52000 | 230000 |
| 130 | 700 | 2197 | 9902 | 57665 | 230000 |
| 140 | 711 | 2198 | 10000 | 57665 | 230000 |
| 147.5 | 733 | 2200 | 10410 | 60000 | 230000 |
| 150 | 750 | 2200 | 10500 | 60000 | 230000 |
| 160 | 750 | 2200 | 10600 | 62000 | 230000 |
| 160 | 750 | 2200 | 10600 | 62000 | 230000 |
| 170 | 750 | 2200 | 10600 | 62000 | 230000 |
| 175 | 800 | 2200 | 10716 | 62000 | 230000 |
| 178 | 829 | 2463 | 11000 | 67000 | 230000 |
| 178 | 829 | 2463 | 11000 | 67000 | 230000 |
| 178 | 829 | 2463 | 11000 | 67000 | 230000 |
| 180 | 854 | 2500 | 11000 | 67000 | 230000 |
| 180 | 854 | 2500 | 11000 | 67000 | 230000 |
| 182.4 | 900 | 2525 | 12000 | 70000 | 230000 |
| 200 | 900 | 2525 | 12000 | 70000 | 230000 |
| 209.7 | 917 | 2625 | 12000 | 70000 | 230000 |
| 210 | 946 | 2625 | 12000 | 70000 | 230000 |
| 214 | 950 | 2625 | 12000 | 70000 | 230000 |
| 220 | 1000 | 2750 | 13500 | 82000 | 750000 |
| 220.4 | 1000 | 2750 | 13500 | 82000 | 750000 |
| 225 | 1056 | 2840 | 13500 | 82000 | 800000 |
| 225 | 1056 | 2840 | 13500 | 82000 | 800000 |
| 225 | 1056 | 2870 | 13500 | 82000 | 800000 |
| 235 | 1067 | 2900 | 14250 | 82000 | 800000 |
| 240 | 1100 | 3000 | 14500 | 91000 | 900000 |
| 245 | 1110 | 3100 | 14600 | 91000 | 900000 |
| 245.4 | 1150 | 3163 | 14950 | 91000 | 900000 |
| 250 | 1150 | 3163 | 15000 | 91000 | 900000 |
| 260 | 1162 | 3250 | 15000 | 91000 | 900000 |
| 260 | 1200 | 3300 | 15000 | 100000 | 900000 |

Any Size Above, Each 15c; Ten for $2.29

MEGOHMS

| | | | | | |
|---|---|---|---|---|---|
| 1. | 1.579 | 2.7 | 4 | 6.7 | 10 |
| 1.1 | 1.65 | 2.76 | 4.23 | 7 | 11.65 |
| 1.2 | 1.75 | 2.85 | 4.35 | 7.5 | 12 |
| 1.25 | 1.8 | 2.855 | 4.6 | 7.62 | 12.83 |
| 1.5 | 2.3 | 3 | 5 | 7.74 | 13 |
| 1.54 | 2.35 | 3.3 | 5.1 | 8 | 13.85 |
| 1.57 | 2.5 | 3.5 | 5.5 | 8.02 | 30 |
| 1.4 | 2.2 | 3.673 | 6 | 8.5 | 61 |
| 1.5 | 2.25 | 3.9 | 6.6 | 9.05 | |
| 1.57 | 2.5 | 3.9 | 6.6 | 9.05 | |

Any Size Above, Each 70c; Ten for $6.49

### POTENTIOMETERS—Type J

1-watt Size w/shaft 5.95
200 ohm Type J ¼" Slotted shaft, 93c; 12 for $10.00
1000 ohm Type J ¼" Slotted shaft, 93c; 12 for $10.00
3500 ohm Type J ¼" Slotted shaft, 93c; 12 for $10.00
7K ohm Type J ¼" Slotted shaft, 93c; 12 for $10.00
25K ohm Type J ¼" Slotted shaft, 93c; 12 for $10.00
50K ohm Type J ¼" Slotted shaft, 93c; 12 for $10.00
100K ohm Type J ¼" Slotted shaft, 93c; 12 for $10.00
1 meg Type J ¼" Slotted shaft, 93c; 12 for $10.00
1 meg Type JJJ (Triple) ¼" shaft ..... 3.69

### HIGH CURRENT MICA CNDRS

CYLINDRICAL SIMILAR TYPE "G"

| MFD | KV | AMPS | MC | EACH |
|---|---|---|---|---|
| .01 | 10 | 20 | 5 | 45.50 |
| .0025 | 20 | 20 | 5 | 45.00 |
| .0025 | 15 | 20 | 5 | 28.95 |
| .001 | 30 | 20 | 5 | 110.00 |
| .0012 | 20 | 16 | 5 | 24.95 |
| .002 | 20 | 22 | 5 | 48.00 |
| .002 | 30 | 20 | 5 | 32.50 |
| .004 | 12 | 20 | 5 | 34.00 |

### METER SPECIALS

0-10 VDC "AN Type 1.98; ..10 for 17.50
0-1Ma 3" Round ..... 7.50
0-25Ma, Weston 3" sq. ..... 6.98
0-100Ma 2½" Rnd. ..... 4.98
0-50 Micro Ammeter 3" sq. Weston, 16.98
0-20 .3 VU, Weston Vol. Level Indic 16.98
0-150 V A.C. 3" sq. Weston Rect. Type 6.98
57-62 Cycles Freq. Mtr. 3" RND ..... 4.98
0-120MA RF 3½" Rnd Weston ..... 14.98
0-800Volt DC Weston 3" Sq. ..... 12.98

### NEW THRIFT-LITE LIFETIME PHOTO-FLASH

Not a kit. Incl. Pwr pak. Life gtd 5,000 flshs. Rflctr & 15' cord flash every 7 sec. True daylight color. Usable all cameras oper 115VAC w/lite Gun Type AC60. Dlvd U.S.A. ..... $38.00
Complete Outfit for AC & Battery opr. Incl. AC40 & BP25 portopak & all accsrs for KODAK & COMPUR shutters. Dlvd U.S.A. ..... $56.00
AD15 Intensifier. Doubles Light Output of Basic Units. Dlvd U. S. A. ..... $15.95
AC-45F 115V/60cy Flash Unit. Features Selective Time Delay. Up to 20 Millisecond. Complete w/Lifetime Flash-Bulb. Dlvd U. S. A. ..... $49.00

### TAB "SUN-FLASH" LAMPS

| | "Tab" No. | Replaces | W-Sec. Max. | Each |
|---|---|---|---|---|
| | U16 | GE FT114 | 100 | $7.25 |
| | No. 1 | AMGLO 5804X | 100 | 10.98 |
| | 25BT | GE FT 210 | 200 | 9.98 |
| | 50BT | GE FT 403 | 500 | 11.98 |
| 3 | VA | SYLV. 4230 | 200 | 9.98 |
| | 25MT | FT 214 | 250 | 9.98 |
| | 25BT | FT 210 | 200 | 9.98 |
| | 25SGTG | FT 502 | 5000 | 49.98 |
| | 5X54 | FT 4500 | 200 | 10.98 |
| | DX | SPRGFA100 | 150 | 9.00 |
| | U5W | GE-FT105 | 100 | 5.98 |

Write for Complete "THRIFTLITE" Data Roostersocks. Rst lites. Units for Focal plane shutters & accessories. We Buy Sell & Swap.

### PHOTO FLASH PWR SUPP KIT

1000VDC/33MA Using Doubler Crkt. Transformer, Rectifr. Socket, Condensers, Resistors Diagram. W/Flash Tube V4X4/X400. Rated 200-300 Watt-Sec 115V/60cy oper. ..... $29.98

### PHOTOFLASH CAPACITORS

2x.36MFD Total .72MFD Per Unit. 20 Units 21.6MFD 1800VDC/38.8 W Sec ..... $4.98
20 Units 21.6MFD/1000VDC 64.8 W Sec ..... 6.98
Save on Replacements. Write for Details
15MFD/330VAC/1500VDC Intermittent. ..... $1.98
25MFD/330VAC/1500VDC Intermittent. ..... 6.49
15MFD/600VAC/2000VDC Intermittent. ..... 6.98
16MFD/660VAC/3000VDC Intermittent. ..... 7.98
32MFD/1.2KVDC/21W. Sec ..... 7.49
27MFD/660VAC/1KV Cmd. 54W. Sec. ..... 8.98
4.5MFD/660VAC/3KVDC Int. 29W. Sec. ..... 4.35
2.7MFD/660VAC/1.5KVDC Int. 29W. Sec. ..... 6.98
2X.44MFD. Total .88 MFD. Per Unit. 25 Units Each 22MFD/600VAC/3KVDC Intermittent, 33W Sec. ..... 7.49

### TUBE CLAMPS

926B-5 926B-16 926B, 929-1 930-19
926B-19, 926A-10 ..... 5 for $1.00

### "TABS" TUBE SPECIALS

BROKEN KEYS—ELECTRICALLY PERFECT

1B3GT, 6H6, 6K6GT, 8N7GT
12SN7GT ..... Each 58c; 6 for $2.00
6U5G6, 6BQ6GT, 12SG7, 19BG6, 6L6G ..... Each 79c; 3 for $2.00
6L6GA ..... Each 79c; 3 for $2.00

### VARIABLE CONDENSERS

150mmf/300VDCap HF ..... $1.39
BUD Dual 75mf ea. Sect 1000V Gap HF ..... $1.39
JOHNSON 70E10 70 mmf/1000V Gap ..... 1.49
Cardwell Neut 2T/13 mmf 500 Volt Gap ..... 98c
Vernier Drive 10 to 365mmf ..... 98c
Midget 2 to 15 mmf, Midline, each ..... 39c
2 Sec Meter Butterfly Condr 30mmf w/FF Cer & Choke ..... 59c; 2 for 99c

### LINE FILTERS

10 Amp/130vacdc Cad UHF ..... $1.39
0.1 to 1000 Me's ..... $1.39
20 Amp/250vacdc Cad ..... 3.98
0.1 to 1000 Me's ..... 2 for $6.00
50 Amp/600vac/250vac. Fits both side of line. SOLAR "Elim-O-Stat." New ..... $9.98
100 Amp/usable 110 vacdc ..... 2 for $1.98

Brand NEW Made to Rigid Gov't Specs.

### MICA CAPACITORS



Fig. B. .001 mf. 10c; .006 mf. 23c; .01 mf/6 Sc.
Fig. C. Solder Lug Terminals & Mtg Holes

| Mfd. | 600 WV Each | Mfd. | 600 WV Each | Mfd. | 1200 WV Each |
|---|---|---|---|---|---|
| .0001 | $0.29 | .03 | .79 | .03 | 1.19 |
| .0002 | .45 | .05 | 1.29 | 1200 WV | |
| .0003 | .45 | .002 | .66 | .002 | .66 |
| .0004 | .51 | .004 | .66 | .004 | .66 |
| .0005 | .59 | .006 | .66 | .005 | .66 |
| .0006 | .59 | .01 | .78 | .006 | .78 |
| .0008 | .66 | 2500 WV | | .01 | .66 |
| .001 | .66 | .00047 | .59 | .02 | .66 |

Fig. D. Screw Term & Mtg.

| Mfd. | 600 WV Each | Mfd. | 1200 WV Each | Mfd. | 2500 WV Each |
|---|---|---|---|---|---|
| .0001 | $0.29 | .01 | .89 | .0004 | .59 |
| .00035 | .42 | .02 | 1.09 | .002 | 1.09 |
| .00065 | .42 | .03 | 1.19 | .01 | 1.09 |
| .001 | .44 | .04 | 1.29 | .02 | 1.19 |
| .002 | .49 | .0004 | .59 | .0024 | 1.13 |
| .003 | .49 | .002 | 1.09 | .033 | 1.29 |
| .004 | .51 | .004 | 1.09 | .0033 | 1.19 |
| .005 | .59 | .02 | 1.19 | .04 | 1.29 |
| .006 | .59 | .0024 | 1.13 | .0043 | 1.29 |
| .01 | .66 | .033 | 1.29 | .05 | 1.49 |
| 1200 WV | | .04 | 1.29 | .0045 | 1.35 |
| .001 | .61 | .0043 | 1.29 | .006 | 1.45 |
| .002 | .66 | .05 | 1.49 | .0051 | 1.45 |
| .003 | .66 | .0045 | 1.35 | .008 | 1.65 |
| .004 | .66 | .006 | 1.45 | .015 | 2.19 |
| .005 | .66 | 3000 WV | | .005 | 1.65 |

Fig. E. Upright Xmtg Micas

| Mfd. | 250 VDC Each | Mfd. | 1500 VDC Each | Mfd. | 2000 VDC Each |
|---|---|---|---|---|---|
| .05 | $0.47 | .04 | .89 | .05 | 1.98 |
| .1 | .52 | .05 | 1.09 | 2000 VDC | |
| 500 VDC | | 2000 VDC | | .003 | 1.08 |
| .001 | .49 | .003 | 1.08 | .005 | 1.19 |
| .002 | .49 | .005 | 1.19 | .006 | 1.19 |
| .003 | .49 | .006 | 1.19 | .01 | 1.39 |
| .004 | .49 | .01 | 1.39 | .015 | 1.69 |
| .005 | .49 | .015 | 1.69 | .02 | 1.98 |
| .006 | .49 | .02 | 1.98 | .03 | 2.59 |
| .01 | .66 | .03 | 2.59 | 2500 VDC | |
| .02 | .66 | 2500 VDC | | .002 | 1.08 |
| .03 | .66 | .002 | 1.08 | .003 | 1.19 |
| 1000 VDC | | .003 | 1.19 | .004 | 1.19 |
| .0005 | .78 | .004 | 1.19 | .005 | 1.29 |
| .001 | .78 | .005 | 1.29 | .006 | 1.39 |
| .002 | .78 | .006 | 1.39 | .01 | 1.79 |
| .003 | .78 | .01 | 1.79 | 3000 VDC | |
| .004 | .78 | 3000 VDC | | .0005 | 1.08 |
| .005 | .78 | .0005 | 1.08 | .001 | 1.19 |
| .006 | .78 | .001 | 1.19 | .002 | 1.29 |
| .01 | .78 | .002 | 1.29 | .003 | 1.49 |
| .02 | .78 | .003 | 1.49 | .004 | 1.49 |
| .03 | .78 | .004 | 1.49 | .005 | 1.49 |
| 1500 VDC | | .005 | 1.49 | .006 | 1.49 |
| .0005 | .78 | .006 | 1.49 | .01 | 1.98 |
| .001 | .78 | .01 | 1.98 | .02 | 2.98 |
| .002 | .78 | .02 | 2.98 | .03 | 3.98 |
| .003 | .78 | .03 | 3.98 | 4000 VDC | |
| .004 | .78 | 4000 VDC | | .001 | 1.49 |
| .005 | .78 | .001 | 1.49 | .002 | 1.49 |
| .006 | .78 | .002 | 1.49 | .003 | 1.49 |
| .01 | .78 | .003 | 1.49 | .004 | 1.49 |
| .02 | .78 | .004 | 1.49 | .005 | 1.49 |
| .03 | .78 | .005 | 1.49 | .006 | 1.49 |
| 2000 VDC | | .006 | 1.49 | .01 | 1.98 |
| .0005 | .78 | .01 | 1.98 | .02 | 2.98 |
| .001 | .78 | .02 | 2.98 | .03 | 3.98 |
| .002 | .78 | .03 | 3.98 | 5000 VDC | |
| .003 | .78 | 5000 VDC | | .001 | 1.98 |
| .004 | .78 | .001 | 1.98 | .002 | 1.98 |
| .005 | .78 | .002 | 1.98 | .003 | 1.98 |
| .006 | .78 | .003 | 1.98 | .004 | 1.98 |
| .01 | .78 | .004 | 1.98 | .005 | 1.98 |
| .02 | .78 | .005 | 1.98

## SELENIUM RECTIFIERS

We specialize in Rectifiers and Power supplies to your specifications. Immediate delivery.

| Current (cont.) | 18/14 Volts | 26/18 Volts | 54/40 Volts | 130/100 Volts |
|---|---|---|---|---|
| 2AMP | 2.20 | 3.60 | 6.50 | 10.50 |
| 4AMP | 3.75 | 6.75 | 8.50 | |
| 7.5AMP | 4.95 | 7.95 | 18.00 | 27.00 |
| 10AMP | 6.75 | 12.00 | 20.00 | 40.00 |
| 12AMP | 9.50 | 16.00 | 25.50 | 50.00 |
| 20AMP | 13.75 | 24.00 | 36.00 | 90.00 |
| 24AMP | 16.00 | 31.00 | 55.00 | 95.00 |
| 30AMP | 18.50 | 24.30 | 36.00 | |
| 36AMP | 25.50 | | 45.00 | |

Full Wave Selen Rect & Trans. in Kit Form. All 115V/60cy inputs.

| | |
|---|---|
| up to 14VDC at 12 amps | 23.98 |
| up to 28VDC at 12 amps | 35.98 |
| up to 28VDC at 48 amps | 145.50 |
| up to *20VDC at 6 amps | 12.98 |

### RECTIFIER XFMRS

| | |
|---|---|
| 18-0-18,2-20.4-21.4 Volts/12 Amp | $14.98 |
| 31-12-34-36 Volts/12 Amp 2 Wdgs. | 16.98 |
| 18-12-9-CT-9-12-18V/4 Amp | 8.75 |
| 18-12-9-CT-9-12-18V/12 Amp | 16.75 |
| 36VCT-24V-18V/24 Amp | 35.75 |

### BATTERY CHARGER RECTIFIER

10-0-10 Volt Ct. 120 Amp (Fan Cooled) Selenium Rectifier. Replaces old Tantalum Sulphur Oxide Types. "TAB" Special ..... $13.75

WRITE FOR QUALITY PRICES

## SELENIUM POWER SUPPLY

0 to 12VDC/2 Amp. Variable DC supply, uncased and completely built-input 115v/60 cy. Usable LAB supply, filament D.C. plating, battery charging, model railroad, includes voltage or speed control and center off reversing sw. Ideal for two "HO" locomotives ..... $10.98

2 for $20.0 9

## "TAB" THAT'S A BUY

### FUSES & HOLDERS

| | |
|---|---|
| 3AG: 1/8, 1/4, 1/2 Amp. Ea. | 5c |
| 3AG: 1, 1/2, 2, 3, 4, 15, 20 Amp. Ea. | 3c |
| 100 for | 2.49 |
| 3AG: 25 Amp. 10, 20 Amp. | 20 for 1.50 |
| 4AB: BUSS 10 Amp. Fct. | 100 for 5.98 |
| 4AG: 1/4, 1/2 Amp. Fct. | 100 for 5.98 |
| 5AG: 1, 3, 10, 15 Amp. Ea. 5c: | 100 for 3.98 |
| 4AG: Slo-Blo: 3, 10, 15, 20 Amp. Ea. 9c: | 100/7.98 |
| 3AB: BUSS: Littelfuse, 5 Amp. Ea. 4c: | 100/3.00 |
| 5AG: 35, 80 Amp. Ea. 5c: | 100 for 3.98 |
| 7AG: 100 Amp. Littelfuse, Ea. 9c: | 100 for 7.98 |
| 8AG: 1/32, 2/10, 1/2 Amp. Ea. 8c: | 100 for 6.98 |
| HOLDER 1075 Littelfuse 20c: | 10 for 1.75 |

### ONE YEAR GTD TV PICTURE TUBES

| | |
|---|---|
| 10 inch Round | $15.95 |
| 12 inch Round | 17.95 |
| 12 inch Metal | 21.50 |
| 14 inch Rectangular | 20.95 |
| 16 inch Glass | 22.95 |
| 16 inch Metal | 23.50 |
| 17 inch Rectangular | 23.49 |
| 19 inch Round | 27.95 |
| 20 inch Rectangular | 29.95 |
| 21 inch Rectangular | 30.98 |

Your old pict. tube is worth money, write for trade-in-allowance toward RMA coded and dated tubes with one year guarantee. Ship your defective picture tubes prepaid only. When ordering metal tube, defective metal tube is required.

### 866A KIT AND XFORMER

2 Tubes, Sckts, xfmr 115v 60cyc input, 2.5vct, 10A/5vct, Reinsul. ..... $6.98

### DIODE PROBE TUBE

Unexcelled for **No-Loss VHF** testing. Ultra-sensitive subminiature envelope. **New**, w/data VR92 ..... 25c: 8 for $1.

### Audio Amplifiers

**Model 600AA** 10 Watt Hi-Fidelity Ampl. in the Low Price Range. Features Mike & Phono Inputs, w/ Separate Gain Cntrls. Uses Inverse Feedback for Base Boost. W/Tone Cntrl. Chassis is Finished in Hammered Bronze Enamel. Complete W/6 Tubes **$24.98**

**Model 305MP** 5 Watt Ampl. as Pictured Above. Features Mike & Phono Inputs, W/Sep. Gain Cntrls. Latest Compensated Tone Cntrl Design. Complete W/8 Tubes ..... $14.98

### PARTS CABINET

50 Draw Hvy Steel 34½"H/18"W/9"L/65 lbs Drawers 3"W/2¼"H/8"L ..... $38
100 Draws as above ..... $63.
72 Draw Hvy Steel 37"H/30½"W/14¾"L/120 lbs. Draws 3"H/9"W/13"L ..... $39.95

**Write for Quality Price "EXTEND DO"**

### STORAGE BATTERIES

**36 Volt** WILLARD HOME-BRAND NEW; 5 or Designed Portable Equip. Models.. 98c: 4 for $3

| | |
|---|---|
| 4V/20AH Willard BATTERIES W/Acid | 3.35 |
| 2V/20AH Willard PLUS 2V. Vibrator | 2.98 |
| 2V/20AH Batt. W/Acid | 3.49 |
| 2V/40AH Batt. W/Acid | 1.98 |
| 6V/6AH Batt. W/Acid | 2.45 |
| 6V/40AH Willard | 6.98 |
| 6V/40AH Batt. W/Acid | 9.25 |
| Hydrometer 1.06 to 1.24 Sp Grav | 1.98 |
| Spec Grav Ind & Merc. Thermom. Acid is Shipped in Bottles, R'Esp only | .98 |

### CONTACTOR

G. E. CR2B11C22AQ. Heavy Duty Electric Starter. Transmitter or Motor Starter Switch. For Single or 3 Phase Appl. Rated 1 Phase 5 HP/110V 7½ HP/220V. 10 HP/600V. Rated 2 or 3 Phase 7½ HP/110V. 15 HP/220V. 25 HP/600V Control Input. 220V/1PH/60-Cy. Contacts rated 45 Amp. Enclosed. 30 Amp Open. Delivered U.S.A. ... $29.98: 2 for $25.00c

### Infrared Snooperscope

Image-Converter Tube Hi-Sensitivity simplified design 2" dia. Willemite screen—Resolution up to 350 lines/in. Complete data & tube, as ..... $4.98: 2 for $9.45

**SNOOPERSCOPE PWR SUPPLY**

**1800VDC/35MA.** Using Doubler Crkt. Transformer, Rectifiers, Sockets, Resistors, Capacitors and Diagram. **115V/60cy** Oper ..... $6.98

### MERCURY THERMO REGULATOR

**DUAL CK** 105°F & 72°F. Extremely sensitive & accurate for most exacting requirements—Research, Fire Prev., Freeze, Ind. Control, or Max-Min Temp Control. Brand New, Indestd. Boxed w-data & ckt. Excellent Safety Device for Thermal Control of Air Cooled Selenium Rectifiers **SPECIAL Ea. 98c:** ..... 12 for $10.00

### CIRCUIT BREAKER FUSES

**PUSH TO RESET**

**Amps** 5-6-8-10-12-15-20 Ea. 20c
4 for $1.: 25 for $5.: 100 for $18.
Circuit Breaker Fuse W/Mounting Clips 35c: 5 for $1.: 20 for ..... $5.98: 100 for ..... $25.
Fuse is 3AG Size. Operates up to 24 Volts

**Heinmann Mega Blex, Amps:** 0.2, 2, 5, 7, 9, 12, 15, 20, 30, 45, 60, 80, 100 ..... Each $1.: 10 for $15.98

**Se. D & CH Toggle Sw Brkrs, Amps:** 5, 10, 15, 20, 25 **25c** ..... 10 for $8.98

**Klixon Thermal Push Button Brkrs Amps:** 5, 10, 15, 20, 25, 30 **89c** ..... 10 for $7.98

### VARISTOR

WE D-97966. High Quality, Full Frequency Response. Designed for A-C Operation in Transmission Circs. **$2.49:** ..... 5 for $10.
3 wdg. 600 Ohm Ct & 400 tapped 250 & 100 Ohm can be used Mike to Grid, Line to Grid & Line to Line Grid & Rod 6bd ..... **SPECIAL 49c:** Ton for $4.49: 100 for $25

# TUBES

## "TAB" TESTED & GUARANTEED

PRICES SUBJECT TO CHANGE

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| OA2 | .95 | 2E24 | 4.69 | 6A4 | 1.85 | | | | |
| OA3/VR75 | 1.04 | 7E25/HY65 | 5.15 | 6A5G | 2.39 | | | | |
| OA4G | 1.05 | 7E26 | 2.88 | 6A7 | .89 | | | | |
| OB2 | 1.17 | 2E30 | 1.95 | 6A7 | 1.32 | | | | |
| OB3/VR90 | 1.09 | 2E31 | 1.49 | 6A8GT | 1.09 | | | | |
| OC3/VR105 | 1.19 | 2E36 | 2.13 | 6AB1 | .79 | | | | |
| OD3/VR150 | .98 | 2E41 | 2.39 | 6AB5/6N5 | 1.33 | | | | |
| OY4 | 2.39 | 2E42 | 3.49 | 6AB7/1853 | 1.39 | | | | |
| OZ4 | .60 | 2G21 | 2.39 | 6AC5GT | 1.09 | | | | |
| C1A/ELC1A | 9.75 | 2J21 | 8.75 | 6AC6G | 1.49 | | | | |
| 01A | .69 | 2J21A | 8.90 | 6AC7 | .59 | | | | |
| VS-1 | 12.49 | 2J22 | 7.69 | 6AD6G | .98 | | | | |
| 1A3 | 1.18 | 2J30 | 87.25 | 6AD7G | 1.49 | | | | |
| 1A3P | .79 | 2J31 | 27.25 | 6AF6G | 1.33 | | | | |
| 1A5GT | .79 | 2J31A | 27.25 | 6AG5 | .79 | | | | |
| 1A6 | 1.49 | 2J32 | 27.45 | 6AG7 | 1.99 | | | | |
| 1A7GT | 1.09 | 2J33 | 27.45 | 6AH6 | 1.49 | | | | |
| 1AD4 | 2.95 | 2J34 | 27.25 | 6AH6 | 1.49 | | | | |
| 1B3GT | .98 | 2J36 | 120.00 | 6AJ5 | 1.40 | | | | |
| 1C1 | 1.98 | 2J37 | 11.75 | 6AK5 | .79 | | | | |
| 1B21/8016 | .81 | 2J38 | 11.75 | 6AK5W | 2.98 | | | | |
| 1B4P | 1.49 | 2J39 | 42.00 | 6AL3 | 1.85 | | | | |
| 1B5/25S | .99 | 2J42 | 250.00 | 6AL5 | .54 | | | | |
| 1B7GT | .79 | 2J48 | 24.25 | 6AL7GT | .79 | | | | |
| 1B21/471A | 2.85 | 2J49 | 14.00 | 6AN5 | 2.98 | | | | |
| 1B22 | 2.85 | 2J50 | 25.25 | 6AQ5 | .55 | | | | |
| 1B23 | 5.90 | 2J52 | 245.00 | 6AQ5W | 1.09 | | | | |
| 1B24 | 9.45 | 2J55 | 85.00 | 6AQ6 | .81 | | | | |
| 1B26 | 1.98 | 2J56 | 100.00 | 6AQ7GT | 1.29 | | | | |
| 1B27 | 12.75 | 2J61 | 49.95 | 6AR5 | .79 | | | | |
| 1B32/832A | 2.98 | 2J62 | 49.45 | 6AR5 | 2.98 | | | | |
| 1B35 | 10.98 | 2K22 | 49.95 | 6AS5 | .79 | | | | |
| 1B37 | 10.98 | 2K25 | 22.00 | 6AS6 | 2.43 | | | | |
| 1B38 | 29.95 | 2K25 | 22.00 | 6AS6W | .79 | | | | |
| 1B40 | 4.95 | 2K25/723AB | 35.00 | 6AS7G | 4.14 | | | | |
| 1B41 | 49.95 | 2K26 | 64.75 | 6AT6 | .63 | | | | |
| 1B42 | 18.00 | 2K29 | 23.95 | 6AU6GT | 1.49 | | | | |
| 1B43 | 3.98 | 2K33 | 300.00 | 6AU6 | .63 | | | | |
| 1B53 | 49.95 | 2K35 | 398.00 | 6AV6GT | 1.29 | | | | |
| 1B57 | 49.95 | 2K40 | 400.00 | 6AV6 | .59 | | | | |
| 1B58 | 1.79 | 2K41 | 145.00 | 6AW6 | 1.49 | | | | |
| 1B59 | | 2K42 | 135.00 | 6AX4/6U4 | .79 | | | | |
| 1B60 | 69.75 | 2K43 | 450.00 | 6AX5GT | .79 | | | | |
| 1B61 | 50.00 | 2K47 | 460.00 | 6B4G | 1.23 | | | | |
| 1B62/A | 75.00 | 2K48 | 118.00 | 6B5 | .79 | | | | |
| EL1SC | 2.70 | 2V3G | .98 | 6B6G | .89 | | | | |
| 1C1GT | .85 | 2 "YGT | .98 | 6B7 | 1.19 | | | | |
| 1C5 | .79 | X2 | 1.49 | 6B8 | 1.09 | | | | |
| 1C6 | .89 | 2X2A | 1.53 | 6BA6 | .63 | | | | |
| 1D1GP | .98 | 2X4 | .49 | 6BC5 | .63 | | | | |
| 1D7G | .89 | 3A5 | .61 | 6BC5 | .63 | | | | |
| 1D8GT | .89 | 3A5GT | 1.59 | 6BC7 | 1.23 | | | | |
| 1D21/631P1 | 3.89 | 3B4 | 2.69 | 6BD5GT | 1.65 | | | | |
| 1E7G | .79 | 3B7 | .98 | 6BD6 | .83 | | | | |
| 1E7G | .99 | 3B7/1291 | .59 | 6BE6 | .59 | | | | |
| 1F4 | .69 | 3B27 | 2.70 | 6BF5 | .79 | | | | |
| 1F5G | 1.19 | 3B31/RK22 | 2.49 | 6BF6 | 1.09 | | | | |
| 1F6 | .89 | 3B24 | 5.40 | 6BF7 | 2.55 | | | | |
| 1F7GT | .89 | 3B25 | 5.40 | 6BG6G | 2.49 | | | | |
| 1G4GT | .89 | 3B26 | 3.70 | 6BG7 | 1.98 | | | | |
| 1G5GT | .89 | 3B28 | 3.70 | 6BH6 | .63 | | | | |
| 1G6GT | .79 | 3C6/XXB | 1.49 | 6BK7 | 1.09 | | | | |
| 1H4 | .89 | 3C22 | 77.00 | 6BK7GT | 2.15 | | | | |
| 1H5GT | .79 | 3C31 | 1.49 | 6BL7GT | 1.49 | | | | |
| 1H6GT | .79 | 3C31/C1B | 1.49 | 6BN6 | 1.49 | | | | |
| 1J3GT | .79 | 3C33 | 1.49 | 6BQ5 | 1.29 | | | | |
| 1J6GT | .79 | 3C34/HK24 | 6.49 | 6BQ6GT | 1.20 | | | | |
| 1L4 | .69 | 3C45 | 1.49 | 6BR7 | 1.45 | | | | |
| 1L6 | .98 | 3D6/1299 | .69 | 6BY5G | 1.45 | | | | |
| 1LA4 | 1.19 | 3D21A | 4.98 | 6CL6/6C | 16.98 | | | | |
| 1LA6 | | 3D22 | 13.95 | 6CM7 | | | | | |
| 1LB4 | 1.29 | 3D23 | 4.90 | 6CS6GT | .79 | | | | |
| 1LC5 | .79 | 3K7 | 1.49 | 6CB6 | .79 | | | | |
| 1LC6 | 1.39 | 3K22 | 275.00 | 6C7 | 1.25 | | | | |
| 1LD5 | 398.00 | 3K27 | 485.00 | 6CG7G | .89 | | | | |
| 1LD5 | .99 | 3K30 | 300.00 | 6C21 | 29.45 | | | | |
| 1LE3 | .89 | 3LF4 | 1.29 | 6CB6 | .69 | | | | |
| 1LH4 | .89 | 3Q4 | .79 | 6CK6 | 1.49 | | | | |
| 1LN5 | .79 | 3Q5GT | 1.29 | 6D4 | 2.70 | | | | |
| 1N5GT | .79 | 3S4 | .69 | 6D6 | .89 | | | | |
| 1P5GT | .79 | 3V4 | .79 | 6D7G | .89 | | | | |
| 1P21 | 5.68 | 4-125A | 29.95 | 6D8GDG | .89 | | | | |
| 1Q5GT | .89 | 4-250A | 40.95 | 6E5 | 1.24 | | | | |
| 1Q7G | 69.00 | 4-1000A | 100.00 | 6E7 | 2.69 | | | | |
| 1R4/1294 | 1.29 | 4B22 | 16.50 | 6E7 | 2.69 | | | | |
| 1R5 | .79 | 4B27 | 4.98 | 6F4 | 6.35 | | | | |
| 1S4 | 1.19 | 4C35/HK54 | 4.98 | 6F5 | 1.39 | | | | |
| 1S5 | .79 | 4C35 | 99.00 | 6F6 | .99 | | | | |
| 1S23 | .79 | 4C39 | 27.25 | 6F6GT | .79 | | | | |
| 1T4 | .79 | 4C35 | 19.98 | 6F7 | 1.39 | | | | |
| 1T5GT | .79 | 4E27/257 | 14.95 | 6F8G | 43.29 | | | | |
| 1U4/5910 | .73 | 4J22 | 148.50 | 6G6G | 1.49 | | | | |
| 1U5 | .79 | 4J31 | 98.00 | 6H6 | .65 | | | | |
| 1V | .79 | 4J32 | 159.00 | 6J5/5C21 | 6.66 | | | | |
| 1V2 | .79 | 4J42/700 | 27.80 | 6J4 | 6.66 | | | | |
| 1V2G | .79 | 4J47 | 250.00 | 6J5GT | .63 | | | | |
| 1V3 | 6.98 | 4J47CV | 198.00 | 6J6 | .63 | | | | |
| 2A3 | 3.98 | 4J52 | 350.00 | 6J7 | 1.09 | | | | |
| 2A3 | 1.78 | 4T4/2 | 5.95 | 6J8G | 1.29 | | | | |
| 2A3/G | 1.19 | 4X-150A | 46.00 | 6K4 | 5.15 | | | | |
| 2A5 | .69 | 4X-500F | 85.00 | 6K6GT | 1.29 | | | | |
| 2A6 | .69 | 5AX4GT | .54 | 6K8GT | 1.09 | | | | |
| 2A7 | .79 | 5AZ4 | 1.49 | 6L6/6L6G | 1.29 | | | | |
| 2AC15 | 4.98 | 5B/5C10 | 3.95 | 6K7 | .85 | | | | |
| 2AS15 | 4.98 | 5LSBH10 | 16.50 | 6L7 | 1.08 | | | | |
| 2B7 | .89 | 5C21/C6J | 6.95 | 6L5G | .79 | | | | |
| 2B22 | 3.98 | 5C22 | 49.95 | 6L6 | 2.09 | | | | |
| 2C21/1642 | .87 | 5C10/C5B | 12.40 | 6L7 | 1.59 | | | | |
| 2C22/7193 | .33 | 5D21 | 27.45 | 6L6GA | 1.59 | | | | |
| 2C26 | .47 | 5D21/RK65 | 16.50 | 6L6GAY | 1.29 | | | | |
| 2C26A | .47 | 5J29 | 12.40 | 6L7 | 1.19 | | | | |
| 2C31/RK233A | 1.98 | 5R4GY | 1.15 | 6M6G | 1.49 | | | | |
| 2C34/HK34 | .69 | 5R4WGY | 1.75 | 6N6G | 1.79 | | | | |
| 2C39 | 33.98 | 5T4 | 2.45 | 6N7GT | 1.29 | | | | |
| 2C40 | 7.25 | 5U4G | .65 | 6Q7G | .89 | | | | |
| 2C43 | 26.75 | 5V4G | 1.19 | 6Q7 | .89 | | | | |
| 2C43/464A | 3.45 | 5W4 | .89 | 6R8G | .89 | | | | |
| 2C44 | 1.29 | 5X4G | .79 | 6R8 | 1.38 | | | | |
| 2C45 | 1.29 | 5Y3GT | .63 | 6S4 | .89 | | | | |
| 2C51 | 6.48 | 5Y4G | .79 | 6S7G | .89 | | | | |
| 2D21 | 1.29 | 5Z3 | .89 | 6S8GT | .89 | | | | |
| 2D32 | 1.26 | 6Z4 | 1.49 | 6SA7GT | .89 | | | | |
| 2E2 | 1.19 | 6A4 | 6.75 | 6SA7GTY | 1.37 | | | | |
| 2E24 | 1.59 | 6A3 | 1.98 | 6SB7Y | 1.19 | | | | |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 6SC7 | 1.39 | 12AX4GT | 1.20 | 12L7GT | 1.49 | 117N7GT | 1.79 | CK534AX | .89 |
| 6SD7GT | .99 | 12AX7 | .79 | 13 | .99 | 117P7GT | 1.39 | CK536AX | .89 |
| 6SF5 | .89 | 12AY7 | 2.98 | 15 | .69 | 117Z3 | 1.29 | CK537AX | 4.98 |
| 6SF7 | .89 | 12AZ7 | 1.49 | 31/51 | .89 | 117Z4GT | 1.35 | CK538AX | .89 |
| 6SG7 | 1.39 | 12BA6 | .79 | 19AT | .79 | 117Z6GT | 1.15 | CK540AX | .89 |
| 6SH7 | .99 | 12BA7 | .79 | 19BG6G | 1.99 | 117Z7GT | 1.49 | CK5330X | 1.98 |
| 6SJ7 | .89 | 12BD6 | 1.23 | 35C5 | .79 | 123A | 7.90 | CK5431DX | 1.98 |
| 6SK7GT | .89 | 12BE6 | .79 | 35L6GT | 1.29 | 171A/CV1 | 12.49 | CK5432DX | 1.98 |
| 6SL7GT | .89 | 12BF6 | .85 | 35T | 6.95 | 1F27A | 19.98 | CK5433DX | .98 |
| 6SN7GT | .89 | 12BH7 | 1.25 | 35Y6G | 1.49 | 1F27T/27A | 14.98 | CK5434DX | .98 |
| 6SN7WGT | 2.29 | 12BY7 | 1.35 | 35W4 | .65 | CV148 | 4.98 | CK5436DX | 1.98 |
| 6SQ7GT | .79 | 12BZ7 | 1.39 | 35Z3 | .69 | 100T | 4.98 | CK5437DX | 1.98 |
| 6SR7 | .69 | 12C5 | 1.39 | 35Z5 | .79 | FG16G | 45.00 | 550PP | 15.95 |
| 6SS7 | 1.12 | 12F5GT | .79 | 35Z4GT | .69 | FG17Z | 29.00 | CK571AX/ | |
| 6ST7 | 1.13 | 12H6 | .79 | 35Z5GT | .85 | 182B | 1.20 | 6B6 | 4.98 |
| 6SU7GTY | 1.37 | 12J5GT | .69 | REL36,6J4 | .49 | FG190 | 12.80 | CK573AX/ | |
| 6SZ7 | 1.05 | 12J7GT | .89 | 35 | .99 | T200 | 22.98 | 6B29 | 4.45 |
| 6T7G | .89 | 12K7GT | .89 | 37 | .69 | 201A/CX301A | .98 | 575A/975 | 13.75 |
| 6T8 | 1.09 | 12K8 | .89 | 38 | .59 | 203Z | 12.49 | CK5901 | 1.98 |
| 6U5/6G5 | .99 | 12Q7GT | .79 | 39/44 | 1.49 | 203H/VT2 | 1.69 | WL579B | 12.98 |
| 6U6GT | 1.09 | 12SA7 | .99 | 39/44 | .59 | 205B | .50 | CE206 | 3.15 |
| 6U7G | 1.09 | 12SF5 | .89 | 41 | .59 | 211/VT4C | 4.98 | CK5915 | .25 |
| 6V3 | 1.89 | 12SC7 | 1.35 | T40 | 4.25 | CE211 | 8.95 | CK1005 | 17.00 |
| 6V6 | 1.09 | 12SF5 | .79 | T40 | 1.98 | RK211 | 5.95 | CK1006 | 17.00 |
| 6V6GT | .57 | 12SF7GT | .69 | 40 | 1.09 | WE211A | .12 | WL632 | 65.00 |
| 6V8 | 1.09 | 12SG7 | .89 | 40Z | 1.25 | 227C | 4.98 | WL676A | 15.98 |
| 6W4GT | .57 | 12SM7 | 1.10 | 41 | .79 | 227E | 4.98 | WL676 | 15.98 |
| 6W6GT | .89 | 12SJ7GT | .79 | 42 | .69 | 231 | 1.20 | WL686 | 15.00 |
| 6W7G | 1.33 | 12SK7 | .89 | 43 | .79 | 242C | 1.35 | 701A | 1.15 |
| 6X4 | .69 | 12SL7GT | .79 | 45 | .69 | 246A | 4.15 | 702A | 1.25 |
| 6X5GT | .79 | 12SN7GT | .69 | 47/VT52 | .69 | 247A | 4.15 | 703A | 1.25 |
| 6Y6G | 1.27 | 12SQ7GT | .79 | 45Z3 | .69 | 250R | 9.98 | 703A | 4.75 |
| 6Y7G | .89 | 12SR7 | .79 | 45Z3GT | .69 | 250TH | 22.50 | 704A | .98 |
| 6Z7G | .89 | 12X7 | .90 | 46 | .89 | 280TL | 12.75 | 705A | 1.98 |
| 6Z9/EL6 | .89 | 12Z3 | .89 | 47 | .99 | HK254 | 14.45 | 706A/8021 | 1.98 |
| 7A4/XXL | 1.35 | 24A | 1.37 | 262B | 1.98 | 707A | 7.90 | 715A | 1.98 |

**Use Your Priority for SPEEDY DELIVERY—Extend Your DO & Contract Now**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 7A5 | .99 | 14A7/12B7 | .99 | RK48A | 6.65 | B | 3.45 | 707B | 13.50 |
| 7A6 | 1.23 | 14AF7/XXD | 15.00 | RK49 | 2.98 | 776A | 3.45 | 708A/8011 | .79 |
| 7A7 | .99 | 14B6 | .79 | 49 | .83 | T300 | 26.98 | 713A | .99 |
| 7A8 | .89 | 14B8 | .89 | 50 | 1.19 | 300B | 11.50 | NL714 | 5.90 |
| 7AD7 | 1.49 | 14C5 | 1.09 | 304TH | 9.90 | 715AY | 5.90 | 715A | 1.63 |
| 7AF7 | .89 | 14C7 | 1.09 | 50B5 | .79 | 304TL | 8.90 | 715A | 6.00 |
| 7AG7 | 1.39 | 14E6 | 1.09 | 50C5 | .69 | 307A/RK75 | 2.25 | 715B | 6.48 |
| 7AH7 | 1.19 | 14E7 | 1.09 | 50C6G | 1.49 | 310A | 6.25 | 715C | 19.80 |
| 7B4 | .89 | 14F7 | 1.09 | 50CH | .69 | 313CH | 10.95 | 715G | .98 |
| 7B5 | .79 | 14F8 | 1.29 | 50X6 | .89 | 311CT | 10.50 | 715BY | 48.45 |
| 7B6 | .79 | 14H7 | 1.09 | 50Y6GT | .89 | 313 | 10.50 | 715CY | 48.45 |
| 7B7 | .89 | 14J7 | 1.19 | 50Z7G | .98 | 313C | 2.98 | 719A | 28.50 |
| 7B8 | .89 | 14N7 | 1.49 | 52 | .99 | 316A | 1.49 | 721A | 2.45 |
| 7B8/1203A | .89 | 14Q7 | 1.49 | 53 | .99 | 327A | 24.25 | 721A/287 | 24.25 |
| 7C5 | .98 | 14R7 | 1.19 | T55 | 8.95 | 327A | 4.95 | 723A | 11.98 |
| 7C6 | .99 | 14S7 | 1.09 | 56 | 3.49 | 328A | 4.95 | 723A/B | 11.98 |
| 7C7 | .69 | 14W7 | 1.09 | 56 | .85 | 350A | 6.50 | 724A | 5.95 |
| 7C23 | 72.00 | 14X7 | 1.09 | 57 | .85 | 350B | 6.50 | 725A | 5.95 |
| 7C29 | 69.55 | 15E | 1.58 | 58 | .79 | 353A | 4.65 | 725A | 8.90 |
| 7E5/1201 | 1.25 | 15R | .89 | RK59 | 1.45 | HK354 | 24.98 | 726A | 14.25 |
| 7E6 | .89 | FG17 | .89 | RK60 | 1.45 | 354A | 14.15 | 726B | 14.25 |
| 7E7 | .89 | 16 | .98 | RK60/1641 | 1.98 | 368AS | 7.49 | 726C | 52.00 |
| 7F7 | 1.25 | 19 | 10.45 | 171B | .90 | 800 | .95 | 803 | 6.98 |
| 7F8 | 2.19 | 19BG6G | 1.79 | HY69 | 4.98 | 388A | .79 | 801A | .49 |
| 7G2/1232 | 1.20 | 19T8 | 1.69 | HY70 | 4.98 | 389A | 1.49 | 803 | 1.98 |
| 7H7 | .79 | 19V8 | 1.62 | 70L7GT | 1.59 | 393A | 8.50 | 804 | 11.50 |
| 7J7 | 1.09 | T20/1623 | 3.75 | 71A | .75 | 394A | 4.90 | 805 | 3.90 |
| 7K7 | 1.25 | TUP20 | 1.20 | CHP72 | 1.49 | WE437A | 15.50 | 807 | 1.69 |
| 7L7 | 1.19 | TZ20 | 3.75 | CHP73 | 1.49 | WE437/3842 | 18.50 | 808 | 1.59 |
| 7N7 | .89 | 20 | 1.49 | 100A | 1.49 | WL437A | 18.45 | 809 | 2.43 |
| 7Q7 | .79 | RK20A | 8.95 | NR74 | .29 | GL434A | 18.45 | 809 | |

**To: Dollar Paid for Your Surplus Tubes—Send List and Price**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 7R7 | .99 | RX21 | 3.75 | HY75 | 4.59 | 446A | 1.05 | 810 | 9.95 |
| 7S7 | .99 | 22 | 1.49 | 76 | 1.59 | 446B | 1.49 | 811A | 3.98 |
| 7T7 | 1.01 | 24 | .85 | 76 | .79 | 450TH | 45.00 | 811A | 3.79 |
| 7V7 | 1.19 | 24A | 1.10 | 77 | .69 | 450TL | 42.00 | 812 | 2.79 |
| 7W7 | 1.19 | 24G/3C24 | 1.30 | 78 | 1.65 | 460/HF200 | 15.95 | 813 | 12.49 |
| 7X7/XXFM | 1.19 | 25A6 | 1.09 | 79 | .89 | WL468 | 13.95 | 814 | 12.75 |
| 7Y4 | 1.19 | 25A7G | 1.98 | 80 | .69 | 501A | 1.25 | 815 | 2.75 |
| 7Z4 | .69 | 25AC5GT | 1.98 | 81 | 1.65 | CK501X | 1.26 | 815 866Jr. | 1.07 |
| 8DC-15 | 6.98 | 25A6GT | .79 | 82 | .69 | CK501AX | 1.26 | 828 | 15.98 |
| 10Y | .43 | 25BQ6GT | 1.19 | 82 | 1.15 | CK502AX | 1.79 | 829 | 58.00 |
| 11E | 5.25 | 25C6 | 1.49 | 83 | 1.45 | CK505AX | 1.79 | 829 | 11.49 |
| 12A | .69 | 25L6GT | .63 | 83V | 1.79 | CK506AX | 1.79 | 829B | 12.45 |
| 12A5 | 1.39 | 25W4GT | .89 | 83V | .79 | 5Z4 | 1.79 | 832 | 5.49 |
| 12A6 | .89 | 25Y5 | .89 | 84/6Z4 | 1.49 | CK507AX | 1.79 | 832A | 6.49 |
| 12A7 | 1.29 | 25Z5 | .79 | 85 | .79 | CK509AX | 1.26 | 832 | 2.65 |
| 12AH6GT | .79 | 25Z6GT | .79 | 86 | .79 | CK512AX | 1.79 | 833A | 9.95 |
| 12AC7 | 1.45 | 26 | .75 | VR92 | .75 | CK522AX | 2.49 | 833A | 39.45 |
| 12AH7GT | 1.45 | 27 | .69 | FG81/5560 | 24.75 | CK523AX | 1.15 | 834 | 5.95 |
| 12AK5 | 1.98 | FG27A | 8.70 | FG95 | 19.95 | CK526AX | 1.95 | 836A | 4.75 |
| 12AK5W | 2.98 | HY27 | 10.95 | 100TH | 8.85 | CK527AX | 1.49 | 837 | 1.45 |
| 12AL5 | .61 | RK29A | 4.49 | 102F | 2.50 | CK528AX | 1.79 | 838 | 3.98 |
| 12AT6 | .53 | 2D27 | 1.95 | 102G | .98 | CK529AX | 2.98 | 843 | .98 |
| 12AT7 | .72 | 30 | 2.98 | 104A | 37.50 | 845 | 2.98 | 845 | 4.90 |
| 12AU6 | .72 | 31 | .89 | FG105 | 17.64 | CK531DX | 1.98 | 849 | 29.45 |
| 12AU7 | .53 | 32 | 1.45 | 107B | 1.45 | 531 | 1.98 | 852 | 19.98 |
| 12AV6 | .53 | HY31Z | .75 | HY114B | .75 | CK532DX | 1.98 | 860 | 4.90 |
| 12AV7 | .59 | 32 | .49 | HY115 | 1.45 | 538 | 1.98 | 860 | 4.90 |
| 12AW6 | 1.79 | FG32/5558 | 13.85 | 117L/M7GT | 1.59 | CK533AX | 1.39 | 861 | 23.95 |

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 864 | .39 | 9001 | 1.55 | | | | | | |
| 865 | 1.29 | 9002 | .95 | | | | | | |
| 866A | 1.50 | 9003 | 1.50 | | | | | | |
| 868/CE1C | 3.49 | 9005 | .42 | | | | | | |
| 869 | 36.95 | 9006 | .39 | | | | | | |
| 872A | 3.25 | | | | | | | | |
| 874 | 1.35 | **C'Ray Tubes** | | | | | | | |
| 878 | .98 | | | | | | | | |
| 884/6Q5G | 1.88 | 2AP1 | 9.70 | | | | | | |
| 885 | 1.45 | 3AP1 | 9.75 | | | | | | |
| 889/RK34 | 250.00 | 3AP1A | 10.00 | | | | | | |
| 897 | 2.59 | 3AP1A | 14.25 | | | | | | |
| 902 | 1.49 | 3BP1 | 9.75 | | | | | | |
| 925 | 1.69 | 3BP1A | 14.98 | | | | | | |
| 926 | 1.85 | 3CP1 | 14.98 | | | | | | |
| 927 | 1.98 | 3DP1 | 5.90 | | | | | | |
| 927/CE2S | 1.49 | 3DP1 | 4.75 | | | | | | |
| 930 | 1.20 | 3EP1/1806P1 | 6.95 | | | | | | |
| 931A | 5.00 | 5FP7 | .98 | | | | | | |
| 954 | .39 | 3GP1 | 14.98 | | | | | | |
| 955 | .39 | 3GP1 | 4.20 | | | | | | |
| 956 | .39 | 3GP1 | 16.00 | | | | | | |
| 958 | .39 | 3GP5 | 18.00 | | | | | | |
| 958A | .67 | 3HP7 | 18.00 | | | | | | |
| 9C7/FG17 | 4.98 | 9C7/ | 3.49 | | | | | | |
| SD969 | .98 | 3HP14 | 14.98 | | | | | | |
| 9D8 | 16.95 | 3JP1 | 14.98 | | | | | | |
| 991 | .45 | 3JP12 | 10.95 | | | | | | |
| 1000 | 1.50 | 3JP14 | 10.95 | | | | | | |
| 1001 | 1.98 | 4AP10 | 6.40 | | | | | | |
| 1006 | 3.45 | 5AP1 | 3.45 | | | | | | |
| 1007 | .49 | 5AP1 | 4.25 | | | | | | |
| 1021 | .98 | 5AP1 | 4.25 | | | | | | |
| 1022 | .98 | 5CP5 | 30.00 | | | | | | |
| 1023 | .98 | 5CP5 | 30.00 | | | | | | |
| 1100 | .98 | 5FP7 | 1.49 | | | | | | |
| 1101 | .98 | 5HP4 | 5.70 | | | | | | |
| 1201 | .98 | 5JP2 | 19.25 | | | | | | |
| 1

# INDEX TO ADVERTISERS


Ace Engineering & Machine Co., Inc. ... 192
Acme Electric Corp. ... 385
Acme Electronics, Inc. ... 401
Aeronautical Communications Equipment, Inc. ... 234
Aerovox Corp. ... 185
A'G'A' Division of Elastic Stop Nut Corp. of America ... 372
Air Marine Motors, Inc. ... 391
Aircraft Radio Corporation ... 44, 372
Aircraft Transformer Corporation ... 261
Airpax Products Company ... 367
Alco Electronics Mfg. Co. ... 374
Alden Products Company ... 67
Allen-Bradley Co. ... 62
Allen Co., Inc., L. B. ... 438
Allied Control Company, Inc. ... 205
Allied Industries, Inc. ... 395
Allmetal Screw Products Co., Inc. ... 186
Alpha Metals, Inc. ... 242
Altec Lansing Corporation ... 216
American Electric Motors ... 278
American Lava Corporation ... 283
American Phenolic Corp. ... 176
American Relay & Controls, Inc. ... 258
American Television & Radio Co. ... 380
American Time Products, Inc. ... 321
Amperite Co., Inc. ... 330
Ampex Electric Corp. ... 34, 229
Andrew Corporation ... 270
Antara Chemicals Div. of General Dyestuff Corporation ... 68, 69
Anti-Corrosive Metal Products Co., Inc. ... 392
Arma Corporation ... 227
Armco Steel Corp. ... 353
Arnold Engineering Company ... 339
Arrow Electronics, Inc. ... 242
Art-Lloyd Metal Products Corp. ... 374
Art Wire & Stamping Co. ... 258
Aruna Brothers ... 438
Auburn Button Works, Inc. ... 368
Audio Devices, Inc. ... 313

Ballantine Laboratories, Inc. ... 204
Baltic Metal Products Co. ... 90
Barker & Williamson, Inc. ... 184
Barry Corp. ... 15
Beaver Gear Works, Inc. ... 320
Beckman Instruments, Inc. ... 306, 411
Beede Electrical Instrument Co., Inc. ... 366
Belden Manufacturing Co. ... 275
Bell Telephone Laboratories ... 351
Bendix Aviation Corporation
Eclipse-Pioneer Div. ... 404
Friez Instrument Div. ... 423
Pacific Div. ... 269
Bentley, Harris Manufacturing Co. ... 297
Berkeley Scientific Div. of Beckman Instruments, Inc. ... 180, 427
Bird Electronics Corp. ... 422
Birnbach Radio Co., Inc. ... 419
Birtcher Corporation ... 434
Biwax Corporation ... 380
Bliley Electric Co. ... 301
Bodnar Industries, Inc. ... 366
Boeing Airplane Co. ... 385
Bogart Manufacturing Corp. ... 336
Boonton Radio Corporation ... 169
Borg Corporation, George W. ... 420, 421
Breeze Corporations, Inc. ... 249
Brew & Co., Inc., Richard D. ... 382
Bridgeport Brass Company ... 399
Brilhart Research Corp. ... 405
Browning Laboratories, Inc. ... 294
Brush Development Company ... 224, 363
Burlington Instrument Company ... 387
Burnell & Company ... 21
Bussmann Mfg. Co. ... 345

Cambridge Thermionic Corp. ... 325
Cannon Electric Company ... 274
Carboloy Dept., General Electric Company ... 190, 191
Carborundum Company ... 210
Cargo Packers Incorporated ... 378
Centralab, A Div. of Globe-Union, Inc. ... 11, 12, 13
Century Geophysical Corp. ... 226
Chance Vought Aircraft, Div. of United Aircraft Corp. ... 305
Chase Brass & Copper Co. ... 38
Chatham Electronics Corp. ... 94, 95
Chicago Telephone Supply Corp. ... 72, 73
Chicago Tool & Engineering Co. ... 411
Chicago Transformer, Div. of Essex Wire Corp. ... 344
Cinch Manufacturing Corporation ... 165
Cinema Engineering Co. ... 425
Clarostat Mfg. Co., Inc. ... 87
Cleveland Container Co. ... 265
Clippard Instrument Laboratory, Inc. ... 402
Cohn Corp., Sigmund ... 320
Coleman Instruments, Inc. ... 423
Collectron Corporation ... 415
Collins Radio Company ... 189
Communication Measurements Laboratory, Inc. ... 430
Communication Products Company, Inc. ... 262, 263, 389
Condenser Products Company, Div. of New Haven Clock & Watch Co. ... 85
Continental Connectors Corp. ... 434
Continental-Diamond Fibre Co. ... 287
Cornell-Dubilier Electric Corp. ... 175
Cornish Wire Co., Inc. ... 436
Cosa Corporation ... 206
Coto-Coil Company ... 432
Crescent Co., Inc. ... 298
Crest Laboratories, Inc. ... 281
Cross Co., H. ... 374

Dage Electric Co., Inc. ... 393
Dale Products, Inc. ... 318
Daniels Inc., C. R. ... 405
Dano Electric Co. ... 427
Daven Co. ... Third Cover
De Jur Amsco Corporation ... 434
Delco Radio, Div. of General Motors ... 299
Detectron Co. ... 431
Dial Light Company of America ... 260
Distillation Products Industries ... 203
Dolin Metal Products, Inc. ... 366
Dow Corning Corporation ... 36, 246
Drake Manufacturing Company ... 188
Driver-Harris Company ... 217
DuMont Laboratories, Inc., Allen B. ... 54
DX Radio Products Co. ... 238
Dyna-Labs, Inc. ... 432

Eastern Air Devices, Inc. ... 338
Eastman Kodak Company, Industrial Optical Sales Div. ... 177
Edin Company ... 369
Edison Incorporated, Thomas A. ... 316
Edo Corporation ... 359
Eisler Engineering Co., Inc. ... 366, 438
Eitel McCullough, Inc. ... 93
Electrical Industries, Inc. ... 59
Electro-Coatings, Inc. ... 438
Electro Engineering Prod. Co., Inc. ... 431
Electro-Snap Switch & Mfg. Co. ... 378
Electro Tec Corporation ... 303
Electro-Tech Equipment Co. ... 411
Electronic Associates, Inc. ... 63
Electronic Mechanics, Inc. ... 298
Electronic Parts Manufacturing Co. ... 254
Electronic Transformer Company, Inc. ... 250
Electronic Tube Corporation ... 415
Electronics Center, Inc. ... 407
Engineering Research Associates Inc. ... 254, 395
Erie Resistor Corp. ... 25
Everready Plating Co. ... 438

Fairchild Camera & Instrument Corp. ... 357
Fansteel Metallurgical Corporation ... 236
Federal Telephone & Radio Corp. ... 66



PRECISION
CATHODE RAY TUBE TESTER SERIES CR-30

A complete and self-contained Electronic Instrument. Incorporates a TRUE BEAM CURRENT Test Circuit. Checks overall electron-gun performance for proportionate picture brightness. Additional tests for accelerating anodes and deflection plate elements.

The Precision CR-30 should not be confused with mere adapters connecting to ordinary receiving tube testers which were never designed to meet the very specialized needs of CR tube checking. Similarly, it is not to be confused with neon-lamp units or similar devices of limited technical merit and which do not check all CR tubes or all tube elements.

SPECIFICATIONS

★ **Tests All Modern Cathode Ray Tubes. Tests All CR Tube Elements:** Not just a limited few.

★ **Free-Point 14 Lever Element Selection System,** for all Short-Check, Leakage Testing and Quality Tests.

★ **True Beam Current Test Circuit** checks all CR Tubes with Electron-gun in operation. It is the **Electron Beam** (and NOT total cathode emission) which traces the pattern on the face of the CR tube. The significance of the above rests in the fact that Beam Current (and picture brightness) is primarily associated with the condition of the **center** of the cathode surface and not the overall cathode area.

★ **Voltage Regulated, Bridge Type VTVM** affords supersensitive tube quality indications and positive check of low current anodes and deflection plates.

★ **Micro-Line Voltage Adjustment, Meter-monitored.**

★ **Accuracy** of test circuits closely maintained by use of factory adjusted internal calibrating controls; plastic insulated, telephone type cabled wiring; highest quality, conservatively rated components.

★ **Built In, High Speed, Roller Tube Chart.**

★ **Test Circuits** Transformer Isolated from Power Line.

★ **4½" Full Vision Meter** with scale-plate especially designed for CR tube testing requirements.

**SERIES CR-30** — In hardwood, tapered portable case. 17¼" x 13¼" x 6¾". Complete with standard duodecal cable and universal CR Tube Test Cable.

*Shipping Weight: 22 lbs.* ..... *Net Price:* **$99.75**

*See* the Series CR-30 on display at leading electronic equipment distributors.

PRECISION
APPARATUS CO. INC.
92-27 HORACE HARDING BLVD., ELMHURST 10, N. Y.
Export: 458 Broadway, N. Y. C., U.S.A. Cables: MORHANEX
In Canada: Atlas Radio Corp. Ltd., Toronto, Ontario

# 5 MILLIAMPERES at 30 KV

## REGULATED-REVERSIBLE RF HIGH VOLTAGE POWER SUPPLY

**Model 33HRR**

**A TOOL FOR RESEARCH BEYOND USUAL CURRENT LIMITATIONS**

**OUTPUT:**
From below 1 KV to 30 KV in three ranges, at currents up to 5 Milliamperes. (Up to 400 VA regulated AC may be drawn simultaneously from convenience outlets on panel.)

**REGULATION:**
0.1% of full scale on all ranges.

**LINE VOLTAGE STABILIZATION:**
.01% per volt variation.

**RIPPLE VOLTAGE:**
Less than .05% of DC output voltage.

**OUTPUT POLARITY:**
Reversible—Either positive or negative.

**METERING:**
Output Kilovoltmeter, three ranges, 0-5, 0-15 and 0-30 KV. Current Meter, three ranges, 0-.5, 0-1 and 0-5 MA. Final stage plate voltage meter. Final stage plate milliameter.

**SAFETY FEATURES:**
Adjustable load cut-out. Double push-buttons requiring both hands to energize high voltage. Safety interlock on door. Latching circuit keeps HV off after line voltage failure.

## Bench Type NEUTRONIC HIGH VOLTAGE Supplies

### RF Type

The following NEUTRONIC models are now available. Your specific modifications can be incorporated. All units are housed in standard 19" rack panel cabinets.

| Model No. | Voltage Range | Current Range | Regulation |
|---|---|---|---|
| 21 M | 1-15 KV | 6 MA. at 10 KV | ... |
| 21 MR* | 1-15 KV | 6 MA. at 10 KV | .5% |
| 22 C | 3-26 KV | 2 MA. at 18 KV | ... |
| 22 CR* | 3-26 KV | 2 MA. at 18 KV | .5% |
| 22 M | 3-26 KV | 3 MA. at 20 KV | ... |
| 22 MR* | 3-26 KV | 3 MA. at 20 KV | .5% |
| 23 C | 5-40 KV | 1.3 MA. at 25 KV | ... |
| 23 CR* | 5-40 KV | 1.3 MA. at 25 KV | .5% |
| 23 M | 5-45 KV | 1.5 MA. at 30 KV | ... |
| 23 MR* | 5-45 KV | 1.5 MA. at 30 KV | .5% |
| 24 C | 5-50 KV | 1 MA. at 35 KV | ... |
| 24 CR* | 5-50 KV | 1 MA. at 35 KV | .5% |
| 24 M | 5-55 KV | 2 MA. at 30 KV | ... |
| 24 MR* | 5-55 KV | 2 MA. at 30 KV | .5% |
| 33 S | 1-30 KV | 4½ MA. entire range | ... |

*Regulated models will maintain Regulation to 80% of the MAXIMUM STATED CURRENT.

NEUTRONIC ASSOCIATES
CONTROL DEVICES

**8356 VIETOR AVENUE • ELMHURST, L. I., N. Y.**



Federated Metals Division, American Smelting & Refining Co. ..... 315
Federation Francaise Des Syndicate Nationaux De L'Industrie Radioelectrique 197
Ferroxcube Corp. of America ..... 45
Fidelity Chemical Products Corp. ..... 419
Filtron Co., Inc. ..... 49
Five Star Company, The ..... 438
Franklin, A. W. ..... 91
Franklin Institute, The ..... 403
Frequency Standards ..... 378
Fugle-Miller Laboratories ..... 420
Furst Electronics ..... 429

Gamewell Company ..... 389
General Electric Company
Apparatus Dept. ..... 46, 47, 82, 88, 89, 179, 397
Electronics Dept. ..... 60, 61, 273
General Precision Laboratory, Inc. ..... 243
General Radio Company ..... 17
General Transformer Company ..... 296
Gertsch Products, Inc. ..... 421
GM Laboratories, Inc. ..... 407, 428
Goat Co., Inc., Fred ..... 246
Grant Pulley & H'dw'e Co. ..... 373
Graphite Metallizing Corporation ..... 430
Green Instrument Co. ..... 226
Gudebrod Bros. Silk Co., Inc. ..... 393

Hammarlund Mfg. Co., Inc. ..... 84
Harper Company, H. M. ..... 375
Hathaway Instrument Company ..... 326
Haydon Company, A. W. ..... 374
Haydon Manufacturing Co., Inc. ..... 284
Heath Company ..... 246
Heiland Research Corp. ..... 407
Heinemann Electric Company ..... 376
Heldor Manufacturing Co. ..... 307
Helipot Corporation ..... 171
Heminway & Bartlett Mfg. Co. ..... 429
Hermetic Seal Products Co. ..... 37
Hetherington, Inc. ..... 348
Hewlett-Packard Company ..... 35
Hexacon Electric Co. ..... 405
Hickok Electrical Instrument Co. ..... 317
Hudson Radio & Television Corp. ..... 379
Hudson Tool & Die Company, Inc. ..... 51
Hudson Wire Company ..... 215
Hughes Research & Development Laboratories ..... 360, 425
Hycor Company, Inc. ..... 242
Hytron Radio & Electronics Co. ..... 52

Improved Seamless Wire Company ..... 234
Indiana Steel Products Co. ..... 178
Industrial Condenser Corp. ..... 225
Instrument Resistors Co. ..... 376
Instrument Wire Company, The ..... 413
International Nickel Company, Inc. ..... 347
International Radiant Corp. ..... 435
International Rectifier Corp. ..... 255
International Resistance Company ..... 56, 57
Insuline Corporation of America ..... 257
Ippolito & Co., Inc., James ..... 419
Irvington Varnish & Insulator Co. ..... 93
I-T-E Circuit Breaker Company ..... 323

James Vibrapower Co. ..... 368
Jeffers Electronics Division Speer Carbon Co. ..... 259
Jelliff Manufacturing Corp. ..... 425
Jennings Radio Manufacturing Co. ..... 388
JFD Mfg. Co. ..... 363
Johanson Manufacturing Corp. ..... 418
Johns-Manville ..... 86
Johnson Co., E. F. ..... 209
Jones Div., Howard B. Cinch Mfg. Corp. ..... 425
Joy Manufacturing Company ..... 223

Kahle Engineering Co. ..... 258
Karp Metal Products Co., Inc. ..... 55
Kartron ..... 438
Kay Electric Company ..... 285
Kellogg Company, M. W. ..... 309
Kenyon Transformer Co., Inc. ..... 64
Kester Solder Company ..... 267
Keystone Products Company ..... 194

Kirk & Blum Mfg. Co. ..... 264
Klein & Sons, Mathias ..... 290
Kollsman Instrument Corporation ..... 331
Krohn-Hite Instrument Company ..... 53
Kupfrian Manufacturing Co. ..... 428

Laboratoire Industriel de Physique Appliquee ..... 199
Laboratories R. Deveaux ..... 83
Laboratory for Electronics, Inc. ..... 19
Lambda Electronics Corp. ..... 431
Lampkin Laboratories, Inc. ..... 238
LaPointe-Plascomold Corp. (Vee-D-X) .. 234
Lapp Insulator Co. ..... 233
Le Condensateur Cramique ..... 202
Lenkurt Electric Sales Company ....334, 401
Lewis Engineering Co. ..... 370
Lewis Spring & Mfg. Co. ..... 301
Lion Fasteners, Inc. ..... 412
Little Inc., Arthur D. ..... 324
Logistics Research Company ..... 252
Lord Manufacturing Co. ..... 350
Louthan Manufacturing Company ..... 382

MacDonald Co., Inc., W. S. ..... 385
Magnatran, Inc. ..... 337
Malayan Tin Bureau ..... 222
Mallory & Co., Inc., P. R. ..... 96, 167
Marconi's Wireless Telegraph Co., Ltd. . 408
Marion Electrical Instrument Co. ..... 2
Markem Machine Company ..... 368
Maryland Electronic Mfg. Corp. ..... 295
MB Manufacturing Company, Inc. ..... 181
McGraw-Hill Book Co. ..... 438
Measurements Corporation ..... 426
Mepco, Inc. ..... 196
Mercury Electronic Company ..... 230
Merritt & Zaleski, Inc. ..... 207
Metal Textile Corp. ..... 358
Metals & Controls Corp., General Plate Div. ..... 48
Mica Insulator Company ..... 293
Michel Manufacturing Co. ..... 438
Mico Instrument Company ..... 254
Micro Switch, Div. of Minneapolis-Honeywell Regulator Co. ..... 27
Miles Reproducer Co., Inc. ..... 438
Milford Rivet & Machine Co. ..... 406
Millen Mfg. Co., Inc., James ..... 319
Milo Radio & Electronics Corp. ..... 354
Milwaukee Transformer Company ..... 390
Miniature Precision Bearings, Inc. ..... 173
Minneapolis-Honeywell Regulator Co., Industrial Div. ..... 237
Aero Div. ..... 342
Minnesota Mining & Mfg. Co. ..... 78
Missouri Research Laboratories ..... 391
Mitchell-Rand Insulation Company, Inc. . 92
Moloney Electric Company ..... 245
Mosinee Paper Mills Company ..... 300
Muirhead & Co., Ltd. ..... 3
Mycalex Corporation of America ..... 211

National Company, Inc. ..... 346
National Moldite Company ..... 356
National Plastic Products Co. ..... 272
National Research Corporation .....80, 81
National Vulcanized Fibre Co. ..... 253
Neo-Sil Corporation ..... 391
Neutronic Associates ..... 486
New Hermes, Inc. ..... 427
New York Transformer Co., Inc. ..... 322
Ney Company, J. M. ..... 423
North American Aviation, Inc. ..... 250
Northeastern Engineering, Inc. ..... 370
Nothelfer Winding Laboratories ..... 426

Ohmite Mfg. Co. .....32A, 32B
Olympic Metal Products Co., Inc. ..... 238
Owens-Corning Fiberglas Corp. .....40, 41

Panoramic Radio Products, Inc. ..... 424
Par-Metal Products Corporation ..... 368
Penn Engineering & Manufacturing Corp. 395
Penta Laboratories, Inc. ..... 413
Phalo Plastics Corporation ..... 202
Phaostron Co. ..... 433
Phelps Dodge Copper Products Corp., Inca Manufacturing Division .....28, 29
Phillips & Hiss Co., Inc. ..... 384
Pix Manufacturing Co., Inc. ..... 378
Plastic Capacitors, Inc. ..... 289



# ENGINEERED FLUOROCARBONS

## Offer Engineers a Whole New Family of Materials

Starting with TEFLON*, United States Gasket Company engineers have developed a series of "Filled" Fluorocarbon materials, greatly broadening the scope of usefulness of this wonder-plastic. For example, United States Gasket Company "Application Engineering" has already helped solve such material problems as long-wearing chemical resistant bearings and pump impellers; valve and pump packings, expansion joints and chambers, gaskets; the metal plating of Teflon; the hermetic sealing of electronic components; soldering and cementing to Teflon; etc., etc.

If you have a special materials problem, that one of these Teflon "alloys" might solve, tell us about it. Our engineering department will work with yours to determine the Chemelec Mixture best suited to your requirements.

UNITED STATES GASKET COMPANY

FLUOROCARBON PRODUCTS DIVISION
FABRICATORS OF "TEFLON" "KEL-F" AND OTHER FLUOROCARBON PLASTICS
CAMDEN 1, NEW JERSEY

*duPont's trademark for its tetrafluoroethylene resin.

# REXOLITE 1422

(FORMERLY G. E. TEXTOLITE 1422)

COMBINES EVERY DESIRABLE PHYSICAL, CHEMICAL, & ELECTRICAL PROPERTY IN ONE INSULATING MATERIAL FOR U. H. F.



## REXOLITE 1422

- Specifically designed to meet the growing need for a U. H. F. insulating material thats low in cost.
- Meets JAN-P-77 and MIL-P-77A specifications.
- Withstands high temperature due to its thermosetting nature.
- Has outstanding electrical properties.
- Has low specific gravity — is strong and rigid with unusually high compressive and tensile strengths.
- Has excellent impact strength and hardness allowing its use under highly abusive conditions.
- Its dimensional stability and unusual chemical inertness allow its use where other materials fail.
- Readily machinable to extremely close tolerances.
- Available as centerless ground rods in any diameter up to 1". Also cast in larger diameter rods and sheets.

*Write today for technical bulletins and samples. Our engineering staff is always at your disposal.*

Manufacturers of Non-strip wire, High Temperature Electrical Tubing and other extruded plastic products.

**THE REX CORPORATION**

64 LANDSDOWNE STREET
CAMBRIDGE 39, MASS.



Polarad Electronics Corporation ..... 77
Polymer Corporation ..... 416
Polytechnic Research & Development Company, Inc. ..... 235
Popper & Sons, Inc. ..... 230
Potter Instrument Company, Inc. ..... 244
Praktica Co., Inc. ..... 403
Precision Apparatus Co., Inc. ..... 485
Precision Paper Tube Co. ..... 409
Progressive Manufacturing Co. ..... 280
Pyroferric Co., Inc. ..... 400

Radiac, S. A. ..... 200
Radio Corporation of America ..... Fourth Cover
Radio Materials Corporation ..... 231
Radio Receptor Company ..... 76
Radio Shack Corporation ..... 228
Railway Express Agency, Air Express Div. ..... 343
Raytheon Manufacturing Company ..... 240, 311
Remler Company, Ltd. ..... 424
Republic Foil & Metal Mills, Inc. ..... 371
Resistance Products Co. ..... 384
Revere Copper & Brass Incorporated ..... 58
Rex Corporation ..... 488
Rhode Island Insulated Wire Co., Inc. ..... 241
Richardson Company ..... 50
Roanwell Corporation ..... 421
Rockbar Corporation ..... 413
Rome Cable Corporation ..... 377
Runzel Cord & Wire Co. ..... 411
Rutherford Electronics Co. ..... 395

Sangamo Electric Company ..... 213
Sarkes Tarzian, Inc. Rectifier Div. ..... 328
Tuner Div. ..... 394
Scientific Electric Div. of "S" Corrugated Quenched Gap Co. ..... 308
Secon Metals Corporation ..... 389
Servo Corporation of America ..... 250
Servomechanisms, Inc. ..... 383
Servotrol Company ..... 410
Sessions Clock Co., Timer Div. ..... 256
Shakeproof, Inc. ..... 271
Shallcross Mfg. Company ..... 30, 31
Siemar ..... 200
Sigma Instruments, Inc. ..... 314
Signal Engineering & Mfg. Co. ..... 370
Societe Industrielle Des Procedes Loth ..... 198
Sorensen & Co., Inc. ..... 39
Southwestern Industrial Electronics Co. ..... 208
Specialty Battery Company ..... 384
Spencer-Kennedy Laboratories, Inc. ..... 409
Sprague Electric Company ..... 9, 75
Stackpole Carbon Company ..... 221
Stamford Metal Specialty Company ..... 384
Standard Electric Time Co. ..... 329
Standard Piezo Co. ..... 407
Standard Telephones & Cables, Ltd. ..... 282
Stanley Tools ..... 376
Sterling Transformer Corp. ..... 401
Stevens Arnold Incorporated ..... 387
Stevens Manufacturing Company, Inc. ..... 340
Stoddart Aircraft Radio Co. ..... 292
Struthers-Dunn, Inc. ..... 248
Sturtevant Co., P. A. ..... 391
Sun Electric Corporation ..... 417
Superior Electric Co. ..... 65
Superior Tube Company ..... 74
Supreme, Inc. ..... 433
Sylvania Electric Products, Inc. ..... 7, 70, 291
Synthane Corporation ..... 23
Syntron Co. ..... 423

Taylor Fibre Co. ..... 71
Taylor Tubes, Inc. ..... 276
Tech Laboratories, Inc. ..... 230
Technical Service Corporation ..... 380
Technitrol Engineering Company ..... 436
Technology Instrument Corp. ..... 286
Tektronix, Inc. ..... 232
Tel-Instrument Co., Inc. ..... 332
Telechrome Incorporated ..... 421
Telechron Dept., General Electric Company ..... 327
Teletronics Laboratory, Inc. ..... 387, 438
Television Equipment Corp. ..... 435
Telewave Laboratories, Inc. ..... 380
Telex, Electro-Acoustic Div. ..... 382
Tensolite Insulated Wire Co., Inc. ..... 401
Terpening Company, L. H. ..... 352
Thompson Products, Inc. ..... 277
Tinnerman Products, Inc. ..... 239
Titeflex, Inc. ..... 358
Tobe Deutschmann Corporation ..... 364, 365
Transformers, Inc. ..... 32
Transicoil Corporation ..... 381
Transradio, Ltd. ..... 417
Triplett Electrical Instrument Co. ..... 214
Tru-Ohm Products, Div. of Model Engineering & Mfg., Inc. ..... 247
Tung-Sol Electric, Inc. ..... 64A, 64B
Turner Company ..... 220

Ucinite Co. ..... 218
United-Carr Fastener Corp. ..... 219
United Condenser Corp. ..... 422
United Electronics ..... 279
United Manufacturing & Service Co. ..... 405
United States Gasket Co. ..... 487
United States Radium Corporation ..... 288
United Transformer Corp. ..... Second Cover
Universal Electronics Co. ..... 382
Universal Winding Company ..... 195

Vacuum Metals Corporation, Sub. of National Research Corp. ..... 79
Varflex Corporation ..... 333
Varian Associates ..... 341
Veeder-Root Incorporated ..... 193
Victoreen Instrument Co. ..... 429
Victory Engineering Corp. ..... 433
Volkert Metal Stampings, Inc., John ..... 362

Waldes Kohinoor, Inc. ..... 251
Ward Leonard Electric Company ..... 182, 183
Warren Wire Company ..... 415
Waterman Products Co., Inc. ..... 393
Waters Manufacturing, Inc. ..... 414
Waveforms, Inc. ..... 431
Weckesser Company ..... 403
Welch Scientific Co., W. M. ..... 363
Western Gold & Platinum Works ..... 417
Westinghouse Electric Corp. 42, 43, 48a, 48b, 48c, 48d, 201, 226, 335, 361
White Dental Mfg. Co., S. S. ..... 302, 372
Whitehead Stamping Company ..... 393
Whitney Blake Co. ..... 386
Wilkor Div., Aerovox Corp. ..... 187
Wiley & Sons, Inc., John ..... 389, 400
Williams & Co., C. K. ..... 318
Winchester Electronics, Inc. ..... 212
Workshop Associates Div., The Gabriel Company ..... 349

Xcelite, Incorporated ..... 403

Zophar Mills, Inc. ..... 413


■

PROFESSIONAL SERVICES ..... 437

■

SEARCHLIGHT SECTION
*(Classified Advertising)*
*H. E. HILTY, Mgr.*

SEARCHLIGHT ADVERTISERS INDEX
480, 481

This index is published as a convenience to the readers. Every care is taken to make it accurate, but ELECTRONICS assumes no responsibility for errors or omissions.

# THESE ARE THE

# REASONS

## WHY DAVEN IS THE LEADER IN THE AUDIO ATTENUATOR FIELD

1
2
3
4
5

Greatly expanded production facilities enable Daven to make delivery from stock on a large number of standard attenuator types.

Write for complete catalog data.

THE DAVEN CO.

WORLD'S LARGEST MANUFACTURER OF ATTENUATORS

191 Central Ave., Newark 4, N. J.

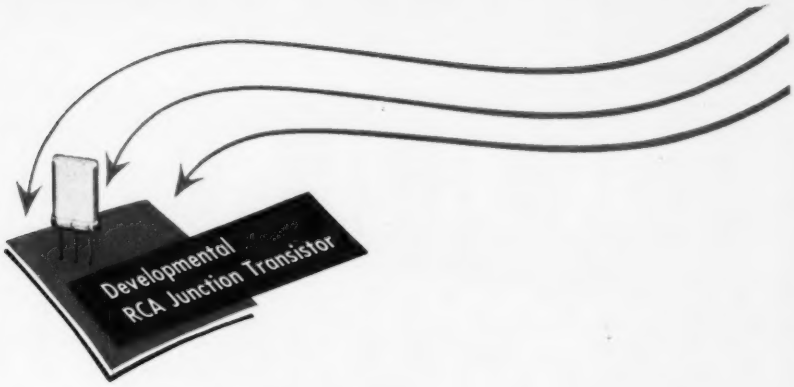


# An RCA progress report

## ...on *Transistors*

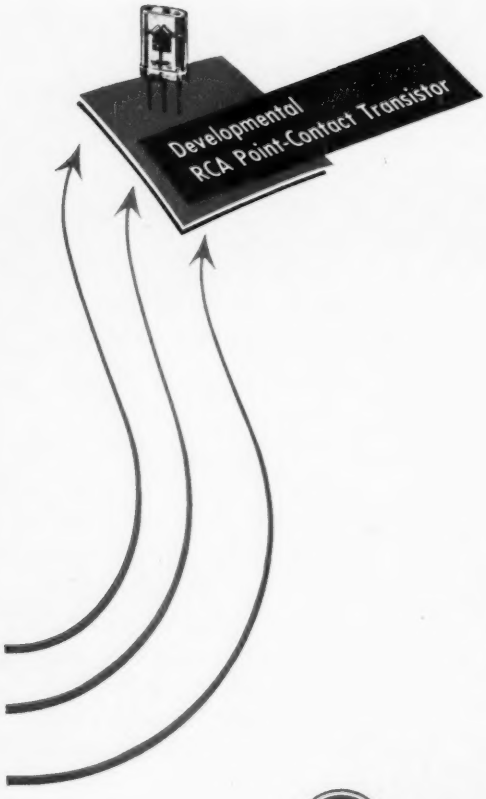


MORE THAN FOUR YEARS AGO, RCA embarked on a research and development program to determine the practicability of transistors in the field of electronics. The early work was concerned with the principles, designs, and applications of point-contact transistors; and later was expanded to include junction transistors and other similar semiconductive devices.

As an important recent result of the studies on point-contact transistors, RCA Tube Department engineers have made in the laboratory experimental point-contact transistors which oscillate at frequencies above 200 megacycles, one of which exceeded 300 megacycles. This achievement opens the way to the use of transistors in FM radio and in VHF television, in addition to their previous potentialities for low-frequency applications including audio and switching uses.

This work has also led to considerable success in developing junction transistors for audio and radio amplifier applications. A point of particular significance is that much progress has been made in the development of practical assembly techniques.

Point-contact types are now being sampled to equipment manufacturers and government agencies as a part of our development program. It is anticipated that junction transistors will be available for similar sampling in the near future.

Although much remains to be done, promising results have been attained in controlling the characteristics of both types of transistors; pilot production runs are being made.

Meanwhile RCA is pushing forward its development program to assure its customers that the commercial transistors of the future will be made to the same high standards of quality and dependability as the RCA electron tubes of today.

**RADIO CORPORATION of AMERICA**

**ELECTRON TUBES** — **HARRISON, N. J.**

TMK. ®